

AD-A214 409



AGARD-INDEX 86-88

AD-A214 409 AGARD-INDEX 86-88

AGARD

ADVISORY GROUP FOR AEROSPACE RESEARCH & DEVELOPMENT

7 RUE ANCELLE 92200 NEUILLY SUR SEINE FRANCE

DTIC
ELECTE
NOV 13 1989
S G E D

AGARD Index of Publications 1986-1988

This document has been approved
for public release and sale; its
distribution is unlimited.

NORTH ATLANTIC TREATY ORGANIZATION



DISTRIBUTION AND AVAILABILITY
ON BACK COVER

89 11 13 125

AGARD-INDEX

NORTH ATLANTIC TREATY ORGANIZATION
ADVISORY GROUP FOR AEROSPACE RESEARCH AND DEVELOPMENT
(ORGANISATION DU TRAITE DE L'ATLANTIQUE NORD)

AGARD INDEX OF PUBLICATIONS

1986-1988

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
A-1	

This Index has been prepared as part of the programme of the Technical Information Panel
of AGARD.

THE MISSION OF AGARD

According to its Charter, the mission of AGARD is to bring together the leading personalities of the NATO nations in the fields of science and technology relating to aerospace for the following purposes:

- Recommending effective ways for the member nations to use their research and development capabilities for the common benefit of the NATO community;
- Providing scientific and technical advice and assistance to the Military Committee in the field of aerospace research and development (with particular regard to its military application);
- Continuously stimulating advances in the aerospace sciences relevant to strengthening the common defence posture;
- Improving the co-operation among member nations in aerospace research and development;
- Exchange of scientific and technical information;
- Providing assistance to member nations for the purpose of increasing their scientific and technical potential;
- Rendering scientific and technical assistance, as requested, to other NATO bodies and to member nations in connection with research and development problems in the aerospace field.

The highest authority within AGARD is the National Delegates Board consisting of officially appointed senior representatives from each member nation. The mission of AGARD is carried out through the Panels which are composed of experts appointed by the National Delegates, the Consultant and Exchange Programme and the Aerospace Applications Studies Programme. The results of AGARD work are reported to the member nations and the NATO Authorities through the AGARD series of publications of which this is one.

Participation in AGARD activities is by invitation only and is normally limited to citizens of the NATO nations.

The content of this publication has been reproduced directly from material supplied by AGARD or the authors.

Published August 1989
Copyright © AGARD 1989
All Rights Reserved
ISBN 92-835-1563-3



*Printed by Specialised Printing Services Limited
40 Chigwell Lane, Loughton, Essex IG10 3TZ*

PREFACE

This volume provides abstracts and indexes for AGARD unclassified publications published during the period 1986—1988. By an arrangement with U.S. National Aeronautics and Space Administration (NASA) in Washington, D.C., the NASA computerized data base has been used to prepare this publication.

Full bibliographic citations and abstracts for all the documents in this publication are given in the abstract section, which is organized in the major subject divisions and specific categories used by NASA in abstract journals and bibliographies. The major subject divisions are listed, together with a note for each that defines its scope and provides any cross-references. Category breaks in the abstract section are identified by category number and title, and a scope note. Within each category, the abstracts are arranged by series and year.

Six indexes — Subject (based on *NASA Thesaurus* nomenclature), Personal Author, Corporate Source, Panel Report/Accession Number, and Accession Number — are included. Sample entries are shown on the first page of each index.

NB A number of changes have been made to the contents and format for this edition, which it is hoped will facilitate its use:

- a. There is now an index by AGARD Panel (to complete publications only).
- b. The citations for individual papers in a publication such as a conference proceedings now include a reference to the number of the parent publication, e.g. CP-402.
- c. The citations for individual papers now appear in the correct category for their own subject matter, which may not be the same category as the parent.

CONTENTS

SUBJECT CATEGORIES	v
TYPICAL CITATION	ix
ABSTRACTS (in subject order)	1
SUBJECT INDEX	A-1
PERSONAL AUTHOR INDEX	B-1
CORPORATE SOURCES INDEX	C-1
PANEL INDEX	D-1
REPORT/ACCESSION NUMBER INDEX	E-1
ACCESSION NUMBER INDEX	F-1

SUBJECT CATEGORIES

AERONAUTICS

Includes aeronautics (general); aerodynamics; air transportation and safety; aircraft communications and navigation; aircraft design, testing and performance; aircraft instrumentation; aircraft propulsion and power; aircraft stability and control; and research and support facilities (air).

For related information see also *Astronautics*.

01 AERONAUTICS (GENERAL) 1

02 AERODYNAMICS 4

Includes aerodynamics of bodies, combinations, wings, rotors, and control surfaces; and internal flow in ducts and turbomachinery.

For related information see also 34 *Fluid Mechanics and Heat Transfer*.

03 AIR TRANSPORTATION AND SAFETY 22

Includes passenger and cargo air transport operations; and aircraft accidents.

For related information see also 16 *Space Transportation* and 85 *Urban Technology and Transportation*.

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION 25

Includes digital and voice communication with aircraft; air navigation systems (satellite and ground based); and air traffic control.

For related information see also 17 *Space Communications, Spacecraft Communications, Command and Tracking* and 32 *Communications and Radar*.

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE 30

Includes aircraft simulation technology.

For related information see also 18 *Spacecraft Design, Testing and Performance* and 39 *Structural Mechanics*. For land transportation vehicles see 85 *Urban Technology and Transportation*.

06 AIRCRAFT INSTRUMENTATION 45

Includes cockpit and cabin display devices; and flight instruments.

For related information see also 19 *Spacecraft Instrumentation* and 35 *Instrumentation and Photography*.

07 AIRCRAFT PROPULSION AND POWER 57

Includes prime propulsion systems and systems components, e.g., gas turbine engines and compressors; and onboard auxiliary power plants for aircraft.

For related information see also 20 *Spacecraft Propulsion and Power*, 28 *Propellants and Fuels*, and 44 *Energy Production and Conversion*.

08 AIRCRAFT STABILITY AND CONTROL 72

Includes aircraft handling qualities; piloting; flight controls; and autopilots.

For related information see also 05 *Aircraft Design, Testing and Performance*.

09 RESEARCH AND SUPPORT

FACILITIES (AIR)

79

Includes airports, hangars and runways; aircraft repair and overhaul facilities; wind tunnels; shock tubes; and aircraft engine test stands.

For related information see also 14 *Ground Support Systems and Facilities (Space)*.

ASTRONAUTICS

Includes astronautics (general); astrodynamics; ground support systems and facilities (space); launch vehicles and space vehicles; space transportation; space communications, spacecraft communications, command and tracking; spacecraft design, testing and performance; spacecraft instrumentation; and spacecraft propulsion and power.

For related information see also *Aeronautics*.

12 ASTRONAUTICS (GENERAL) N.A.

For extraterrestrial exploration see 91 *Lunar and Planetary Exploration*.

13 ASTRODYNAMICS N.A.

Includes powered and free-flight trajectories; and orbital and launching dynamics.

14 GROUND SUPPORT SYSTEMS AND FACILITIES (SPACE) 91

Includes launch complexes, research and production facilities; ground support equipment, e.g., mobile transporters; and simulators.

For related information see also 09 *Research and Support Facilities (Air)*.

15 LAUNCH VEHICLES AND SPACE VEHICLES 91

Includes boosters; operating problems of launch/space vehicle systems; and reusable vehicles.

For related information see also 20 *Spacecraft Propulsion and Power*.

16 SPACE TRANSPORTATION 94

Includes passenger and cargo space transportation, e.g., shuttle operations; and space rescue techniques.

For related information see also 03 *Air Transportation and Safety* and 18 *Spacecraft Design, Testing and Performance*. For space suits see 54 *Man/System Technology and Life Support*.

17 SPACE COMMUNICATIONS, SPACECRAFT COMMUNICATIONS, COMMAND AND TRACKING N.A.

Includes telemetry; space communications networks; astronavigation and guidance; and radio blackout.

For related information see also 04 *Aircraft Communications and Navigation* and 32 *Communications and Radar*.

18 SPACECRAFT DESIGN, TESTING AND PERFORMANCE 94

Includes satellites; space platforms; space stations; spacecraft systems and components such as thermal and environmental controls; and attitude controls.

For life support systems see *54 Man/System Technology and Life Support*. For related information see also *05 Aircraft Design, Testing and Performance*, *39 Structural Mechanics*, and *16 Space Transportation*.

19 SPACECRAFT INSTRUMENTATION N.A.

For related information see also *06 Aircraft Instrumentation and 35 Instrumentation and Photography*.

20 SPACECRAFT PROPULSION AND POWER 99

Includes main propulsion systems and components, e.g. rocket engines; and spacecraft auxiliary power sources.

For related information see also *07 Aircraft Propulsion and Power*, *28 Propellants and Fuels*, *44 Energy Production and Conversion*, and *15 Launch Vehicles and Space Vehicles*.

CHEMISTRY AND MATERIALS

Includes chemistry and materials (general); composite materials; inorganic and physical chemistry; metallic materials; nonmetallic materials; propellants and fuels; and materials processing.

23 CHEMISTRY AND MATERIALS (GENERAL) N.A.

24 COMPOSITE MATERIALS 102

Includes physical, chemical, and mechanical properties of laminates and other composite materials.

For ceramic materials see *27 Nonmetallic Materials*.

25 INORGANIC AND PHYSICAL CHEMISTRY 103

Includes chemical analysis, e.g., chromatography; combustion theory; electrochemistry; and photochemistry.

For related information see also *77 Thermodynamics and Statistical Physics*.

26 METALLIC MATERIALS 110

Includes physical, chemical, and mechanical properties of metals, e.g., corrosion; and metallurgy.

27 NONMETALLIC MATERIALS 112

Includes physical, chemical, and mechanical properties of plastics, elastomers, lubricants, polymers, textiles, adhesives, and ceramic materials.

For composite materials see *24 Composite Materials*.

28 PROPELLANTS AND FUELS 113

Includes rocket propellants, igniters and oxidizers; their storage and handling procedures; and aircraft fuels.

For related information see also *07 Aircraft Propulsion and Power*, *20 Spacecraft Propulsion and Power*, and *44 Energy Production and Conversion*.

29 MATERIALS PROCESSING N.A.

Includes space-based development of products and processes for commercial application.

For biological materials see *55 Space Biology*.

ENGINEERING

Includes engineering (general); communications and radar; electronics and electrical engineering; fluid mechanics and heat transfer; instrumentation and photography; lasers and masers; mechanical engineering; quality assurance and reliability; and structural mechanics.

For related information see also *Physics*.

31 ENGINEERING (GENERAL) 117

Includes vacuum technology; control engineering; display engineering; cryogenics; and fire prevention.

32 COMMUNICATIONS AND RADAR 122

Includes radar; land and global communications; communications theory; and optical communications.

For related information see also *04 Aircraft Communications and Navigation and 17 Space Communications, Spacecraft Communications, Command and Tracking*. For search and rescue see *03 Air Transportation and Safety*, and *16 Space Transportation*.

33 ELECTRONICS AND ELECTRICAL ENGINEERING 153

Includes test equipment and maintainability; components, e.g., tunnel diodes and transistors; microminiaturization; and integrated circuitry.

For related information see also *60 Computer Operations and Hardware and 76 Solid-State Physics*.

34 FLUID MECHANICS AND HEAT TRANSFER 154

Includes boundary layers; hydrodynamics; fluidics; mass transfer and ablation cooling.

For related information see also *02 Aerodynamics and 77 Thermodynamics and Statistical Physics*.

35 INSTRUMENTATION AND PHOTOGRAPHY 170

Includes remote sensors; measuring instruments and gages; detectors; cameras and photographic supplies; and holography.

For aerial photography see *43 Earth Resources and Remote Sensing*. For related information see also *06 Aircraft Instrumentation and 19 Spacecraft Instrumentation*.

36 LASERS AND MASERS 172

Includes parametric amplifiers.

For related information see also *76 Solid-State Physics*.

37 MECHANICAL ENGINEERING 174

Includes auxiliary systems (nonpower); machine elements and processes; and mechanical equipment.

38 QUALITY ASSURANCE AND RELIABILITY 179

Includes product sampling procedures and techniques; and quality control.

39 STRUCTURAL MECHANICS 182

Includes structural element design and weight analysis; fatigue; and thermal stress.

For applications see *05 Aircraft Design, Testing and Performance and 18 Spacecraft Design, Testing and Performance*.

GEOSCIENCES

Includes geosciences (general); earth resources and remote sensing; energy production and conversion; environment pollution; geophysics; meteorology and climatology; and oceanography.

For related information see also *Space Sciences*.

42 GEOSCIENCES (GENERAL) N.A.

43 EARTH RESOURCES AND REMOTE SENSING 187

Includes remote sensing of earth resources by aircraft and spacecraft; photogrammetry; and aerial photography.

For instrumentation see 35 *Instrumentation and Photography*.

44 ENERGY PRODUCTION AND CONVERSION N.A.

Includes specific energy conversion systems, e.g., fuel cells; global sources of energy; geophysical conversion; and windpower.

For related information see also 07 *Aircraft Propulsion and Power*, 20 *Spacecraft Propulsion and Power*, and 28 *Propellants and Fuels*.

45 ENVIRONMENT POLLUTION N.A.

Includes atmospheric, noise, thermal, and water pollution.

46 GEOPHYSICS 187

Includes aeronomy; upper and lower atmosphere studies; ionospheric and magnetospheric physics; and geomagnetism.

For space radiation see 93 *Space Radiation*.

47 METEOROLOGY AND CLIMATOLOGY 189

Includes weather forecasting and modification.

48 OCEANOGRAPHY N.A.

Includes biological, dynamic, and physical oceanography; and marine resources.

For related information see also 43 *Earth Resources and Remote Sensing*.

LIFE SCIENCES

Includes life sciences (general); aerospace medicine; behavioral sciences; man/system technology and life support; and space biology.

51 LIFE SCIENCES (GENERAL) 190

52 AEROSPACE MEDICINE 190

Includes physiological factors; biological effects of radiation; and effects of weightlessness on man and animals.

53 BEHAVIORAL SCIENCES 207

Includes psychological factors; individual and group behavior; crew training and evaluation; and psychiatric research.

54 MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT 208

Includes human engineering; biotechnology; and space suits and protective clothing.

For related information see also 16 *Space Transportation*.

55 SPACE BIOLOGY N.A.

Includes exobiology; planetary biology; and extraterrestrial life.

MATHEMATICAL AND COMPUTER SCIENCES

Includes mathematical and computer sciences (general); computer operations and hardware; computer programming and software; computer systems; cybernetics; numerical analysis; statistics and probability; systems analysis; and theoretical mathematics.

59 MATHEMATICAL AND COMPUTER SCIENCES (GENERAL) N.A.

60 COMPUTER OPERATIONS AND HARDWARE 221

Includes hardware for computer graphics, firmware, and data processing.

For components see 33 *Electronics and Electrical Engineering*.

61 COMPUTER PROGRAMMING AND SOFTWARE 223

Includes computer programs, routines, algorithms, and specific applications, e.g., CAD/CAM.

62 COMPUTER SYSTEMS 232

Includes computer networks and special application computer systems.

63 CYBERNETICS 232

Includes feedback and control theory, artificial intelligence, robotics and expert systems.

For related information see also 54 *Man/System Technology and Life Support*.

64 NUMERICAL ANALYSIS 233

Includes iteration, difference equations, and numerical approximation.

65 STATISTICS AND PROBABILITY 234

Includes data sampling and smoothing; Monte Carlo method; and stochastic processes.

66 SYSTEMS ANALYSIS 234

Includes mathematical modeling; network analysis, and operations research.

67 THEORETICAL MATHEMATICS N.A.

Includes topology and number theory.

PHYSICS

Includes physics (general); acoustics; atomic and molecular physics; nuclear and high-energy physics; optics; plasma physics; solid-state physics; and thermodynamics and statistical physics.

For related information see also *Engineering*.

70 PHYSICS (GENERAL) N.A.

For precision time and time interval (PTTI) see 35 *Instrumentation and Photography*; for geophysics, astrophysics or solar physics see 46 *Geophysics*, 90 *Astrophysics*, or 92 *Solar Physics*.

71 ACOUSTICS 236
Includes sound generation, transmission, and attenuation.
For noise pollution see 45 *Environment Pollution*.

72 ATOMIC AND MOLECULAR PHYSICS N.A.
Includes atomic structure, electron properties, and molecular spectra.

73 NUCLEAR AND HIGH-ENERGY PHYSICS N.A.
Includes elementary and nuclear particles; and reactor theory.
For space radiation see 93 *Space Radiation*.

74 OPTICS 237
Includes light phenomena and optical devices.
For lasers see 36 *Lasers and Masers*.

75 PLASMA PHYSICS 242
Includes magnetohydrodynamics and plasma fusion.
For ionospheric plasmas see 46 *Geophysics*. For space plasmas see 90 *Astrophysics*.

76 SOLID-STATE PHYSICS N.A.
Includes superconductivity.
For related information see also 33 *Electronics and Electrical Engineering* and 36 *Lasers and Masers*.

77 THERMODYNAMICS AND STATISTICAL PHYSICS N.A.
Includes quantum mechanics; theoretical physics; and Bose and Fermi statistics.
For related information see also 25 *Inorganic and Physical Chemistry* and 34 *Fluid Mechanics and Heat Transfer*.

SOCIAL SCIENCES

Includes social sciences (general); administration and management; documentation and information science; economics and cost analysis; law, political science, and space policy; and urban technology and transportation.

80 SOCIAL SCIENCES (GENERAL) N.A.
Includes educational matters.

81 ADMINISTRATION AND MANAGEMENT 243
Includes management planning and research.

82 DOCUMENTATION AND INFORMATION SCIENCE 247
Includes information management; information storage and retrieval technology; technical writing; graphic arts; and micrography.
For computer documentation see 61 *Computer Programming and Software*

83 ECONOMICS AND COST ANALYSIS 254
Includes cost effectiveness studies.

84 LAW, POLITICAL SCIENCE AND SPACE POLICY N.A.
Includes NASA appropriation hearings; aviation law; space law and policy; international law; international cooperation; and patent policy.

85 URBAN TECHNOLOGY AND TRANSPORTATION N.A.
Includes applications of space technology to urban problems; technology transfer; technology assessment; and surface and mass transportation.
For related information see 03 *Air Transportation and Safety*, 16 *Space Transportation*, and 44 *Energy Production and Conversion*.

SPACE SCIENCES

Includes space sciences (general); astronomy; astrophysics; lunar and planetary exploration; solar physics; and space radiation.
For related information see also *Geosciences*.

88 SPACE SCIENCES (GENERAL) N.A.

89 ASTRONOMY N.A.
Includes radio, gamma-ray, and infrared astronomy; and astrometry.

90 ASTROPHYSICS N.A.
Includes cosmology; celestial mechanics; space plasmas; and interstellar and interplanetary gases and dust.
For related information see also 75 *Plasma Physics*.

91 LUNAR AND PLANETARY EXPLORATION N.A.
Includes planetology; and manned and unmanned flights.
For spacecraft design or space stations see 18 *Spacecraft Design, Testing and Performance*.

92 SOLAR PHYSICS N.A.
Includes solar activity, solar flares, solar radiation and sunspots.
For related information see 93 *Space Radiation*.

93 SPACE RADIATION 255
Includes cosmic radiation; and inner and outer earth's radiation belts.
For biological effects of radiation see 52 *Aerospace Medicine*. For theory see 73 *Nuclear and High-Energy Physics*.


GENERAL

Includes aeronautical, astronautical, and space science related histories, biographies, and pertinent reports too broad for categorization; histories or broad overviews of NASA programs.

99 GENERAL N.A.

Note: N.A. means that no abstracts were assigned to this category for this issue.

TYPICAL CITATION

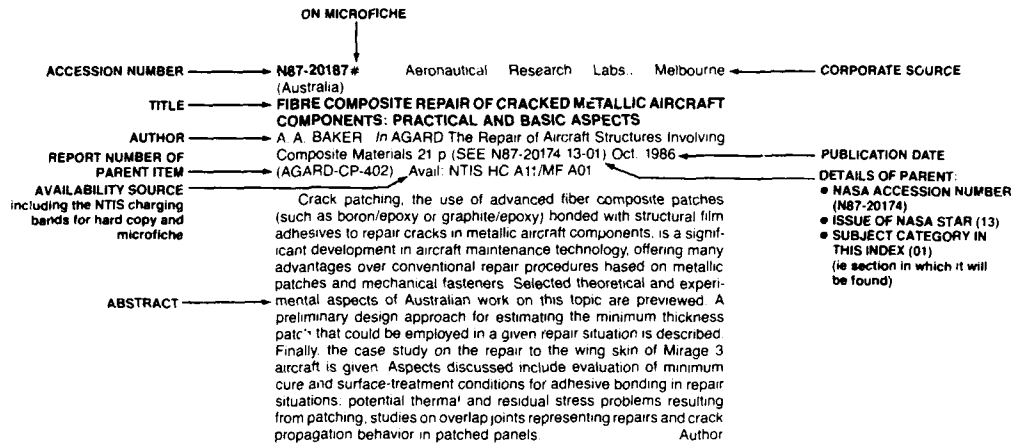

NB Many AGARD publications, such as Conference Proceedings and Lecture Series, contain a number of individual papers. There is a separate citation in this Index for each such paper, each containing a cross-reference (01 in this instance) to the parent publication in the form shown above. To locate the parent in this index, refer to the subject category given in the cross-reference. Within each category citations are in numerical order.

AGARD INDEX OF PUBLICATIONS (1986-1988)

ABSTRACT SECTION

01

AERONAUTICS (GENERAL)

N87-20174# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

THE REPAIR OF AIRCRAFT STRUCTURES INVOLVING COMPOSITE MATERIALS

Oct. 1986 240 p. In ENGLISH and FRENCH Meeting held in Oslo, Norway, 14-16 Apr. 1986

(AGARD-CP-402; ISBN-92-835-0400-3; AD-A178691) Avail.

NTIS HC A11/MF A01

Modern combat aircraft are making increasing use of composite materials in both primary and secondary structures, and the need for repair schemes which involve a mixture of composite and metallic materials is no longer exceptional. At its sixty-second meeting, the Structures and Materials Panel held a conference of Specialists, the aim of which was to share experiences of repairs involving composites and structures now in service. A further aim was to highlight the demand for the development of innovative times and increase repair capabilities under all conditions of service but also make for greater standardization. For individual titles see N87-20175 through N87-20192.

N87-20175# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

REPAIR PROCEDURES FOR COMPOSITE PARTS ON THE ALPHA JET

TH. THIELE In AGARD The Repair of Aircraft Structures Involving Composite Materials 7 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail. NTIS HC A11/MF A01

A survey is given of activities to develop repair procedures for the composite parts of the alpha jet. The complete program was divided into two parts: the first part covered the repair and test of specimen; the second part the repair and test of a full scale speed brake

Author

N87-20177# Lockheed-California Co., Burbank. DEVELOPMENT OF FIELD LEVEL REPAIRS FOR COMPOSITE STRUCTURES

ROBERT H. STONE In AGARD The Repair of Aircraft Structures Involving Composite Materials 12 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail. NTIS HC A11/MF A01

Bolted and bonded field-level repairs have been developed, fabricated and tested at Lockheed-California Company for several recent contract and independent research programs. Bolted repairs are particularly well adapted to field repair situations. Bolted aluminum repair concepts have been developed and verified under a NASA sponsored program for an L-1011 composite inboard aileron, which is now in flight-service evaluation. Special drilling, machining, fastener installation and sealing procedures were developed for these repairs. Bolted repairs were also developed and validated under a Naval Air Development Center (NADC) sponsored program. These included various configurations of aluminum and titanium patches using blind fasteners, with drilling and installation procedures representative of field conditions including lack of back-side access. Repair specimens were tested in tension and compression, and the patches restored design strength levels to the damaged composite. Bonded field repairs

require adhesives with room temperature storability in addition to the other structural/environmental requirements. Screening tests were run on various film and two-part adhesives. A two-part adhesive, developed by NADC and now commercially available, had the best combination of properties for field repairs. Other tests related to bonded field repairs determined that 177 C (350 F) curing film adhesives have several months' storability at room temperature, and verified prebond storability of titanium surface treatments for use in bonded repair kits.

Author

N87-20179# Societe Nationale Industrielle Aerospatiale, Marignane (France). Advanced Engineering Dept.

REPAIR OF HELICOPTER COMPOSITE STRUCTURE TECHNIQUES AND SUBSTANTIATIONS

MANUEL TORRES and BERNARD PLISSONNEAU In AGARD

The Repair of Aircraft Structures Involving Composite Materials 21 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail. NTIS HC A11/MF A01

The advantages of composite materials are now well known and have been widely demonstrated. Lighter weight, lower cost, shorter manufacturing cycles, damage tolerance, etc. are some of the advantages. As a result, composite materials are increasingly used in helicopters. Helicopter designs have made extensive use of composites for over twenty years. Composite rotor blades date from 1970. More recently, major programs have been undertaken to produce the future generation of helicopters with a totally composite fuselage. The increasing number of composite items in the aircraft structure raises the problem of damage and repair. This concern is further justified by the relatively high damage probability of a helicopter that may be operated in severe environmental conditions. The repair philosophy engages the responsibility of the aircraft manufacturer as well as the operator. The manufacturer must develop and substantiate repair methods that are as simple as possible. The operator must be equipped with suitable inspection and repair facilities. These repairs must ensure an adequate safety level for the remaining helicopter's service life. They must be suitable for the nature of the damage and the type of part involved. They must be as easy as possible to implement and require minimal special tools and expertise, and the repair cost must remain well below the price of new replacement parts.

Author

N87-20181# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Stress Office.

COMPOSITE REPAIR OF COCURED J-STIFFENED PANELS: DESIGN AND TEST VERIFICATION

GEORG GUENTHER and LUDWIG LEMMER In AGARD The Repair of Aircraft Structures Involving Composite Materials 19 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail. NTIS HC A11/MF A01

An increasing percentage of military aircraft fuselage and wing structures are being replaced by cocured integrated carbon fiber composites (CFC) structures. The probability of damage in day-to-day operation is increased, since most of the structure is located on the aircraft surface. The most common field of application for cocured stiffeners are thin panels critical to buckling under shear and/or compression loading and fuselage frames subject to bending. Bonded repair methods for two maintenance levels (depot and field) have been developed and tested using representative components. For the stiffened panels both repair methods (field and depot) fulfilled structural requirements and proved their durability in the fatigue tests. Test results of the stiffened skin elements showed that cocured fuselage structures with complex geometries are repairable without reduction in

NOTICE

The single asterisk following the accession number indicates that the report is NASA sponsored

01 AERONAUTICS (GENERAL)

strength and stiffness tests performed after artificial ageing of the repair structure proved their reliability in the environment.

Author

N87-20182# Royal Aircraft Establishment, Farnborough (England).

EFFECT OF ADHESIVE BONDING VARIABLES ON THE PERFORMANCE OF BONDED CFRP PATCH REPAIRS OF METALLIC STRUCTURES

P. POOLE, M. H. STONE, G. R. SUTTON, and R. N. WILSON. In AGARD The Repair of Aircraft Structures Involving Composite Materials 21 p (SEE N87-20174 13-01) Oct. 1986 (AGARD-CP-402) Avail: NTIS HC A11/MF A01

The literature is briefly reviewed and limitations of the existing experimental data on the performance of bonded carbon fiber reinforced plastics (CFRP) patches are indicated. Earlier work from the Royal Aircraft Establishment is summarized, showing the importance of patch size and crack growth conditions prior to patching. Fatigue data for center-cracked, patched aluminum alloy thin sheets (7075-T76) are then presented. These show that: adhesive layer stiffness had only a moderate effect; differential contraction stresses had much less effect than predicted; and neither variations in surface treatment of the aluminum alloy before bonding nor exposure of the patch to warm/moist conditions had any substantial effect on crack rates. Bond durability wedge and peel tests did show marked effects of alloy pretreatments. Explanations are advanced for the lack of effect of moisture and ΔT pretreatment on the alloy-adhesive bonds of the patched sheets.

Author

N87-20183# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH., Aeronautical Systems Div.

COMPOSITE REPAIR OF CRACKED ALUMINUM STRUCTURE

LARRY G. KELLY. In AGARD The Repair of Aircraft Structures Involving Composite Materials 6 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail: NTIS HC A11/MF A01

The use of bonded composite patches for repair of a wide range of typical fatigue cracked and otherwise damaged aluminum structural panels is discussed. Experimental data on stress intensity and crack growth characteristics were obtained to evaluate the advantages of such repairs. A range of metal thickness and patch parameters (thickness, orientation, bonding temperature) were tested. Edge cracked 4 inch by 18 inch 2024T3 aluminum panels were patched and fatigue behavior evaluated under constant amplitude and the Falstaff flight spectrum loading. The results showed panel thickness and fatigue test load spectrum to be important parameters. Present repair procedures for cracked aluminum aircraft structures call for bolted on metal patches. Advanced composite material bonded to such damaged structures offers the advantage of increased fatigue life. To quantify this advantage a test program was conducted with boron/epoxy patches on cracked aluminum panels. The panels were subjected to both constant amplitude and flight spectrum loads. The objective was to establish the reduction in stress intensity and thus reduced crack growth rate achieved through the use of room temperature and 250 F cured adhesive bonded patches. The pertinent parameters evaluated were aluminum thickness, patch area, and ply orientation. Dramatic improvements in fatigue life were achieved up to 20 times extended lifetimes for 1/16 inch repaired aluminum panels having an initial .34 inch induced crack.

Author

N87-20184# Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France).

DAMAGE REPAIR OF IN-SERVICE COMPOSITE STRUCTURES: APPLICATION TO THE MIRAGE 2000 [REPARATION DE DOMMAGES EN SERVICE DES STRUCTURES COMPOSITES. APPLICATION AU MIRAGE 2000]

DANIEL CHAUMETTE and FRANÇOISE HENRIOT. In AGARD The Repair of Aircraft Structures Involving Composite Materials 10 p (SEE N87-20174 13-01) Oct. 1986 In FRENCH; ENGLISH summary

(AGARD-CP-402) Avail: NTIS HC A11/MF A01

A summary is given of the 15 years experience AMD/BA has had in the field of composite structures repair, and the application to the case of the Mirage 2000. AMD/BA has developed repairs using a boron fiber dry fabric impregnated and bonded in situ on aluminum structures. These repairs have been the subject of tests,

and of such practical applications as local reinforcements on the Mercure airliner. Since 1978 a large number of carbon fiber ailerons have been put in service on the fighter aircraft Mirage F1 and on the Falcon 50 business jet. Repair procedures have been developed for these elements. These elements have been troublefree up to now.

Author

N87-20185# Societe de Construction des Avions Hurel-Dubois, Paris (France).

COMPOSITE STRUCTURE REPAIRS CARRIED OUT ACCORDING TO AERONAUTICAL TECHNIQUES [REPARATIONS DE STRUCTURES COMPOSITES REALISEES SELON LES TECHNIQUES AERONAUTIQUES]

JEAN-ALAIN JOUAN. In AGARD The Repair of Aircraft Structures Involving Composite Materials 13 p (SEE N87-20174 13-01) Oct. 1986 In FRENCH

(AGARD-CP-402) Avail: NTIS HC A11/MF A01

Advanced composite materials (aramide, carbon, honeycomb) initially utilized in aircraft structures are seeing their domain of application extended to other sectors. The experiences of Hurel-Dubois with two specific composite material applications, frames for the Formula 1 racing car and structures for transoceanic racing catamarans, are discussed with reference to damage repair and the restoration of structural integrity. The various types of in-service damage are outlined and the materials and procedures for repair are described.

Author

N87-20186# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

COMPOSITE REPAIR TECHNIQUES FOR J-STIFFENED COMPOSITE FUSELAGE STRUCTURES

K. LEDWA. In AGARD The Repair of Aircraft Structures Involving Composite Materials 11 p (SEE N87-20174 13-01) Oct. 1986 (AGARD-CP-402) Avail: NTIS HC A11/MF A01

The next generation of lightweight military aircraft will feature an essentially increased application of carbon fiber reinforced plastics (CFRP) to primary structure including fuselage side skins. Mainly for cost and weight reasons they will be large size integrally stiffened components cured in a single shot operation. In order to avoid a costly replacement of the entire side skin in case of damage, adjusted repair techniques are required. Basic repair philosophies for field and depot level repairs using composite materials were defined and proved by two different types of test specimen. Specially designed flat panels with a 50 mm diameter hole penetrating skin and stiffener were followed by single curved side skin elements damaged by a destructive qualification test. Both types were repaired using different methods and finally destructive tested. The test results showed that the restoration of part stiffness and sufficient strength after repair can successfully be realized. Manufacturing problems were recognized concerning material choice and cure cycles at elevated temperatures and regarding the nondestructive inspection of applied repair patches.

Author

N87-20187# Aeronautical Research Labs., Melbourne (Australia).

FIBRE COMPOSITE REPAIR OF CRACKED METALLIC AIRCRAFT COMPONENTS: PRACTICAL AND BASIC ASPECTS

A. A. BAKER. In AGARD The Repair of Aircraft Structures Involving Composite Materials 21 p (SEE N87-20174 13-01) Oct. 1986 (AGARD-CP-402) Avail: NTIS HC A11/MF A01

Crack patching, the use of advanced fiber composite patches (such as boron/epoxy or graphite/epoxy) bonded with structural film adhesives to repair cracks in metallic aircraft components, is a significant development in aircraft maintenance technology, offering many advantages over conventional repair procedures based on metallic patches and mechanical fasteners. Selected theoretical and experimental aspects of Australian work on this topic are provided. A preliminary design approach for estimating the minimum thickness patch that could be employed in a given repair situation is described. Finally, the case study on the repair to the wing skin of Mirage 3 aircraft is given. Aspects discussed include evaluation of minimum cure and surface-treatment conditions for adhesive bonding in repair situations, potential thermal and residual stress problems resulting from patching, studies on overlap joints representing repairs and crack propagation behavior in patched panels.

Author

01 AERONAUTICS (GENERAL)

N87-20188# Naval Air Development Center, Warminster, PA. **COMPOSITE REPAIR MATERIAL AND DESIGN DEVELOPMENT EFFORTS**

R. C. COCHRAN, T. M. DONNELLAN, E. L. ROSENZWEIG, and R. E. TRABOCCO / In AGARD The Repair of Aircraft Structures Involving Composite Materials 13 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail: NTIS HC A11/MF A01

Recent developments in the area of bonded and bolted composite repair are discussed. An ideal resin or adhesive for field repair would have the following characteristics: ambient storage, low temperature cure, short time cure, elevated temperature and moisture resistance, and vacuum processing. Two approaches were used to achieve resin formulations for repair patches which will meet these requirements. The first method utilizes chemically hindered diamines as curing agents for epoxy resins. The second method involves isolation of the curing agents from the epoxy resin by phase separation. In the area of adhesives for field repair of composites, a two-part paste adhesive has been developed. The adhesive meets all of the program requirements and can be used with various repair materials. The design of bolted repairs for composite structures is discussed. A simplified design has been established which uses standard plate thicknesses, bolt sizes and spacing. Several patch shapes have been tested and found to restore design ultimate strains. Author

N87-20 89# McDonnell Aircraft Co., Saint Louis, MO

BATTLE DAMAGE REPAIR OF COMPOSITE STRUCTURES

JAMES V. HINKLE, JACK VANES, and CHARLES L. RAMSEY (Air Force Wright Aeronautical Labs., Wright-Patterson AFB, Ohio.) / In AGARD The Repair of Aircraft Structures Involving Composite Materials 11 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail: NTIS HC A11/MF A01

Concepts and procedures for the rapid repair of battle-damaged composite structures are discussed. The damage consists of elongated or concentrated penetrations of solid wing skins and of honeycomb empenage. The size of the damage, in conjunction with the strength-critical nature of these structures, requires structural repairs in order to restore a strength capability commensurate with the maximum expected flight loads and service temperatures. Guidelines for these repairs are based on the USAF concept of operation for aircraft battle damage repair. Structural tests are being conducted to validate repair designs. Damage simulation, repair design, damage cleanup, repair fabrication, and available test results are reported. Author

N87-20190# Army Materials Technology Lab., Watertown, MA. **UNCONVENTIONAL APPROACHES TO FIELD REPAIR**

STANLEY E. WENTWORTH, MICHAEL S. SENNETT, and JOHN W. GIBSON (Southern Research Inst., Birmingham, Ala.) / In AGARD The Repair of Aircraft Structures Involving Composite Materials 8 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail: NTIS HC A11/MF A01

Field repair of composites presents special problems for the Army where the repair might literally be performed in a field or other remote location. In such a situation, access to electric power both for refrigeration to preserve reactive resin systems and for heating to cure the patch, is severely limited. In order to circumvent these problems, we have investigated some novel approaches to the packaging and curing of composite patches. One approach involves a self-contained kit in which all of the patch components including the reinforcement are separate from one another until the patch is needed, at which time they are combined in the proper ratio by means of a simple operation. Shelf-life for such a system, even without refrigeration is thus indefinite. Another approach makes use of optical fibers to carry light energy into the interior of an otherwise opaque graphite fiber-reinforced patch thereby permitting the use of a photochemical curable matrix resin. Initial efforts to implement these approaches, some of the difficulties encountered, and current attempts to circumvent them are discussed. Some new approaches are also outlined. Author

N87-20191# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

PATCH REPAIR OF CORRODED AIRCRAFT SKIN AREAS

W. G. J. THART and R. J. H. WANHILL / In AGARD The Repair of Aircraft Structures Involving Composite Materials 8 p (SEE N87-20174 13-01) Oct. 1986 Sponsored by the Royal Netherlands Air Force

(AGARD-CP-402) Avail: NTIS HC A11/MF A01

Environmental conditions in Europe are conducive to corrosion attack of aircraft structures. In military aircraft, corrosion problems occur especially at countersunk fastener holes. The corrosion is generally removed by grinding. A limited amount of material removal is specified by the aircraft manufacturers, but it is sometimes necessary to exceed these limits. When this happens a repair is necessary to allow continued operation. An investigation of the effectiveness of bonded patch repairs was carried out. The patch materials were aluminum alloy sheet and aramid fiber reinforced composite prepreg. A cold curing acrylic based adhesive was used for bonding. Specimens with simulated patch repairs were subjected to both constant amplitude and flight simulation fatigue testing under various environmental conditions. The results indicated that bonded patches are potentially very good repairs for areas weakened by corrosion and its removal. Author

N87-20192# British Airways, Middlesex (England).

BRITISH AIRWAYS EXPERIENCE WITH COMPOSITE REPAIRS

K. B. ARMSTRONG / In AGARD The Repair of Aircraft Structures Involving Composite Materials 12 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail: NTIS HC A11/MF A01

British Airways experience with composite repairs since 1970 is discussed. The use of composite materials to repair metal structures such as Concorde wing leading edges is discussed. Repair of composite parts from Radomes starting in 1970, through B.747 body fairing and floor panels, to the repair of carbon fiber composite control surfaces and access doors on the B.757 is covered. Most of the repairs have used cold-setting resins (with heat lamp assisted curing) but some hot-setting adhesives and pre-pregs have been used. Effort is being made to develop techniques to facilitate the use of hot-setting adhesives. More information will be sought on diffusion and solubility coefficients of all types of adhesives to aid selection and improve the durability of repairs. Author

N87-22664# Ministry of Defence, London (England).

COST ANALYSIS OF AIRCRAFT PROJECTS

D. FADDY / In AGARD Improvement of Combat Performance for Existing and Future Aircraft 10 p (SEE N87-22663 16-05) Dec. 1986

(AGARD-CP-409) Avail: NTIS HC A07/MF A01

The effect of advancing technology on the cost of past aircraft and the implications for the future is reviewed. The validity of historical records for forecasting a future dominated by technological change and the consequences of continued escalation are discussed. It is argued that more priority needs to be given to the reduction of support cost and a way of looking at this as a direct contribution to military capability is suggested. The role of operations research is briefly emphasized and a more deliberately evolutionary approach to the production of aircraft is advocated. Author

N88-28857# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel.

BOUNDARY LAYER SIMULATION AND CONTROL IN WIND TUNNELS

Apr. 1988 462 p
(AGARD-AR-224; ISBN-92-835-0457-7; AD-A198667) Avail: NTIS HC A20/MF A01

The results of a study performed by AGARD Working Group 09 on boundary layer simulation in wind tunnels are presented with emphasis on the transonic speed regime. This report is intended to display the current state-of-the-art in boundary layer simulation where Reynolds number is or cannot be simulated and give attention to wind tunnel effects as well as to document the physical aspects of boundary layer simulation and the research needed. Finally, a simulation methodology is proposed which can serve wind tunnel user and operator as an ordered thinking process for the design of wind tunnel tests where viscous effects are

01 AERONAUTICS (GENERAL)

important. For individual titles, see N88-28858 through N88-28877.

N88-29717# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

THE FLIGHT OF FLEXIBLE AIRCRAFT IN TURBULENCE: STATE-OF-THE-ART IN THE DESCRIPTION AND MODELLING OF ATMOSPHERIC TURBULENCE

Jun. 1988 111 p Meeting held in Cesme, Turkey, 4-9 Oct. 1987

(AGARD-R-734-ADD; ISBN-92-835-0458-5; AD-A198702) Avail: NTIS HC A06/MF A01

The large scale use of flight recorders by commercial airlines, coupled with the enhanced quality of results offered by modern computer based reduction processes makes it possible to broaden knowledge of the phenomenon of atmospheric turbulence. At the same time, new methods for predicting the response of flexible aircraft to turbulence are being proposed, and novel gust alleviation systems are being designed and tested. The presentations made at a workshop held for the discussion of these ideas are given. For individual titles, see N88-29718 through N88-29724.

N88-29725# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

THE FLIGHT OF FLEXIBLE AIRCRAFT IN TURBULENCE: STATE-OF-THE-ART IN THE DESCRIPTION AND MODELLING OF ATMOSPHERIC TURBULENCE

Dec. 1987 187 p Meeting held in Athens, Greece, 28 Sep. - 3 Oct. 1986

(AGARD-R-734; ISBN-92-835-0426-7; AD-A194870) Avail: NTIS HC A09/MF A01

The flight of flexible aircraft in turbulence was studied. Presentations given at the first of two workshops on the subject are provided. Topics covered here are: (1) Measurements of turbulence by specially equipped aircraft, and (2) Data collection and reduction of incremental accelerations observed in commercial flights. For individual titles, see N88-29726 through N88-29734.

N88-29735# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

ADVANCES IN FLYING QUALITIES

May 1988 194 p Lecture held in Delft, Netherlands, 26-27 May 1988, in Rome, Italy, 30-31 May 1988, and in Torrance, Calif., 15-16 Jun. 1988

(AGARD-LS-157; ISBN-92-835-0461-5; AD-A199307) Avail: NTIS HC A09/MF A01

Judging the suitability of an aircraft to safely and effectively perform its mission without undue pilot skill and discomfort is what flying qualities is all about. Central to such judgement, and to the design of suitable aircraft plus flight control systems, is an understanding of what the pilot can do with ease and comfort or conversely what bothers him. The lectures are designed to impart such understanding to both novice and seasoned practitioners in flying qualities and flight control and thereby to provide the bridge required to extend flying qualities requirements from simple classic response aircraft, to the responses attending the use of full time active control. Mathematical models of pilot control behavior are explained. The application of various model to flying qualities are discussed; and the influences, regarding the generic likes and dislikes of pilots drawn from such studies are listed. For individual titles, see N88-29736 through N88-29742.

N89-10001# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

TECHNICAL EVALUATION REPORT ON THE FLIGHT MECHANICS PANEL SYMPOSIUM ON FLIGHT VEHICLE DEVELOPMENT TIME AND COST REDUCTION

GERALD G KAYTEN (Kayten, Gerald G., Chevy Chase, Md.) 1988 16 p Symposium held in Toulouse, France, 11-14 May 1987

(AGARD-AR-244; ISBN-92-835-0473-9; AD-A199742) Avail: NTIS HC A03/MF A01

There is a current perception that time and especially the cost of the new systems are increasing at an ever accelerating rate

greater than that for improvement of the capabilities of the machines. The purpose of this symposium was to provide a forum to identify and discuss the elements contributing to the increased time and cost development, and to explore the question of what can be done to arrest and reverse the trend. Another aim of this symposium was to encourage others in the nontechnical area to join with the technical people in attacking these problems resolutely. It is considered that the meeting was successful in focusing attention on this situation, showing what technologies can do to reduce development time and cost growth, and by highlighting key areas that must be addressed to reverse the trend. Author

N89-10831# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

COMPUTING SYSTEMS CONFIGURATION FOR HIGHLY INTEGRATED GUIDANCE AND CONTROL SYSTEMS

Jun. 1988 164 p Lectures held in Bourges, France, 20-21 Jun. 1988, in Neubiberg, West Germany, 23-24 Jun. 1988, and in Seattle, Wash., 6-7 Jul. 1988

(AGARD-LS-158; ISBN-92-835-0464-X; AD-A199308) Avail: NTIS HC A08/MF A01

Modern military air vehicles have to comply with sophisticated performance requirements. As a result, full advantage must be taken of the rapid advances in computer hardware/software and future micro-electronics technologies. New design and development strategies must be implemented in order to obtain the overall performance benefits offered by advanced integrated systems for guidance and control, avionics, weapon delivery and tactical performance management. In a two-day program this Lecture Series addresses issues which have demonstrated notable and outstanding advances in the field of computing system design, design tools and techniques, computers, data buses, and architectures. In particular, the second day's program will show how technological advances have enabled the design of a modern computing system architecture. Future trends and new directions will be subjects for round table discussions. For individual titles, see N89-10832 through N89-10837.

02

AERODYNAMICS

Includes aerodynamics of bodies, combinations, wings, rotors, and control surfaces; and internal flow in ducts and turbomachinery.

N86-27182*# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel.

TECHNICAL EVALUATION REPORT OF AGARD TECHNICAL EVALUATION MEETING ON UNSTEADY AERODYNAMICS: FUNDAMENTALS AND APPLICATIONS TO AIRCRAFT DYNAMICS

D. G. MABEY (Royal Aircraft Establishment, Bedford, England) and J. R. CHAMBERS (NASA, Langley Research Center, Hampton, VA) Jan. 1986 18 p Meeting held in Goettingen, Fed. Republic of Germany, 6-9 May 1985

(AGARD-AR-222; ISBN-92-835-1515-3; AD-A167592) Avail: NTIS HC A02/MF A01 CSCL 01A

From May 6 to 9, 1985, the Fluid Dynamics Panel and Flight Mechanics Panel of AGARD jointly arranged a Symposium on Unsteady Aerodynamics-Fundamentals and Applications to Aircraft Dynamics at the Stadthall, Goettingen, West Germany. This Symposium was organized by an international program committee chaired by Dr K. J. Orlik-Ruckemann of the Fluid Dynamics Panel. The program consisted of five sessions grouped in two parts: (1) Fundamentals of Unsteady Aerodynamics; and (2) Applications to Aircraft Dynamics. The 35 papers presented at the 4 day meeting are published in AGARD CP 386 and listed in the Appendix. As the papers are already available and cover a very wide field, the evaluators have offered brief comments on every paper, followed by an overall evaluation of the meeting, together with some general conclusions and recommendations. Author

02 AERODYNAMICS

N86-27187# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. **AIRCRAFT DRAG PREDICTION AND REDUCTION. ADDENDUM 1: COMPUTATIONAL DRAG ANALYSES AND MINIMIZATION; MISSION IMPOSSIBLE?**

J. W. SLOOFF (National Aerospace Lab., Amsterdam, Netherlands) Apr 1986 33 p Presented at Aircraft Drag Prediction and Reduction, Rhode Saint Genese, Belgium, 20-23 May 1985, and Hampton, Va., 5-8 Aug. 1985; sponsored by the von Karman Inst., AGARD, and NASA Langley Research Center (AGARD-R-723-ADD-1; ISBN-92-835-1524-2) Avail: NTIS HC A03/MF A01

The Special Course on Aircraft Drag Prediction was sponsored by the AGARD Fluid Dynamics Panel and the von Karman Institute and presented at the von Karman Institute, Rhode-Saint-Genese, Belgium, on 20 to 23 May 1985 and at the NASA Langley Research Center, Hampton, Virginia, USA, 5 to 6 August 1985. The course began with a general review of drag reduction technology. Then the possibility of reduction of skin friction through control of laminar flow and through modification of the structure of the turbulence in the boundary layer were discussed. Methods for predicting and reducing the drag of external stores, of nacelles, of fuselage protuberances, and of fuselage afterbodies were then presented followed by discussion of transonic drag rise. The prediction of viscous and wave drag by a method matching inviscid flow calculations and boundary layer integral calculations, and the reduction of transonic drag through boundary layer control are also discussed. This volume comprises Paper No.9 Computational Drag Analyses and Minimization: Mission Impossible? which was not included in AGARD Report 723 (main volume). Author

N86-32408# Dynetics, Inc., Huntsville, AL. Fluid Dynamics Panel.

AERODYNAMICS OF AIRCRAFT AFTERBODY: REPORT OF THE WORKING GROUP ON AERODYNAMICS OF AIRCRAFT AFTERBODY

1986 348 p (AGARD-AR-226; AD-A172341) Avail: NTIS HC A15/MF A01

Aircraft afterbody design is still one of the most critical problems for industry, especially in fighter aircraft development. The flow around the rear part of the fuselage is characterized by the simultaneous occurrence of interfering physical phenomena such as thick turbulent boundary layers, viscous flow separation, hot jet interference at the base and the boat tail, and jet plume expansion in three-dimensional transonic and supersonic flow. Even experimental techniques hardly fulfill requirements for correct wind tunnel simulation of all effects. Drag prediction and drag minimization procedures for complex configurations are strongly dependent on the reliability of numerical and experimental flowfield simulation. This publication reports on the progress which has been made by AGARD-FDP Working Group WG08, established to evaluate the state-of-the-art in experimental and computational techniques for aircraft afterbodies. Author

N87-20199# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. **APPLICATIONS OF COMPUTATIONAL FLUID DYNAMICS IN AERONAUTICS**

Nov. 1986 428 p In ENGLISH and FRENCH Symposium held in Aix-en-Provence, France, 7-10 Apr. 1986 (AGARD-CP-412; ISBN-92-835-0402-X; AD-A177380) Avail: NTIS HC A19/MF A01

The goal of the symposium was to provide a balanced, if not exhaustive, assessment of the status of computational fluid dynamics in aerodynamic design and analysis, where CFD is making an increasingly major impact. The rapid progress in computer capability, the general availability of large scale computers and parallel achievements in numerical analysis, algorithm development and user experience were evidenced by the presentations. The sessions were divided into subject areas of: grid generation, inviscid flow, viscous-inviscid interactions, and Navier-Stokes solutions. For individual titles see N87-20200 through N87-20231.

N87-20206# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

THE PREDICTION OF TRANSONIC LOADING ON ADVANCING HELICOPTER ROTORS

R. C. STRAWN and C. TUNG In AGARD Applications of Computational Fluid Dynamics in Aeronautics 14 p (SEE N87-20199 13-02) Nov. 1986 (AGARD-CP-412) Avail: NTIS HC A19/MF A01

Two different schemes are presented for including the effect of rotor wakes on the finite-difference prediction of rotor loads. The first formulation includes wake effects by means of a blade-surface inflow specification. This approach is sufficiently simple to permit coupling of a full-potential finite-difference rotor code to a comprehensive integral model for the rotor wake and blade motion. The coupling involves a transfer of appropriate loads and inflow data between the two computer codes. Results are compared with experimental data for two advancing rotor cases. The second rotor-wake modeling scheme is a split potential formulation for computing unsteady blade-vortex interactions. Discrete vortex fields are introduced into a three-dimensional, conservative, full-potential rotor code. Computer predictions are compared with two experimental blade-vortex interaction cases. Author

N87-20207# Canadair Ltd., Montreal (Quebec).

PREDICTION OF WING-BODY-STORE AERODYNAMICS USING A SMALL PERTURBATION METHOD AND A GRID EMBEDDING TECHNIQUE

FASSI KAFYEKE In AGARD Applications of Computational Fluid Dynamics in Aeronautics 13 p (SEE N87-20199 13-02) Nov. 1986 Sponsored by Department of National Defence of Canada (AGARD-CP-412) Avail: NTIS HC A19/MF A01

A computer program providing accurate and cost effective predictions of transonic flow fields about three dimensional configurations has been developed at Canadair. The computation scheme uses the Small Perturbation Equation and a grid embedding technique. The flow field is solved iteratively, using successive line overrelaxation. The comparisons between computed results and experiment for a wing-body and a generic wing-body-pylon-store configuration show that a good level of accuracy can be obtained with this approach. The program was written with the overall emphasis on lowering the computation time and is considered as a stepping stone towards a full aircraft-store aerodynamic simulation. The potential of the method for analyzing complex three dimensional configurations is discussed, showing that the code is a very practical tool for the design office, for parametric studies or as a lead program for more sophisticated investigations using Euler or Navier-Stokes solvers. Author

N87-20208# National Aerospace Lab., Amsterdam (Netherlands). Information Div.

MATRICES, TRANSONIC POTENTIAL FLOW CALCULATIONS ABOUT TRANSPORT AIRCRAFT

J. VANDERVOOREN, A. J. VANDERWEES, and J. H. MEELKER In AGARD Applications of Computational Fluid Dynamics in Aeronautics 14 p (SEE N87-20199 13-02) Nov. 1986 Sponsored in part by Netherlands Agency for Aerospace Programs (NIVR) (AGARD-CP-412) Avail: NTIS HC A19/MF A01

MATRICES is a system under development for the calculation of transonic (potential) flow about transport aircraft. The motivation for this development is discussed, as well as the basic concepts of the system. Details of the full potential flow solver, involving the newly developed Implicit Lower Upper decomposition/Strongly Implicit Procedures (ILU/SIP) relaxation scheme, are given. A discussion on computer power required and some informatics aspects are also presented. Results of computations are presented and discussed. Author

02 AERODYNAMICS

N87-20209# British Aerospace Aircraft Group, Warton (England). Fluid Dynamics Section.

APPLICATIONS AND DEVELOPMENTS OF COMPUTATIONAL METHODS FOR THE AERODYNAMIC PROBLEMS OF COMPLEX CONFIGURATIONS

J. A. H. PETRIE and P. M. SINCLAIR. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 14 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

Problems encountered by the Aerodynamicist at a military design site are characterised by complex geometry and complex flow conditions. Because of the limitations of current Computational Fluid Dynamics (CFD) technology, its use represents a compromise in one or both of these areas. The way in which sensible use of the current generation of CFD codes can generate useful aerodynamic design data is illustrated by three particular examples; wing design, installed store loading and the prediction of store release trajectories. Although these examples will show that data can be generated by such techniques, they are by no means ideal. As an alternative to the methods being widely developed which require a body fitted grid, BAe Brough is developing an integral method which uses a rectangular grid passing through the configuration surface(s). The theory behind this method will be presented together with some results which show the technique to have great promise. Author

N87-20214# Massachusetts Inst. of Tech., Cambridge. CFD Lab.

APPLICATIONS OF EULER EQUATIONS TO SHARP EDGE DELTA WINGS WITH LEADING EDGE VORTICES

EARL M. MURMAN and ARTHUR RIZZI (Aeronautical Research Inst. of Sweden, Bromma). In AGARD Applications of Computational Fluid Dynamics in Aeronautics 13 p (SEE N87-20199 13-02) Nov. 1986

(Contract NAG1-358)

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

Studies on the solution of discrete Euler equations past swept delta wing configurations with sharp leading edges are presented. Freestream Mach numbers range from zero to supersonic, although the Mach number normal to the leading edge is subsonic for all cases discussed. A few examples are given to show the application of the numerical methods to representative problems. The major discussion is directed at the application of Computational Fluid Dynamics to the understanding of the fundamental fluid mechanic mechanisms of this class of flows. Author

N87-20215# Avions Marcel Dassault, Saint-Cloud (France). Dept. d'Aerodynamique Theorique.

UTILIZATION OF EULER CODES IN NONLINEAR AERODYNAMICS [UTILISATION DES CODES EULER EN AERODYNAMIQUE NON LINEAIRE]

PIERRE PERRIER. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 8 p (SEE N87-20199 13-02) Nov. 1986 In FRENCH

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

Principal solution techniques for Euler problems are reviewed including the finite difference and finite volume methods, the finite element method, perturbation techniques for potential non-rotational solutions, and methods covering rotational zones. Specific examples of Euler code computations are discussed, namely, air intake, nonstationary, and hypersonic calculations. Finally, the use of Euler codes as approximations of Navier-Stokes codes is examined. M.G.

N87-20217# General Dynamics Corp., Fort Worth, TX. ANALYSIS OF THE F-16 FLOW FIELD BY A BLOCK GRID EULER APPROACH

STEVE L. KARMAN, JR., JOHN P. STEINBRENNER, and KEITH M. KISIELEWSKI. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 14 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A grid generation procedure was developed to create complex block grid systems, beginning with the generation of block surfaces, up to the generation of the full block volume grids. Parallel to this, a multiple block Euler equation solver was developed using a hybrid flux vector split and split MacCormack scheme, written to allow very general boundary conditions specification. The two

codes are utilized herein to generate an inviscid analysis of an entire F-16 transonic flowfield. Preliminary results are presented and are seen to compare well with experimental data. Even better correlation with experimental data is expected once a fully converged solution is obtained. Author

N87-20218# Imperial Coll. of Science and Technology, London (England). Dept. of Mechanical Engineering.

COMPARISON OF FINITE DIFFERENCE CALCULATIONS OF A LARGE REGION OF RECIRCULATING FLOW NEAR AN AIRFOIL TRAILING EDGE

L. REIS and B. E. THOMPSON (Waterloo Univ., Ontario). In AGARD Applications of Computational Fluid Dynamics in Aeronautics 21 p (SEE N87-20199 13-02) Nov. 1986 Sponsored by British Ministry of Defense, Instituto Nacional de Investigacao Cientifica of Portugal and the National Science and Engineering Council of Canada

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

Calculations are presented for a turbulent boundary layer which separates upstream of a sharp trailing edge and results in a large region of recirculating flow and a curved downstream wake. The solutions obtained from two procedures that solve finite-difference equations formulated with hybrid combinations of upwind-central and bounded skew-upwind-central difference approximations for convective terms, are compared. Numerical error was smaller, and accordingly less false diffusion was apparent, in the bounded-skew calculations although there was no significant improvement in the agreement with experiment. Agreement between measured and calculated values of the lift coefficient was within 3% and required representation of momentum transport and pressure gradient normal to the surface, but the measured drag coefficient was less than 80% of that obtained in both calculations. Deficiencies are attributable, in part, to turbulence-model assumptions which do not represent the effects of stabilizing and destabilizing streamline curvature and the complex interaction of the backflow, pressure-side and curved suction-side boundary layers in the vicinity of the rear stagnation point downstream of the trailing edge. Author

N87-20219# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

ZONAL SOLUTIONS FOR AIRFOILS USING EULER BOUNDARY-LAYER AND NAVIER-STOKES EQUATIONS

M. A. SCHMATZ and E. H. HIRSCH. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 13 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A method is presented to simulate steady viscous flows by a zonal concept, where local solutions of the Navier-Stokes equations are coupled with solutions of the Euler and the boundary-layer equations. The basic idea is to solve the Navier-Stokes equations only in those zones of the flowfield where strong interaction occurs. The overall goal is to reduce the computation costs. The governing equations and the coupling procedures are presented for general three dimensional viscous flows. Results are given from two dimensional applications obtained with an alternating coupling scheme. Then a close coupling scheme is introduced. For this purpose a new relaxation approach for the implicit unfactored Euler and Navier-Stokes equations was implemented. The computed results demonstrate good capability for the close approach. Author

N87-20220# Istanbul Univ. (Turkey). Faculty of Aeronautics and Astronautics.

NUMERICAL INVESTIGATION OF THE LAMINAR BOUNDARY LAYER ON A 3-D BODY STARTED IMPULSIVELY FROM REST

U. GULCAT. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 6 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

Unsteady flow of viscous incompressible fluid external to three dimensional bodies is considered. Based on the boundary layer concept the simplified version of the equations of motion are expressed in non-orthogonal coordinates which fits to body surface. The differential form of the equations are discretised with finite differencing to give a solution procedure which does not require any iteration while marching in space and in time. The procedure developed first tested for the flow past a circular cylinder. The

results obtained are compared with the experimental and the results of the previous numerical works available. Finally three dimensional impulsive flow past an oblate spheroid is considered. The metric coefficients and all the necessary geometrical features obtained analytically are used in the governing equations. The numerical solution is carried until the time of flow reversal that occurs at the rear stagnation point of the spheroid. Author

N87-20221# Societe Nationale Industrielle Aerospatiale, Marignane (France). Div. Helicopteres.
THEORETICAL ANALYSIS OF FLOWS AROUND HELICOPTER FUSELAGES: APPLICATION TO DESIGN AND DEVELOPMENT
A. CLER *In* AGARD Applications of Computational Fluid Dynamics in Aeronautics 8 p (SEE N87-20199 13-02) Nov. 1986 (AGARD-CP-412) Avail: NTIS HC A19/MF A01

Three dimensional aerodynamic calculations as applied to fuselage design are described. Three levels of complexity may be distinguished in the calculation programs: (1) a singularities method describing the potential flow around a fuselage, (2) an integral three dimensional boundary layer method for predicting three dimensional separations, and (3) a point vortex wake model. The first two methods are routinely used with very short response times, either on complete fuselages or for specific aircraft sections. Close agreement is obtained with the available experimental results. Various examples are given of applications to project or development work. Operational calculations cannot yet be performed with the wake model, as the method is still under development. In the current state of the art, aerodynamic calculations provide undeniable services but can by no means replace wind tunnel tests for determining complete aircraft drag. Author

N87-20224# Royal Aircraft Establishment, Farnborough (England). Aerodynamics Dept.
APPLICATIONS OF RAE VISCOUS FLOW METHODS NEAR SEPARATION BOUNDARIES FOR THREE-DIMENSIONAL WINGS IN TRANSONIC FLOW
M. C. P. FIRMIN *In* AGARD Applications of Computational Fluid Dynamics in Aeronautics 14 p (SEE N87-20199 13-02) Nov. 1986 (AGARD-CP-412) Avail: NTIS HC A19/MF A01

Three applications of computational fluid dynamics (CFD) at high subsonic speeds, with transonic flow, are presented. Two of these relate to the prediction of the pressure distribution over swept wings at conditions close to the separation boundary and one to the design of a swept wing for a wind-tunnel model. The methods involved are a potential flow treatment of the inviscid flow coupled with a three dimensional, integral treatment of the turbulent boundary layer. The coupling between the viscous and inviscid flow codes is direct, through a transpiration condition at the wing surface and on a surface downstream of the wing. Author

N87-20225# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.
APPLICATION OF THE NAVIER-STOKES EQUATIONS TO SOLVE AERODYNAMIC PROBLEMS
J. S. SHANG AND W. L. HANKEY (Wright State Univ., Dayton, Ohio.) *In* AGARD Applications of Computational Fluid Dynamics in Aeronautics 12 p (SEE N87-20199 13-02) Nov. 1986 (AGARD-CP-412) Avail: NTIS HC A19/MF A01

An area presently evolving is Interdisciplinary Computational Fluid Dynamics (ICFD) in which the Navier-Stokes equations are coupled to another set of equations to solve interacting problems. The large computers approaching will permit elaborate solutions to these ICFD problems. Therefore, research on generic systems of equations by the CFD community is required to assist engineers to solve their coupled problems. Already some of the necessary research has been accomplished to solve ICFD problems. Advantage is taken of the present numerical algorithms and grid generation. The conservation form for the governing equations can be utilized and the field data to exploit vector processors can be arranged. However, new technology must be developed to model complex interface boundary conditions and to incorporate a variety of constitutive relationships for the state variables and transport processors. Also, it will become necessary to model many physical processes that are below subgrid scale. Examples of subgrid scale modeling phenomenon are turbulence, evaporation,

atomization, devolatilization, nucleation, chemical reactions, surface tension and surface roughness. This modeling can only be achieved after a series of numerical computations are combined with validation experiments. It also appears necessary that new numerical damping factors must be developed for ICFD in order to account for the new physics added to the problem with the attendant mathematical stiffness difficulties. Author

N87-20227# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.
HIGH SPEED VISCOUS FLOW CALCULATIONS ABOUT COMPLEX CONFIGURATIONS
DENNY S. CHAUSSEE *In* AGARD Applications of Computational Fluid Dynamics in Aeronautics 18 p (SEE N87-20199 13-02) Nov. 1986 (AGARD-CP-412) Avail: NTIS HC A19/MF A01 CSCL 01A

A review of past parabolized Navier-Stokes applications is presented. The equations, boundary conditions, the numerical method and the grid generation are all discussed. Results ranging from the low supersonic regime to the hypersonic regime are included. Author

N87-20228# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.
TRANSONIC NAVIER-STOKES WING SOLUTION USING A ZONAL APPROACH. PART 1: SOLUTION METHODOLOGY AND CODE VALIDATION
J. FLORES, T. L. HOLST, UNVER KAYNAK (Sterling Software, Palo Alto, Calif.), K. GUNDY, and S. D. THOMAS *In* AGARD Applications of Computational Fluid Dynamics in Aeronautics 12 p (SEE N87-20199 13-02) Nov. 1986 Previously announced as N86-29765 (AGARD-CP-412) Avail: NTIS HC A19/MF A01 CSCL 01A

A fast diagonalized Beam-Warming algorithm is coupled with a zonal approach to solve the three dimensional Euler/Navier-Stokes equations. The computer code, called Transonic Navier-Stokes (TNS), uses a total of four zones for wing configurations (or can be extended to complete aircraft configurations by adding zones). In the inner blocks near the wing surface, the thin-layer Navier-Stokes equations are solved, while in the outer two blocks the Euler equations are solved. The diagonal algorithm yields a speedup of as much as a factor of 40 over the original algorithm/zonal method code. The TNS code, in addition, has the capability to model wind tunnel walls. Transonic viscous solutions are obtained on a 150,000-point mesh for a NACA 0012 wing. A three-order-of-magnitude drop in the L2-norm of the residual requires approximately 500 iterations, which takes about 45 min of CPU time on a Cray-XMP processor. Simulations are also conducted for a different geometrical wing called WING C. All cases show good agreement with experimental data. Author

N87-20229# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.
TRANSONIC NAVIER-STOKES WING SOLUTIONS USING A ZONAL APPROACH. PART 2: HIGH ANGLE-OF-ATTACK SIMULATION
NEAL M. CHADERJIAN *In* AGARD Applications of Computational Fluid Dynamics in Aeronautics 9 p (SEE N87-20199 13-02) Nov. 1986 Previously announced as N86-32392 (AGARD-CP-412) Avail: NTIS HC A19/MF A01 CSCL 01A

A computer code is under development whereby the thin-layer Reynolds-averaged Navier-Stokes equations are to be applied to realistic fighter aircraft configurations. This transonic Navier-Stokes code (TNS) utilizes a zonal approach in order to treat complex geometries and satisfy in-core computer memory constraints. The zonal approach was applied to isolated wing geometries in order to facilitate code development. The TNS finite difference algorithm, zonal methodology, and code validation with experimental data is addressed. Also addressed are some numerical issues such as code robustness, efficiency, and accuracy at high angles of attack. Special free-stream-preserving metrics proved an effective way to treat H-mesh singularities over a large range of severe flow conditions, including strong leading edge flow gradients, massive shock induced separation, and stall. Furthermore, lift and drag coefficients were computed for a wing up through CLmax. Numerical oil flow patterns and particle trajectories are presented both for subcritical and transonic flow. These flow simulations are

02 AERODYNAMICS

nch with complex separated flow physics and demonstrate the efficiency and robustness of the zonal approach. Author

N87-20230# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. for Theoretical Fluid Mechanics.

SIMULATION OF THREE-DIMENSIONAL TRANSONIC FLOW WITH SEPARATION PAST A HEMISPHERE CYLINDER CONFIGURATION

W. KORDULLA, H. VOLLMERS, and U. DALLMANN In AGARD Applications of Computational Fluid Dynamics in Aeronautics 15 p (SEE N87-20199 13-02) Nov. 1986
(Contract DA-183/1-172)
(AGARD-CP-412) Avail: NTIS HC A19/MF A01

The numerical simulation of the transonic laminar flow past a hemisphere cylinder at an angle of incidence of 0 deg and 19 deg is presented. In both cases the computations suggest unsteady flow behavior which requires further investigations, in particular because other applications by similar methods in two and three dimensions do allow the simulation of symmetric transonic and steady supersonic flows. One instantaneous flow result for the 19 deg case is used as an example to analyze the topology of a flow with separation. The analysis shows that the numerical simulation yields results consistent with possible topological structures, and can be used further to investigate steady state flows with separation. Author

N87-20231# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

NUMERICAL SIMULATION OF THE FLOW FIELD AROUND A COMPLETE AIRCRAFT

J. S. SHANG and S. J. SCHERR In AGARD Applications of Computational Fluid Dynamics in Aeronautics 11 p (SEE N87-20199 13-02) Nov. 1986 Sponsored by NASA
(AGARD-CP-412) Avail: NTIS HC A19/MF A01

The present effort represents a first attempt of numerical simulation of the flow field around a complete aircraft-like, lifting configuration utilizing the Reynolds averaged Navier-Stokes equations. The numerical solution generated for the experimental aircraft concept X24C-10D at a Mach number of 5.95 not only exhibited accurate prediction of detailed flow properties but also of the integrated aerodynamic coefficients. In addition, the present analysis demonstrated that a page structure of data collected into cyclic blocks is an efficient and viable means for processing the Navier-Stokes equations on the CRAY XMP-22 computer with external memory device. Author

N87-24398# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

AEROELASTICITY IN AXIAL-FLOW TURBOMACHINES.

VOLUME 1: UNSTEADY TURBOMACHINERY AERODYNAMICS
MAX F. PLATZER, ed. and FRANKLIN O. CARTA, ed. (United Technologies Research Center, East Hartford, Conn.) Mar. 1987 276 p

(AGARD-AG-298-VOL-1; ISBN-92-835-1543-9; AD-A181676)
Avail: NTIS HC A13/MF A01

The field of unsteady turbomachinery aerodynamics is reviewed. Linearized unsteady aerodynamic theory, classical two-dimensional methods, three-dimensional flows, unsteady transonic flow, stall flutter, forced vibration, fan blade flutter, and unsteady aerodynamic measurements on rotors are among the topics discussed. For individual titles, see N87-24399 through N87-24408.

N87-24399 United Technologies Research Center, East Hartford, CT.

LINEARIZED UNSTEADY AERODYNAMIC THEORY

JOSEPH M. VERDON In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 31 p (SEE N87-24398 18-02) Mar. 1987 Sponsored by Naval Air Systems Command and Air Force Office of Scientific Research
(AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

The importance, complexity and variety of the unsteady flow phenomena occurring in axial flow turbomachines; the major assumptions used in theoretical aerodynamic formulations intended for aeroelastic investigations; and the requirements placed on such

formulations were reviewed. Emphases was placed on the description of linearized two-dimensional unsteady aerodynamic theories and on the derivation of a rather general linearization that accounts for the effects of blade geometry, mean blade loading and shocks and their motions on aerodynamic response to prescribed structural and aerodynamic excitations. R.J.F.

N87-24400 Cambridge Univ. (England). Dept. of Engineering.

CLASSICAL TWO-DIMENSIONAL METHODS

D. S. WHITEHEAD In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 30 p (SEE N87-24398 18-02) Mar. 1987
(AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

The most important two-dimensional solutions which can be obtained by the superposition of elementary analytical solutions are presented. This has enabled cascades of flat plates to be treated up to Mach numbers at which the axial velocity becomes sonic. Singularity theory valid for incompressible flow through cascades of thick cambered blades is discussed. Author

N87-24401 Kyushu Univ., Fukuoka (Japan). Dept. of Aeronautical Engineering.

THREE-DIMENSIONAL FLOWS

MASANOBU NAMBA In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 30 p (SEE N87-24398 18-02) Mar. 1987
(AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

The objective is to outline the available theoretical methods which can predict various three-dimensional effects upon unsteady blade loadings. An attempt is made to describe typical features of three-dimensional effects revealed by those theoretical methods. Author

N87-24402 Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

THREE-DIMENSIONAL FLOW

PIERRE SALAUN In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 17 p (SEE N87-24398 18-02) Mar. 1987
(AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

A single annular blade row with a finite number of vibrating blades which are rotating at a constant angular velocity in an infinitely long cylindrical duct is considered. The only cases considered are those where the relative velocity is either subsonic or supersonic over all of the blades. R.J.F.

N87-24403 TopExpress Ltd., Cambridge (England).

NUMERICAL METHODS FOR UNSTEADY TRANSONIC FLOW

E. ACTON and S. G. NEWTON (Rolls-Royce Ltd., Derby, England) In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 21 p (SEE N87-24398 18-02) Mar. 1987
(AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

Some of the numerical methods used in aeroelastic problems to calculate unsteady transonic flow are reviewed. Blade flutter and force response are studied. Author

N87-24405 Purdue Univ., West Lafayette, IN. Thermal Sciences and Propulsion Center.

UNSTEADY AERODYNAMIC MEASUREMENTS IN FLUTTER RESEARCH

SANFORD FLEETER and ROBERT L. JAY (General Motors Corp., Indianapolis, Ind.) In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 18 p (SEE N87-24398 18-02) Mar. 1987
(AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

Various aspects of unsteady aerodynamic flutter experiments were considered. Overall objectives included the validation of analysis, the development of a flutter boundary data bank, and concept investigations. Experimental modeling requirements and the applicability of high speed rotating rigs, stationary annular cascades, and two-dimensional linear cascade facilities were discussed in terms of the overall objectives. Author

02 AERODYNAMICS

N87-24406 General Motors Corp., Indianapolis, IN. Gas Turbine Div.

UNSTEADY AERODYNAMIC MEASUREMENTS IN FORCED VIBRATION RESEARCH

ROBERT L. JAY and SANFORD FLEETER (Purdue Univ., West Lafayette, Ind.) In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 38 p (SEE N87-24398 18-02) Mar. 1987 (AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

By defining the operating environment of turbomachinery blading in terms of absolute and relative velocity fields, airfoil dynamic mode shapes, and reduced frequency ranges, the applicability of various flow facilities in establishing critical time varying aeroelastic data needed for the solution of flutter and forced vibration problems was examined. Author

N87-24407 Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

UNDERSTANDING FAN BLADE FLUTTER THROUGH LINEAR CASCADE AEROELASTIC TESTING

EDMOND SZECHENYI In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 16 p (SEE N87-24398 18-02) Mar. 1987 (AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

An attempt is made to give some insight into the causes and origins of different flutter regimes. The discussion is based on experimental data obtained in a linear cascade. For subtransonic flutter the validity of the cascade measurements is tested by comparison with actual compressor data. Author

N87-24408 Technische Hochschule, Aachen (Germany, F.R.). Inst. fuer Strahltriebwerke.

UNSTEADY AERODYNAMIC MEASUREMENTS ON ROTORS

HEINZ E. GALLUS In AGARD Aeroelasticity in Axial-Flow Turbomachines. Volume 1: Unsteady Turbomachinery Aerodynamics 18 p (SEE N87-24398 18-02) Mar. 1987 (AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

A review is given of the wide variety of fluid and structural measurements used on rotors. Techniques for displacement and vibration measurement of rotor blades, for unsteady flow measurement, for unsteady blade static pressure measurement, and for flow field and rotor wake studies are discussed. Flow visualization, employing Schlieren and shadowgraph techniques, gas fluorescence, holographic interferometry, and laser velocimetry are discussed. R.J.F.

N87-24478# Rockwell International Corp., Los Angeles, CA. Aircraft Operations.

UNSTEADY INLET DISTORTION CHARACTERISTICS WITH THE B-1B

C. J. MACMILLER and W. R. HAAGENSEN In AGARD Engine Response to Distorted Inflow Conditions 17 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

An extensive wind tunnel and flight test program was conducted to verify inlet performance and distortion characteristics on the B-1B aircraft. During the course of these investigations, several unsteady, total-pressure disturbances at various discrete frequencies were encountered: (1) inlet duct resonance at low power settings; (2) environmental control system (ECS) precooler duct resonance; and (3) nose gear wake ingestion. This resulted in the need to quantify these effects and assess the impact on engine stability characteristics. As a result, engine control features were modified, and aircraft configuration changes were implemented. Results and findings of these investigations are summarized. Author

N87-24479# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

EXPERIMENTAL DETERMINATION OF THE TRANSFER FUNCTION OF AN AXIAL COMPRESSOR TO DISTORTED INLET FLOW [DETERMINATION EXPERIMENTALE DES LOIS DE TRANSFERT DE PERTURBATIONS A LA TRAVERSEE D'UN COMPRESSEUR AXIAL]

JACQUES HUARD In AGARD Engine Response to Distorted Inflow Conditions 11 p (SEE N87-24464 18-07) Mar. 1987 In FRENCH; ENGLISH summary Original language document was announced in IAA as A87-21025 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

Transfer equations were identified for disturbances introduced into an axial flow compressor by disturbances to the flow across the inlet. The rotating blade rows are represented as a semi-actuator disk and aerothermodynamic values of the flow upstream and downstream of the disk are related by the transfer equations. The equations were derived from experimental data on the displacement of streamlines and the pressure changes after a distortion screen upstream from a blade row. Upstream flow distortions had a linear quasi-sinusoidal periodicity, while those between rows varied bilinearly. IAA

N87-26881# Leicester Univ. (England). Fluid Dynamics Panel.

THE AERODYNAMICS OF PARACHUTES

D. J. COCKRELL and A. D. YOUNG, ed. Jul. 1987 81 p Sponsored by AGARD, Neuilly-sur-Seine, France (AGARD-AG-295; ISBN-92-835-0422-4; AD-A184620) Avail: NTIS HC A05/MF A01

This AGARD report discusses the principal aerodynamic characteristics of parachutes and the factors which affect them. It is anticipated that its main readers will be recent engineering graduates entering research establishments, parachute companies or related industries so some appreciation of basic mechanics, the principles of computing and elementary fluid dynamics on the part of the reader has been assumed. Its contents include Steady-State and Unsteady Aerodynamics, Parachute Deployment and Inflation, Experimental Investigations, Methods of analysis, Extraterrestrial Parachute Applications, and some suggestions for future research. Author

N87-28518# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

FUTURE RESEARCH ON TRANSONIC UNSTEADY AERODYNAMICS AND ITS AEROELASTIC APPLICATIONS

Aug. 1987 45 p Meeting held in Athens, Greece, 28 Sep. - 3 Oct. 1986

(AGARD-R-749; ISBN-92-835-0425-9; AD-A184769) Avail: NTIS HC A03/MF A01

The workshop focused on strategies for promoting and developing engineering level transonic flutter prediction techniques. The technology of transonic aerodynamics is currently undergoing rapid development. Significant progress is being made to solve the inherently nonlinear equations describing unsteady motions of wings in transonic flow, while the availability of reliable and efficient computational methods will greatly enhance the ability to predict the aeroelastic behavior of modern aircraft operating under transonic flow conditions. For individual titles, see N87-28519 through N87-28520.

N87-28519# National Aeronautics and Space Administration. Langley Research Center, Hampton, VA.

DEVELOPMENT OF COMPUTATIONAL METHODS FOR UNSTEADY AERODYNAMICS AT THE NASA LANGLEY RESEARCH CENTER

E. CARSON YATES, JR. and WOODROW WHITLOW, JR. In AGARD, Future Research on Transonic Unsteady Aerodynamics and Its Aeroelastic Applications 20 p (SEE N87-28518 23-02) Aug. 1987 Previously announced as N87-21859 (AGARD-R-749; NAS 1.15:89133) Avail: NTIS HC A03/MF A01 CSCL 01B

The current scope, recent progress, and plans for research and development of computational methods for unsteady aerodynamics at the NASA Langley Research Center are reviewed. Both integral equations and finite difference methods for inviscid and viscous flows are discussed. Although the great bulk of the effort has focused on finite difference solution of the transonic

02 AERODYNAMICS

small perturbation equation, the integral equation program is given primary emphasis here because it is less well known. Author

N87-28520# Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (Germany, F.R.).

COMPARISON BETWEEN 2D TRANSONIC FLUTTER CALCULATIONS IN THE TIME AND FREQUENCY DOMAIN

HELMUT ZIMMERMANN and BERND SCHULZE In AGARD, Future Research on Transonic Unsteady Aerodynamics and Its Aeroelastic Applications 16 p (SEE N87-28518 23-02) Aug. 1987

(AGARD-R-749) Avail: NTIS HC A03/MF A01

Unsteady airloads in the transonic speed range for the application in flutter calculations can only be predicted by using nonlinear flow equation codes. The MBB-A3 profile is used as theoretical model for the flutter investigations. Flutter calculations are presented using the classical method in the frequency domain as well as a structural aerodynamic coupling procedure in the time domain. The unsteady aerodynamic coefficients which are used for these flutter investigations are calculated for several M-numbers and incidences with the transonic small perturbation (TSP) equation without and with quasiunsteady boundary layer and with the time linearized TSP equation without and with steady boundary layer and for comparison reasons with the Doublet Lattice method. The boundary layer influences essentially the unsteady aerodynamic pressure distributions and coefficients. The flutter results obtained in the frequency and time domain differ less from each other. Nevertheless the time marching flutter simulation takes the nonlinearity effects of the airloads dependent on the vibration amplitude essentially better into account than the classical flutter solution. Author

N88-13219# Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine (France). Fluid Dynamics Panel.

AERODYNAMICS OF HYPERSONIC LIFTING VEHICLES

Nov. 1987 560 p In ENGLISH and FRENCH Symposium held in Bristol, United Kingdom, 6-9 Apr. 1987

(AGARD-CP-428; ISBN-92-835-0435-6; AD-A198665) Avail:

NTIS HC A24/MF A01

The Symposium was conducted at the outset of a new era in hypersonic aerodynamics. The Proceedings therefore present a valuable stock taking of the status of the field after a comparative lull in the last decade. A particular gap exists in the field of experimental facilities. At the same time, developments in computational fluid dynamics and experimental techniques provide possibilities that did not exist 10 years before. The papers presented were grouped in the fields: experimental facilities; experimental techniques and results; computational techniques; design methods; and projects. The most significant results of the symposium was a perspective of the need for special effort in the near future. For individual titles, see N88-13220 through N88-13252.

N88-13224# Comptech, Inc., Palo Alto, CA.

TURBULENCE MEASUREMENT IN HYPERSONIC FLOW

F. K. OWEN and W. CALARESE (Air Force Wright Aeronautical Labs., Wright-Patterson AFB, Ohio.) In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 17 p (SEE N88-13219 05-02) Nov. 1987 Sponsored in part by Hunting Engineering, Ltd., Amptill, United Kingdom

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

An assessment was made of the potential for hot wire and laser anemometer measurements of turbulent fluctuations in hypersonic flow fields. The results of experiments conducted in the AFWAL M=6 High Reynolds Number Wind Tunnel are reported and comparisons made with previous hot wire turbulence measurements. Author

N88-13225# Technische Univ., Brunswick (Germany, F.R.). Inst. fuer Stroemungsmechanik.

EXPERIMENTAL INVESTIGATIONS ON BLUNT BODIES AND CORNER CONFIGURATIONS IN HYPERSONIC FLOW

DIETRICH HUMMEL In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 16 p (SEE N88-13219 05-02) Nov. 1987

(Contract SCHL-5/82; HU-254/2)

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

Within the framework of some theses hypersonic flows were investigated theoretically as well as by experiments in the

hypersonic facility gun tunnel of the institute. Some of these activities during the last year are summarized. The first problem to be treated is that of a blunt body of revolution with subsonic blowing in the stagnation point region against the hypersonic main flow. Surface pressure and heat transfer measurements were carried out for two bodies at different free-stream Mach numbers and for various blowing rates. Remarkable agreement was obtained in comparison with a combination of Newtonian and potential theory. The second problem discussed is that of the hypersonic flow in corners formed by intersecting swept wedges. The corner angle and the leading-edge sweep angle were varied systematically. The flow field was analyzed by means of pitot pressure measurements in a characteristic cross section and the flow structure near the wall was determined from oilflow pictures as well as from wall pressure and heat transfer measurements. Strong vortical flows were detected underneath the corner shock system. Starting from a 90 degree corner of unswept wedges, the heat flux in the corner center can be reduced considerably by increasing the corner angle and by sweeping the leading-edges back.

Author

N88-13226# Texas Univ., Austin. Dept. of Aerospace Engineering.

DRIVING MECHANISM OF UNSTEADY SEPARATION SHOCK MOTION IN HYPERSONIC INTERACTIVE FLOW

D. S. DOLLING and J. C. NARLO, II In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 12 p (SEE N88-13219 05-02) Nov. 1987

Sponsored in part by NASA, Washington, D.C. and ONR, Washington, D.C.

(Contract AF-AFOSR-0112-86)

(AGARD-CP-428) Avail: NTIS HC A24/MF A01 CSCL 01A

Wall pressure fluctuations were measured under the steady separation shock waves in Mach 5 turbulent interactions induced by unswept circular cylinders on a flat plate. The wall temperature was adiabatic. A conditional sampling algorithm was developed to examine the statistics of the shock wave motion. The same algorithm was used to examine data taken in earlier studies in the Princeton University Mach 3 blowdown tunnel. In these earlier studies, hemicylindrically blunted fins of different leading-edge diameters were tested in boundary layers which developed on the tunnel floor and on a flat plate. A description of the algorithm, the reasons why it was developed and the sensitivity of the results to the threshold settings, are discussed. The results from the algorithm, together with cross correlations and power spectral density estimates suggests that the shock motion is driven by the low-frequency unsteadiness of the downstream separated, vortical flow. Author

N88-13227# Cranfield Inst. of Tech., Bedford (England). Coll. of Aeronautics.

THE EFFECTS OF SWEEP AND BLUNTNESS ON A GLANCING SHOCK WAVE TURBULENT BOUNDARY LAYER INTERACTION

N. R. FOMISON and J. L. STOLLERY In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 18 p (SEE N88-13219 05-02) Nov. 1987

Sponsored in part by Hunting Engineering, Ltd., Amptill, United Kingdom

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

An experimental investigation was conducted into the effects of leading edge sweep and bluntness on the flow characteristics of a glancing shock wave turbulent boundary layer interaction generated by a fin-on-plate configuration. A series of sharp swept fins (covering angles of sweep from 0 to 75 deg) and a series of blunt unswept fins (ranging in leading edge diameter from 0 to 25.4 mm) were tested at incidences of up to 30 deg at a Mach number of 2.4 and a freestream Reynolds number of 2,600,000/m. Observations of the mean flow were made using oil flow visualization, static pressure measurements, schlieren photography, and vapor screen visualization techniques. In addition, some limited measurements of the unsteady static pressures beneath the interaction were taken. Flow field models are proposed to include the effects of sweep and bluntness and the governing parameters controlling the extent of the disturbed flow and the pressure levels beneath the interaction are examined. Author

02 AERODYNAMICS

N88-13229# Royal Aircraft Establishment, Farnborough (England). Aerodynamics Dept.

THE DRAG OF SLENDER AXISYMMETRIC CONES IN RAREFIED HYPERSONIC FLOW

T. J. RHYS-JONES In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 12 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

An experimental study performed in the RAE Low Density Tunnel to determine the aerodynamic characteristics of a range of slender axisymmetric bodies in rarefied hypersonic flow is described. The main purpose of this study was to assess the effects of cone angle, nose bluntness, and Reynolds number on the zero incidence drag of cones. In addition, some measurements of axial force, normal force, and pitching moment at incidence were made. The bodies tested at a nominal Mach number of 10 and at flow conditions which correspond to those in the transitional rarefied flow regime. These data were compared with correlations developed to represent the change in drag coefficient in this flow regime between continuum and free-molecular flow. Author

N88-13230# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). inst. for Experimental Fluid Mechanics.

LOW REYNOLDS NUMBER INFLUENCE ON AERODYNAMIC PERFORMANCE OF HYPERSONIC LIFTING VEHICLES

GEORG KOPPENWALLNER In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 14 p (SEE N88-13219 05-02) Nov. 1987

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

The aerodynamic performance of lifting reentry vehicles in the high Mach number (Ma is greater than 10) and high altitude (H is greater than 50 km) regime is analyzed. Due to the high flight velocity of chemical reactions, the low density viscous and rarefaction effects are of importance. Free flight data of the U.S. Shuttle and low density wind tunnel data of DFVLR are used. It is found that aerodynamic performance loss and a destabilizing pitching moment change can be explained by viscous-rarefaction effects. Author

N88-13232# Naval Weapons Center, China Lake, CA. Propulsion Research Branch.

COMBUSTION RELATED SHEAR-FLOW DYNAMICS IN ELLIPTIC SUPERSONIC JETS

K. C. SCHADOW, E. GUTMARK, S. KOSHIGOE, and K. J. WILSON In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 13 p (SEE N88-13219 05-02) Nov. 1987

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

An elliptic jet having an aspect ratio of 3:1 was studied and compared to a circular jet at three Mach numbers: $M = 0.15, 1$, and 1.3 . Hot-wire measurements and schlieren photography were employed. The superior mixing characteristics of an elliptic jet relative to a circular jet, which were found in previous works in subsonic jets, prevail in the sonic jet and are further augmented by the shock structures of the supersonic underexpanded jet. The major and minor axes switch at a distance of 3 diameters from the nozzle, and the spreading rate of the minor axis side is twice that of a subsonic jet. The experimental data are supported by the results of the linear instability analysis of the supersonic elliptic jet which show that the initial vortices are bending at the major axis side in a similar way to the process which occurs in a subsonic elliptic jet. Author

N88-13233# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

NUMERICAL ANALYSIS OF FLOW THROUGH SCRAMJET ENGINE INLETS

AJAY KUMAR In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 11 p (SEE N88-13219 05-02) Nov. 1987

(AGARD-CP-428) Avail: NTIS HC A24/MF A01 CSCL 01A

A set of computer programs was developed to analyze flow through supersonic combustion ramjet (scramjet) inlets. These programs solve either the two or three dimensional Euler/Navier-Stokes equations in full conservation form by McCormack's explicit or explicit-implicit method. An algebraic two-layer eddy viscosity model is used for turbulent flow calculations. The programs are operational in Control Data CYBER-200 series vector-processing computer system and were optimized to take maximum advantage of the vector processing

capability of the system. Since their development, the programs were extensively verified and used to analyze a number of very complex inlet configurations. Results are presented from two-dimensional, quasi-three-dimensional, and three-dimensional analyses of the inlet flow field to illustrate the use of the program. Author

N88-13234# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

NUMERICAL SIMULATION OF THE HYPERSONIC FLOW AROUND LIFTING VEHICLES

YEHIA RIZK (Sterling Federal Systems, Inc., Palo Alto, Calif.), DENNY CHAUSSEE, and JOSEPH STEGER In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 11 p (SEE N88-13219 05-02) Nov. 1987 Previously announced as N87-22116 (AGARD-CP-428) Avail: NTIS HC A24/MF A01 CSCL 01A

A method of solving the viscous hypersonic flow field around realistic configurations is presented. The numerical procedure for generating the required finite difference grid and the two-factored implicit flow solver are described. Results are presented for the shuttle orbiter and a generic wing-body configuration at hypersonic Mach numbers. Author

N88-13235# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.). Aerodynamics Dept.

SOLUTION OF SOME 3-D VISCOUS AND INVISCID SUPERSONIC FLOW PROBLEMS BY FINITE-VOLUME SPACE-MARCHING SCHEMES

H. RIEGER In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 17 p (SEE N88-13219 05-02) Nov. 1987

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

For prediction of steady supersonic flow fields two numerical methods for solution of the three-dimensional Euler and parabolized Navier-Stokes (PNS) equations are considered. Both are based on a Finite-Volume discretization (FVD) of the governing conservation laws and because of the special properties of steady supersonic flows cost-effective space-marching integration techniques can be applied. Both methods are described and results for inviscid and viscous flows are presented. In view of the upcoming European space transportation activities the simulation of hypersonic flows past complex blunted lifting vehicles requires also efficient methods for solution of the full, not-reduced Navier-Stokes equations. These are needed to provide solutions for supersonic and hypersonic flow fields with large subsonic regions and also to get accurate initial conditions for the space marching codes developed. A relaxation procedure for the steady form of the not-reduced Navier-Stokes and the Euler equations is described and some first results are presented. Author

N88-13236# Office National d'Etudes et de Recherches Aeronautiques, Toulouse (France).

HYPERSONIC LAMINAR BOUNDARY LAYER: PARAMETRIC STUDY FOR THE REPRESENTATION OF REAL GAS EFFECTS (COUCHE LIMITE LAMINAIRE HYPERSONIQUE ETUDE PARAMETRIQUE DE LA REPRESENTATION DES EFFETS DE GAZ REEL)

B. AUPOIX, C. ELDEM, and J. COUSTEIX In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 14 p (SEE N88-13219 05-02) Nov. 1987 In FRENCH

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

A sensitivity study of the real gas model was performed in boundary layer computations on an hyperboloid equivalent to the Space Shuttle windward symmetry plane; for the STS 2 reentry. The real gas model is due to Straub and accounts for only five chemical species while assuming thermodynamic equilibrium. The study has brought into evidence the dependence of both wall heat flux and displacement thickness, not only upon the wall catalyticity but also upon the selected reaction rates and the wall temperature. The skin friction coefficient is insensitive to the real gas model. Moreover, only a few chemical reactions can be selected and the diffusion model can be simplified to save computational time without drastic changes in the prediction. Author

02 AERODYNAMICS

N88-13237# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. for Theoretical Fluid Mechanics.

ON THE NUMERICAL SIMULATION OF THREE-DIMENSIONAL HYPERSONIC FLOW

S. RIEDELBAUCH, W. WETZEL, W. KORDULLA, and H. OERTEL, JR. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 16 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

The first steps towards the numerical simulation of hypersonic flows is presented. Intentionally, the ideal-gas assumption is used to validate the methods by comparing results with experimentally observed or theoretically obtained data in cold hypersonic flows about simple geometries. The approaches cover the continuum as well as the gas-kinetic flow regime. An implicit finite-difference method with bow-shock fitting is employed to integrate the time-dependent Navier-Stokes equations, while the gas-kinetic flow is simulated by approximations to Boltzmann's equation. The direct-simulation Monte Carlo method is preferred to the molecular-dynamics approach because of its larger computational efficiency. Results are compared with experimental data for the laminar flow past a blunt cone at $M = 10.6$ and past a hemisphere at $M = 4.15$. The decay of Oseen's vortex at $Kn = 0.1$, and the gas-kinetic flow past a cylinder at $M = 5.48$ with $Kn = 0.1$ and 0.3 were simulated, and results are shown in comparison with theoretical data. As an application to more realistic configurations the three-dimensional laminar flow past the nose of a typical spacecraft and the gas-kinetic flow in the symmetry plane of the flow past the same configuration is being discussed. The next steps will include real-gas modelling. For hot hypersonic flows experimental data are badly needed for comparison purpose. Author

N88-13238# Glasgow Univ. (Scotland). Dept. of Aeronautics and Fluid Mechanics.

NUMERICAL EXPERIMENTS WITH HYPERSONIC FLOWS BENEATH A CONE-DELTA-WING COMBINATION

N. QIN and B. E. RICHARDS In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 14 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

Numerical experiments of hypersonic flows beneath a cone-delta-wing combination were carried out by solving the compressible Navier-Stokes equations using an assumption of local conicity. An implicit method is combined with a multigrid scheme in the solution procedure to achieve fast convergence to the steady state. Detailed flow field results provide further insight into the complex flow structures due to interaction between the cone shock and the wing shock and the interaction of the resulting flow with the wing or cone boundary layer. Flow field pictures reveal phenomena of value in the design of hypersonic lifting vehicles, such as the interference surface pressure and the high local wall heating. Comparisons with experimental data and conical Euler solution are also made. Author

N88-13239# Cincinnati Univ., OH. Dept. of Aerospace Engineering and Engineering Mechanics

A SPATIAL MARCHING TECHNIQUE FOR THE INVISCID BLUNT BODY PROBLEM

R. T. DAVIS and FREDERICK G. BLOTTNER (Sandia National Labs., Albuquerque, N. Mex.) In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 11 p (SEE N88-13219 05-02) Nov. 1987 Previously announced as N87-20972 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

A technique was developed for obtaining approximate solutions of the inviscid, hypersonic flow on a blunt body with a spatial marching scheme. The scheme introduces the Vigneron pressure gradient approximation into the momentum equation in the direction along the body surface. The resulting governing equations are hyperbolic. With a specified shock wave these equations are solved at the stagnation streamline with an iteration procedure and are solved in the downstream direction with a marching scheme. The complete Euler equations are solved with the numerical scheme when the flow is supersonic. A global iteration procedure is required to obtain the shock wave location. The approximate results from the spatial marching technique are compared with the complete solution of the Euler equations for flow over a sphere. The two results are shown to be in approximate agreement and

the spatial marching technique provides useful engineering predictions while requiring considerably less computational time. Author

N88-13240# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Space Systems Group.

A 3-D EULER SOLUTION FOR HYPERSONIC MACH NUMBERS

MICHAEL PFITZNER and CLAUS WEILAND In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 13 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

The development of reusable reentry vehicles and hypersonic missiles require the control of aerothermal problems. To that end it is necessary to develop aerothermal prediction methods and to change and extend existing methods, which were developed for subsonic and supersonic flow problems. The integration of three dimensional unsteady and steady Euler equations in the regime of hypersonic flow is discussed. Author

N88-13241# Imperial Coll. of Science and Technology, London (England). Dept. of Aeronautics.

COMPUTATION OF FLOW PAST CONICAL HYPERSONIC WINGS USING A SECOND ORDER GODUNOV METHOD

R. HILLIER In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 15 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

Computations of inviscid hypersonic flow past flat plate delta wings during a second order Godunov-type scheme are presented. The governing equations are written in an unsteady conical form and then time marched to a final conical steady state. The core of the calculation is a generalized Riemann problem which is used to determine the flux transfers at the interfaces between computational cells. Results are presented for wings with shock waves both attached at and detached from the leading edges. The leeward surface flows support embedded shock waves and separated vortex flows and the likely influence of real viscous effects on these is discussed. Author

N88-13242# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

AEROTHERMODYNAMICS RESEARCH AT NASA AMES

GEORGE S. DEIWERT In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 17 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01 CSCL 01A

Research activity in the aerothermodynamics branch at NASA Ames Research Center is reviewed. Advanced concepts and mission studies relating to the next generation aerospace transportation systems are summarized and directions for continued research identified. Theoretical and computational studies directed at determining flow fields and radiative and convective heating loads in real gases are described. Included are Navier-Stokes codes for equilibrium and thermochemical nonequilibrium air. Experimental studies in the 3.5 foot hypersonic wind tunnel, the ballistic ranges and the electric arc driven shock tube are described. Tested configurations included generic hypersonic aerospace plane configurations, aerostated orbital transfer vehicle shapes and Galileo probe models. Author

N88-13243# Messerschmitt-Boelkow-Blohm G.m.b.H., Hamburg (Germany, F.R.). Unternehmensbereich Transport- und Verkehrsflugzeuge.

VORTEX FORMATION OVER DELTA, DOUBLE-DELTA AND WAVE RIDER CONFIGURATIONS AT SUPERSONIC SPEEDS

UWE GANZER and JCACHIM SZODRUCH In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 32 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

The flow field of the thick delta wing at high subsonic and supersonic speeds was the subject of quite a variety of investigations at the Technical University of Berlin. The research work started as early as in the late 60's and is still going on today. It was triggered off by the initiatives of the late Dietrich Kuchemann-aiming at a hypersonic transport and it was taken as a contribution to the Eurohyp activities. The wing configurations investigated were of simple shape: delta wings with straight leading edges and triangular cross sections of different thicknesses. The interest was focussed on the development of the leeside flow with changes in angle of incidence and main stream Mach number.

02 AERODYNAMICS

In addition to that similar delta wings with curved leading edges and also with a jump in leading edge sweep were investigated, as well as two types of wave riders. Besides some theoretical work mainly wind tunnel tests were made applying available test techniques: surface pressure measurements, Pitot measurements in the flow visualization by schlieren, vapor and oilfilm techniques, skin friction determination using oilfilm interferogram and, finally, laser velocimetry. The experimental investigations were particularly challenging, because of the small models of generally not more than 6 cm span. This limitation arose from the small size of the transonic and supersonic wind tunnel. Author

N88-13246# Southampton Univ. (England). Dept. of Aeronautics and Astronautics.
HYPERSONIC STATIC AND DYNAMIC STABILITY OF AXISYMMETRIC SHAPES: A COMPARISON OF PREDICTION METHODS AND EXPERIMENT

R. A. EAST and G. R. HUTT. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 15 p (SEE N88-13219 05-02) Nov. 1987. Sponsored in part by Ministry of Defence, United Kingdom (AGARD-CP-428). Avail: NTIS HC A24/MF A01

The stability of oscillatory motions of vehicles flying at hypersonic Mach numbers is of considerable relevance to their initial design. Methods are needed for quick and accurate predictions of stability and control which are applicable over a wide range of body shapes, angles of attack, and flow conditions, without the need to resort to computationally time consuming numerical flow field calculation methods. Experimental data, obtained over a range of angles of attack, concerning the static and dynamic pitching stability of a wide range of both pointed and blunted axisymmetric shapes including cones and blunted cylinder flares are presented. Although Newtonian theory gives inadequate accuracy of prediction, inviscid embedded Newtonian theory, which accounts for the reduced dynamic pressure and lower flow velocity in the embedded flow downstream of the strong bow shock, is shown to provide surprisingly good agreement with the experimental data over a wide range of conditions. Comparisons with experimental results show that the broad flow features and their effect on static and dynamic stability are well described in regimes not containing flow structural change. However, in some cases discrepancies exist between the predictions and experimental observations and these were attributed to a variety of viscous flow phenomena involving boundary layer transition and flow separation, including complex lee-surface vortical flows. Author

N88-13249# British Aerospace Public Ltd. Co., Bristol (England). Aerodynamics Research Dept.

EXPERIENCES USING THE MARK IV SUPERSONIC HYPERSONIC ARBITRARY BODY PROGRAM

CARREN M. E. FISHER. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 18 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428). Avail: NTIS HC A24/MF A01

Work done during the last two years in an attempt to gain an understanding of, and to establish a capability for the use of, the Douglas Supersonic/Hypersonic Arbitrary Body Program (S/HABP) is described. This program has a complex structure and offers a large variety of aerodynamic prediction methods to solve many different types of problems. Most of the features of the program were used with success. Aspects of the flowfield routines and viscous options, which could not be utilized correctly, are either under investigation, or updates to the programming are awaited. Some accurate predictions were made using the inviscid pressure methods, which were evaluated for a wide range of configurations, for Mach numbers from 1.7 to 25.0 and from an incidence of -8 to 40 deg. The code was seen to be highly flexible, but the accuracy of the results is user dependent. Relative to computational fluid dynamics codes, S/HABP geometries are easy to prepare and the code is cheap to run. Author

N88-13250# Royal Aircraft Establishment, Bedford (England).
THE RAE EXPERIMENTAL DATA-BASE FOR MISSILES AT HIGH MACH NUMBER AND ITS USE IN ASSESSING CFD METHODS

J. HODGES and L. C. WARD. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 14 p (SEE N88-13219 05-02) Nov. 1987

(AGARD-CP-428). Avail: NTIS HC A24/MF A01

Wind tunnel tests are being performed in order to measure overall and panel forces and moments on cruciform body-control and body-wing missile configurations at $M = 2.5, 3.5$, and 4.5 . When completed, the test results will provide a wide ranging data base suitable for inclusion into semi-empirical prediction methods. Additionally it can be used to help validate and assess the computational fluid dynamics (CFD) methods that are available. A detailed description of all the models and the wind tunnel test conditions, and selected results are presented. Comparisons are shown between the experimental data and results from a space-marching Euler code. An outline is given of the extension of these comparisons to surface pressure. Author

N88-13251# Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France).

GENERAL AERODYNAMIC-AEROTHERMODYNAMIC CONCEPTS FOR HERMES [CONCEPTS GENERAUX AERODYNAMIQUES-AEROTHERMIQUES D'HERMES]

P. PERRIER and PH. CAUPENNE. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 7 p (SEE N88-13219 05-02) Nov. 1987. In FRENCH

(AGARD-CP-428). Avail: NTIS HC A24/MF A01

Overall aerodynamic and aerothermal design considerations for the Hermes space vehicle are summarized and a general methodology for the development of Hermes is outlined. Examples of specific design objectives are given which address the problems of longitudinal stability and vehicle aerodynamic heating. M.G.

N88-13252# British Aerospace Public Ltd. Co., Preston (England). HOTOL Study Team.

HYPERSONIC AERODYNAMICS: APPLICATIONS FOR HOTOL

ALISON J. WAKE. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 12 p (SEE N88-13219 05-02) Nov. 1987

(AGARD-CP-428). Avail: NTIS HC A24/MF A01

HOTOL has emerged from studies between BAe and Rolls-Royce as a totally reusable airframe with a hybrid air-breathing propulsion system. It is aimed at placing payloads into low Earth orbit for 20 percent of the cost of the U.S. Space Shuttle. As part of the current proof-of-concept study an assessment is being made of the aerodynamic characteristics of the vehicle including those in the hypersonic regime. This assessment will also identify areas of high risk and where current methods are deficient. Some of the results obtained, the areas so far identified as requiring further work are detailed and a five year program is proposed to investigate these areas. Author

N88-28860# Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (Germany, F.R.G.). Civil Transport Aircraft Div.

DELTA WING CONFIGURATIONS

J. SZODRUCH. In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 30-49 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224). Avail: NTIS HC A20/MF A01

The flow field over a slender delta wing at angle of attack immersed in a supersonic stream can be divided into two characteristic regions. The windward or pressure side faces the oncoming flow and is strongly influenced by the bow shock wave; the leeward or suction side is dominated by the effects of inviscid/viscous interaction. It is mainly the leeward flow which is then affected by Reynolds number changes and especially these effects are discussed in more detail. In the past, for subsonic, transonic, and supersonic free stream Mach numbers the essential issue of design with slender wings, where vortices occur over the wing at virtually every flight condition, is to fix the location of the separation lines so that the vehicle is always controllable. This is why Reynolds number effects in these flow regimes were considered of secondary importance. On the other hand at hypersonic speeds the influence of Reynolds number on peak heating as well as on the development and size of characteristic patterns in the flow field are more important. Here hypersonic viscous interaction is dominating, especially near the wing apex, and the vortices induce high rates of heat transfer along the

02 AERODYNAMICS

attachment line. The discussion is confined to free stream Mach numbers from high subsonic to supersonic. With respect to Reynolds number effects it is of major importance to define the different types of vortical flow in that velocity range and to consider the influence of wing geometry. *Author*

N88-28869# Potter (J. Leith), Nashville, TN.
MISSILES, FUSELAGES AND SIMILAR BODIES

J. LEITH POTTER *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 191-208 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

The flows about elongated bodies are discussed in the context of simulation and scaling. With that as a point of departure, the present discussion is confined to the practice of tripping laminar boundary layers at locations on models selected with the goals of simulating higher Reynolds numbers. Possible flow phenomena and the effects of Reynolds numbers are reviewed. It is suggested that many of the strategies developed mainly in testing airfoils and wing models may also be appropriate when missile and fuselage shapes are involved. *B.G.*

N88-28870# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. fuer Experimentelle Stromungsmechanik.

INTRODUCTION AND CRITICAL FLOW PHENOMENA

E. STANEWSKY *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 211-216 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

The present scope of work can be expressed as follows: review the physics associated with the simulation of high Reynolds number flow and, in particular, determine viscous and outer inviscid flow parameters that dominate viscous/inviscid interaction crucial to the simulation process; define needed research to improve the understanding of the flow physics associated with boundary layer simulation, including research needed to identify and account for wind tunnel environmental effects on the boundary layer simulation, and define experiments and/or computational fluid dynamics (CFD) exercises needed to establish the sensitivity of relevant flow phenomena or flow developments to viscous effects. *Author*

N88-28871# Office National d'Etudes et de Recherches Aeronautiques, Toulouse (France).

BOUNDARY LAYER DEVELOPMENT AND TRANSITION

ROGER MICHEL *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 217-249 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

The principal critical flow phenomena were defined as being very sensitive to modifications of the properties of the incoming boundary layer. The problem is schematized by considering the transonic flow around some profile; the two main critical flow phenomena are the shock-boundary layer interaction region and the downstream separation and trailing-edge flow region. The properties of the boundary layer are analyzed through the three classical aspects of a laminar boundary layer, boundary layer transition and, at last, a turbulent boundary layer. The essential aspects of the phenomena and weighted factors are examined as well as opportunities which exist in order to predict the initial characteristics of the boundary as regards to the critical phenomena. *Author*

N88-28874# Technische Hogeschool, Delft (Netherlands). Dept. of Aerospace Engineering.

CLASSICAL SEPARATION, TRAILING-EDGE FLOWS AND BUFFETING

J. L. VANINGEN *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 306-337 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

An overview of those aspects of classical separation, trailing-edge flows, and buffeting which are relevant to the simulation process is given. Viscous flow parameters which should be simulated are defined and some recommendations for further research are given. *Author*

N88-28893# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AERODYNAMIC DATA ACCURACY AND QUALITY: REQUIREMENTS AND CAPABILITIES IN WIND TUNNEL TESTING

MARION L. LASTER (Arnold Engineering Development Center, Arnold Air Force Station, Tenn.) Jul. 1988 13 p. Presented at the AGARD Fluid Dynamics Panel Symposium, Naples, Italy, 28 Sep. - 1 Oct. 1987

(AGARD-AR-254; ISBN-92-835-0468-2; AD-A200522) Avail: NTIS HC A03/MF A01

This report presents a technical evaluation and assessment of the AGARD Fluid Dynamics Panel Symposium on Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing, held in September 1987 in Naples, Italy. The major issues addressed were: what data accuracy is needed by users, what accuracy is presently achieved, and what can be done to improve the situation. Users have asked that cruise drag be measured to a precision of one drag count for transports and two for military fighters; it was shown that this is possible when reference methods can be used. However, one or two drag count uncertainty is not state-of-the-art for the direct scaling concept and improvement will require a thorough understanding of all these parameters which significantly contribute to wind tunnel uncertainty, including bias and precision. A reduction in total uncertainty appears possible but a reduction to a level of one or two drag count also appears formidable. *Author*

N88-29731# National Aeronautical Establishment, Ottawa (Ontario). Unsteady Aerodynamics Lab.

AIRCRAFT DYNAMICS: AERODYNAMIC ASPECTS AND WIND TUNNEL TECHNIQUES

K. J. ORLIK-RUECKEMANN *In* AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 14 p. (SEE N88-29725 24-01) Dec. 1987. Previously announced as N88-13320

(AGARD-R-734) Avail: NTIS HC A09/MF A01

The dynamic behavior of modern fighter aircraft depends more and more on unsteady aerodynamics. Until recently, the designer concentrated on classical problems such as aeroelasticity and flutter. Dynamic stability parameters were most often determined by low angle of attack calculation methods, without much recourse to experiment. The results obtained from the few dynamic experiments performed were used to confirm the absence of problems rather than as design parameters. New requirements for fighter aircraft performance include the ability to fly at high angles of attack in the presence of extensive regions of separated or vortical flows, relaxed static stability, greatly increased agility, and an interest in unorthodox geometries such as closely coupled canard or tail first configurations. The time lags and unsteady phenomena associated with flow fields resulting from rapid maneuvers and large amplitude motions significantly affect the dynamic behavior of modern fighter aircraft and become as important for aircraft design as the classical static performance criteria. A review is made of the various aerodynamic aspects affecting aircraft dynamic behavior and some experimental techniques. *Author*

N88-29755# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel

SPECIAL COURSE ON MISSILE AERODYNAMICS

Apr. 1988 429 p. Course held in Rhode-Saint-Genese, Belgium, 30 Mar. - 3 Apr. 1987, in Athens, Greece, 18-19 May 1987, and in Ankara, Turkey, 21-22 May 1987

(AGARD-R-754; ISBN-92-835-0452-6; AD-A199172) Avail: NTIS HC A19/MF A01

Topics addressed include: a survey of aerodynamic problems encountered on existing and future missiles and of the most important predictive methods; the criteria that define the required prediction accuracy; nonlinear aerodynamic effects; engineering computation methods used for calculating stability and control for conventional and unconventional missiles; the roles of intake in the propulsion system of turbojet and ramjet powered missiles; internal and external aerodynamic aspects of the induction system; computer aided design, prediction of aerodynamic heating; base flows with and without propulsion; and next generation supersonic and hypersonic missiles. For individual titles, see N88-29756 through N88-29766

02 AERODYNAMICS

N88-29756# McDonnell-Douglas Astronautics Co., Saint Louis, MO

ACCURACY CRITERIA FOR EVALUATING SUPERSONIC AERODYNAMIC COEFFICIENT PREDICTIONS

J. E. WILLIAMS and R. J. KRIEGER. In AGARD, Special Course on Missile Aerodynamics 18 p (SEE N88-29755 24-02) Apr. 1988. Sponsored in part by Department of the Air Force, Washington, D.C. (AGARD-R-754) Avail. NTIS HC A19/MF A01

Aerodynamic prediction methods are traditionally compared with wind tunnel test data. However, the assessment of accuracy is left to an arbitrary interpretation. An accuracy criteria was developed that defines the required prediction accuracy in terms of allowable errors in missile performance and design parameters. Equations were selected that relate these parameters to the aerodynamic drag, stability, and control coefficients. These equations are differentiated with respect to the aerodynamic coefficients and simplified when possible. Allowable errors in the performance or design parameters are estimated, based on preliminary design requirements, and the required aerodynamic coefficient accuracy calculated. The results allow a quantitative evaluation of prediction accuracy. Author

N88-29757# Nielsen Engineering and Research, Inc., Mountain View, CA. Missile and Store Separation Aerodynamics

SURVEY ON NONLINEAR EFFECTS

MARNIX F. E. DILLENIUS and STANLEY C. PERKINS, JR. In AGARD, Special Course on Missile Aerodynamics 101 p (SEE N88-29755 24-02) Apr. 1988 (AGARD-R-754) Avail. NTIS HC A19/MF A01

A survey of experimental observations and intermediate level prediction methods aimed at nonlinear aerodynamic characteristics of tactical missiles is described. A description is given of the major differences between missile and aircraft flight and configuration characteristics. The importance of vortical interference and nonlinear compressibility due to shocks is stressed. Nonlinearities associated with deformable fin design, supersonic fin on body interference, wraparound fins, and unsteady flight are discussed. Summarized accounts are provided for the effects of asymmetric body vortex shedding and vortex bursting on overall missile aerodynamic characteristics. Physical examples are given that show vortex structures and shock formations in vapor screen and schlieren pictures. In many instances, the nonlinear aerodynamic effects are illustrated by theoretical results obtained with and without the relevant nonlinearity. Short descriptions are given of intermediate level panel-based missile aerodynamic prediction methods with special attention to the models incorporated to account for vortical and nonlinear compressibility effects. The descriptions include applications to additive force analysis for supersonic inlets and to deformable fins. Additional comparisons with experimental data are provided and the nonlinear effects pointed out. Presently available methods and future needs are summarized in the concluding remarks. Author

N88-29758# PRC Kentron, Inc., Hampton, VA.

SEMI-EMPIRICAL METHODS FOR CONVENTIONAL AND UNCONVENTIONAL MISSILES

MICHAEL J. HEMSCH. In AGARD, Special Course on Missile Aerodynamics 21 p (SEE N88-29755 24-02) Apr. 1988 (AGARD-R-754) Avail. NTIS HC A19/MF A01

In the development and use of semi-empirical methods for prediction of the aerodynamic characteristics of modern missiles, one fact is exploited more than any other: the slenderness of the airframes and of the flows surrounding them. The first mathematical attempts to use this fact were made over thirty years ago and resulted in classical slender-body theory and the universally-known Pitts, Nielsen, and Kaatan method for conventional missiles. It is shown that invoking slenderness for a missile in supersonic high angle-of-attack flow yields similarity forms which correlate data for affine bodies and wings in a particularly useful way. The equivalent angle-of-attack concept which is rooted in classical slender body theory is also presented together with extensions required for flows with high crossflow Mach number, one of the similarity variables. Finally, it is shown that the classical two-term fits to normal-force and center-of-pressure-location data for isolated wings and bodies are inferior to one-term power-law fits to the data in similarity form. Author

N88-29759# Naval Surface Weapons Center, Silver Spring, MD. SPACE MARCHING EULER SOLVERS

ANDREW B. WARDLAW, JR. In AGARD, Special Course on Missile Aerodynamics 32 p (SEE N88-29755 24-02) Apr. 1988 (AGARD-R-754) Avail. NTIS HC A19/MF A01

Space marching Euler solvers for tactical missiles are examined. These solvers are applicable to missiles in supersonic flight provided that the flow field remains supersonic everywhere. The introductory section outlines progress to date and is followed by a discussion of numerical methods which were used to compute the flow about tactical missiles. Four different codes are described which are available for treating missile body shapes. Results from these computational methods are presented for body-alone, body-wing, and body-wing-tail cases. Force coefficients, surface pressures, and flow field predictions are compared to experiment. Reasonable agreement is obtained, illustrating the feasibility of using these methods in the design process. The limitation of the Euler equations are also discussed. Author

N88-29760# MATRA Service Aerodynamique, Veizy-Villacoublay (France).

NUMERICAL METHODS: EULER TIME DEPENDENT SOLVER

J. J. CHATTOT. In AGARD, Special Course on Missile Aerodynamics 28 p (SEE N88-29755 24-02) Apr. 1988 (AGARD-R-754) Avail. NTIS HC A19/MF A01

The EULER time dependent solver of MATRA is described and the fundamental problem of separated flow simulation with an inviscid model is addressed, in particular separation on a smooth surface. Applications pertinent to missile aerodynamics, ranging from simple configurations to complete missile flow simulations, are examined. Author

N88-29761# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.)

PREDICTION OF DYNAMIC DERIVATIVES

HEINZ FUCHS and ROLF KAPP. In AGARD, Special Course on Missile Aerodynamics 41 p (SEE N88-29755 24-02) Apr. 1988 (AGARD-R-754) Avail. NTIS HC A19/MF A01

The dynamic derivatives are introduced by their mathematical definition derived from the general expansion of aerodynamic functions with respect to the relevant independent fluid motion variables. The common classification of the dynamic derivatives is evaluated in accordance with the definitions used at flight mechanical applications. This is shown with the examples of nonstationary motion types creating dynamic derivative effects. Some basic aspects of a semiempirical method for the calculation of dynamic derivatives of missile configurations or military aircraft are shown. Results of the computer program DYNAM are presented in comparison with experimental results of different test rigs. For higher angles of attack the linear theory for the calculation of the derivatives with respect to q is extended by a cross-flow assumption using the cross-flow drag coefficient. In addition to the semiempirical prediction method of total missile or aircraft configurations there are nonstationary panel methods which are useful for the determination of dynamic derivative of harmonic oscillating wings or wing-rudder systems. An overview of the different dynamic test rigs is given which are in use at the different aerodynamic test laboratories of FR Germany. Test results of a Dornier standard missile configuration are discussed. An outlook on future activities on the evaluation methods of the dynamic test rigs at the high angle-of-attack region is given. Author

N88-29762# British Aerospace Public Ltd. Co., Bristol (England) Naval and Electronic Systems Div

AIR INTAKE AERODYNAMICS

C. S. JELL. In AGARD, Special Course on Missile Aerodynamics 62 p (SEE N88-29755 24-02) Apr. 1988 (AGARD-R-754) Avail. NTIS HC A19/MF A01

The effective operation of airbreathing missiles is strongly dependent on the efficiency of the air intake system and its ability to supply the engine with air of adequate quality at all required flight conditions while minimizing any undesirable effects that the intakes may have on the overall aerodynamic characteristics of the missile. The role of the intake in the propulsion system of turbojet and ramjet powered missiles is described and both the internal and external aerodynamic aspect of the induction system are addressed. The features of various types of air intake commonly used for subsonic and supersonic operation are discussed. The

02 AERODYNAMICS

causes and effects of flow instability and flow non-uniformity at engine entry are considered and the operational relationship between the engine and the intake is shown. Finally three major aspects of intake installation are discussed: namely the influence of the missile body flowfields on internal performance; the forces and moments generated by the internal flow; and the effect of the intakes and their associated fairings on the overall aerodynamic characteristics of the missile. Author

N88-29763# McDonnell-Douglas Astronautics Co., Saint Louis, MO.

SEMIEMPIRICAL METHODS FOR AIRBREATHING MISSILES

J. E. WILLIAMS and R. J. KRIEGER In AGARD, Special Course on Missile Aerodynamics 12 p (SEE N88-29755 24-02) Apr. 1988

(AGARD-R-754) Avail: NTIS HC A19/MF A01

A computer-aided design procedure is described for use in conceptual design for sizing and shaping supersonic noncircular missiles with turbojet or ramjet propulsion systems. The theoretical basis for the method which uses a sensitivity derivative approach is developed. Avionics, structures, payload, inlet, engine, fuel, aerodynamic and performance models are described. Inlet/engine sizing, external moldline shaping and interactive graphics design processes are presented. The synthesis procedure overcomes many of the major drawbacks of airbreathing missile synthesis. It has features such as: simple initial geometry setup for body, tails, and inlets; modeling of completely arbitrary missile shapes; noncircular subsystem packaging; noncircular and multiple inlet modeling; aerodynamic and performance shaping; low cost, short duration computer sessions; rapid convergence; and accurate aerodynamic predictions. Two example configuration shapings are provided to depict the sizing process. Author

N88-29764# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.)

AERODYNAMIC HEATING OF MISSILES

ROLF KAPP, H. MATHAUER, and H. RIEGER In AGARD, Special Course on Missile Aerodynamics 19 p (SEE N88-29755 24-02) Apr. 1988

(AGARD-R-754) Avail: NTIS HC A19/MF A01

The results of investigations of the aerodynamic heatings of missiles are presented. First the applied basic semiempirical methods to determine the flow field about the isolated components of missiles are described and some possibilities to calculate the heat flux in the boundary layer are specified for different pointed or blunted body noses, such as conical, ogival, and hemispherical noses. The methods are valid for laminar and turbulent flow properties and in the transition region between laminar and turbulent. The calculated heat transfer factors or Stanton numbers are compared with experimental results. The agreement between theoretical and measured values is good. A theoretical method for the calculation of the flow field around missile configurations is presented. This method is based on the parabolization of the compressible, stationary Navier-Stokes equations (PNS-2D) and limited to supersonic Mach numbers. The quality of the results is demonstrated by comparison to corresponding test results of other authors. Finally, a computational method is described to calculate the local time-dependent temperatures at the surface or inside the body. The configuration is divided into a number of volume elements, thus permitting numerical solution of the time varying equation of heat transfer. The resulting temperatures for some special configurations are plotted and when possible compared with experimental results. Author

N88-29765# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

PREDICTION OF BASE-FLOWS

J. DELERY and R. G. LACAU (Société Nationale Industrielle Aérospatiale, Paris, France) In AGARD, Special Course on Missile Aerodynamics 72 p (SEE N88-29755 24-02) Apr. 1988

(AGARD-R-754) Avail: NTIS HC A19/MF A01

The base region of a missile or a launcher is the seat of complex phenomena which can have important repercussions on vehicle performance. The fields they concern are many: afterbody drag, heat transfer, and interaction between external stream and the base. Thus prediction of these phenomena is of great practical interest for missile design. The basic principles underlying most of the methods currently used to compute base-flows are examined.

These methods belong essentially to the following categories. In the inviscid/viscous interactive approach, the outer inviscid flow and the viscous regions are computed together and made compatible along a common boundary. In the Multi-Component approach, the flowfield is decomposed into a limited number of regions which are treated by approximate methods and then patched together. This approach has led to the development of a large variety of practical methods which are still routinely used in industry. The last approach consists in solving the time averaged Navier-Stokes equations. Base-flows in the jet-off and jet-on situations are now computed by solving the full Navier-Stokes equations or the thin layer approximation of these equations. Although still costly in computer time and not always in good agreement with experiments because of the difficulty of modeling turbulence in such complex flows, the Navier-Stokes approach is particularly promising. It appears also as the most straightforward way to extend prediction capability to three-dimensional flows. Author

N88-29766# McDonnell-Douglas Astronautics Co. Saint Louis, MO.

NEXT GENERATION MISSILE DESIGN

J. E. WILLIAMS and R. J. KRIEGER In AGARD, Special Course on Missile Aerodynamics 12 p (SEE N88-29755 24-02) Apr. 1988

(AGARD-R-754) Avail: NTIS HC A19/MF A01

Traditional long range cruise class missiles fly at low altitudes and subsonic speed. To meet operational requirements, the next generation missiles will fly at relative high altitudes and supersonic or hypersonic speeds. Because of economic constraints, low cost design and development approaches must be used. To illustrate these approaches, the results of the U.S. Air Force sponsored Aerodynamic Configured Missile (ACM) Program and the subsequent Low Cost Aerodynamic Configured Missile Demonstrator Program are summarized with emphasis on the impact of these studies on future missile concepts. The ACM program objective was to exploit the aerodynamic potential of supersonic cruise and maneuvering missiles to achieve significant improvements in performance. During three phases of effort over a 30 month period, configuration development, wind tunnel testing, and performance analyses were performed. The major uses of the program results to date are described. A low cost approach is described which uses existing equipment, standard airframe structural design, the existing ACM data base, trajectory shaping, and aggressive program planning. Two flight test options are then identified. Program plans, costs, and subset experimental programs are identified including growth versions with higher Mach number capability. Author

N89-10006# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

AGARD MANUAL ON AEROELASTICITY IN AXIAL-FLOW TURBOMACHINES. VOLUME 2: STRUCTURAL DYNAMICS AND AEROELASTICITY

MAX F. PLATZER, ed and FRANKLIN O. CARTA, ed. (United Technologies Research Center, East Hartford, Conn.) Jun. 1988 266 p

(AGARD-AG-298-VOL-2; ISBN-92-835-0467-4; AD-A199697)

Avail: NTIS HC A12/MF A01

An overview of structural dynamics characteristics and analysis methods applicable to single blades and bladed assemblies is presented. The blade fatigue problem and its assessment methods, and life-time predictions are considered. Aeroelastic topics covered include: the problem of blade-disc shroud aeroelastic coupling, formulations and solutions for tuned and mistuned rotors, and instrumentation on test procedures to perform a fan flutter test. The effect of stagnation temperature and pressure on flutter is demonstrated and current, available forced vibration and flutter design methodology is reviewed. For individual titles, see N89-10007 through N89-10016.

02 AERODYNAMICS

N89-16760# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel.
REYNOLDS NUMBER EFFECTS IN TRANSONIC FLOW
 A. ELSENAAR, T. W. BINION, JR., E. STANEWSKY, and H. C. HORNUNG, ed. (California Inst. of Tech., Pasadena.) Mar. 1989 92 p
 (AGARD-AG-303) Avail. NTIS HC A05/MF A01

Reynolds number effects in transonic flow are critically reviewed. A discussion is presented of the viscous effects observed on realistic configurations. The following geometries are considered: Airfoils and high aspect ratio wings typical of transport aircraft, fighter-type low aspect ratio delta wings, two- and three-dimensional bodies characteristic of missiles and combat aircraft fuselages, and afterbodies. Pseudo-Reynolds number effects are identified which may arise, for instance due to the influence of the Reynolds number on the wind tunnel environment and in turn affect the flow about a model. As an introduction, a brief retrospect of the history of Reynolds number effect is presented. Author

N89-16847# Army Aviation Systems Command, Moffett Field, CA

A CRITICAL ASSESSMENT OF WIND TUNNEL RESULTS FOR THE NACA 0012 AIRFOIL

W. J. MCCROSKEY In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 21 p (SEE N89-16846 09-09) Jul. 1988 Previously announced as N88-11636
 (AGARD-CP-429) Avail. NTIS HC A22/MF A01 CSCL 01A

A large body of experimental results, obtained in more than 40 wind tunnels on a single, well known two-dimensional configuration, was critically examined and correlated. An assessment of some of the possible sources of error was made for each facility, and data which are suspect were identified. It was found that no single experiment provided a complete set of reliable data, although an investigation stands out as superior in many respects. However, from the aggregate of data the representative properties of the NACA 0012 airfoil can be identified with reasonable confidence over wide range of Mach numbers, Reynolds number, and angles of attack. This synthesized information can now be used to assess and validate existing and future wind tunnel results and to evaluate advanced Computational Fluid Dynamics codes. Author

N89-16849# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

COMPARISON OF THE RESULTS OF TESTS ON A300 AIRCRAFT IN THE RAE 5 METRE AND THE ONERA F1 WIND TUNNELS

C. QUEMARD and P. B. EARNshaw (Royal Aircraft Establishment, Farnborough, England) In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 16 p (SEE N89-16846 09-09) Jul. 1988
 (AGARD-CP-429) Avail. NTIS HC A22/MF A01

Studies of the A300 Airbus were carried out in the pressurized low speed wind tunnel at RAE and ONERA. Initially comparison of the results from the same model mounted on an identical three strut support, showed discrepancies which in the case of lift coefficient amounted to about 2.5 pct. A systematic comparison was made of the measurement techniques together with the methods used in the reduction of the resulting data. The production of uncorrected aerodynamic coefficients required the measurement of loads by means of underfloor balances and of the reference pressure. Checks were carried out on the balance calibrations confirming their accuracy after which an attempt was made in both facilities to assess and refine the accuracy of the reference pressure measurement. As a result, corrections were applied to the measurements made in both wind tunnels which reduced but did not eliminate the differences between the two sets of results. The data reduction relies on corrections to be applied for tunnel wall interference as well as that from the strut support system. Author

N89-16850# Boeing Vertol Co., Philadelphia, PA. Advanced Aircraft Aerodynamics.

ANALYTICAL AND EXPERIMENTAL METHODS USED TO RESOLVE THE AERODYNAMIC RESULTS OF TESTS CONDUCTED IN THREE TEST FACILITIES

ROSS D. CLARK and H. J. ROSENSTEIN In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 15 p (SEE N89-16846 09-09) Jul. 1988
 (AGARD-CP-429) Avail. NTIS HC A22/MF A01

The V-22 aerodynamic drag and stability data base developed through extensive wind tunnel testing is examined. Early drag and stability aerodynamic testing showed differences in characteristics when comparing results from different test facilities. A joint Bell-Boeing/Navy plan involving a thorough understanding/refinement of test techniques, facility calibrations and application of computational methods resolved these issues and permitted validation of the data base. Author

N89-16858# Office National d'Etudes et de Recherches Aeronautiques, Modane (France)

PRECISION IMPROVEMENT OF TRANSPORT AIRCRAFT DRAG MEASUREMENTS (AMELIORATION DE LA PRECISION DE LA MESURE DE LA TRAINEE D'UN AVION DE TRANSPORT)

C. ARMAND and C. PUJOL (Societe Nationale Industrielle Aeronautique, Toulouse, France) In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 14 p (SEE N89-16846 09-09) Jul. 1988 In FRENCH Previously announced in IAA as A88-22537
 (AGARD-CP-429) Avail. NTIS HC A22/MF A01

Methods used in the ONERA S1MA and S2MA wind tunnels for attaining the desired absolute precision of 0.0002 in drag measurements of Airbus type transport aircraft are discussed. Factors considered include the quality of the balances, the precision of the incidence measurements, and the effects of friction and extreme temperatures. It is also noted that in order to obtain accurate drag measurements the airfoil geometry and the pressure distribution on the airfoil must be known to a high degree of precision. The results are corrected for the pressure fields in the test section and for the effects of the wall and the sting. E R

N89-16856# National Aerospace Lab., Amsterdam (Netherlands).

ON REYNOLDS NUMBER EFFECTS AND SIMULATION

A. ELSENAAR In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 22 p (SEE N89-16846 09-09) Jul. 1988
 (AGARD-CP-429) Avail. NTIS HC A22/MF A01

The change in flow development with Reynolds number, commonly referred to as the Reynolds number effect, has both attracted and annoyed the aerodynamic community. A misjudgment of the magnitude of the Reynolds number effect may lead to an over- or underestimation of flight performance resulting in economic loss. In the worst case a costly redesign is required during the period of flight testing. The question of Reynolds number effects is crucial because of its very fundamental nature, a thorough understanding of viscous flow phenomena and their interactions with the inviscid flow field is required to explain the Reynolds number effects. As long as routine wind tunnel testing at the actual flight Reynolds number is not possible, other ways must be found to close the experimental Reynolds number gap. Basically, Reynolds number effects originate from a Reynolds number dependency of a viscous shear layer close to the body surface and its interaction with the outer inviscid flow field. If the boundary layer can be manipulated in the wind tunnel such that its development at flight Reynolds number is closely approximated, the inviscid flow senses the proper boundary condition and the overall flow development will then be very similar. The fundamental aspects of the Reynolds number effects are reviewed. Author

02 AERODYNAMICS

N89-16868# Naples Univ. (Italy). Inst. of Aerodynamics 'Umberto Nobile'.

EXPERIMENTS ON BOUNDARY LAYER TRANSITION TRIPPING AT LOW REYNOLDS NUMBERS

GIUSEPPE P. RUSSO In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 13 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

A systematic experimental investigation was undertaken with the aim of obtaining sound results on the effectiveness of distributed roughnesses in tripping transition on a flat plate at low Reynolds numbers. A 2.5 mm band of double stick scotch tape dusted with sparse carborundum grains was used as a tripping element at various speeds, ranging from 11 to 17 m/s. Transition location was detected by streamwise traversing, at a fixed height from the flat plate, both a Pitot tube and a hot-wire probe; also relevant velocity profiles in the boundary layer were measured. When needed surface flow visualization was used to confirm the transition position. A good correlation was found, in terms of the critical roughness Reynolds number needed to fix transition at the roughness, with the results found in the open literature. Author

N89-16869# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

SOME DIFFICULTIES IN THE WIND TUNNEL PREDICTION OF MODERN CIVIL AIRCRAFT BUFFETING: PROPOSED REMEDIES

R. DESTUYNDER, V. SCHMITT, J. BERGER, and R. BARREAU (Societe Nationale Industrielle Aerospatiale, Toulouse, France) In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 14 p (SEE N89-16846 09-09) Jul. 1988 In FRENCH; ENGLISH summary (AGARD-CP-429) Avail: NTIS HC A22/MF A01

The prediction of transport aircraft buffet response still remains a challenge despite recent progress in understanding of the phenomenon. The prediction is up to now inaccessible to a purely theoretical approach and so is mainly based on wind tunnel investigations. After a review of experimental methods currently used to determine model buffeting and a short description of full scale application techniques, the simulation problems that appear are presented. The next point deals with a number of improvements concerning models and experimental methodology with the final objective to provide more reliable buffeting predictions on large transport aircrafts. Author

N89-16875# MATRA Service Aerodynamique, Velizy-Villacoublay (France).

ACCURACY OF LIFT AND CENTER-OF-THRUST MEASUREMENTS AT MISSILE CONTROL SURFACES

J. PERINELLE and M. RIBADEAU DUMAS In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 17 p (SEE N89-16846 09-09) Jul. 1988 In FRENCH; ENGLISH summary (AGARD-CP-429) Avail: NTIS HC A22/MF A01

During the study of aerodynamically piloted missiles it is necessary to estimate the forces and moments applied to the control surfaces. These quantities are difficult to evaluate by numerical methods and the study is performed in the wind tunnel experimentally. After a first evaluation of an optimal position of the axis of rotation and of the planform, the efforts, and moments are measured in the whole flight envelope. An accurate knowledge of the moments about the axis (hinge moment) is required for guidance and control studies. The influence of various experimental parameters on the accuracy of such measurements is assessed. Author

N89-16876# Naples Univ. (Italy). Inst. of Aerodynamics 'Umberto Nobile'.

COMPUTERIZED THERMOGRAPHIC TECHNIQUE FOR THE DETECTION OF BOUNDARY LAYER SEPARATION

R. MONTI and G. ZUPPARDI In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 15 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

The computerized unsteady thermographic methodology was used as a noninvasive technique to analyze the boundary layer development and to detect the transition lines and the separation regions on airfoil surfaces in the wind tunnel. The method is based

on the strong dependence of the heat transfer coefficient upon the flow field condition at the airfoil surface. This noninvasive technique has proved to be very appropriate when studying the boundary layer behavior at very low Reynolds numbers in incompressible flow because at these conditions the boundary layer is very unstable and cannot tolerate any disturbance induced by intrusive techniques. The experimental diagnostic equipment consists of a thermograph (AGA 680), and A/D conversion unit (AVIORRADIO DIGIMEN), and a microcomputer (APPLE IIe). The tests were performed on an elliptic cylinder, on a WORTMANN FX-63-137 and on a Miley MO6-13-128 airfoil. The experimental results compare favorably with those obtained by other authors that utilized conventional techniques. Author

N89-18614# Royal Aircraft Establishment, Bedford (England). WIND TUNNEL EXPERIMENTS ON AEROFOIL MODELS FOR THE ASSESSMENT OF COMPUTATIONAL FLOW METHODS

P. R. ASHILL, D. J. WEEKS, and J. L. FULKER In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 14 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Wind tunnel experiments on two airfoil models (unswept and a 25 deg sweep) at high subsonic speeds and for Reynolds numbers up to about $20 \times 1,000,000$ are described. Both models had detachable trailing edges for studying flows with differing rear pressure distributions and used a method for fixing transition, which gave precise control of the disturbance to the boundary layer. Following a discussion of the measurement and correction procedures, comparisons are presented between the data and CFD methods: these comparisons reveal the importance for the accurate prediction of the flow over advanced airfoils of including effects in the modeling of the shear layers which become significant as separation is approached. Author

N89-18615# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

PARAMETRIC STUDY OF GRID SIZE, TIME STEP AND TURBULENCE MODELING ON NAVIER-STOKES COMPUTATIONS OVER AIRFOILS

CHRISTOPHER L. RUMSEY and W. KYLE ANDERSON In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 19 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01 CSCL 01A

An upwind-biased implicit approximate factorization algorithm is applied to several steady and unsteady turbulent flows. The thin layer form of the compressible Navier-Stokes equation is used. Both the flux vector splitting and flux difference splitting methods are used to determine fluxes, and the results are compared. Flux difference splitting predicts results more accurately than flux vector splitting on a given mesh size, but, in its present implementation, is more severely limited by the maximum CFL number for unsteady time accurate flows. Physical aspects of the computations are also examined. An equilibrium turbulent boundary layer model computes generally better steady and unsteady results than a nonequilibrium model when there is little to no boundary layer separation. Conversely, when a significant region of separation exists, the nonequilibrium model performs in better agreement with experiment. Author

N89-18616# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

ON THE VALIDATION OF A CODE AND A TURBULENCE MODEL APPROPRIATE TO CIRCULAR CONTROL AIRFOILS

J. R. VIEGAS, M. W. RUBESIN, and R. W. MACCORMACK (Stanford Univ., CA.) In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 22 p (SEE N89-18610 11-34) Dec. 1988 Previously announced as N88-22864 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01 CSCL 01A

A computer code for calculating flow about a circulation control airfoil within a wind tunnel test section was developed. This code is being validated for eventual use as an aid to design such airfoils. The concept of code validation being used is explained. The initial stages of the process were accomplished. The present code was

02 AERODYNAMICS

applied to a low subsonic, 2-D flow about a circulation control airfoil for which extensive data exist. Two basic turbulence models and variants thereof were successfully introduced into the algorithm, the Baldwin-Lomax algebraic and the Jones-Launder two equation models of turbulence. The variants include adding a history of the jet development for the algebraic model and adding streamwise curvature effects for both models. Numerical difficulties and difficulties in the validation process are discussed. Turbulence model and code improvements to proceed with the validation process are also discussed. Author

N89-18622# Royal Aircraft Establishment, Bedford (England). **A THEORETICAL AND EXPERIMENTAL EVALUATION OF A NUMERICAL METHOD FOR CALCULATING SUPERSONIC FLOWS OVER WING-BODY CONFIGURATIONS** J. L. FULKER and P. R. ASHILL. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 11 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

A method of solving the Euler equations is described and is applied to the calculation of supersonic flows over two wing-body configurations typical of present day combat aircraft. A multiblock method is used to generate body conforming grids for the complex three dimensional geometries of the configurations and the flow equations are solved by applying time stepping to a finite volume algorithm. An assessment is made of the theoretically predicted flows, by demonstrating the effect on the solution of some of the important features of the CFD method. Results are given for a series of careful wind tunnel tests on models of similar geometry, and comparisons between calculated and measured results are shown. Author

N89-18623# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). **THE DFVLR-F5 WING EXPERIMENT: TOWARDS THE VALIDATION OF THE NUMERICAL SIMULATION OF TRANSONIC VISCOUS WING FLOWS** W. KORDULLA, D. SCHWAMBORN, and H. SOBIECZKY. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 18 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

A major step towards the rigorous validation of Navier-Stokes codes for the simulation of the transonic flow past transport-type wings is described. The basis for this is the DFVLR-F5 wing experiment which was designed to allow the analytical formulation of a boundary value problem. This requires the determination of flow conditions on the entire surface of the prescribed control volume. The experiment led to the organization of a workshop, selected results of which are presented. These show considerable scatter, the sources of which can not be defined very well because there are too many possible ones, and the salient ingredients are too diverse. Some of the difficulties are illustrated by results of additional computations. Both, experimentalists as well as computational aerodynamicists, have to do more work to achieve a successful validation. Author

N89-18628# Aircraft Research Association Ltd., Bedford (England). GARTEUR Action Group. **ACCURACY STUDY OF TRANSONIC FLOW COMPUTATIONS FOR THREE DIMENSIONAL WINGS** M. P. CARR. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 17 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

GARTEUR Action Group AD(AG05) has undertaken an investigation of ten flow field methods. Calculations of inviscid flow over the DFVLR F4 wing for two conditions were analyzed. The main results and conclusions are presented. Author

N89-18629# Fokker B.V., Schiphol-Oost (Netherlands). Aerodynamics and Aeroelasticity Dept.

CFD APPLICATIONS IN DESIGN AND ANALYSIS OF THE FOKKER 50 AND FOKKER 100

N. VOOGT, W. J. A. MOL, J. STOUT, and D. F. VOLKERS. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 11 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Aerodynamic computational codes were used and validated extensively during the aerodynamic development phases of the Fokker 50 and 100 aircraft projects. Validations were made against wind tunnel tests as well as flight measurements. A description is given of the methods on which the codes are based and applications are discussed in areas of intake aerodynamics, low speed high lift flow and transonic flow. Author

N89-18630# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, CA.

EXPERIMENTAL PROGRAM FOR REAL GAS FLOW CODE VALIDATION AT NASA AMES RESEARCH CENTER

GEORGE S. DEIWERT, ANTHONY W. STRAWA, SURENDRA P. SHARMA, and CHUL PARK. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 16 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01 CSCL

01A
The experimental program for validating real gas hypersonic flow codes at NASA Ames is described. Ground based test facilities used include ballistic ranges, shock tubes and shock tunnels, arcjet facilities and heated air hypersonic wind tunnels. Also included are large scale computer systems for kinetic theory simulations and benchmark code solutions. Flight tests consist of the Aeroassist Flight Experiment, the Space Shuttle, Project Fire 2, and planetary probes such as Galileo, Pioneer Venus and PAET. Author

N89-18631# Societe Nationale Industrielle Aerospatiale, Paris (France). Div. Engins tactiques.

THREE-DIMENSIONAL CALCULATIONS OF LATERAL JET INTERACTION WITH AN EXTERNAL SUPERSONIC FLOW (CALCULS TRIDIMENSIONNELS DE L'INTERACTION D'UN JET LATERAL AVEC UN ECOULEMENT SUPERSONIQUE EXTERNE)

M. DORMIEUX and C. MAHE (Office National d'Etudes et de Recherches Aerospatiales, Paris, France). In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 16 p (SEE N89-18610 11-34) Dec. 1988. In FRENCH; ENGLISH summary (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

High maneuverability levels and short response time required for some tactical missiles have lead to the development of new concepts for control systems, among which is direct thrust vector control generated by a lateral jet in the vicinity of the center of gravity. Aerospatiale has chosen such a concept for some of its future missiles. However, generation of a transverse jet on a missile raises the problem of the aerodynamic interactions of this jet on the missile. Within the framework of the development of lateral jet control applications, Aerospatiale has been investigating, with the collaboration of ONERA, aerodynamic phenomena connected with lateral jet interactions. Author

N89-18632# Societe Nationale Industrielle Aerospatiale, Paris (France). Div. Engins tactiques.

NUMERICAL SIMULATION OF SEPARATED SUPERSONIC FLOWS AROUND TACTICAL MISSILE BODIES

PHILIPPE GUILLEN and JEROME LORDON. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 18 p (SEE N89-18610 11-34) Dec. 1988. Sponsored in part by Direction des Recherches Etudes et Techniques, France (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Beyond 4 or 5 degs of incidence, vortices develop on the leeside of tactical missile fuselages. The validation is presented of a numerical approach to simulate these separated flows. In this approach, the flow is computed by solving the Euler equations and separation is forced by a local treatment (Kutta condition like) on the body of the missile, near the supposed location of

02 AERODYNAMICS

the separation line, which has to be known. This local treatment was implemented in two different Euler solvers. Results are presented for various configurations and different aerodynamic conditions. The influence of several parameters was investigated. Finally some calculations show the interest of the method to evaluate the vortical flow interaction with wings. Author

N89-18641# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.).

COMPUTATION OF TRANSONIC 3D CASCADE FLOW AND COMPARISON WITH EXPERIMENTS

H.-W. HAPPEL and B. STUBERT. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 11 p (SEE N89-18610 11-34) Dec. 1988. Sponsored in part by Bundesministerium fuer Forschung und Technologie, Fed. Republic of Germany and Bundesministerium der Verteidigung, Fed. Republic of Germany (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

The inviscid turbomachinery flow within a single stator or rotor blade row is computed by a time marching 3-D Euler code. With respect to rotor blades, the conservation laws are formulated in a rotating frame. The numerical scheme is explicit and first order accurate in time and space. Explicit numerical viscosity terms are added to the Euler equations to achieve a stable solution process. In order to save computer time, local time stepping and a grid refining procedure are used in the calculation. The computational efficiency of the code is demonstrated for realistic blade geometries. The comparison with measurements proves the code to be a useful tool for calculating the 3-D flow through cascades of turbomachinery. Author

N89-18642# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

NUMERICAL AND EXPERIMENTAL INVESTIGATION OF ENGINE INLET FLOW WITH THE DORNIER EM2 SUPERSONIC INLET MODEL

H. BUERS, S. LEICHER, and P. A. MACKRODT (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen, Germany, F.R.). In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 16 p (SEE N89-18610 11-34) Dec. 1988. Sponsored in part by the Ministry of Defense, Fed. Republic of Germany (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Numerical and experimental investigations were conducted with the Dornier EM2 supersonic, fixed geometry, side mounted inlet to improve the performance in the supersonic flight regime. A ramp bleed system is described and some representative results from wind tunnel tests are presented to confirm the procedure. The theoretical investigations were executed with a block structured Euler program, which allowed a more accurate modeling of the realistic aircraft geometry. To simulate boundary layer effects at the ramp of the inlet, an outflow velocity perpendicular to the ramp was introduced. The calculated and the experimental data were in good agreement. Author

N89-18644# Carleton Univ., Ottawa (Ontario). Dept. of Mechanical and Aeronautical Engineering.

MEASUREMENTS AND COMPUTATIONS OF SWIRLING FLOW IN A CYLINDRICAL ANNULUS

R. J. KIND, F. M. YOWAKIM, and P. M. REDDY. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 12 p (SEE N89-18610 11-34) Dec. 1988. Sponsored in part by Natural Sciences and Engineering Research Council, Canada (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Comprehensive measurements were completed for 4 swirling flows in a cylindrical annulus. Nominal swirl angles were 0, 15, 30 and 45 degrees. The data include static and total pressure distributions, axial and tangential wall shear stress components, and profiles of the mean velocity components and of the Reynolds shear and normal stresses. Data was provided for validation of computational methods. Consistency checks indicate that the data are of high quality and suitable for this purpose. Also outlined is a computational method which was used with simple mixing length turbulence models to compute development of the measured flows. The computations have demonstrated that a simple mixing length

model gives excellent predictions of the swirling flow near the annulus walls. Author

N89-18645# Instituto Superior Tecnico, Lisbon (Portugal). Dept. of Mechanical Engineering.

ON THE VALIDATION OF 3-D NUMERICAL SIMULATIONS OF TURBULENT IMPINGING JETS THROUGH A CROSSFLOW

J. M. M. BARATA, D. F. G. DURAO, M. V. HEITOR, and J. J. MCGUIRK (Imperial Coll. of Science and Technology, London, England). In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 10 p (SEE N89-18610 11-34) Dec. 1988. Sponsored in part by RAE, Farnborough, United Kingdom Prepared in cooperation with Lisbon Univ. Portugal (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Laser Doppler measurements of the flow field resulting from the impingement of a single axisymmetric jet against a wall after penetrating a confined cross flowing stream are presented and used to validate numerical predictions of the flow. The experiments were carried out for a Reynolds number of 60,000, corresponding to a jet to crossflow velocity ratio of 30 and for a jet exit 5 jet diameters above the opposing wall. A basis is provided for better understanding of several related but more complex practical flow fields. The data is particularly suitable for the evaluation of the accuracy of the turbulence model used in several numerical methods currently under development for the prediction of this type of flow. As an example of this latter use, calculations are presented of the 3-D flow characterized by the measurements (a standard $k-\epsilon$ turbulence model is used). The difficulty of assessing turbulence model performance in these complex flows due to the intrusion of numerical diffusion errors is demonstrated by comparing calculations on both coarse and fine meshes and by improving the accuracy of the discretization of the convection terms using the high order QUICK method. Author

N89-18649# Aeritalia S.p.A., Pomigliano D'Arco (Italy). Transport Aircraft Group.

VALIDATION OF A MULTI-BLOCK EULER FLOW SOLVER WITH PROPELLER-SLIPSTREAM FLOWS

A. AMENDOLA, R. TOGNACCINI, J. W. BOERSTOEL, and A. KASSIES (National Aerospace Lab., Amsterdam, Netherlands). In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 15 p (SEE N89-18648 11-34) Dec. 1988 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

A new computer-program system for the numerical simulation of subsonic and transonic flows around complex aircraft configurations is described. This system computes Euler flows on multi-blocked grids. The system consists of four major parts: a block decomposer for the subdivision of flow domains into blocks, a grid generator for blocked flow domains, a flow solver for blocked grids, and a flow visualizer for flows on blocked grids. These parts are interfaced by files with simple formats. Special attention was given to provide this package of software products with: excellent portability (the system was tested on various front-end and supercomputers), modularity (with respect to physical and numerical subtasks, and with respect to subdividing total simulation task in loosely coupled subtasks). The system has good growth potential towards a Navier-Stokes simulation environment. The system is being validated with various test cases. Results of one of these test cases (the wing/nacelle/propeller configuration tested in a NASA Langley wind-tunnel, NASA CR 172605) show that the system performs reasonably from the point of view of both accuracy and operational manageability. Author

N89-18650# Technische Univ., Delft (Netherlands). Faculty of Aerospace Engineering.

INVESTIGATION OF THE SURFACE FLOW OF CONICAL BODIES AT HIGH SUBSONIC AND SUPERSONIC SPEEDS

W. J. BANNINK, E. M. HOUTMAN, and S. P. OTTOCHIAN. In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 14 p (SEE N89-18648 11-34) Dec. 1988 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

Turbulent boundary layer calculations have been performed of the flow on the leeward side of two conical bodies at moderate to high angles of attack. A sharp-edged planar 65 deg sweep delta wing at high subsonic speeds up to M (infinity) equals 0.85 and angles of attack up to 15 deg and a 7.5 deg semi-apex angle circular cone at M (infinity) equals 2.95 at 14 deg angle of

attack are used. The boundary layer method, based on a finite difference predictor-corrector algorithm, assumes a conical external flow and applies a local (Blasius) similarity concept in radial direction from the apex. The solution marches in cross-direction from the reattachment line toward produced correct results with respect to the location of separation and the surface flow inclination, experimental pressure distributions are used to generate the inviscid solutions at the edge of the boundary layer. The predicted surface flow on both bodies are in close agreement with the experimental results. In particular the location of the separation lines were very close to those observed in oil flow patterns. That the approximate flow model (conical) produces such good results in the case of the delta wing is due to the relatively large spanwise pressure gradients compared to the chordwise gradients. Author

N89-18653# Boeing Advanced Systems Co., Seattle, WA
SLENDER CONE CFD AND EXPERIMENTAL DATA COMPARISONS IN HYPERSONIC FLOW

J. Y. BALTAR and E. TJOENNELAND In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 14 p (SEE N89-18648 11-34) Dec. 1988
 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

A zonal Navier-Stokes Parabolized Navier-Stokes (NS/PNS) computational fluid dynamics (CFD) analysis of the flow field about sharp and slightly blunted cones at Mach 18.7 was made. The results were compared with experimental measurements from the Princeton High Pressure Hypersonic Nitrogen Tunnel. Plots are shown comparing predicted and measured shock locations, surface pressures, surface heat transfer, and several flow field properties. Contour plots of the overall flow field are shown for cones with two nose radii. The agreement between the CFD results and experiment was fair considering that several important aspects of the flow physics in the tunnel were not properly modeled. The most important of these are the axial variation in wind tunnel static pressure and the gas characteristics of the nitrogen in the test section. The experimental data set, including data up to Mach 26.5, has proven to be valuable for improving the understanding of the flow physics on slender cones at hypersonic speeds. Author

N89-18655# Defence Research Establishment Ottawa, (Ontario).

COMPARISON OF THEORY AND EXPERIMENT FOR FOUR SUPERCRITICAL, LOW DRAG AIRFOILS

D. J. JONES, M. KHALID, and B. EGGLESTON (De Havilland Aircraft Co. of Canada Ltd., Downsview, Ontario) In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 16 p (SEE N89-18648 11-34) Dec. 1988
 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

A comparison of a revised Bauer, Garabedian, and Korn (BGK) code, GRUMFOIL, and the DRELA code from MIT (modified by Boeing) is here presented. The results are compared against experimental data for four different airfoils with relative thickness from 10 to 21 percent. Shown here is a comparison of three different two-dimensional transonic airfoil theories and a comparison of them to experimental data obtained in a 1.5 m x 1.5 m blowdown wind tunnel with a 38 cm wide 2-D insert. Four different airfoils of 10, 13, 16 and 21 percent maximum thickness are considered in the study. Author

N89-18657# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

DETAILED FLOWFIELD MEASUREMENTS OVER A 75 DEG SWEEPED DELTA WING FOR CODE VALIDATION

SCOTT O. KJELGAARD and WILLIAM L. SELLERS, III In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 14 p (SEE N89-18648 11-34) Dec. 1988
 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01 CSCL 01A

Selected results from an experimental investigation documenting the flowfield over 75 deg swept delta wing at an angle-of-attack of 20.5 deg are presented. Results obtained in the investigation include surface flow visualization, off-body flow visualization, and detailed flowfield surveys for various Reynolds numbers. Flowfield surveys at Reynolds numbers of 0.5, 1.0 and 1.5 million were conducted with both a pitot pressure probe and a 5-hole pressure probe; and 3-component laser Doppler velocimeter surveys were conducted at a Reynolds number of 1.0 million. The pitot pressure

surveys were obtained at 5 longitudinal stations, the 5-hole probe surveys were obtained at 3 longitudinal stations and the laser Doppler velocimeter surveys were obtained at one station. The accuracy of each instrumentation system is discussed, as well as, discrepancies in the calculation of vorticity using various algorithms. Author

N89-18658*# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

EXPERIMENTS AND CODE VALIDATION FOR JUNCTURE FLOWS

L. R. KUBENDRAN, C.-H. SUNG, and C.-I. YANG (Naval Ship Research and Development Center, Bethesda, MD.) In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 11 p (SEE N89-18648 11-34) Dec. 1988
 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01 CSCL 01A

The turbulent flow around a junction formed by an unswept wing and a flat plate has been experimentally studied, and the effectiveness of modifications near the wing leading edge in controlling the junction flow field has been evaluated. The results are compared with numerical solutions of the incompressible Reynolds-averaged Navier-Stokes equations. The Baldwin-Lomax turbulence model is used in the computations. The numerical code is very time efficient, and it predicts the flow behavior well, including the detection of leading-edge vortex formation. It tends to over-predict the boundary layer thickness and the location of the vortex. Both the experiment and computations indicate that the leading edge flow separation is eliminated by the use of a leading-edge fillet designed in this study, resulting in drag reduction. Author

N89-18660# Aeronautical Research Inst. of Sweden, Bromma.
LARGE-SCALE VISCOUS SIMULATION OF LAMINAR VORTEX FLOW OVER A DELTA WING

BERNHARD MUELLER and ARTHUR RIZZI (Aeronautical Research Inst. of Sweden, Stockholm.) In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 16 p (SEE N89-18648 11-34) Dec. 1988
 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

A numerical method has been developed to solve the Navier-Stokes equations for laminar compressible flow around delta wings. A large-scale solution on a mesh of 129x49x65 points for transonic flow M (infinity) equals 0.85 alpha equals 10 deg. and Re (infinity), sub C sub R equals 2.38x10 to the 6th around a 65 deg. swept delta wing with round leading edge is presented and discussed. The results reveal the presence of primary, secondary, and even tertiary vortices. Comparison with experiment shows that the interaction between the primary and secondary vortices is obtained correctly and that these results are a more realistic simulation than the one given by the Euler equations. Author

N89-18663*# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

OVERVIEW OF CFD METHODS AND COMPARISON WITH FLIGHT AEROTHERMAL DATA

KENNETH SUTTON, ERNEST V. ZOBY, and H. HARRIS HAMILTON In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 17 p (SEE N89-18648 11-34) Dec. 1988
 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01 CSCL 01A

An overview of previously published aerothermal investigations which demonstrate the capabilities of detailed computational fluid dynamics and engineering codes to predict the aerothermal environment about an entry vehicle is presented. The overview consists of a brief discussion of the computational methods and experimental data and includes comparisons between the computed results and data. The overview focuses primarily on analyses of flight data since these data provide the unique capability to assess the real-gas chemistry options in the codes. The computed results are based on a series of codes which are employed by the Aerothermodynamics Branch of the Space System Division at the Langley Research Center. The flight data, which were measured on the Reentry F, the Space Shuttle, and the Fire II vehicles, represent a wide range of vehicle configurations and freestream conditions. Also, results of one recent set of ground tests are included since the tests provide data on a model of a

03 AIR TRANSPORTATION AND SAFETY

pending flight project. The comparisons of the predicted results and data demonstrate the adequacy of the present computational fluid dynamics capabilities and indicate the potential to predict the aerothermal environment about future flight vehicles. Author

03

AIR TRANSPORTATION AND SAFETY

Includes passenger and cargo air transport operations; and aircraft accidents.

N86-30708# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Avionics Panel.
INTERACTION BETWEEN EMP (ELECTROMAGNETIC PULSE), LIGHTNING AND STATIC ELECTRICITY WITH AIRCRAFT AND MISSILE AVIONICS SYSTEMS
1986 144 p Presented at a Lecture Series, Ankara, Turkey, 29-30 May 1986, Oberpfaffenhofen, West Germany, 2-3 Jun. 1986, and The Hague, The Netherlands, 5-6 Jun. 1986; sponsored by Avionics Panel and the Consultant and Exchange Programme of AGARD
(AGARD-LS-144; ISBN92-835-1528-5; AD-A171298) Avail: NTIS HC A07/MF A01

Interactions between transient electromagnetic waves with aircraft and missile avionics systems are described. Transient electromagnetic waves include electromagnetic pulses (EMP) from nuclear explosions, lightning, and static electricity. Interactions are introduced by coupling of EMP and lightning induced currents and voltages with avionics components. Shielding against these interactions is discussed with respect to induced currents and voltages from EMP and lightning, and induced voltages from static charging effects. Several examples of interactions, coupling, shielding, and measurement techniques are presented. This Lecture Series, sponsored by the Avionics Panel of AGARD, has been implemented by the Consultant and Exchange Program of AGARD. Author

N86-30709# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.
CRASHWORTHINESS OF AIRFRAMES
1986 34 p Presented at the 61st Meeting of the Structures and Materials Panel of AGARD in Oberammergau, West Germany, 8-13 Sep. 1985
(AGARD-R-737; ISBN92-835-1525-0; AD-A171305) Avail: NTIS HC A03/MF A01

At its 61st Meeting the AGARD Structures and Materials Panel heard three papers as a preliminary to setting up a Sub-Committee on this topic; this publication contains these papers. They survey a range of theoretical and experimental aspects of crashworthiness relating to metallic structures. For structures made of these materials theoretical methods are becoming useful design tools, but much further development is required before composite structures can be satisfactorily handled. There is a very great need for a data base of reliable experimental information (including accident data bases) on both metallic and composite structures. Author

N89-18421# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.
ENERGY ABSORPTION OF AIRCRAFT STRUCTURES AS AN ASPECT OF CRASHWORTHINESS
Dec. 1988 327 p In ENGLISH and FRENCH Meeting held in Luxembourg, 1-6 May 1988
(AGARD-CP-443; ISBN-92-835-0485-2) Avail: NTIS HC A15/MF A01

Considerable effort was hitherto devoted to crash avoidance, but relatively little to crash survivability. In certain regimes the risk of accident remains, e.g., the low-altitude low-speed regime. There is a strong incentive to increase the prospects for occupant survival through improvements in airframe design. Information about structural behavior and characteristics under these conditions is very sparse and an exchange of information between the NATO

nations is long overdue. At its sixty-sixth meeting, the Structures and Materials Panel held a conference of specialists, the aim of which was to stimulate an exchange of experience and development results. A further aim was to act as a focus for the discussion of those design philosophies which may be needed to provide the balance between survivability and functions. The document contains the papers presented. For individual titles, see N89-18422 through N89-18442.

N89-18422# Ingenieur a la Direction des Constructions Aeronautiques, Paris (France).

REGULATORY ASPECT OF CRASHWORTHINESS (ASPECT REGLEMENT DU CRASHWORTHINESS)

P. J. RABOURDIN In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 14 p (SEE N89-18421 11-03) Dec. 1988 In FRENCH
(AGARD-CP-443) Avail: NTIS HC A15/MF A01

Aircraft crashworthiness is examined from the perspective of safety and regulation. The past and anticipated evolution of crash-related regulations is described. Two main areas of regulatory concern for the future are identified and discussed: acceleration attenuation (including modification of safety standards related passenger seating) and passenger evacuation. Author

N89-18423# Army Aviation Systems Command, Fort Eustis, VA. Safety and Survivability Technical Area.

EVOLVING CRASHWORTHINESS DESIGN CRITERIA

C. HUDSON CARPER and LEROY T. BURROWS In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 8 p (SEE N89-18421 11-03) Dec. 1988
(AGARD-CP-443) Avail: NTIS HC A15/MF A01

Although significant strides were made in recent years toward improving aviation safety, mishaps involving all classes of helicopters presently are and will continue to be a major, expensive U.S. Army problem in terms of casualties, material loss, and reduction in mission effectiveness. Modern day training and tactical employment requirements for the U.S. Army helicopter dictate that a large percentage of operations occur in the low-speed, low-altitude flight regime, which contributes to the problem by reducing critical margins of safety normally associated with higher airspeed and higher altitude operations with accompanying greater time for response in case of an emergency. This increased probability of accident occurrence, coupled with the lack of in-flight egress capability, makes design for crashworthiness essential for Army helicopters. The evolution of crash survival design for rotary-wing aircraft and its application to current and new generation Army helicopters are discussed. Emphasis is given to the need for a total systems' approach in design for crashworthiness and the necessity for considering crashworthiness early in the design phase of an aviation weapons development effort. The actual application of crashworthiness to Army helicopters is presented with statistics that show dramatic reductions in fatalities and injuries with implementation of a crashworthy fuel system. The cost effective aspects of designing helicopters to be more crash survivable are also discussed. Author

N89-18424# Cranfield Inst. of Tech., Bedford (England). Impact Centre.

CRASHWORTHINESS DESIGN METHODS APPLICABLE AT CONCEPT STAGE

M. M. SADEGHI In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 21 p (SEE N89-18421 11-03) Dec. 1988
(AGARD-CP-443) Avail: NTIS HC A15/MF A01

For the effective incorporation of the secondary safety into structures developed for aircraft and moving vehicles, it is essential to tackle crashworthiness in the early stage of the development. For a set of defined loading conditions (crash or crush) to which the structure must comply, it is of great benefit to specify necessary guidelines for defining collapse zones, as well as structural properties concerning nonlinear behavior of constituent components and joints of the overall structure. A hybrid approach is described which predicts the crash behavior of an impacting structure which is tailored to velocities which do not exceed 30 to 40 miles/h. The method involves using component and joint test data (as data base) in conjunction with coarse finite element idealization to determine the collapse mechanism sequence of

03 AIR TRANSPORTATION AND SAFETY

the collapse and collapse speed of an impacting structure.

Author

N89-18425# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

CRASHWORTHINESS ACTIVITIES ON MBB HELICOPTERS

F. OCH *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 22 p (SEE N89-18421 11-03) Dec. 1988

(AGARD-CP-443) Avail: NTIS HC A15/MF A01

Crashworthiness activities at MBB date back to the late sixties, when during BO 105 development crash protection systems such as seats, fuel systems, and landing gears were developed which are integrated in the military versions of the BO 105 for the German Army. In February 1974 a BO 105 was crash tested to show compliance with the Crash Survival Design Guide (TR 71-22) under an impact condition of 15 m/s longitudinal and 8 m/s vertical velocity. Since the mid-seventies theoretical studies were conducted with the aid of the computer program KRASH and nonlinear finite element codes, supported by the German Ministry of Defence, and partly verified by component tests. The experience with the crash behavior of the BO 105 was successfully used for the development of the BK 117 which was shown by a full-scale crash test, conducted in 1985 by Kawasaki, MBB's partner in the BK 117 development. Effective design tools, both in house and at subcontractors and experience with helicopters in service are used at MBB to contribute significantly to fulfill the crash requirements in European helicopter programs and in joint development with foreign partners. Although crash protection techniques and crashworthiness prediction methods are already fairly well established, there still remains a lot of tasks, mainly when using advanced materials and in improving the analytical methods from an economic point of view.

Author

N89-18426# Politecnico di Milano (Italy). Dept. of Aerospace Engineering.

THE DESIGN OF HELICOPTER CRASHWORTHINESS

V. GIAVOTTO, C. CAPRILE, and G. SALA *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 9 p (SEE N89-18421 11-03) Dec. 1988

(AGARD-CP-443) Avail: NTIS HC A15/MF A01

The extensive use of composite materials in helicopter structures has prompted research activities in crashworthiness in the last decade. A rational design of crashworthy structures requires a great deal of data and experience to be collected and organized; in particular the most efficient mechanisms of energy absorption must be understood and carefully investigated and consequently the best structural concepts and detail design can be identified. With this aim and in cooperation with Agusta Helicopters a research program was undertaken, covering many of the basic aspects of crashworthy design, i.e., dynamic experimentation on subcomponents and subassemblies, hybrid and true finite element modeling, design, and verification procedures. The paper presents some preliminary results, together with the outline of the whole program.

Author

N89-18427# Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France).

DEVELOPMENTS AND PERSPECTIVES AT AMD-BA IN THE FIELD OF IMPACT AND CRASH SIZING (DEVELOPPEMENTS ET PERSPECTIVES DANS LE DOMAINE DU DIMENSIONNEMENT AUX IMPACTS ET AU CRASH AUX AMD-BA)

Y. MARTIN-SIEGFRIED *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 13 p (SEE N89-18421 11-03) Dec. 1988 *In* FRENCH; ENGLISH summary Original language document was announced in IAA as A89-21407

(AGARD-CP-443) Avail: NTIS HC A15/MF A01

Impact and soft crash sizing simulations were performed using a finite-element global ground-aircraft model. Results are presented for the hard landing of a Mercure aircraft and the soft crash of a Falcon 900 aircraft. The data will be used as input in the dynamic and nonlinear modeling of hard crash problems for commuter-type aircraft such as the Falcon 10.

B.G.

N89-18428# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Safety and Survivability Technical Area.

FULL SCALE HELICOPTER CRASH TESTING

HAROLD HOLLAND and KENT F. SMITH *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 7 p (SEE N89-18421 11-03) Dec. 1988

(AGARD-CP-443) Avail: NTIS HC A15/MF A01

Today, analytical math models are becoming more capable of predicting the dynamic behavior of aircraft structures and occupants subjected to crash loads. The engineering community still finds it necessary, however, to periodically perform full-scale crash tests for the purpose of validating math models, exploring crashworthy component design concepts, defining synergistic effects, or a variety of other goals. Aspects of full-scale aircraft crash testing based on almost 30 years experience by the U.S. Army Aviation Applied Technology Directorate (AVSCOM) and its predecessor organizations are addressed. Though each test is unique, certain principles and procedures were found to provide a high degree of assurance of acquiring accurate data.

Author

N89-18429# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

CRUSHING BEHAVIOUR OF HELICOPTER SUBFLOOR STRUCTURES

J. FRESE and D. NITSCHKE *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 23 p (SEE N89-18421 11-03) Dec. 1988

(AGARD-CP-443) Avail: NTIS HC A15/MF A01

Crash loads must be attenuated in the landing gear, the subfloor structure, and the seat to values tolerable for the human body. In addition the remaining loads must not jeopardize a living space for the occupants. A program was undertaken to investigate, both analytically and experimentally, the crushing behavior of helicopter subfloor structures. Stiffened panels and honeycomb sandwich panels in metal were considered under quasistatic and dynamic conditions. The primary intent of the investigations was to design subfloor structures with high efficiency for crash impact and to establish the nonlinear characteristics of subfloor structures as input data for the program KRASH.

Author

N89-18430# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Stuttgart (Germany, F.R.). Inst. for Structures and Design.

CRASH INVESTIGATIONS WITH SUB-COMPONENTS OF A COMPOSITE HELICOPTER LOWER AIRPLANE SECTION

CH. KINDERVATER, A. GIETL, and R. MUELLER (Messerschmitt-Boelkow-Blohm G.m.b.H., Munich, Germany, F.R.) *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 18 p (SEE N89-18421 11-03) Dec. 1988

(AGARD-CP-443) Avail: NTIS HC A15/MF A01

For the BK 117 helicopter a composite fuselage was designed, manufactured, and will be flight tested at MBB. Within the development program evidence was given to the crashworthy design of the fuselage which was accomplished by a joint activity between MBB and DFLVR Stuttgart. The crash investigations were focused on the lower airframe section under vertical crash loads. The task was performed by design support tests on the specimen level and by subcomponent crush testing. Sandwich panel specimens were statically and dynamically crushed to study various crush initiators at the panel-skin intersections, and to investigate the energy absorption capability. Subcomponent crush tests under quasi-static loading were concentrated on structural node points (intersections of keel beams and bulkheads) and on bulkheads located in the rear of the fuselage. The component's crush characteristics and the energy absorption performance were determined. Various designs with notched corners at the intersections of beams and bulkheads were considered with the aim to reduce the initial peak failure loads. Structural elements supporting the parallel panels of the landing skid frames were used to avoid global buckling and to initiate and stabilize efficient energy absorption crush modes. The generated load-deflection characteristics of the subcomponents are intended to be used as inputs for crash simulation calculations.

Author

03 AIR TRANSPORTATION AND SAFETY

N89-18431# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Stuttgart (Germany, F.R.). Inst. for Structures and Design.

CRASHWORTHY DESIGN OF AIRCRAFT SUBFLOOR STRUCTURAL COMPONENTS

CH. KINDERVATER, H. GEORGI, and U. KOERBER *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 24 p (SEE N89-18421 11-03) Dec. 1988 (AGARD-CP-443) Avail: NTIS HC A15/MF A01

Subfloor beams and bulkheads in aircraft structures are designed to carry longitudinal and shear loads resulting from fuselage bending and torsion. In crashes, however, the subfloor is highly loaded in compression and shear. Especially the intersections of beams and bulkheads represent stiff vertical hard points, and the resulting high peak failure loads under compression can create life threatening crash pulses to the occupants. For a commuter type aircraft subfloor aluminum as well as composite cruciforms were designed to match the same longitudinal stiffness of the floor beams and the same shear stiffness of the bulkheads. Various designs of the intersections including notched corners, corrugated and tapered edge joints, and less stiff laminate layups were investigated to reduce the initial peak loads, and to trigger efficient energy absorbing crush failure modes. The cruciforms and subelements such as angle stiffeners and angle stiffened plates were statically crash tested in order to gain information about the complex collapse behavior of subfloor construction. Based on the load-deflection curves important energy absorption parameters were determined, and were compared to the aluminum baseline design. For crash simulations with so called hybrid computer codes load deflection curves of structural elements are needed as input data. For the cruciforms and sub-elements, the prediction of load deflection curves are presented and discussed including plastic hinge formation and approximate mean crush load prediction as well as failure load and critical stress evaluations. Author

N89-18432# Centre d'Essais Aeronautique Toulouse (France). Lab. d'Essais de Crash.

METHOD AND MEANS FOR GROUND CRASH TESTING AT THE CENTRE D'ESSAIS AERONAUTIQUE DE TOULOUSE: APPLICATION TO THE SA 341 AND AS 332 HELICOPTERS (METHODE ET MOYENS D'ESSAIS D'ECRASEMENT AU SOL AU CENTRE D'ESSAIS AERONAUTIQUE DE TOULOUSE: APPLICATION AUX HELICOPTERES SA 341 ET AS 332)

RENE GUINOT *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 26 p (SEE N89-18421 11-03) Dec. 1988 *In* FRENCH (AGARD-CP-443) Avail: NTIS HC A15/MF A01

Test installations and methodologies used for evaluating the general structural response and crashworthiness of helicopters are discussed. In particular, a 20-meter vertical drop tank, a horizontal acceleration stand, a vehicle crash installation, a landing dynamics stand, and a severe crash installation are described. The kinds of results obtained from each test stand are listed. Data acquisition and analysis strategies are also described. Finally, some results obtained for the SA 341 Gazelle and the AS 332 Super Puma are summarized. Author

N89-18433# Institut de Mecanique des Fluides de Lille (France).

NUMERICAL AND EXPERIMENTAL STUDY OF THE CRASH BEHAVIOR OF HELICOPTERS AND AIRCRAFT (ETUDE NUMERIQUE ET EXPERIMENTALE DU COMPORTEMENT AU CRASH DES HELICOPTERES ET DES AVIONS)

F. DUPRIEZ, P. GEOFFROY, J. L. PETITNIOT, and T. VOHY *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 17 p (SEE N89-18421 11-03) Dec. 1988 *In* FRENCH (AGARD-CP-443) Avail: NTIS HC A15/MF A01

The crash behavior of helicopters and fixed-wing aircraft was studied numerically by the finite element method and experimentally using representative models. Experimental results obtained with a falling autorotating helicopter compared with full-scale testing results. An experimental study of the landing of a light aircraft on soft ground is discussed. Elastoplastic bending results and data on the crushing of metallic structures were applied to the numerical study of a commercial aircraft structure. M.G.

N89-18434# Toronto Univ., Downsview (Ontario). Inst. for Aerospace Studies.

STUDY OF THE DYNAMIC BEHAVIOUR OF STIFFENED COMPOSITE FUSELAGE SHELL STRUCTURES

J. S. HANSEN and R. C. TENNYSON *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 12 p (SEE N89-18421 11-03) Dec. 1988 (AGARD-CP-443) Avail: NTIS HC A15/MF A01

An overview of the development of a computer model for analyzing the crash response of stiffened composite fuselage structures is presented together with the experimental validation program. Using a finite element formulation based on Reissner/Mindlin plate theories, the numerical model can treat stiffened laminated shell buckling, large deflections, nonlinear material behavior, and element failure. Numerical results are presented for several test cases, although experimental comparisons are not yet available. Details on the design and construction of the first prototype composite fuselage model are also provided together with a description of the crash test facility. Author

N89-18435# Lockheed Aeronautical Systems Co., Burbank, CA. TRANSPORT AIRPLANE CRASH SIMULATION, VALIDATION AND APPLICATION TO CRASH DESIGN CRITERIA

G. WITTLIN and C. CAIAFA (Federal Aviation Administration, Atlantic City, NJ.) *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 23 p (SEE N89-18421 11-03) Dec. 1988 (AGARD-CP-443) Avail: NTIS HC A15/MF A01

A brief description of the evolutionary development of the program KRASH to its most recent release, KRASH85, is presented, and some background is provided to delineate various program features as well as to illustrate the range of aircraft configurations and impact conditions for which the program was validated. The application of program KRASH to analyze the structural crash dynamics behavior of a narrow-body commercial jet transport aircraft used in the FAA/NASA conducted Controlled Impact Demonstration (CID) test is discussed. A description of the modeling along with comparative results between test and analyses is provided. Included in the correlation effort are acceleration time histories, sequence of impact events, fuselage crush distribution, wing and fuselage bending moment distributions, and estimates of moment and shear strength levels. The results of the transport aircraft correlation effort are used in a subsequent parametric study to formulate a crash design velocity envelope. Parametric analyses, section test and full-scale crash test results are utilized and presented in the form of acceleration time histories at the cabin floor. The transport crash design envelope, along with additional data, is used to assess the effect of aircraft size on floor acceleration pulses in a survivable crash environment. The most recent applications of KRASH are discussed. Author

N89-18436# Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn (Germany, F.R.).

CRASHWORTHINESS OF AIRCRAFT STRUCTURES

W. JARZAB and R. SCHWARZ *In* AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 13 p (SEE N89-18421 11-03) Dec. 1988 (AGARD-CP-443) Avail: NTIS HC A15/MF A01

Modern analytical models and their numerical realizations have become powerful tools in nonlinear crash analysis. Crash simulation has to consider advanced nonlinear constitutive equations and sophisticated formulations of the contact problem. The refinement of discretization and the treatment of geometrical complex structures requires highly developed hardware like the vector processor. Topics discussed are the material modeling of impact loaded composite structures, the main features of an explicit crash code and the results of two calculations simulating the drop test of a B707-section. Finally the possibilities of a specific interface between a crash code based on the finite element method like ANCS and a program like KRASH85 are outlined in detail. Author

N89-18437# Engineering System International, Eschborn (Germany, F.R.).

CRASH SIMULATION AND VERIFICATION FOR METALLIC, SANDWICH AND LAMINATE STRUCTURES

D. ULRICH, A. K. PICKETT, E. HAUG, and J. BIANCHINI (Engineering System International, Rungis, France) In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 18 p (SEE N89-18421 11-03) Dec. 1988 (AGARD-CP-443) Avail: NTIS HC A15/MF A01

Some of the research for crash simulation of structures using metallic and composite construction recently undertaken at ESI is outlined. Several current areas of interest are reviewed including helicopter stiffened panel construction, automotive structures, and, on a micro level, the compressive failure analysis of Carbon-Epoxy test coupons. In each study a specialized finite element code is used. The dynamic buckling behavior of panels stiffened with Z sections are simulated numerically. The various components are connected using specially developed rivet elements that fail at a prescribed load and are intended to produce a controlled collapse mode. These panels form the lower structure of a helicopter frame which also houses a flexible membrane fuel compartment. The effect of this internal hydrostatic loading is also represented during the crash event. Some preliminary dynamic investigations for failure predictions of honeycomb core panels are also discussed. Verification of these numerical procedures with experimental behavior is an important issue. The automotive industry has well defined experimental test procedures which provide an excellent standard to assess and validate numerical results. The progressive failure analysis of Carbon-Epoxy fiber test coupons loaded in compression and in bending are undertaken using the program PAM-FISS. The material model uses a BI-PHASE concept in which the constituent matrix and fiber materials have independent mechanical and failure criteria. Author

N89-18438# H. W. Structures Ltd., Pitsea (England).

PREDICTING CRASH PERFORMANCE

D. PARSONS and A. BELFIELD In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 13 p (SEE N89-18421 11-03) Dec. 1988 (AGARD-CP-443) Avail: NTIS HC A15/MF A01

In the past, aircraft were designed with high structural integrity such that crash situations can be avoided, i.e., aircraft were designed for crash avoidance and not crashworthiness. There is considerable effort now being devoted to the study of aircraft crashworthiness. Clearly, it is only in relatively low speed impacts that design considerations may be effective. In this area, H.W. Structures, LTD and the automotive environment in general have built up a wealth of experience. How this experience may be applied to aircraft structures is discussed. Analytical techniques for prediction of the behavior of the structure and its occupants are examined. Author

N89-18439# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Biodynamics and Bioengineering Div.

HUMAN CRASHWORTHINESS AND CRASH LOAD LIMITS

HENNING E. VONGIERKE and JAMES W. BRINKLEY In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 15 p (SEE N89-18421 11-03) Dec. 1988 (AGARD-CP-443) Avail: NTIS HC A15/MF A01

The assessment of the hazard to a crewmember in a potential aircraft crash requires information about human tolerance to mechanical forces, a method for the identification and evaluation of the contributing factors to potential injury in a crash and a means of estimating the environmental forces on an occupant and the resultant responses of the occupant. Results or research in the U.S. Air Force in these three areas are discussed. Specifically, the rationale for and formulation of a dynamic response six degree-of-freedom whole body impact tolerance specification, a detailed head-spine structural mechanics and a vehicle occupant gross motion rigid body dynamics model and their areas of applicability in crash analysis; and features of the developed U.S. Air Force Advanced Dynamic Anthropomorphic Manikin (ADAM) are discussed. It is suggested that a comprehensive method for injury risk assessment for any system must consider all three areas. Author

AIRCRAFT COMMUNICATIONS AND NAVIGATION

Includes digital and voice communication with aircraft; air navigation systems (satellite and ground based); and air traffic control.

N87-13275# Strathclyde Univ., Glasgow (Scotland). Dept. of Electronic and Electrical Engineering.

FIBRE OPTIC GYROSCOPES IN INERTIAL NAVIGATION

B. CULSHAW and J. D. NUTTALL (Ferranti Ltd., Edinburgh (Scotland)) In AGARD Guided Optical Structures in the Military Environment 6 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

The potential application of fiber optic gyroscopes (FOG) in inertial navigation (IN) systems is discussed. The requirements for IN are briefly reviewed and compared to the reported performance of experimental FOG's. This leads to the identification of areas in which further work is necessary, in both physical understanding and technological developments. Author

N87-21881# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

EFFICIENT CONDUCT OF INDIVIDUAL FLIGHTS AND AIR TRAFFIC OR OPTIMUM UTILIZATION OF MODERN TECHNOLOGY FOR THE OVERALL BENEFIT OF CIVIL AND MILITARY AIRSPACE USERS

ANDRE BENOIT, ed. Dec. 1986 326 p In ENGLISH and FRENCH Symposium held in Brussels, Belgium, 10-13 Jun. 1986

(AGARD-CP-410; ISBN-92-835-0403-8; AD-A182150) Avail: NTIS HC A15/MF A01

A number of issues related to air traffic control are investigated, with particular attention being paid to new technologies. Attention is focused on the use of more powerful data processing technologies, the introduction of satellites for integrated navigation communications and surveillance and the potential role of automatic two-way air/ground data links. The fields covered include advanced surveillance radar, advanced landing systems, the management of air traffic, the potential and limitations of automation, including the possible applications of intelligent knowledge based systems and new onboard equipment that will necessitate a fresh look at the relationship between air traffic control and individual aircraft. For individual titles, see N87-21882 through N87-21904.

N87-21882# Air Navigation Technical Service, Paris (France). Dept. Radiocommunication et Radioguidage.

THE SELECTION OF FUTURE CIVIL AIR NAVIGATION SYSTEMS

OLIVIER CAREL In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 7 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

The International Civil Aviation Organization has established a special committee (FANS) responsible for assessing Future Air Navigation Systems. This report describes the creation of this committee and gives a detailed summary of its principle meeting, FANS-2, held in April 1985. Recent work of the committee is also discussed. Automatic dependent surveillance (ADS) and required navigation performance capability (RNP) concepts are addressed. Finally, the rapid evaluation of aeronautic mobile communications by satellite is discussed. M.G.

N87-21883# Eurocontrol Agency, Brussels (Belgium). AIR NAVIGATION SERVICES AND AIRCRAFT AROUND THE YEAR 2000

V. VACHIERY In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 16 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

The Air Traffic Services (ATS) System for 2000 and beyond shall have to cope with the constantly increasing traffic demand. It shall take wholly into account the methods by which the aircraft

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

are conducted, and, in particular the ability to adhere accurately to a predefined profile. Since 1980 a working party of the EUROCONTROL Agency has been in charge of the development of a future system concept and the formulation of a corresponding research program. The objectives, the difficulties, the main principles and the characteristics associated with the development and implementation of the future ATS concept are reviewed. The necessity for close consultation between aircraft manufacturers, avionics manufacturers, aircraft operators and the authorities responsible for air traffic management is discussed. Author

N87-21884# Stuttgart Univ. (Germany, F.R.). Inst. for Navigation.

GPS: OVERVIEW AND PRESENT STATUS

PH. HARTL, W. SCHOELLER, and K.-H. THIEL. In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 18 p (SEE N87-21881 15-04) Dec. 1986 (AGARD-CP-410) Avail: NTIS HC A15/MF A01

Due to various reasons the interest in the practical use of the Global Positioning System (GPS) has considerably increased during the last two years. The test phase has demonstrated its outstanding performance. With the differential method the relative accuracies achieve values that open its use even for the precision approach of aircraft landing. The development of new techniques also allows 3-dimensional attitude measurement and angular rate determination. Diverse civilian groups will use GPS in the future; in particular motor car drivers, geodesists, civil engineers etc. The present state of development and various practical applications are discussed. Author

N87-21885# Societe d'Applications Generales d'Electricite et de Mecanique, Paris (France). Dept. Aeronautique.

INERTIAL-GPS: A MARRIAGE OF REASON, AN ANALYSIS [INERTIE-GPS: UN MARIAGE DE RAISON - A L'ESSAI]

P. LLORET and B. CAPIT. In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 23 p (SEE N87-21881 15-04) Dec. 1986 In FRENCH (AGARD-CP-410) Avail: NTIS HC A15/MF A01

The coupling of inertial navigation methods with the Global Positioning System (GPS) is examined. The characteristics of various types of inertial systems are reviewed and past attempts at inertial/radiation hybridizations including those with multi- and VOR-DME (VHF omnidirectional range - distance measuring equipment), Transit, OMEGA, ILS (instrument landing systems), and altitude correlation are discussed. The possible configurations for an inertial/GPS systems, given the type (classical platform and strap-down) and classes of inertial designs and the number of GPS channels utilized, are defined and performance characteristics are outlined for each. Simulation and in-flight studies of prototype systems are discussed. Signal properties and Kalman filtering are addressed. Finally, perspectives on the continuing development of inertial/GPS hybrid systems are offered. M.G.

N87-21886# Aeronautical Radio, Inc., Annapolis, MD. Engineering Dept.

COMMUNICATION, NAVIGATION AND SURVEILLANCE SERVICES FOR THE AVIATION INDUSTRY USING SATELLITE TECHNOLOGY

R. A. PICKENS. In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 4 p (SEE N87-21881 15-04) Dec. 1986 (AGARD-CP-410) Avail: NTIS HC A15/MF A01

A general historical survey of Communication Navigation, and Surveillance (CNS) services for the aviation industry using satellite technology is given. Aeronautical Radio, Inc.'s (ARINC) air-ground communications services, which consist of VHF voice and data transfer services, and HF voice communications are discussed. ARINC's implementation of an integrated satellite system and companion integrated avionics to provide air traffic control, company operational control, navigation capability for enroute operations, and support for cooperative operations is discussed. R.J.F.

N87-21887# Eurocontrol Agency, Brussels (Belgium).

POSSIBLE CONTRIBUTIONS FROM THE SSR MODE S DATA LINK TO THE CONDUCT OF EFFICIENT AIRCRAFT OPERATIONS

M. E. COX. In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 15 p (SEE N87-21881 15-04) Dec. 1986 (AGARD-CP-410) Avail: NTIS HC A15/MF A01

The paper entitled Data Link - The Key to Improvements in Civil Military Air Traffic Management, presented at the Guidance and Control Panel (GCP) Symposium, Copenhagen, in October 1979, outlined a number of potential applications of a data link, then known as ADSEL/DABS, and referred to a number of feasibility studies that were being conducted in respect of these applications. Since that date the two systems (ADSEL/DABS) have led to the emergence of secondary surveillance radar (SSR) Mode S which is now being standardized for international use. Here, a brief description is given of the Mode S data link characteristics. A number of the applications proposed in 1979 are recalled and the results of studies conducted subsequently on such topics as the controller/pilot interfaces with the link and machine/machine data interchanges and their possible benefits to air traffic control (ATC) are given. Plans are discussed for more extensive data link evaluations. The initial steps that could be taken in progressing from today's situation towards a system of control employing a high level of automation are proposed. Author

N87-21891# Federal Aviation Administration, Atlantic City, NJ. Technical Center.

MICROWAVE LANDING SYSTEM (MLS) AREA NAVIGATION: COMPUTED CENTERLINE EXPERIMENTS AND SYSTEM ACCURACY ANALYSIS IN AN RF ENVIRONMENT

JAMES H. REMER and BARRY R. BILLMANN. In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 17 p (SEE N87-21881 15-04) Dec. 1986 (AGARD-CP-410) Avail: NTIS HC A15/MF A01

By definition of the International Civil Aviation Organization (ICAO) Standards and Recommended Practices (SARPS) the Time Reference Scanning Beam (TRSB) Microwave Landing System (MLS) will supplant the existing Instrument Landing System (ILS) as the recognized international standard as early as 1995. Among numerous other advantages, the MLS provides the ability to determine the aircraft's position in three dimensional space over a large coverage volume in the airport terminal area. The use of this capability to navigate and execute approaches throughout this volume of coverage results from the application of a technique known as Microwave Landing System Area Navigation (MLS RNAV). Applications of MLS RNAV can be as simple as executing approaches offset from but parallel to the MLS 0 azimuth or as complex as multi-segment and curved path approaches. MLS RNAV is particularly adaptable to helicopter operations. It allows approaches to heliports located away from the main instrumented runway. In order to assess and further develop the potential capabilities of MLS RNAV, the FAA Technical Center has undertaken the task of performing analytical studies, as well as the development of a prototype MLS RNAV system. Applications of this system to helicopter operations are particularly being emphasized. The unique feature of this work is that besides the onboard data acquisition systems, an independent source of position information was, at times, available for comparison. The source was independent position tracking in the form of laser or radar data. The work reviewed here should have immediate application in the development of MLS RNAV Terminal Area Instrument Approach Procedures (TERPS). Author

N87-21892# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Group.

MLS: ITS TECHNICAL FEATURES AND OPERATIONAL CAPABILITIES

R. SEIFERT. In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 10 p (SEE N87-21881 15-04) Dec. 1986 (AGARD-CP-410) Avail: NTIS HC A15/MF A01

Taking into account present developments in guidance and control automation in the airplane cockpit as well as in Air Traffic

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

Control (ATC) systems, the following aspects of the Instrument Landing System/Microwave Landing System (ILS/MLS) are analyzed and presented: (1) the complexity of MLS approach procedures and function allocation to ATC and aircraft; (2) cockpit automation and presentation of MLS approach information; and (3) aspects of all weather approach and landing with military aircraft. Author

N87-21893* National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

ADVANCED ATC: AN AIRCRAFT PERSPECTIVE

LEONARD CREDEUR, DAVID H. WILLIAMS, WILLIAM E. HOWELL, and CARY R. SPITZER In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 14 p (SEE N87-21881 15-04) Dec. 1986 Previously announced in IAA as A86-49637

(AGARD-CP-410) Avail: NTIS HC A15/MF A01 CSCL 17G

The principal operational improvements desired by commercial aircraft operators in the United States are efficient aircraft operations and delay reductions at the major terminals. Efforts underway within the Advanced Transport Operating Systems Program at the Langley Research Center to provide a technology basis for reducing delay while improving aircraft efficiency are discussed. The principal thrust is the development of time-based traffic control concepts which could be used within the framework of the upgraded National Airspace System and which would allow conventionally equipped aircraft to operate in a manner compatible with advanced aircraft. Author

N87-21894* Consiglio Nazionale delle Ricerche, Rome (Italy). Progetto Finalizzato Trasporti and Istituto di Analisi dei Sistemi ed Informatica.

STRATEGIC CONTROL TO IMPROVE EFFICIENCY OF AIR TRAFFIC MANAGEMENT

LUCIO BIANCO In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 10 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

The strategic control concept, intended as a new management philosophy that can improve efficiency of Air Traffic Control (ATC) systems, is discussed. After having introduced a classification of the different ATC functions based on a multilevel scheme, strategic control is decomposed in a hierarchy of sub-functions. Subsequently, the on-line strategic control of flights is considered and the mathematical aspects of this problem are illustrated. Then the structure of a real time solution algorithm, proposed in a previous work, and a possible scheme of route-time profile generation are reported. Finally, computational efficiency of the proposed approach is discussed. Author

N87-21895* National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

A TIME-BASED CONCEPT FOR TERMINAL-AREA TRAFFIC MANAGEMENT

HEINZ ERZBERGER and LEONARD TOBIAS In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 14 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01 CSCL 17G

An automated air-traffic-management concept that has the potential for significantly increasing the efficiency of traffic flows in high-density terminal areas is discussed. The concept's implementation depends on techniques for controlling the landing time of all aircraft entering the terminal area, both those that are equipped with on-board four-dimensional (4D) guidance systems as well as those aircraft types that are conventionally equipped. The two major ground-based elements of the system are a scheduler which assigns conflict-free landing times and a profile descent advisor. Landing time provided by the scheduler is unlinked to equipped aircraft and translated into the appropriate 4D trajectory by the on-board flight-management system. The controller issues descent advisories to unequipped aircraft to help them achieve the assigned landing times. Air traffic control simulations have established that the concept provides an efficient method for controlling various mixes of 4D-equipped and unequipped, as well as low- and high-performance, aircraft. Piloted simulations of

profiles flown with the aid of advisories have verified the ability to meet specified descent times with prescribed accuracy. Author

N87-21896* Federal Aviation Administration, Washington, DC, Systems Engineering Service.

PHILOSOPHY OF APPLYING AUTOMATION TO AIR TRAFFIC CONTROL

LELAND F. PAGE In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 3 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

The objectives of the U.S. program for applying automation to air traffic control systems, progress thus far, and plans for the future are discussed. Since the time in 1958 when computers were first used to print flight strips in the United States at a small number of air traffic control (ATC) centers, it has been a continuing objective to capitalize on the rapidly evolving computer technologies to improve the ATC system. Specific objectives have been to apply computers and the associated automation functions to: improve safety of ATC operations; increase the efficiency of traffic management; and increase the productivity of ATC controllers. Author

N87-21897* Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.). Inst fuer Flugfuehrung.

COMPUTER ASSISTED ARRIVAL SEQUENCING AND SCHEDULING WITH THE COMPAS SYSTEM

U. VOELCKERS In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 11 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

The Computer Oriented Metering Planning and Advisory System (COMPAS) developed at the DFVLR-Institute for Flight Guidance was tested and evaluated at the institute's air traffic simulation facility, using traffic scenarios of Frankfurt airport with up to 52 aircraft movements simultaneously. The operational objectives of the COMPAS-system are, with regard to Frankfurt airport, to achieve the best possible usage of the available but limited runway landing capacity, to avoid unnecessary delays and to apply economic approach profiles whenever possible. The planning functions which today are still carried out by human controllers will be transferred to a computer. It generates a comprehensive plan for a best overall arrival sequence and schedule. The execution of this plan, however, intentionally remains the task of the human controllers. They are provided with all data necessary to control the approaching aircraft. The systems concept, the dynamic planning algorithms as well as the operational concept for computer assistance and the man-machine interface are presented. Some preliminary results of the experiments and evaluation are reported. Author

N87-21898* Eurocontrol Agency, Brussels (Belgium).

NEXT GENERATION OF CONTROL TECHNIQUES IN ADVANCED TMA

ANDRE BENOIT, SIP SWIERSTRA, and RENE DEWISPELAERE In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 31 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

It is very likely that any future concept to be used for the safe and efficient conduct of air traffic (in terms of expedition, economy and capacity) will exhibit two essential, closely interrelated components. Firstly, the on-line management of air traffic over a large area - from a Zone of Convergence type to a continental coverage - will generate the landing and departure times for each aircraft entering the area, while at the same time defining the essential characteristics of the relevant flight paths. Secondly, an operational control procedure will be required to conduct each individual flight accurately throughout the area, that is to say, in the case of a Zone of Convergence, from entry to touchdown, in agreement with the air traffic management directives and in line with operational practice (onboard and on the ground). The essential operational features of a control procedure suitable to meet the above constraints while ensuring a 10-second accuracy

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

for the time of arrival as predicted initially at entry into the zone (and possibly amended subsequently), for current air carriers in present R/T or future D/L communications environments are outlined. Author

N87-21899# Smiths Industries Ltd., Bishops Cleeve (England). Engineering Dept.

EXPLOITING THE CAPABILITIES OF FLIGHT MANAGEMENT SYSTEMS IN SOLVING THE AIRPORT ARRIVAL PROBLEM

J. F. MEREDITH *In* AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 10 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

Increasingly Flight Management Computers are becoming standard fit on present day passenger aircraft (737-300, 757, 767, A310, A300-600). Avionic update programs which incorporate Flight Management Computers are in hand for 747 and MD 80 and new aircraft programs A320, MD 11, 7J7, A330 and A340 are or are likely to include Flight Management Computing as standard fit. As these aircraft come to dominate the traffic entering and leaving major airports there is potentially a new level of information and of control available to the air traffic controllers whose task it is to schedule the aircraft flow into and out of the terminal area. This information flow and the consequent control actions should enable the traffic to be handled in a manner to minimize delay, thus enhancing the available traffic handling capacity of an airport. Author

N87-21900# Naval Air Development Center, Warminster, PA.

APPLICATION OF FLIGHT PERFORMANCE ADVISORY SYSTEMS TO US NAVY AIRCRAFT

M. J. FRIEDMAN, L. J. COWLES, and R. C. CARSON, JR. *In* AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 14 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

The U.S. Navy, in its Aircraft Energy Conservation Research and Development Program, is currently investigating various methods for improving the fuel efficiency of existing and future Navy aircraft. Fuel saving concepts under development include an aircraft integrated flight performance advisory system, a pre-flight mission planning program utilizing a desk type computer and an aircraft performance advisory system using an HP-41 CV hand-held calculator. The integrated flight performance advisory system for the F/A-18, the A-7E, and the S-3 are described in detail by reviewing the displayed outputs to the pilots and describing the required inputs and their sources. Features of each aircraft system are described in accordance with the development status of the program. The preflight mission planning program utilizing an HP-9845 desktop computer is described for the P-3C aircraft. The approach to weather, takeoff and cruise are described by specifying the input and output data. Sample displays are also shown. The hand-held HP-41 CV calculator utilized for flight performance predictions is described for the P-3C. All the calculator functions are described for the takeoff and cruise flight modes of this aircraft. The operational status of these three programs and plans for other Navy aircraft are also specified. Author

N87-21903# Royal Signals and Radar Establishment, Malvern (England).

SEMI-AUTOMATIC CROSS-CHECKING BETWEEN DIFFERENT COPIES OF THE SAME FLIGHT PLAN

S. RATCLIFFE *In* AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 7 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

A flight-plan usually exists in several different forms in the aircraft flight management system: as hard copy on the flight-deck, in one or more Air Traffic Control (ATC) data processors, and distributed over flight-progress strips (or their electronic equivalents) in one or more control centers. Any discrepancies between various versions of the plan are potentially hazardous. Given that the flight plan is already stored, for one reason or another, in at least one computer, it is proposed that each computer should also be used to generate a check word which can easily and rapidly be

compared with that stored as hard-copy or in some other machine. The check word might consist of four alpha characters which can easily be remembered and passed by voice. Possible algorithms for generating check-words are discussed. The results of some laboratory trials of a prototype system are given. Author

N87-21904# Civil Aviation Authority, London (England).

THE APPLICATION OF INTELLIGENT KNOWLEDGE BASED SYSTEMS TO AIR TRAFFIC CONTROL

W. S. NICOL, G. C. DEAN, A. JACKSON, and W. A. STRETTON (Royal Signals and Radar Establishment, Malvern, England) *In* AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 9 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

The need to explore the approach of Intelligent Knowledge Based Systems (IKBS) towards meeting the pressures for change in future air traffic control systems is discussed. The discussion includes the role of automation in air traffic control (ATC) and the suitability of IKBS within a shared approach between controller and machine. Areas selected to provide practical experience of IKBS applied to ATC include air traffic flow management and conflict resolution and training. Finally, guideline concepts for the introduction of a new technology to ATC are outlined. Author

N87-23608# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

EFFICIENT CONDUCT OF INDIVIDUAL FLIGHTS AND AIR TRAFFIC OR OPTIMUM UTILIZATION OF MODERN TECHNOLOGY FOR THE OVERALL BENEFIT OF CIVIL AND MILITARY AIRSPACE USERS

BERNARDO FURCOLO 1987 16 p. Proceedings of the 42d Symposium of the Guidance and Control Panel of AGARD, Brussels, Belgium, 10-13 Jun. 1986

(AGARD-AR-236; AD-A182145) Avail: NTIS HC A02/MF A01

The AGARD Guidance and Control Panel 42nd Symposium was held in Brussels, Belgium, from 10 to 13 June 1986. The program presented at the symposium is appended to this report, and the Conference Proceedings are published separately. Author

N87-29474# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

ADVANCES IN GUIDANCE AND CONTROL SYSTEMS AND TECHNOLOGY

Jul. 1987 146 p. Symposium held in London, England, 7-10 Oct. 1986. Original contains color illustrations

(AGARD-CP-411; ISBN-92-835-0421-6; AD-A191464) Avail: NTIS HC A07/MF A01

Papers were presented under the following headings: target and terrain sensors; aircraft state sensors; force and moment generators; guidance and control algorithms; and integrated systems. For individual titles, see N87-29475 through N87-29484.

N87-29477# Army Avionics Research and Development Activity, Fort Monmouth, NJ.

VELOCITY ACCURACY MEASUREMENT OF GPS USER EQUIPMENT

JOSEPH MCGOWAN *In* AGARD, Advances in Guidance and Control Systems and Technology 17 p (SEE N87-29474 24-04) Jul. 1987

(AGARD-CP-411) Avail: NTIS HC A07/MF A01

A test program conducted by the U.S. Army Avionics Research and Development Activity (AVRADA) to determine the level of velocity accuracy achievable with Global Positioning System (GPS) is described. The precision of the reference instrumentation and the availability of the GPS receiver measurement data were exploited to characterize the errors in GPS observations. An investigation into the performance benefits of GPS and inertial integration is described. Author

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

N87-29480# Honeywell Advanced Technology Centre, North York (Ontario).

CONFIGURATION DESIGN OF A HELICOPTER INTEGRATED NAVIGATION SYSTEM

S. I. FINGEROTE, D. B. REID, D. F. LIANG, L. VALLOT, C. GREENE, and J. MAHESH (Honeywell Systems and Research Center, Minneapolis, Minn.) *In* AGARD, Advances in Guidance and Control Systems and Technology 9 p (SEE N87-29474 24-04) Jul. 1987

(AGARD-CP-411) Avail: NTIS HC A07/MF A01

Results are presented from the configuration performance study phase of the Helicopter Integrated Navigation System project. A configuration assessment is presented including processor selection, and a discussion of system architecture and configuration tradeoffs leading to a recommended configuration. Results of the system error analysis and the Kalman filter design are presented demonstrating integrated system performance. Author

N87-29481# Litton Technische Werke, Freiburg (Germany, F.R.).

NAVIGATION SYSTEMS FOR THE NEW GENERATION OF COMBAT AND TRANSPORT HELICOPTERS AND ASSOCIATED FLIGHT TESTS

W. HASSENPLUG and M. BAEUMKER *In* AGARD, Advances in Guidance and Control Systems and Technology 22 p (SEE N87-29474 24-04) Jul. 1987

(AGARD-CP-411) Avail: NTIS HC A07/MF A01

An integrated strapdown inertial helicopter navigator which is augmented by a Doppler velocity sensor and a magnetometer is described. A radar altimeter is used to obtain height above ground. Accurate weapon delivery requirements and flight safety aspects while operating the helicopter under adverse weather conditions and at night demand the accurate determination of TAS throughout the entire speed regime. Besides position, velocity, and attitude, the strapdown system provides angular rates for stability augmentation and linear accelerations in bodyframe coordinates, inertial altitude and vertical speed from the Doppler velocity sensor and the baro-inertial loop as well. The system communicates with the other avionics on board the helicopter through a dual MIL-STD 1553B bus and for redundancy purposes through an ARINC 429 interface with the AFCS. Flight tests were performed to demonstrate the navigation capability and performance of a Doppler and flux valve augmented strapdown navigator, a new analytical true air speed system for the low speed regime and the performance of a strapdown magnetometer. The navigation performance was verified in three different helicopters, a BO-105, a CH-53, and a Gazelle. Author

N88-10810# Carleton Univ., Ottawa (Ontario). Dept. of System and Computer Engineering.

AN EXPERT SYSTEM FOR AIRCRAFT CONFLICT RESOLUTION IN DENSE AIRSPACES

B. A. BOWEN *In* AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 13 p (SEE N88-10806 02-08) Aug. 1987 Sponsored by Transport Canada

(AGARD-LS-155) Avail: NTIS HC A07/MF A01

A hybrid, knowledge-based system is described which provides advice to air traffic controllers on the optimal tactics for resolving predicted aircraft conflicts. The overall functional architecture is described which has both computational algorithms and rule bases containing the knowledge and experience of controllers in the air traffic environment. The system is designed to replicate the way a controller might react to a predicted conflict. It responds to conflict predictions with resolution advice, which depends on both formal rules and on heuristics obtained from controllers. Author

N88-10815# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.). Inst. fuer Flugfuehrung.

A RULE-BASED SYSTEM FOR ARRIVAL SEQUENCING AND SCHEDULING IN AIR TRAFFIC CONTROL

U. VOELCKERS *In* AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 12 p (SEE N88-10806 02-08) Aug. 1987

(AGARD-LS-155) Avail: NTIS HC A07/MF A01

A rule based system is presented that is designed to assist human controllers in efficiently merging high density inbound traffic

into congested airports. The rationale for the design of a rule based system and the critical requirements for the development of a rule based system for application to air traffic control are discussed. The system uses the OPS5 production system and is programmed in FRANZ LISP with embedded C functions. The system still has limited capabilities. Author

N89-10874# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Avionics Panel.

THE NAVSTAR GPS SYSTEM

Sep. 1988 141 p. Lecture series held in Wessling, West Germany, 19-20 Sep. 1988, in Athens, Greece, 22-23 Sep. 1988, in Ankara, Turkey, 26-27 Sep. 1988, and in Lisbon, Portugal, 29-30 Sep. 1988

(AGARD-LS-161; ISBN-92-835-0477-1; AD-A199829) Avail: NTIS HC A07/MF A01

A comprehensive and up-to-date lecture series on the NAVSTAR GPS System is presented. Among the subjects covered are the system concept, navigation principles, system design, user applications, and techniques involved. The lectures are a balanced presentation of theory, application, and measured performance. For individual titles, see N89-10875 through N89-10884.

N89-10875# Aerospace Corp., El Segundo, CA.

THE GPS OVERVIEW AND NAVIGATION SYSTEM CONCEPT

EDWARD LASSITER and MOHAN ANANDA *In* AGARD, The NAVSTAR GPS System 13 p (SEE N89-10874 02-04) Sep. 1988

(AGARD-LS-161) Avail: NTIS HC A07/MF A01

The Global Positioning System (GPS) objective for both military and civil applications and the historical evolutions of the GPS are presented. The GPS concept validation phase, full-scale engineering developments, system test phase and operational system phase are described. The fundamental principles of the GPS concept are briefly reviewed. The GPS radiometric measurements of pseudo-range and accumulated delta range and how these measurements are used in forming the navigation equations to solve for the user position parameters are described. The current program status and future plans for system enhancements are outlined. Author

N89-10876# Aerospace Corp., El Segundo, CA.

THE GLOBAL POSITIONING SYSTEM (GPS) CONSTELLATION AND COVERAGE

MOHAN ANANDA *In* AGARD, The NAVSTAR GPS System 17 p (SEE N89-10874 02-04) Sep. 1988

(AGARD-LS-161) Avail: NTIS HC A07/MF A01

The NAVSTAR Global Positioning System (GPS) is a space-based system that will be operational in 1990 and will enable a user to determine position, velocity, and time with greater accuracy on a worldwide basis than it had ever achieved. The GPS is currently undergoing full-scale engineering development and testing. The test constellation and available coverage for testing the various system segments are reviewed. Also discussed is the 18-, 21-, and 24-satellite operational constellations. The current baseline constellation consists of 18 satellites with three active spare satellites. The concept of constellation value and various dilution-of-precision parameters due to geometry are discussed, such as geometrical dilution of precision (GDOP) and position dilution of precision (PDOP). The constellation design issues related to minimizing the reduced accuracy regions due to geometry problems are also reviewed. Coverage maps over the globe are presented for the test constellation, as well as for the operational constellations. Author

N89-10877# Aerospace Corp., El Segundo, CA.

THE GLOBAL POSITIONING SYSTEM (GPS) ACCURACY, SYSTEM ERROR BUDGET, SPACE AND CONTROL SEGMENT OVERVIEW

MOHAN ANANDA *In* AGARD, The NAVSTAR GPS System 17 p (SEE N89-10874 02-04) Sep. 1988

(AGARD-LS-161) Avail: NTIS HC A07/MF A01

The NAVSTAR Global Positioning System is a space-based navigation system that will provide continuous, all weather, global navigation capability to properly equipped users with high accuracy. The position, velocity, and time accuracy that can be achieved by a user of the GPS are discussed. The system accuracy will be examined in light of the Geometric Dilution of Precision parameter

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

and measurement error. Also reviewed is the system error budget for the three subsystem segments: space, control, and user. A discussion of the user range error (URE) and its relationship to three-dimensional position error expressed in spherical error probable (SEP) and horizontal position error expressed in circular error probable (CEP) is presented. The role of the World Geodetic System reference frame in the GPS is discussed. A brief overview of space and control systems is also presented. Author

N89-10878# Naval Materiel Command, Haakonvern (Norway).

GPS SIGNAL STRUCTURE

PER W. NIEUWEJAAR In AGARD, The NAVSTAR GPS System 6 p (SEE N89-10874 02-04) Sep. 1988 (AGARD-LS-161) Avail: NTIS HC A07/MF A01

The characteristics of the Global Positioning System (GPS) signal structure, frequencies, codes, and navigation-message are described. The content of the navigation-message and the user algorithms associated with the navigation-message are described in some detail. Author

N89-10879# Air Force Space Div., Los Angeles, CA. GPS Joint Program Office.

USER EQUIPMENT OVERVIEW

ELIO BOTTARI In AGARD, The NAVSTAR GPS System 11 p (SEE N89-10874 02-04) Sep. 1988 (AGARD-LS-161) Avail: NTIS HC A07/MF A01

The Global Positioning System (GPS) includes all the hardware and software needed to determine the user's position, velocity, time data, and other derived parameters, as required. Additionally, the GPS User System can be integrated with other navigation systems to provide accurate navigation under severe dynamics and hostile environmental conditions. During the development phase, various classes of users were defined based on user requirements and characteristics such as desired accuracy, user maneuvering, anti-jamming capability, and cost. The application of GPS user equipment (UE) in various types of host vehicles, used under a wide variety of operational conditions, has led to the development of three types of UE sets: LD = Low Dynamic (one channel); MD = Medium Dynamic (two channels); and HD = High Dynamic (four or more channels). A brief description of GPS signals is given to better describe the functions and operating concept of user equipment. Author

N89-10880# TAU Corp., Los Gatos, CA.

GPS/INTERNAL NAVIGATION SYSTEM INTEGRATION FOR ENHANCED NAVIGATION PERFORMANCE AND ROBUSTNESS

ROBERT P. DENARO and G. JEFFREY GEIER In AGARD, The NAVSTAR GPS System 12 p (SEE N89-10874 02-04) Sep. 1988

(AGARD-LS-161) Avail: NTIS HC A07/MF A01

The emergence of the Global Positioning System (GPS) from the laboratory and the test range into the operational environment, with affordable, high-performance receivers now available, has heralded a widespread study of the integration of GPS with the current standard in precise positioning, inertial navigation systems. Once considered by some to be a potential competitor of inertial navigation, GPS is now recognized by most navigation system developers as having tremendous potential for system performance improvement over either system in isolation by integrating with inertial systems. So powerful is this synergism that deep integration of the two systems often dictates potential major design modifications in the inertial measurement unit (IMU) as well as the GPS receiver. These design modifications are necessary to exploit the performance potential to the maximum, particularly in the military environment, and at the same time to realize substantial cost savings in the system as an additional benefit. Author

N89-10881# Naval Materiel Command, Haakonvern (Norway).

AIDING AND INTEGRATION OF A GPS RECEIVER

PER W. NIEUWEJAAR In AGARD, The NAVSTAR GPS System 10 p (SEE N89-10874 02-04) Sep. 1988

(AGARD-LS-161) Avail: NTIS HC A07/MF A01

The need for receiver aiding due to contingencies such as satellite outages, jamming, and terrain masking is described. Alternative aiding methods are also described, such as: integration of GPS/INS or Attitude Heading Reference System (AHRS); integration of GPS and baro-altimeter; integration of GPS and

atomic clock; use of altitude hold or mean sea level information; and integration of GPS/Transit/LORAN-C and/or Omega.

Author

N89-10882# Air Force Space Div., Los Angeles, CA.

CIVIL AND MILITARY APPLICATIONS OF GPS

HANS J. KUNZE In AGARD, The NAVSTAR GPS System 19 p (SEE N89-10874 02-04) Sep. 1988 (AGARD-LS-161) Avail: NTIS HC A07/MF A01

The objectives are to give an overview of military and civil applications of the NAVSTAR Global Positioning System (GPS), to discuss the resulting benefits for the users, and to present a planned system development that will provide the user community with the GPS information, such as overall system status or satellite data, required for their mission. Author

N89-10883# TAU Corp., Los Gatos, CA.

DIFFERENTIAL OPERATION OF NAVSTAR GPS FOR ENHANCED ACCURACY

ROBERT P. DENARO and RUDOLPH M. KALAFUS In AGARD, The NAVSTAR GPS System 18 p (SEE N89-10874 02-04) Sep. 1988

(AGARD-LS-161) Avail: NTIS HC A07/MF A01

The NAVSTAR Global Positioning System has demonstrated impressive absolute accuracy in tests and operational use. Most applications will benefit from the increased accuracy afforded by GPS over conventional systems. However, many applications require even better accuracy than GPS can provide in its stand-alone mode. Differential GPS is a practical solution in many situations. The subject of differential GPS is fundamentally a simple concept, but implementation details can be more complex, and handling of all cases takes special care to achieve continuously reliable results. The concept and objective of differential GPS is covered, and a methodology for implementation presented. Example test results are presented which validate the potential of differential GPS. Author

N89-10884# TAU Corp., Los Gatos, CA.

GPS NAVIGATION PROCESSING AND KALMAN FILTERING

ROBERT P. DENARO and PETER V. W. LOOMIS In AGARD, The NAVSTAR GPS System 9 p (SEE N89-10874 02-04) Sep. 1988

(AGARD-LS-161) Avail: NTIS HC A07/MF A01

The processing of Global Positioning System (GPS) signals is a complex process of dealing with two observables, the range and the Doppler of the signal. This provides opportunities for substantial sophistication in processing techniques in the tracking loops, and later in the navigation processing of the Kalman filter or other filter. In total, the combination of techniques is a closely interrelated set of algorithms that provide near-optimum performance. Author

05

AIRCRAFT DESIGN, TESTING AND PERFORMANCE

Includes aircraft simulation technology.

N86-27276# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

COMBAT LOADS ON MODERN FIGHTERS

Feb. 1986 21 p

(AGARD-R-730; ISBN-92-835-1518-8; AD-A167593) Avail: NTIS HC A02/MF A01

A number of factors which influence the selection of design cases are examined in the light of modern fighter usage and modern technologies that are available, or will soon be available. It was found that pilots fly fighters very differently than was the norm for the period of time when most design criteria specifications were written, largely because the environment created by today's detection systems and weapons is very different than it was then. It was found that as technology advances, such advanced composite construction and fly-by-wire control systems make it

possible to tailor the configuration to achieve a maneuvering capability previously unattainable. It is concluded that the method of selecting design cases need to be updated. Available methods for predicting loads for new, more complex design cases are discussed. No firm recommendations can be made, but a number of suggestions are made which, it is hoped, will contribute to fruitful future consideration of the problems discussed. Author

N86-30726# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel

THE INFLUENCE OF LARGE-SCALE COMPUTING ON AIRCRAFT STRUCTURAL DESIGN

Apr 1986 67 p
(AGARD-R-726; ISBN92-835-1522-6; AD-A171306) Avail: NTIS HC A04/MF A01

An outcome of the AGARD Working Group on Large Scale Computing was the institution by the Structures and Materials Panel of a Sub-Committee to consider this topic in relation to Aircraft Structural design. The publication contains papers on various aspects of the topic heard by the Sub-Committee plus a summary. These cover likely developments in both soft- and hardware, and their applications to the Design process. This Report was sponsored by the Structures and Materials Panel of AGARD. Author

N86-30727# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel

STORE SEPARATION FLIGHT TESTING

R. J. ARNOLD, C. S. EPSTEIN, and R. K. BOGUE, ed. Apr. 1986 161 p
(AGARD-AG-300-VOL-5; ISBN92-835-1522-4; AD-A171301) Avail: NTIS HC A08/MF A01

This volume in the AGARD Flight Test Techniques Series treats stores separation testing from the overall systems standpoint. All aspects of testing are described from the time of identification of a particular aircraft/store requirement through all steps leading to the establishment of a satisfactory employment envelope. Considerable emphasis is placed on the planning and execution of the flight test phase of the stores clearance program, including the definition of a basic structure, and a set of procedures which will maximize the safe and efficient execution of such a program. Author

N87-10067# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel

ENGINE-AIRFRAME INTEGRATION FOR ROTORCRAFT

May 1986 154 p Lecture Series held in St. Louis, Mo., 2-3 Jun 1986, in Rome, Italy, 9-10 Jun 1986, and in Marseilles, France, 12-13 Jun 1986

(AGARD-LS-148; ISBN-92-835-1529-3; AD-A171297) Avail: NTIS HC A08/MF A01

Topics addressed include numerous airframe integration aspects relating to rotor wing aircraft. Various areas of engine airframe integration, including the impact of advanced engine design variables to specific propulsion subsystems, will be discussed. Other propulsion system integration aspects such as engine/rotor/drive system torsional stability and transient response will also be discussed. Additional areas considering the specification and qualification requirements of propulsion items will be examined. For individual titles see N87-10068 through N87-10074.

N87-10068# Sikorsky Aircraft, Stratford, CT. Propulsion Systems

ENGINE-AIRFRAME INTEGRATION CONSIDERATIONS FOR PRELIMINARY AIR VEHICLE PERFORMANCE ANALYSIS

R. C. FRAWLEY and H. N. SHOHET. In AGARD Engine-Airframe Integration for Rotorcraft 21 p (SEE N87-10067 01-05) May 1986

(AGARD-LS-148) Avail: NTIS HC A08/MF A01

Helicopter engine/airframe integration issues are examined from a preliminary design viewpoint with emphasis on those areas where an impact on aircraft power available and/or aerodynamics is involved. The areas of the helicopter propulsion system specifically addressed include the engine air induction system considering aerodynamic performance, anti-icing, exhaust gas re-ingestion, and inlet particle separation, the engine exhaust system considering

aerodynamic performance, engine compartment cooling, and exhaust ejector system; and lastly, engine bleed air extraction as it relates to environmental control systems and the trade studies associated with same. These subsystems are discussed in terms of basic design guidelines, interaction with other helicopter subsystems, system trade studies, and first order analytical design approaches adequate for preliminary design purposes. Author

N87-10069# Pisa Univ. (Italy). Dipt. de Energetica

ENGINE-TRANSMISSION-STRUCTURAL AIRFRAME MEMBERS COMPATIBILITY

D. DINI. In AGARD Engine-Airframe Integration for Rotorcraft 33 p (SEE N87-10067 01-05) May 1986
(AGARD-LS-148) Avail: NTIS HC A08/MF A01

The sophistication of current turbine-powered helicopters have introduced many new problems involving the compatibility of the major multidegree of freedom systems: rotor, control, airframe, drive train, and powerplant. The solutions to the various problems were obtained from the application of basic engineering principles. Engine installation is described in the helicopter, particularly the A-129, i.e., power plant attachment, oil cooling system, engine control and monitoring, electric starting system, location of components and leading particulars, and anti-vibration devices. The design of the transmission system is dictated by the configuration of the helicopter. An aerodynamic analysis is conducted on the helicopter mission in order to obtain complete spectra of the rotor loads and moments as well as the maneuver loads and transient for maximum transmission reliability. The application of fiber reinforced resin composites to selected areas of the helicopter drive system will produce weight and cost savings as well as improvements in reliability and safety. These improvements which were demonstrated in airframe applications can be transferred to structural components in the drive system, with high weight saving. Author

N87-10070# Rolls-Royce Ltd., Walford (England)

IMPACT OF IPS AND IRS CONFIGURATIONS ON ENGINE INSTALLATION DESIGN

J. R. BALLARD. In AGARD Engine-Airframe Integration for Rotorcraft 14 p (SEE N87-10067 01-05) May 1986
(AGARD-LS-148) Avail: NTIS HC A08/MF A01

Helicopters operate in a variety of roles many of which pose severe problems to the engine due to ingestion of sand, ice, salt, and other foreign objects. It is possible to design a compromise engine intake which combats all these hazards to a limited degree. Engine design should be coordinated with both engine and airframe mounted separator performance characteristics to ensure that optimized designs can be offered to customers with very different operational requirements. A design method was outlined which would allow the erosion reduction characteristics of engine and airframe Intake Protection System (IPS) designs to be taken into account during engine design. The Infrared Suppression (IRS) designs can be integrated with IPS scavenge requirements to produce a low signature engine installation. B.G.

N87-10071# Army Aviation Systems Command, Saint Louis, MO. Engineering Dept.

ENGINE-AIRFRAME INTEGRATION FOR ROTORCRAFT: COMPONENT SPECIFICATIONS AND QUALIFICATION

J. A. RAY. In AGARD Engine-Airframe Integration for Rotorcraft 10 p (SEE N87-10067 01-05) May 1986

(AGARD-LS-148) Avail: NTIS HC A08/MF A01

Both past history and current principles associated with engine-airframe integration for rotorcraft are provided as related to component specification requirements and their individual qualification assurance. Component specification and qualification requirements have tended to be generic and standardized without consideration of actual usage, location, and exposure. As such, overall requirements have had problems of being overly restrictive in some cases and not exacting enough in others. The current trend in tailoring for specific applications as well as insuring system performance requirements by conducting early component/bench level tests will be discussed along with lessons learned from past efforts. Components involved in the overall engine-airframe integration effort such as pumps, fans, starter, valves, sensors, infrared suppressors, inlet particle separators, and fuel cells will be discussed. Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N87-10072# Garrett Turbine Engine Co., Phoenix, AZ. **INFLUENCE OF ENGINE VARIABLES ON FUTURE HELICOPTER SYSTEMS**

M. L. EARLY and P. K. ZEINER In AGARD Engine-Airframe Integration for Rotorcraft 24 p (SEE N87-10067 01-05) May 1986

(AGARD-LS-148) Avail: NTIS HC A08/MF A01

A helicopter system defined for the year 2000 must make numerous assumptions about future technology and system requirements. In the case of propulsion system options, the required 5 to 15 year development cycle (from preliminary engine cycle studies through engine development to production) complicates the process of optimizing the engine/rotorcraft system. A well-disciplined approach to engine definition studies to yield engine candidates that best use emerging technologies is illustrated. An advanced, single-engine helicopter requiring a 2000-shp powerplant was used as a base-line vehicle. Both simple and heat-recovery cycles were evaluated, using trade factors to establish engine effects on helicopter direct operating cost (DOC), the optimization parameter assumed for purposes of illustration. Author

N87-10073# Societe Nationale Industrielle Aerospatiale, Marignane (France). Helicopter Div. **HELICOPTER AIR INTAKE PROTECTION SYSTEMS**

X. DELASERVETTE and P. CABRIT In AGARD Engine-Airframe Integration for Rotorcraft 20 p (SEE N87-10067 01-05) May 1986

(AGARD-LS-148) Avail: NTIS HC A08/MF A01

The primary function of an engine air intake is to provide air supply with minimum pressure drop and distortion. Static or dynamic air intakes are selected according to both the type of engine air intake and the helicopter missions envisaged. The other function of an engine air intake is to protect the engine against foreign object ingestion, sand erosion, and the various atmospheric agents such as rain, snow, and ice. As a general rule, the air intake protection systems are all the more penalizing as regards performance as they are efficient. The best tradeoff is therefore between both functions. The dimensioning and test criteria for each function of an air intake is examined and then the various development stages are given for the SA 366 G1 Dauphin air intake as an example. Author

N87-10074# Army Aviation Systems Command, Saint Louis, MO. Engineering Dept. **ENGINE-AIRFRAME INTEGRATION FOR ROTORCRAFT: SYSTEM SPECIFICATIONS AND QUALIFICATION**

J. A. RAY In AGARD Engine-Airframe Integration for Rotorcraft 10 p (SEE N87-10067 01-05) May 1986

(AGARD-LS-148) Avail: NTIS HC A08/MF A01

Both past history and current principles associated with engine-airframe integration for rotorcraft are provided as related to system specification requirements and the resulting qualification assurance. System specification requirements have evolved through periods of few details and lack of definitive requirements to the opposite extreme of exacting details and extremely specific requirements. The current trend of performance related specifications is intended to enhance the freedom of design while meeting the essential mission related requirements. This has required a revised qualification program effort to insure essential requirements are being met throughout the development effort. Lessons learned in this evaluation as well as current methods will be discussed for overall engine-airframe integration system requirement. In particular, system qualification will be addressed for such areas as adverse environment requirements for icing, cold/hot temperatures and sand/dust; mission related requirements for engine response, infrared signature reduction, and crashworthiness; and basic engine integration requirements for torsional stability, vibration, and cooling. Author

N87-15986# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel. **ROTORCRAFT ICING: PROGRESS AND POTENTIAL**

Sep. 1986 140 p
(AGARD-AR-223; ISBN-92-835-1535-8; AD-A173807) Avail: NTIS HC A07/MF A01

Helicopter icing remains a significant operational consideration for military helicopters operating throughout Europe and northern

parts of North America. The working group (WG09) considered the following objectives: (1) to examine rotorcraft icing analysis and modeling; (2) to consider new methods of ice protection; (3) to compare operational experience with ice protected rotorcraft with the design and qualification criteria presently established. The findings of an international group are presented including a comparison of icing atmosphere models and forecasting techniques and an assessment of predictive methods and simulation, flight clearance strategies and requirements. Various new methods of icing protection for rotorcraft are considered. Author

N87-16001# Ferranti Defence Systems Ltd., Edinburgh (Scotland). Electro-Optics Dept. **THE UNMANNED AIRCRAFT AS A FORCE MULTIPLIER**

W. H. MCKENDRICK and MAURICE R. PACK-DAVISON In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 15 p (SEE N87-16000 08-15) Jun. 1986

(AGARD-CP-388) Avail: NTIS HC A12/MF A01

A principal role for small military remote piloted vehicles (RPVs) now and in the foreseeable future is to enhance the effectiveness of other weapon systems, in particular those capable of delivering munitions against distant targets. The requirement is for a force multiplier which can be used to increase weapon effectiveness and weaken the offensive and defensive capability of the enemy. How the RPV System design and configuration are influenced by a requirement to act as a force multiplier is discussed. The approach adopted is to concentrate initially on the target acquisition role and show how mission requirements impinge on every level of RPV system design. The discussion is then generalized to other weapon support roles and finally to the implication of a multiple-role capability on RPV system equipment and operation. Author

N87-16002# Naval Air Systems Command, Washington, DC. **NAVY TECHNOLOGY REQUIREMENTS FOR UNMANNED AIRBORNE VEHICLES**

P. E. MULLOWNEY In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 5 p (SEE N87-16000 08-15) Jun. 1986

(AGARD-CP-388) Avail: NTIS HC A12/MF A01

Navy technology requirements for unmanned airborne vehicles are most unique in their shipboard launch, recovery, and maintainability. The current and future Remotely Piloted Vehicle (RPV) programs will demand cost and mission effective systems with a high degree of survivability. Cost effectiveness will be emphasized from the shipboard operation end of the problem, starting with storage, launch, remote piloting and data acquisition, through the tradeoff of expendability versus recovery, and shipboard maintenance and Instrument Landing System (ILS) concepts. Until the technology can provide RPVs fully integrated with shipboard operations, Navy applications will remain the same. B.G.

N87-16011# Naval Air Development Center, Warminster, PA. Aero Analysis Div. **HIGH ALTITUDE, LONG ENDURANCE RPV DESIGN TECHNOLOGY STUDY**

CAMPBELL HENDERSON, EDWARD MCQUILLEN, and LARRY LEHMAN In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 14 p (SEE N87-16000 08-15) Jun. 1986

(AGARD-CP-388) Avail: NTIS HC A12/MF A01

The Naval Air Development Center conducted a design technology study of high altitude long endurance Remotely Piloted Vehicles (RPVs) for possible mission applications which might include surveillance, over the horizon communications, and targeting, among others. Phase 1 was to investigate technology levels and potential technology breakthroughs that can provide vehicle endurance of greater than 100 hours at altitudes greater than 60,000 feet, and to incorporate the technologies into conceptual vehicle designs. These results are presented. Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N87-20176# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter Div.

DESIGN FOR REPAIRABILITY OF HELICOPTER COMPOSITE BLADES

M. HAHN In AGARD The Repair of Aircraft Structures Involving Composite Materials 15 p (SEE N87-20174 13-01) Oct. 1986 (AGARD-CP-402) Avail: NTIS HC A11/MF A01

First a careful definition is made of the specific kinds of damages where repairability is aimed for. The criteria of repairability are described using the example of the main rotor blade. Then some repair procedures are detailed, starting with the criteria to be used to decide on repair level, showing components in particular and the aspects of design to repairability. Comparison of early and later design is used to demonstrate how improvement with respect to repairability was achieved. The concluding chapter describes service experience with the main and tail rotor blades, gained e.g., out of more than one mio. flight hours of BO 105-fleet.

Author

N87-20210# British Aerospace Aircraft Group, Warton (England). Aerodynamics Dept.

THE INTEGRATION OF COMPUTATIONAL FLUID DYNAMICS INTO THE MILITARY AIRCRAFT DESIGN PROCESS

W. R. MARCHBANK In AGARD Applications of Computational Fluid Dynamics in Aeronautics 13 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

The rapid analysis and subsequent iterative refinement of aircraft shape is demonstrated by a number of applications of integrated CFD procedures, aimed at achieving specified supersonic performance. Without any reduction in transonic performance, the following complimentary benefits in the supersonic flight regime were established: (1) 5% reduction in drag through fuselage shaping; (2) 3% reduction in drag by decambering the wing through use of flaps; (3) 6% reduction in drag through a reduction in trim drag; (4) 15% increase in Thrust minus Drag through optimization of the intake flow field. Thus CFD based Project Procedures, used early in configuration design to refine the 3D lines, were used to increase supersonic turn rate by approximately 20%, for a fixed engine thrust, allowing supersonic design requirements to be met without penalizing transonic performance.

Author

N87-20216# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Group.

EULER SOLUTION FOR A COMPLETE FIGHTER AIRCRAFT AT SUB- AND SUPERSONIC SPEED

ALBRECHT EBERLE and KENT MISEGADES (Cray Research, Inc., Mendota Heights, Minn.) In AGARD Applications of Computational Fluid Dynamics in Aeronautics 12 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A survey is given on the construction of a novel high resolution Euler code which is applied for airflow calculations past a fighter type aircraft. The principle feature of the flow solver is a Godunov type averaging procedure based on the eigenvalue analysis of the Euler equations by means of which the fluxes are evaluated at the finite volume faces which separate constant sets of flow variables on either side. The procedure is third order accurate and locally monotonicity preserving thus avoiding the drawbacks of global TVD-schemes. The grid generation for complex configurations is performed from solutions of linear biharmonic equations with only one parameter prescribed by the program user. Vector computer performance of the explicit and implicit program versions are considered.

Author

N87-20226# Boeing Military Airplane Development, Seattle, WA.

CALCULATIONS FOR A GENERIC FIGHTER AT SUPERSONIC HIGH-LIFT CONDITIONS

J. C. WAI, G. BLOM, and H. YOSHIHARA In AGARD Applications of Computational Fluid Dynamics in Aeronautics 8 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

The parabolized Navier-Stokes method was used to calculate the flow over a generic fighter configuration with a canard and underwing nacelles at supersonic high lift conditions. The calculated pressure distributions agreed closely with experiments, but the pilot pressure profile predictions for the boundary layer were less

satisfactory largely due to an inadequate mesh in the viscous sublayer.

Author

N87-21913# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

IDENTIFICATION OF DYNAMIC SYSTEMS - APPLICATIONS TO AIRCRAFT, PART 1: THE OUTPUT ERROR APPROACH

R. E. MAINE and K. W. ILIFF Dec. 1986 187 p

(AGARD-AG-300-VOL.3-PT.1; ISBN-92-835-1540-4; AD-A178766) Avail: NTIS HC A09/MF A01

This document examines the practical application of parameter estimation methodology to the problem of estimating aircraft stability and control derivatives from flight test data. The primary purpose of the document is to present a comprehensive and unified picture of the entire parameter estimation process and its integration into the flight test program. The document concentrates on the output-error method to provide a focus for detailed examination and to allow us to give specific examples of situations that have arisen in our experience. The document first derives the aircraft equations of motion in a form suitable for application to estimation of stability and control derivatives. It then discusses the issues that arise in adapting the equations to the limitations of analysis programs, using a specific program for an example. The document then addresses the roles and issues relating to mass distribution data, preflight predictions, maneuver design, flight scheduling, instrumentation sensors, data acquisition systems, and data processing. Finally, the document discusses evaluation and use of the analysis results.

Author

N87-22663# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

IMPROVEMENT OF COMBAT PERFORMANCE FOR EXISTING AND FUTURE AIRCRAFT

Dec. 1986 143 p In ENGLISH and FRENCH Symposium held in Treviso, Italy, 14-17 Apr. 1986

(AGARD-CP-409; ISBN-92-835-0408-9; AD-A184501) Avail: NTIS HC A07/MF A01

These proceedings contain the unclassified papers presented at the AGARD Flight Mechanics Panel Symposium on The Improvement of Combat Performance for Existing and Future Aircraft, held in Treviso, Italy from 14 to 18 April 1986. In planning the enhancement of a defence capability to meet a growing threat within increasing financial constraints, it is invariably necessary, and is current practice in all NATO countries, to consider varying options for improvement of existing weapon systems as an alternative to embarking on totally new systems concepts. A wide range of technical options are now available to improve the overall performance of a weapon system. Many of these features are equally applicable for embodiment in new designs or in existing combat aircraft. In considering these varied options, cost and effectiveness remain the common constraints. For individual titles, see N87-22664 through N87-22675.

N87-22665# Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn (Germany, F.R.).

PERFORMANCE IMPROVEMENT OF AIRBORNE WEAPON SYSTEMS METHODS, SCOPE AND LIMITATIONS

P. EGELING and R. HUBER In AGARD Improvement of Combat Performance for Existing and Future Aircraft 11 p (SEE N87-22663 16-05) Dec. 1986

(AGARD-CP-409) Avail: NTIS HC A07/MF A01

The performance improvement and the necessity to evaluate the overall and operational system performance improvement by use of systems assessment methods are discussed. These methods are briefly discussed using simple examples of former evaluations.

Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N87-22666# Italian Air Staff, Rome.

SOME DEVELOPMENT TRENDS IN LIGHT GROUND ATTACK AIRCRAFT

R. TONINI, G. M. AVAGNINA, E. LOJACONO, and N. BRAGAGNOLO (Aeritalia S.p.A., Caselle Torinese, Italy) In AGARD Improvement of Combat Performance for Existing and Future Aircraft 16 p (SEE N87-22663 16-05) Dec. 1986 (AGARD-CP-409) Avail: NTIS HC A07/MF A01

The development of a light bomber attack aircraft, AM-X, is discussed. Specific design requirements and cost effectiveness, a mission effectiveness model, effectiveness tradeoffs, weapon systems and avionics are among the topics surveyed. R.J.F.

N87-22667# French Air Force, Paris. Nouveaux Avions de Combat Div.

WEAPON SYSTEMS POLYVALENCE: AN ECONOMIC AND OPERATIONAL CHALLENGE (POLYVALENCE DES SYSTEMES D'ARMES: UN DEFI ECONOMIQUE ET OPERATIONNEL)

JEAN-JACQUES FLOCH In AGARD Improvement of Combat Performance for Existing and Future Aircraft 5 p (SEE N87-22663 16-05) Dec. 1986 In FRENCH

(AGARD-CP-409) Avail: NTIS HC A07/MF A01

With the broadening of the concept of the weapons system, air combat missions of the 1990's will include, in the course of a single mission, phases of flight during which air-to-air and air-to-ground capabilities will be alternately or even simultaneously put to the test. The notion of polyvalence is introduced and the importance of the concept to aircraft design and particularly aircraft weapon systems definition is discussed. The primary benefit of polyvalence is that it greatly extends the ability of combat aircraft to adapt to an evolving operational environment. Author

N87-22668# British Aerospace Public Ltd. Co., Kingston-upon-Thames (England). Aerodynamics Dept.

EVOLUTION OF COMBAT PERFORMANCE OF THE HAWK LIGHT COMBAT AIRCRAFT

S. F. STAPLETON and R. S. DABBS In AGARD Improvement of Combat Performance for Existing and Future Aircraft 11 p (SEE N87-22663 16-05) Dec. 1986

(AGARD-CP-409) Avail: NTIS HC A07/MF A01

The progressive evolution of the BAe Hawk from its original concept as the advanced flying trainer aircraft for the RAF to the currently planned developments as a light attack aircraft is reviewed. The developments are described in aerodynamics propulsion and systems to give improvement in performance and weapon delivery capability appropriate to effective light attack operational roles. Author

N87-22669# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Airplane Div.

INTEGRATED DESIGN OF STRUCTURES

O. SENSBURG, G. SCHMIDINGER, and K. FUELLHAS In AGARD Improvement of Combat Performance for Existing and Future Aircraft 20 p (SEE N87-22663 16-05) Dec. 1986 (AGARD-CP-409) Avail: NTIS HC A07/MF A01

It is shown that for highly sophisticated, naturally unstable airplanes flying supersonically a joint strategy to lay out the flight control system while minimizing design loads must be adopted. The selection of control surface geometry must be performed utilizing all possibilities from overall structural optimization including aeroelastic tailoring for primary carbon fiber structures. In the proposed design philosophy the behavior of the elastic airplane structure must be introduced and optimized in the very early design stage. It is shown that the required control surface hinge moments can be reduced by optimizing mass penalties and efficiencies. Minimizing installed hydraulic power supply has also a beneficial effect on engine performance at low speed, high altitudes. Author

N87-22671# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. X-29 Advanced Development Program Office.

X-29 INTEGRATING ADVANCED TECHNOLOGIES FOR TOMORROW'S AIR COMBAT

THOMAS M. WEEKS and JAMES R. PRUNER In AGARD Improvement of Combat Performance for Existing and Future Aircraft 13 p (SEE N87-22663 16-05) Dec. 1986 (AGARD-CP-409) Avail: NTIS HC A07/MF A01

The X-29 Advanced Technology Demonstrator Program is underway and in flight status at NASA Dryden Flight Research Facility. The joint US Air Force, NASA DARPA, Grumman Aerospace Corporation program is demonstrating a set of advanced airframe technologies for consideration by designers of tomorrow's combat aircraft. These technologies are described and preliminary quantitative results are discussed. These technologies are integrated within the X-29 airframe. Tomorrow's combat aircraft will require new, integrated technologies and will benefit from the X-29 integration experience base. The X-29 aircraft is being considered for several potential test bed demonstrations of new equipment and airframe concepts and will serve well in this role to satisfy near term requirements. Author

N87-22672# Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

SIMULATION OF AN INTEGRATED FLIGHT/FIRE CONTROL SYSTEM DURING AIR-TO-GROUND GUNNERY ATTACK (SIMULATION D'UNE SYSTEME INTEGRE DE COMMANDES DE VOL ET DE CONDUITE DE TIR CANON AIR-SOL)

B. DANG VU and C. LABURTHER In AGARD Improvement of Combat Performance for Existing and Future Aircraft 5 p (SEE N87-22663 16-05) Dec. 1986 In FRENCH

(AGARD-CP-409) Avail: NTIS HC A07/MF A01

A fixed base simulation study demonstrated that an integrated flight/fire control (IFFC) system decreased pilot workload during an air-to-ground gunnery attack and improved airplane flying qualities in comparison with those of a conventional aircraft. The IFFC system was designed to use only standard on-board instrumentation, excluding sophisticated sensors (e.g., electro-optical). A preliminary investigation of direct side force showed that it does not provide significant improvements in aiming effectiveness. Author

N87-22675# British Aerospace Public Ltd. Co., Lancashire (England). Military Aircraft Div.

THE ASSESSMENT AND EVALUATION OF COMBAT PERFORMANCE IMPROVEMENTS

A. G. BARNES In AGARD Improvement of Combat Performance for Existing and Future Aircraft 8 p (SEE N87-22663 16-05) Dec. 1986

(AGARD-CP-409) Avail: NTIS HC A07/MF A01

Aircraft performance improvements, for combat or any other operational role, are becoming increasingly difficult to achieve. The dramatic year-by-year advances of the forties and fifties are long gone. Aerodynamicists have a much better understanding of the physical properties of the atmosphere and the shapes which can best be propelled through it. The relationships between the energy in fuel, and the conversion process into thrust are well developed. Structural engineers understand the mechanical properties of materials needed to build engines and airframes. All these factors have been exploited, and further improvements do not come cheaply. Only in the area of avionics can it be said that large benefits in the weight/cost/performance trade-off can be expected. The use of mathematical models, current simulation capabilities, tradeoff studies, and operational tactics are discussed. Author

N87-23609# Advisory Group for Aerospace Research and Development, Ne-Jilly-Sur-Seine (France). Structures and Materials Panel.

AIRCRAFT DYNAMIC RESPONSE TO DAMAGED AND REPAIRED RUNWAYS

Mar. 1987 45 p Meeting held in Oberammergau, West Germany, 8-13 Sep. 1985

(AGARD-R-739; ISBN-92-835-0409-7; AD-A181678) Avail: NTIS HC A03/MF A01

The dynamic response of aircraft operating from damaged and repaired runways is examined. The response of a simplified

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

representation of an aircraft to two discrete disturbances is analyzed to see how the second disturbance modifies system behavior caused by the first disturbance. A mathematical model is provided which can be used for calculation of the dynamic response of aircraft structures operating on rough surfaces; a comparison is made between theoretical predictions for a YF16 aircraft and typical measurements from frequency response tests. For individual titles, see N87-23610 through N87-23611.

N87-23610# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. Structures and Dynamics Div.
INTERPRETATION IN TERMS OF THE RESPONSE OF A ONE-DEGREE-OF-FREEDOM OSCILLATOR TO TWO SUCCESSIVE DISTURBANCES

JAMES J. OLSEN In AGARD Aircraft Dynamic Response to Damaged and Repaired Runways 22 p (SEE N87-23609 17-05) Mar. 1987

(AGARD-R-739) Avail: NTIS HC A03/MF A01

The dynamic response of an aircraft that taxis over two arbitrary disturbances, under the assumption that the aircraft can be represented as a linear, one degree-of-freedom system is explained. That analysis produced the concept of the BUMP MULTIPLIER which explicitly and simply determines whether a second discrete disturbance will amplify or attenuate the response from a first disturbance. The BUMP MULTIPLIER also simplifies the understanding and presentation of the results. While the assumptions are very severe, the resulting formulas can be very useful to guide more elaborate nonlinear calculations or to plan test programs. Author

N87-23611# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. of Aeroelasticity.

AN EXPERIMENTAL-ANALYTICAL ROUTINE FOR THE DYNAMIC QUALIFICATION OF AIRCRAFT OPERATING ON ROUGH RUNWAY SURFACES

R. FREYMAN In AGARD Aircraft Dynamic Response to Damaged and Repaired Runways 14 p (SEE N87-23609 17-05) Mar. 1987

(AGARD-R-739) Avail: NTIS HC A03/MF A01

A mathematical model to be used as a basis for analytical investigations to predict the dynamic structural response of flexible aircraft operating on rough runway surfaces is presented. It is shown how the structural parameters included in the aircraft generalized equations of motion are determined in a ground vibration test on the real aircraft structure and in additional tests on components of the undercarriage. The validation of the developed mathematical model is achieved by a comparison of typical results from frequency response tests and calculations performed on a YF-16 prototype fighter aircraft. Finally, the way in which the developed mathematical model can be used in combination with various systematic test procedures for the dynamic qualification process of aircraft operation on damages/ repaired runways is indicated. Author

N87-24445# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

INTEGRATED DESIGN OF ADVANCED FIGHTERS

May 1987 213 p Lectures held in London, England, 1-2 Jun. 1987; in Lisbon, Portugal; and in Los Angeles, Calif., 23-24 Jun. 1987

(AGARD-LS-153; ISBN-92-835-1552-8; AD-A185224) Avail: NTIS HC A10/MF A01

A general overview of the state of the art in modern fighter design is presented, with an introduction to the innovations of computer aided design evaluation to both preliminary design and the final optimization of the various design compromises. After the introduction reviewing the evolution of the modern fighter aircraft, the various stages of the total design problem is developed. The integration of requirements into the preliminary configuration of the design is followed by discussions of modern design techniques that are currently used to assess and validate the evolving configuration. The overall integrations process as applied to various current design challenges are considered including multi-role aircraft, shipborne operators and VSTOL and STOVL concepts. For individual titles, see N87-24446 through N87-24454.

N87-24446# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

INTEGRATION OF AERODYNAMIC, PERFORMANCE, STABILITY AND CONTROL REQUIREMENTS INTO THE DESIGN PROCESS OF MODERN UNSTABLE FIGHTER AIRCRAFT CONFIGURATIONS

G. WEDEKIND and P. MANGOLD In AGARD Integrated Design of Advanced Fighters (date) 20 p (SEE N87-24445 18-05) May 1987

(AGARD-LS-153) Avail: NTIS HC A10/MF A01

Already in the early design stage of a modern fighter aircraft development with usually unstable basic characteristics in pitch, a well balanced compromise between optimum performance and excellent handling qualities has to be found. This compromise must be based on sufficient margins for stability and control, maneuverability in terms of agility and economic aspects which usually are in contradiction to pure performance requirements as for example sustained/instantaneous turn rates and high specific excess power. Reasonable criteria deduced from flight mechanical and control law design point of view are discussed, which lead straight ahead towards a set of desirable longitudinal and lateral characteristics for the basic unaugmented aircraft. These requirements impose remarkable constraints for the aerodynamic design of a fighter and its elements like wing planform, strakes, vertical fins and horizontal tail size and location. The problems and possibilities to stay within the reasonable flight mechanical limits are demonstrated. Author

N87-24447# Northrop Corp., Hawthorne, CA. Flight Control Engineering.

SIMULATION AS A FIGHTER DESIGN TOOL

J. L. LOCKENOUR In AGARD Integrated Design of Advanced Fighters 34 p (SEE N87-24445 18-05) May 1987

(AGARD-LS-153) Avail: NTIS HC A10/MF A01

Simulation has been playing a growing role in the development of fighter aircraft weapon systems. In the 60's and early 70's simulation was almost exclusively the tool of the engineers responsible for the flight control and flying qualities of the airplane. However, in the last 10 to 15 years, simulation has seen an ever increasing usage for tactics, crew workload and mission avionics assessment. The current status of real time, pilot-in-the-loop flight simulation is reviewed. Examples are presented of simulators as is a brief discussion of the components of a flight simulator with emphasis on the features of importance to the user. Fidelity as it relates to the perception of the pilot and his task performance is discussed. Data is given on the motion and visual requirements. Key topics are also presented in experimental design including task selection, pilot factors and data collection. An enumeration of technology improvements already on the horizon which are expected to make a major impact on simulation is also given. Author

N87-24448# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Div.

FLIGHT TESTING OF FIGHTER AIRCRAFT

A. KNAUS and K. H. BURGER In AGARD Integrated Design of Advanced Fighters 21 p (SEE N87-24445 18-05) May 1987

(AGARD-LS-153) Avail: NTIS HC A10/MF A01

A realistic overall picture about flight testing of fighter aircraft today and trends for the future is given. It is shown whether, where and to what extent flight testing is and will be necessary. Especially the implications of advanced fighter aircraft concepts on the test program are discussed regarding the high technology standard of the complete weapon system and the operational requirements. It is concluded that best equipped facilities together with a well organized management are mandatory. The introduction of up-to-date scientific computer systems and the development of new software seems to be a permanent requirement to handle the streams of data which confront the flight test engineer. Early plannings and preparations are required to integrate as many tasks as possible per flight in order to save expensive flying time. Finally, an overview of flight test disciplines is given. It is shown that flight test is an universal discipline. Consequently areas of main test effort only and corresponding test methods to be applied are discussed in more detail. Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N87-24449# British Aerospace Aircraft Group, Kingston-upon-Thames (England).

CARRIAGE OF EXTERNAL STORES

CLIFFORD L. BORE / In AGARD Integrated Design of Advanced Fighters 23 p (SEE N87-24445 18-05) May 1987 (AGARD-LS-153) Avail: NTIS HC A10/MF A01

The main interactions between the external stores and fighter aircraft as a whole are considered. Since the context is that of fighter design, the understanding of the magnitude of those efforts which can be chosen by designers is concentrated on. The factors affect the overall value of a fighter airforce as a whole, so that the sensitivity of value to these factors can be appreciated. Then the influence of the separate factors is considered: drag and other installed forces, trajectory testing in wind tunnels, stability and flutter, agility, and airframe/store integration. Author

N87-24450# Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France).

DESIGN OPTIMIZATION FOR A FAMILY OF MULTI-ROLE COMBAT AIRCRAFT

JEAN-CLAUDE HIRONDE / In AGARD Integrated Design of Advanced Fighters 23 p (SEE N87-24445 18-05) May 1987 (AGARD-LS-153) Avail: NTIS HC A10/MF A01

The future multi-role combat aircraft design process is used as an example. At the early stage of the design, requirements of the French Air Force and Navy and other potential customers are studied very closely. Then the main technological improvements, from the existing aircraft, that are needed to meet these requirements are clearly defined. The improvements are achieved by an optimization process carried throughout each and all aircraft design disciplines, involving an intensive use of the very large range of design and tests tools available from the aircraft company and state research establishments. Because of the numerous technical innovations which will be introduced in the future combat aircraft, an in-flight demonstration aircraft was judged necessary. The RAFALE demonstration aircraft, and the evolution into a future family of multi-role specific versions, is presented. Author

N87-24451# McDonnell Aircraft Co., Saint Louis, MO. Aircraft Engineering.

DESIGN OPTIMIZATION OF FIGHTER AIRCRAFT

D. D. SNYDER / In AGARD Integrated Design of Advanced Fighters 20 p (SEE N87-24445 18-05) May 1987 (AGARD-LS-153) Avail: NTIS HC A10/MF A01

The explosion of digital computation capability over the last 30 years has transformed the military aircraft design process, and provided unprecedented opportunity for true optimization of selected configurations prior to production commitment. To date, this revolution has worked primarily to reduce risk in aircraft development. Today's new aircraft flies as expected, without unforeseen handling quirks or instability, and exploration of the flight envelope is possible on the first flight. Digital flight simulation, sophisticated wind tunnel test techniques, and performance, structural and thermal modeling all combine to elevate confidence in a new design to a very high level. Another, as yet unrealized benefit is an enormous potential improvement in productivity and efficiency, and therefore cost, of the aircraft design and manufacturing process. Insight is provided into the modern aircraft development process from the perspective of a designer and builder of high performance military fighter, McDonnell Aircraft Co. Author

N87-24452# British Aerospace Aircraft Group, Kingston-upon-Thames (England).

V/STOL AND STOVL FIGHTER DESIGN

CLIFFORD L. BORE / In AGARD Integrated Design of Advanced Fighters 20 p (SEE N87-24445 18-05) May 1987 (AGARD-LS-153) Avail: NTIS HC A10/MF A01

A wide range of basing concepts, including dispersed land bases, small and very small ships, ski jump and Skyhook, are reviewed. The design of STOVL fighter aircraft is examined, starting from consideration of the engine and nozzles system, which is the heart of jet powered STOVL fighters. This leads to consideration of the nature of the aerodynamics of vertical landing, such as hot gas ingestion, jet induced suck-down and the ground/jets fountain. Then the special features of air intakes design are considered, followed by the special considerations of lifting-surface design.

Finally, the special features of thrust vectoring in forward flight (VIFF), are considered. Author

N87-24453# Societe pour l'Equipment des Vehicules, Gosseles (Belgium).

ADVANCED FIGHTER DESIGN: OPERATIONAL EXPERIENCE AND FUTURE REQUIREMENTS

D. AGNEESSENS / In AGARD Integrated Design of Advanced Fighters 14 p (SEE N87-24445 18-05) May 1987 (AGARD-LS-153) Avail: NTIS HC A10/MF A01

The possibilities of the F84F, Mirage 5, the F104G and the F-16 are compared. The deficiencies that they show for the mission for which they are employed are examined. Before these aircraft are analyzed, it is necessary to state in what role each they are employed. To do this, the requirements have to be considered. These are mostly imposed by NATO, but national requirements could also be considered. Due to the large variety of missions to be performed, in the air-to-air (A/A) or in the air-to-ground (A/G) roles, it is evident that non specialized aircraft will be used and also low cost aircraft will be chosen more and more often. This analysis is limited to the different aircraft which were or are still in use in European airforces or more generally in the European theater of operations. This theater is very demanding due to different factors such as the threat and the weather. The concept of multi-role aircraft, being considered as the ideal choice by many, is discussed as a response to the variety of requirements in the European theater. Another point that is discussed is pilot training in peace time. The use of simulators is mentioned to show how it is possible to maintain a high level of proficiency for the pilots. Author

N87-24454# Air Force Systems Command, Andrews AFB, MD. Test and Evaluation.

THE INTEGRATION AND OPERATIONAL SUITABILITY OF EMERGING TECHNOLOGIES FOR FUTURE FIGHTER AIRCRAFT: A PILOT'S PERSPECTIVE

JOHN M. HOFFMAN / In AGARD Integrated Design of Advanced Fighters 9 p (SEE N87-24445 18-05) May 1987 (AGARD-LS-153) Avail: NTIS HC A10/MF A01

The tactical air mission has become extremely challenging and complex due to improvements in ground defenses and sophistication of opposing threat air forces. To fight, survive, and win in this demanding environment, the capabilities must be developed which are needed by the tactical pilots to successfully counter the threat. Technological developments have fostered a host of new capabilities for application to future aircraft. A pilot's perspective on the development, integration, and application of these emerging technologies for the air superiority mission is provided. Of real concern is determining which capabilities will be most useful to the pilot, yet not overload or exceed his capacity to perform. Assessments are based on personal experiences in combat, in flight testing applications in current fighter aircraft, and on plans for incorporation in future fighter aircraft. The pilot/vehicle interface and enhanced pilot performance is the central focus, conditioned by operational suitability. Key factors include information or task saturation, situational awareness, physiological limitations, and cockpit designs. The concept of Fighter Battle Management is introduced. Author

N88-10812# Royal Aircraft Establishment, Farnborough (England).

TOWARDS THE UNMANNED COCKPIT

BRIAN ELLIS / In AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 12 p (SEE N88-10806 02-08) Aug. 1987 (AGARD-LS-155) Avail: NTIS HC A07/MF A01

Trends in air warfare make the development of autonomous unmanned aircraft necessary. Advances in intelligent knowledge-based systems (IKBS) and in computing technology will make it possible. The case for unmanned aircraft and their probable evolution is made. Some indications are offered of the developments that will be called for in the IKBS themselves and in the computing hardware. Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N88-11649# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). *Flight Mechanics Panel.*

ROTORCRAFT DESIGN FOR OPERATIONS

Jun. 1987 319 p. In ENGLISH and FRENCH. Symposium held in Amsterdam, Netherlands, 13-16 Oct. 1986 (AGARD-CP-423; ISBN-92-835-0420-8; AD-A199169) Avail: NTIS HC A14/MF A01

The objective was to explore the impact of operational needs on the evolution of rotorcraft design. The status of rotorcraft design is reviewed and priorities and neglected topics are discussed. For individual titles, see N88-11650 through N88-11672.

N88-11650# Army Aviation Systems Command, Saint Louis, MO.

THE INFLUENCE OF OPERATIONAL REQUIREMENTS ON LHX CONCEPT FORMULATION

ROBERT D. HUBBARD and ROBERT L. TOMAINE. In AGARD, Rotorcraft Design for Operations 8 p (SEE N88-11649 03-05) Jun. 1987

(AGARD-CP-423) Avail: NTIS HC A14/MF A01

The U.S. Army's Light Helicopter Family (LHX) program which is currently in concept formation is discussed. The activities associated with concept formation including governing regulations, how the process is executed, the scope of the effort involved and innovations included for LHX are discussed. The evolution of the requirements is emphasized and the focus is on how the operational requirements drive the engineering requirements and ultimately the design of the aircraft. Operational requirements are driven by the LHX concept, namely, a family of Scout/Attack (LHX/SCAT) and Utility (LHX-U) aircraft with common dynamic components, core mission equipment and common subsystems. The impacts of the unique LHX-SCAT aircraft on the design of and commonality with the LHX-U are discussed. The operational requirements are categorized into those associated with the Army 21 concept of the future battlefield, the threat, safety and reliability, and availability and maintainability. Each category results in several specific design impacts. Author

N88-11651# KLM Helicopters B.V., Amsterdam (Netherlands).

DESIGN REQUIREMENTS FOR FUTURE COMMERCIAL OPERATIONS

F. F. J. SCHAPER. In AGARD, Rotorcraft Design for Operations 14 p (SEE N88-11649 03-05) Jun. 1987

(AGARD-CP-423) Avail: NTIS HC A14/MF A01

Design requirements for helicopters stemming from civil operations are discussed. The offshore oil and gas industry is and will continue to be the main application of civil helicopters. Development of other commercial markets will require major improvements in almost all areas. Some of these areas are highlighted, including: safety, reliability, cockpit ergonomics, and vibration. The current rate of progress is considered to be much too slow and concern is expressed about military and civil requirements drifting too far apart. Designers of new military helicopters should be aware of these civil requirements and take them into account as much as possible. Author

N88-11652# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.). Inst. fuer Flugmechanik.

MISSION-ORIENTED FLYING QUALITIES CRITERIA FOR HELICOPTER DESIGN VIA IN-FLIGHT SIMULATION

B. GMELIN, H.-J. PAUSDER, and P. HAMEL. In AGARD, Rotorcraft Design for Operations 14 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

Some recent activities and results in the fields of rotorcraft in-flight simulation are presented. The following general conclusions were drawn: (1) general purpose in-flight simulators will play a decisive role in the rotorcraft design, evaluation, development, and certification process; (2) the capability of in-flight simulators will support industry to meet the demands for future rotorcraft systems and to reduce the costs and risks of development programs; and (3) for the generation of generic flying qualities, test vehicles providing adequate mission performance and variable characteristics are required. Author

N88-11657# Army Aviation Research and Development Command, Moffett Field, CA.

MODELING XV-15 TILT-ROTOR AIRCRAFT DYNAMICS BY FREQUENCY AND TIME-DOMAIN IDENTIFICATION TECHNIQUES

MARK B. TISCHLER and JUERGEN KALETKA (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick, West Germany). In AGARD, Rotorcraft Design for Operations 20 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

Models of the open-loop hover dynamics of the XV-15 Tilt-Rotor Aircraft are extracted from flight data using two approaches: frequency domain and time-domain identification. Both approaches are reviewed and the identification results are presented and compared in detail. The extracted models are compared favorably, with the differences associated mostly with the inherent weighing of each technique. Step responses are used to show that the predictive capability of the models from both techniques is excellent. Based on the results of this study, the relative strengths and weaknesses of the frequency and time-domain techniques are summarized and a proposal for a coordinated parameter identification approach is presented. Author

N88-11658# Royal Aircraft Establishment, Farnborough (England).

OPERATIONAL LOAD MEASUREMENTS ON SERVICE HELICOPTERS

DOROTHY M. HOLFORD. In AGARD, Rotorcraft Design for Operations 12 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

The philosophy of operational load measurement programs as applied to rotary wing aircraft is reviewed. A major aim is to substantiate component fatigue lives in the light of operational usage. The aircraft installation to meet the needs of the programs is described. The analysis techniques, which are designed to provide the operator and engineer with a view of the origins of fatigue damage, are described. Problem areas in comprehensive fatigue monitoring systems are discussed. Author

N88-11663# Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn (Germany, F.R.).

IMPACTS OF ROTOR HUB DESIGN CRITERIA ON THE OPERATIONAL CAPABILITIES OF ROTORCRAFT SYSTEMS

R. SCHINDLER and E. PFISTERER. In AGARD, Rotorcraft Design for Operations 23 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

Starting with the description of the different design principles of articulated, see-saw, hingeless and bearingless rotor concepts, a variety of realized constructions is presented and discussed. The flight mechanic aspects such as maneuverability and handling qualities are explained with respect to their operational capabilities. The differences in the flapping hinge offset are discussed. The trend of the flapping hinge offset over three decades of armed and utility helicopters is analyzed. Author

N88-11664# Societe Nationale Industrielle Aerospatiale, Marignane (France). Helicopter Div.

NEW AERODYNAMIC DESIGN OF THE FENESTRON FOR IMPROVED PERFORMANCE

A. VUILLET and F. MORELLI. In AGARD, Rotorcraft Design for Operations 11 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

A general definition of the fenestron and its advantages for civil and military helicopters are given. A detailed airflow analysis through the fenestron was recently achieved on the tail rotor bench in hover. The experimental technique and the flow measurements are surveyed. Also presented are the correlations made with blade element theory as well as more advanced analysis derived from a radial equilibrium code in use for compressors. Author

N88-11665# Sikorsky Aircraft, Stratford, CT. Research and Advanced Design.

ROTORCRAFT DESIGNS FOR THE YEAR 2000

EVAN A. FRADENBURGH. In AGARD, Rotorcraft Design for Operations 11 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

Some of the rotorcraft concepts that can offer higher speeds than the pure helicopter, including the compound helicopter, ABC,

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

tilt-rotor, X-wing, and stowed rotor configurations are discussed. All of these are potentially practical aircraft. Economic considerations will dictate that the pure helicopter is here to stay; higher speed rotorcraft are not as cost effective at short distances. Also examined is the approach to helicopter sizing for heavy-lift applications. It is concluded that a super-large helicopter, sized to carry the heaviest payload needed, is unaffordable. A better solution is to develop a moderately large helicopter that will carry most of the required loads, and to use the twin-lift technique to transport the occasional extra-heavy load. Author

N88-11666# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

HELICOPTER (PERFORMANCE) MANAGEMENT

WINFRIED BENNER and ROLF DUESSMAN In AGARD, Rotorcraft Design for Operations 9 p (SEE N88-11649 03-05) Jun. 1987

(AGARD-CP-423) Avail: NTIS HC A14/MF A01

The next generation of military helicopters will have to fly under night and adverse weather conditions below tree top level. Dornier System started 15 years ago to develop avionics systems with a performance that would allow pilots to fly the new missions. In the Dornier baseline display cockpit concept the first steps of the Helicopter Management System (HMS) will be realized. Here, the main aspects of the system are discussed. The main parts are the mission planning system on the ground and the HMS onboard the helicopter. Author

N88-11669# Costruzioni Aeronautiche Giovanni Agusta S.p.A., Varese (Italy).

A129 ADVANCED SOLUTIONS FOR MEETING TODAY'S COMBAT HELICOPTER REQUIREMENT

GIUSEPPE VIRTUANI In AGARD, Rotorcraft Design for Operations 9 p (SEE N88-11649 03-05) Jun. 1987

(AGARD-CP-423) Avail: NTIS HC A14/MF A01

It is argued that the A129 light attack helicopter represents the answer to modern and severe operational requirements. The main rotor hub and transmission are described as examples of unconventional and advanced technology design. The engine installation represents the case of a configuration where the operative requirement induced a deep physical integration among the subsystems. The large computer structure, the integrated multiplexing system based on the multiplexing and microprocessor technologies, constitutes a major example of functional integration between the helicopter and mission subsystem. Author

N88-11670# McDonnell-Douglas Helicopter Co., Mesa, AZ. Advanced Engineering.

APACHE FOR THE BATTLEFIELD OF TODAY AND THE 21ST CENTURY

JAMES B. FORKE In AGARD, Rotorcraft Design for Operations 13 p (SEE N88-11649 03-05) Jun. 1987

(AGARD-CP-423) Avail: NTIS HC A14/MF A01

The AH-64A Apache is in service with the U.S. Army. The operational requirements which drove the design of the Apache and caused this particular combination of attributes are documented. The attributes discussed include performance, survivability, crashworthiness, transportability, deployability, navigation, target acquisition and weapon systems. Author

N88-11672# Agusta S.p.A., Milan (Italy).

THE EH-101 INTEGRATED PROJECT: A NAVAL, UTILITY AND COMMERCIAL HELICOPTER SYSTEM

PIETRO ALLI, RUGGERO BALDASSARRINI, GIOVANNI MARZORATI, GIOVANNI PAGLIARO, and LUCIANO ARMITI In AGARD, Rotorcraft Design for Operations 32 p (SEE N88-11649 03-05) Jun. 1987

(AGARD-CP-423) Avail: NTIS HC A14/MF A01

The Royal Navy and Marina Militare Italiana tasked EHI to develop a new shipborne helicopter. The two Navies defined a common set of requirements related to the basic common helicopter plus a dedicated different set for each specific mission. Concurrently EHI performed autonomous research on the potential EH 101 civil and utility market, through those analysis EHI came to the conclusion that a common basic helicopter could satisfy all of the requirements even if the roles were sometimes very different. The rationale and the trade off approach which were successfully

devised and implemented to produce an aircraft with the best compromise of performance and cost are given. Author

N88-12481# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

DEVELOPMENTAL AIRDROP TESTING TECHNIQUES AND DEVICES

H. J. HUNTER and R. K. BOGUE, ed. Sep. 1987 97 p (AGARD-AG-300-VOL-6; ISBN-92-835-1559-5; AD-A189621)

Avail: NTIS HC A05/MF A01

The practical aspects of planning, conducting, and reporting on developmental airdrop tests made from cargo transport type aircraft are presented. Typical cargo aircraft aerial delivery systems, parachute extraction systems, and special devices and rigging techniques are described in detail. Typical instrumentation systems for obtaining aircraft and parachute systems force data are also described and piloting techniques for various airdrop methods are briefly discussed. A scenario of a typical parachute tow test is used to demonstrate the application of these techniques and the use of challenge and response checklists among the flight crewmembers. Finally the use of reports is discussed and appendices are included with many useful charts and calculations that are readily applicable in research and development airdrop testing. Author

N88-13244# Lockheed-California Co., Burbank.

THE OFF-DESIGN PERFORMANCE OF HYPERSONIC WAVERIDERS

LYLE N. LONG In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 14 p (SEE N88-13219 05-02) Nov. 1987

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

Waveriders are being considered more and more as potential aerospace vehicles. However there are several questions regarding these configurations that must be answered before they can be considered viable designs. The most significant problems are related to aerothermal heating, propulsion integration, and off-design performance. Off-design performance predictions for two generic waveriders are presented. The results are from a numerical method based upon the nonlinear, inviscid Euler equations. Comparisons to experimental data are also shown. Author

N88-13245# Maryland Univ., College Park. Dept. of Aerospace Engineering.

NUMERICAL OPTIMIZATION OF CONICAL FLOW WAVERIDERS INCLUDING DETAILED VISCOUS EFFECTS

KEVIN G. BOWCUTT, JOHN D. ANDERSON, JR., and DIEGO CAPRIOTTI In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 23 p (SEE N88-13219 05-02) Nov. 1987 Sponsored in part by NASA Langley Research Office, Hampton, Va. and Army Research Office, Washington, D.C.

(AGARD-CP-428) Avail: NTIS HC A24/MF A01 CSCL 01A

A family of optimized hypersonic waveriders is generated and studied wherein detailed viscous effects are included within the optimization process itself. This is in contrast to previous optimized waverider work, wherein purely inviscid flow is used to obtain the waverider shapes. For the present waveriders, the undersurface is a streamsurface of an inviscid conical flowfield, the upper surface is a streamsurface of the inviscid flow over a tapered cylinder (calculated by the axisymmetric method of characteristics), and the viscous effects are treated by integral solutions of the boundary layer equations. Transition from laminar to turbulent flow is included within the viscous calculations. The optimization is carried out using a nonlinear simplex method. The resulting family of viscous hypersonic waveriders yields predicted high values of lift/drag, high enough to break the L/D barrier based on experience with other hypersonic configurations. Moreover, the numerical optimization process for the viscous waveriders results in distinctly different shapes compared to previous work with inviscid-designed waveriders. Also, the fine details of the viscous solution, such as how the shear stress is distributed over the surface, and the location of transition, are crucial to the details of the resulting waverider geometry. Finally, the moment coefficient variations and heat transfer distributions associated with the viscous optimized waveriders are studied. Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N88-13248# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. Aeromechanics Div.
LIFTING BODIES: AN ATTRACTIVE AERODYNAMIC CONFIGURATION CHOICE FOR HYPERVELOCITY VEHICLES
 ALFRED C. DRAPER and MELVIN L. BUCK In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 44 p (SEE N88-13219 05-02) Nov. 1987
 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

A brief chronology is given of the lifting body configurations investigated by the Flight Dynamics Laboratory, along with their aeroperformance capabilities including ASSET, PRIME, the X-24A, and the X-24B. Also included is a brief discussion of lifting body applications at supercircular velocities such as the SORTIE. The impact of basic geometric and component effects on aerodynamic performance parameters is addressed. These results were then translated into an aerodynamic configuration which eliminates the aft vertical fins without degrading the hypersonic lift-to-drag ratio while maintaining directional stability. Additionally, the benefits and applicability are examined. Specifically, the more significant methods such as the Hypersonic Arbitrary Body Program (HABP), PANAIR, Euler, Parabolized Navier-Stokes (PNS), and Navier-Stokes (NS) codes are discussed. Experimental capabilities and needs are discussed and finally, long term goals for future lifting body configurations are assessed. Author

N88-13315# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel.
SPECIAL COURSE ON FUNDAMENTALS OF FIGHTER AIRCRAFT DESIGN
 Oct. 1987 290 p Course held in Rhode-St-Genese, Belgium, 17-21 Feb. 1986, in Athens, Greece, 24-25 Feb. 1986, and in Ankara, Turkey, 27-28 Feb. 1986
 (AGARD-R-740; ISBN-92-835-1560-9; AD-A192214) Avail: NTIS HC A13/MF A01

The Special Course on the Fundamentals of Fighter Aircraft was sponsored by the AGARD Fluid Dynamics Panel and the von Karman Institute and presented at the latter in Rhode-Saint-Genese, Belgium, 17 to 21 February 1986, at the Greek Air Force Academy, Athens, Greece, 24 to 25 February 1986, and at the ARGE, Ankara, Turkey, 27 to 28 February 1986. The Course presented a comprehensive review of fundamental procedures used during a fighter pre-development phase concentrating on the following: basic mission requirements and aircraft sizing; aerodynamic design including performance, stability and control; materials, structural optimization and aeroelasticity; aircraft dynamics; engine intake and nozzle integration; and airframe store-compatibility. Experimental and theoretical work has been demonstrated to play complementary roles and, in conclusion, recommendations are given for future development of engineering tools. For individual titles, see N88-13316 through N88-13327.

N88-13316# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Div.
FUNDAMENTALS OF FIGHTER AIRCRAFT DESIGN
 P. W. SACHER In AGARD, Special Course on Fundamentals of Fighter Aircraft Design 5 p (SEE N88-13315 05-05) Oct. 1987
 (AGARD-R-740) Avail: NTIS HC A13/MF A01

Following the technical program of the AGARD Fluid Dynamics Panel (FDP) for the past few years, the aeronautical engineer has found many subjects related to a special technical discipline and directed to industrial applications. But in nearly all cases the analysis of given geometry by experimental or theoretical techniques has overruled the more important engineering task, i.e., the design of a new shape which has desired properties. But in all cases concerning successful flying aircraft the result of engineering work has been a design compromise achieved by the fruitful cooperation of all technically relevant disciplines. Therefore, one of the most important intentions of this course has been to attract people from different aeronautical disciplines, working in industry and research institutes, and to look for links within the different branches of aerodynamics such as Wind Tunnel Test Techniques, Computational Fluid Dynamics, Vortex Dynamics, Unsteady Aerodynamics, Viscous Flow Drag Prediction, and their impact on designing aircraft components. Author

N88-13317# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. Design Branch.
MISSION REQUIREMENTS AND AIRCRAFT SIZING
 JAMES L. PARKER In AGARD, Special Course on Fundamentals of Fighter Aircraft Design 46 p (SEE N88-13315 05-05) Oct. 1987 Previously announced in IAA as A87-17881
 (AGARD-R-740) Avail: NTIS HC A13/MF A01

The development of requirements for new fighter aircraft involves defining threats, targets, and air combat scenarios for the future. Current fighter requirements emphasize the need for close-in combat and beyond-visual-range combat capability to achieve superiority in the air-to-air role. High sortie rates and the ability to perform air-to-surface missions are also primary requirements. Conceptual design and aircraft sizing are used to help define requirements. With conceptual design tools, different fighter designs can be sized for different missions. These configurations allow life cycle cost and effectiveness analysis to be performed, which provide the basis for the definition of the requirement to be constrained to a technologically feasible and economically affordable solution. Author

N88-13318# Boeing Military Airplane Development, Seattle, WA.

DESIGN OF WINGS AND WING/BODY CONFIGURATIONS FOR TRANSONIC AND SUPERSONIC SPEEDS
 H. YOSHIHARA In AGARD, Special Course on Fundamentals of Fighter Aircraft Design 19 p (SEE N88-13315 05-05) Oct. 1987
 (AGARD-R-740) Avail: NTIS HC A13/MF A01

Procedures to design wing/fuselage configurations at transonic and supersonic conditions are described. This is preceded by an introductory section sketching the significant flow features as the shock wave and separation patterns for typical fighter wings which affect the performance, followed by a description of the interference effects due to the fuselage. Author

N88-13320# National Research Council of Canada, Ottawa (Ontario). Unsteady Aerodynamics Lab.
AIRCRAFT DYNAMICS: AERODYNAMIC ASPECTS AND WIND TUNNEL TECHNIQUES

K. J. ORLIK-RUECKEMANN In AGARD, Special Course on Fundamentals of Fighter Aircraft Design 30 p (SEE N88-13315 05-05) Oct. 1987
 (AGARD-R-740) Avail: NTIS HC A13/MF A01

The dynamic behavior of modern fighter aircraft depends more and more on unsteady aerodynamics. Until recently, the designer concentrated on classical problems such as aeroelasticity and flutter. Dynamic stability parameters were most often determined by low angle-of-attack calculation methods, without much recourse to experiment. The results obtained from the few dynamic experiments performed were used to confirm the absence of problems rather than as design parameters. New requirements for fighter aircraft performance include the ability to fly at high angles of attack in the presence of extensive regions of separated or vortical flows, relaxed static stability, greatly increased agility, and an interest in unorthodox geometries such as closely-coupled-canard or tail-first configurations. The time lags and unsteady phenomena associated with flow fields resulting from rapid maneuvers and large amplitude motions significantly affect the dynamic behavior of modern fighter aircraft and become as important for aircraft design as the classical static performance criteria. A review is made of the various aerodynamic aspects affecting aircraft dynamic behavior, followed by a survey of the most pertinent experimental techniques.

N88-13321# Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France). Div. des Etudes Avancees.
TECHNIQUES FOR PERFORMANCE OPTIMISATION IN CRUISE AND MANOEUVRABILITY
 PIERRE PERRIER In AGARD, Special Course on Fundamentals of Fighter Aircraft Design 12 p (SEE N88-13315 05-05) Oct. 1987
 (AGARD-R-740) Avail: NTIS HC A13/MF A01

The design of a combat aircraft cannot be left to trial and error design when a definite performance target is precisely defined. It is obvious that there is a large variation in the possible aerodynamic aircraft shapes having the internal volume required for fuel, engine, equipment and weapon system accommodation. Among all possible shapes, the best aircraft will have definite

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

advantages over a poor design in terms of performance for a given cost or in terms of cost for given performance. The best aerodynamic definition need no longer be left to the designers in the design office when efficient theoretical-experimental processes of optimization are available in the aircraft industry. Presented is the state of the art of the reflection and application of optimization, i.e., the latter's targets and tools, and some results and perspectives in combat aircraft design are reviewed.

Author

N88-13322# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

FUNDAMENTALS OF FIGHTER AIRCRAFT DESIGN: ENGINE INTAKE AND AFTERBODY

J. LEYNAERT *In* AGARD, Special Course on Fundamentals of Fighter Aircraft Design 39 p (SEE N88-13315 05-05) Oct. 1987 Previously announced in IAA as A87-21014 (AGARD-R-740) Avail: NTIS HC A13/MF A01

Basic conditions, study parameters, and various solutions of fighter intake and afterbody (except VTOL) are reviewed. Airframe integration and intake adaptation to the flight Mach number are discussed. The following topics of intake flow are analyzed: buzz phenomena, internal bleed flow, high incidence, low speed, mean flow, distortion index, and unsteady distortion. The afterbody discussion covers variable geometry, thrust vectoring, and reverse. Wind tunnel test techniques are also described.

Author

N88-13323# British Aerospace Public Ltd. Co., Kingston-upon-Thames (England).

AIRFRAME/STORE COMPATIBILITY

C. L. BORE *In* AGARD, Special Course on Fundamentals of Fighter Aircraft Design 27 p (SEE N88-13315 05-05) Oct. 1987 (AGARD-R-740) Avail: NTIS HC A13/MF A01

By considering the various parameters dominating the value of a fighter air force, those terms can be isolated which respond to influences of store release features. It is shown that stores affect the transport capacity of the air force through the lift/drag ratio, the availability factor through the agility term, and the target-killing factor through the delivery accuracy term. The physical effects of store installation are then examined, and ways identified to minimize undesirable effects. Thus, drag prediction and drag reduction are considered in some depth. The effects of drag on the agility of the aircraft are examined and stability and flutter effects are reviewed. Store release conditions are reviewed. Finally, some recent approaches to store/airframe integration are considered.

Author

N88-13324# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Group.

AEROELASTICITY AND OPTIMIZATION IN FIGHTER AIRCRAFT DESIGN

H. GOEDF. and H. HOERNLEIN *In* AGARD, Special Course on Fundamentals of Fighter Aircraft Design 15 p (SEE N88-13315 05-05) (C ... 1987 (AGARD-R-740) Avail: NTIS HC A13/MF A01

Constraint functions and their differentiations are given for the most interesting physical disciplines of structural optimization and well-known optimization techniques are mentioned. Because of the growing significances of iterative methods a large space has been conceded to the iterative solution of linear equation systems and its use in various algorithms. It is shown that big computer time saving effects would be achieved if the special characteristics of the physical formulation could be exploited mathematically.

Author

N88-13325# British Aerospace Public Ltd. Co., Preston (England).

MATERIALS FOR FIGHTER AIRCRAFT

R. J. SELLARS *In* AGARD, Special Course on Fundamentals of Fighter Aircraft Design 17 p (SEE N88-13315 05-05) Oct. 1987 Sponsored in part by Ministry of Defence, United Kingdom (AGARD-R-740) Avail: NTIS HC A13/MF A01

Of the many important decisions to be made during the initial conception and design of advanced fighter aircraft, one of the most critical is that made by the materials engineer. Together with the designer, he will recommend the type of material to be incorporated into the aircraft's structure. Such recommendations, while respecting the criteria of minimum mass and minimum cost, must also ensure that the structure will possess a long life and

be simple to service and maintain. Discussed are some of the new materials and production processes available for use on advanced fighter aircraft. Comparisons are made between the advanced light alloys now becoming available (i.e., aluminum-lithium), and the latest intermediate modulus fibers for use in carbon fiber components.

Author

N88-13326# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Div.

THE ROLE OF EXPERIMENTAL INVESTIGATION AND COMPUTATIONAL FLUID DYNAMICS DURING FIGHTER AIRCRAFT DESIGN

P. W. SACHER *In* AGARD, Special Course on Fundamentals of Fighter Aircraft Design 26 p (SEE N88-13315 05-05) Oct. 1987 (AGARD-R-740) Avail: NTIS HC A13/MF A01

In a discussion of the role of experimental investigation and computational fluid dynamics in fighter aircraft design the following topics are reviewed: (1) two ways to simulate compressible flowfields, advantages versus disadvantages of numerical and experimental investigations; (2) general trends in time/speed and costs in experiment and computation; (3) state of the art in numerical aerodynamics; (4) model for numerical simulation; and (5) applications and typical results. In a discussion of wind tunnel technology, the following topics are examined: (1) results from wind tunnel/critical review; (2) effect of Reynolds number; (3) wind tunnel effects; (4) the role of CFD during wind tunnel testing; and (5) the role of wind tunnels during configuration development. In conclusion, it is felt that the computer is not about to replace the wind tunnel, the role of computers is a complementary one to save time and costs and to improve the quality of the final product.

F.M.R.

N88-13327# Office National d'Etudes et de Recherches Aérospatiales, Paris (France). Aerodynamic Dept.

REQUIREMENTS AND RECOMMENDATIONS FOR THE DEVELOPMENT OF THEORETICAL CODES AND EXPERIMENTAL FACILITIES IN THE NEAR FUTURE

B. COSTES *In* AGARD, Special Course on Fundamentals of Fighter Aircraft Design 15 p (SEE N88-13315 05-05) Oct. 1987 (AGARD-R-740) Avail: NTIS HC A13/MF A01

In order to properly use all available tools, the aircraft designer has to be acquainted with both their good qualities and shortcomings. This guides the improvement studies in a context characterized by the following: the general development of the potential of methods and calculation means, wind tunnels and relevant instrumentation; the new requirements for aircraft performance and the ever-growing industrial risks. The incoming developments for various levels of calculation codes, used for an industrial design or for fundamental research are examined. Also, the improvements needed for wind tunnels and testing methods are examined, depending on the character of the studies to be carried out. Examples permit a definition of the present state of the art and an examination of the improvements under study which may be exploitable in the not too distant future.

Author

N88-16588# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

SOME ASPECTS OF AIRCRAFT DYNAMIC LOADS DUE TO FLOW SEPARATION

D. G. MABEY (Royal Aircraft Establishment, Farnborough, England) Feb. 1988 33 p Presented at the 65th Meeting of the Structures and Materials Panel of AGARD, Cesme, Turkey, 4-9 Oct. 1987 (AGARD-R-750; ISBN-92-835-0445-3; AD-A194170) Avail: NTIS HC A03/MF A01

Various topics associated with the study of Aircraft Dynamic Loads due to Flow Separation are discussed in this AGARD paper. Topics discussed include the need for consistent definitions of buffet and buffeting, the advantages of consistent notation for all the papers, buffeting due to wings and other components, the alleviation of buffeting, the special difficulties of flight tests and the special advantages of buffeting measurements in cryogenic wind tunnels.

Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N88-19449# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

WORKSHOP ON DESIGN LOADS FOR ADVANCED FIGHTERS
Feb. 1988 133 p In ENGLISH and FRENCH Workshop held in Madrid, Spain, 27 Apr. - 1 May 1987
(AGARD-R-746; ISBN-92-835-0442-9; AD-A194869) Avail: NTIS HC A07/MF A01

The design of the modern fighter aircraft is becoming an increasingly complex process, and the establishment of design criteria is an extremely important element in that process. The Structures and Materials Panel of AGARD has noted that the existing design maneuver load regulations in the North Atlantic Treaty Organization (NATO) nations are not uniform in content and generally do not reflect the actual service experience of the aircraft. This workshop focuses on these problems. For individual titles, see N88-19450 through N88-19459.

N88-19450# Bundesamt fuer Wehrtechnik und Beschaffung, Munich (Germany, F.R.).

THE DEVELOPMENT OF MANOEUVRE LOAD CRITERIA FOR AGILE AIRCRAFT

MAX HACKLINGER In AGARD. Workshop on Design Loads for Advanced Fighters 9 p (SEE N88-19449 12-05) Feb. 1988
(AGARD-R-746) Avail: NTIS HC A07/MF A01

The maneuver loads part of aircraft design has evolved from a relatively clean cut, predetermined analysis to a long iterative process which gradually utilizes flight test information to expand the flight envelopes. It is a process that is also much more demanding because it involves the reliability of the flight control system (FCS) in proving structural integrity. The conclusions of the study were that: there is no consistent set of airworthiness criteria which fully covers maneuver loads of agile aircraft; attempts to update the existing criteria to embrace the vast possibilities of active control systems (ACT) are only partially successful; proof of airworthiness of aircraft with ACT has become more demanding since the load influencing functions of the FCS are directly safety critical and must be analyzed for failure to the same quantitative criteria as the structure itself; the existing criteria can and should be used for initial design to define the airframe; certification needs to become adaptive to reflect a long period of testing and FCS changes.

Author

N88-19451# Aerospace Medical Research Labs., Wright-Patterson AFB, OH.

FIGHTER DESIGN FOR HUMAN LOAD LIMITS

H. E. VONGIERKE and R. E. VANPATTEN In AGARD. Workshop on Design Loads for Advanced Fighters Design Loads for Advanced Fighters 7 p (SEE N88-19449 12-05) Feb. 1988
(AGARD-R-746) Avail: NTIS HC A07/MF A01

Recent studies have shown that current first line fighters (F-15, F-16) are being flown at very high levels of sustained acceleration with onset rates sufficiently high to provoke the unique physiological dangers inherent in rapid onset acceleration exposures. The loss of nine aircraft through G-induced loss of consciousness has been acknowledged as a result of this type of acceleration environment. Approximate maneuvering G levels versus engagement duration are shown in graphic form.

Author

N88-19452# Aeronautical Systems Div., Wright-Patterson AFB, OH. Loads and Dynamics Branch.

CHANGES IN USAF STRUCTURAL LOADS REQUIREMENTS

DANIEL SHEETS and ROBERT GERAMI In AGARD. Workshop on Design Loads for Advanced Fighters 12 p (SEE N88-19449 12-05) Feb. 1988
(AGARD-R-746) Avail: NTIS HC A07/MF A01

The new specification, Mil-A-87221, will allow design requirements to be more closely tailored to the anticipated use of the aircraft. In this way the final product will be more efficient, with less wasted, unneeded, and unused capabilities. This will lead, in turn, to reduce costs of ownership for Air Force weapon systems. This specification has been applied to the definition of requirements for the Advanced Tactical Fighter.

Author

N88-19453# Royal Aircraft Establishment, Farnborough (England). Materials and Structures Dept.

STRUCTURAL DESIGN REQUIREMENTS FOR AIRCRAFT INCORPORATING ACTIVE CONTROL TECHNOLOGY

M. J. KILSHAW and A. W. CARDRICK In AGARD. Workshop on Design Loads for Advanced Fighters 7 p (SEE N88-19449 12-05) Feb. 1988
(AGARD-R-746) Avail: NTIS HC A07/MF A01

The special structural design and certification requirements that are needed for military aircraft incorporating active control technology (ACT) are considered. United Kingdom requirements are introduced which cover static strength, fatigue performance, aeroelasticity, and the need to assess the influence of modifications to ACT software. The requirements draw attention to the essential role of flight load measurements undertaken during both development and operational flying in the process of structural substantiation.

Author

N88-19454# Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (Germany, F.R.).

THE RELATIONSHIP BETWEEN OPERATIONAL FLIGHT MANOEUVRE PARAMETERS AND DESIGN PARAMETERS

H. STRUCK and H. BALKE In AGARD. Workshop on Design Loads for Advanced Fighters 18 p (SEE N88-19449 12-05) Feb. 1988
(AGARD-R-746) Avail: NTIS HC A07/MF A01

The philosophy of the relevant design requirements and the essential load parameters for the maneuver load conditions, including the determination of the control displacements corresponding to the design requirements, is reviewed. As far as the operational load parameters are concerned, numerous data have been recorded for the normal load factor, but only a few for the other main load parameters, e.g., lateral load factor, roll rate, etc. These data are usually evaluated as cumulative frequency distributions. The envelope of such normal load factor spectra shows a large scatter depending on the aircraft and its usage. For future design work, an approach to the evaluation of operational maneuvers is presented. In this analysis, the maximum values of the main load parameters needed, i.e., normal and lateral load factor, roll rate and bank angle, can be determined. The extreme operational loads on the structural components have been derived by applying a maneuver model and compared with the design values.

Author

N88-19455# British Aerospace Public Ltd. Co., Kingston-upon-Thames (England). Flight Mechanics Group.

MANOEUVRES BY DEFAULT, BY DEMAND AND BY DESIGN

E. J. DALLEY and C. D. S. CLARKSON (British Aerospace Public Ltd. Co., Brough, England) In AGARD. Workshop on Design Loads for Advanced Fighters 16 p (SEE N88-19449 12-05) Feb. 1988
(AGARD-R-746) Avail: NTIS HC A07/MF A01

The use of strain gage bridges for the derivation of aircraft maneuver loads is reviewed in the context of a recent load measuring flight trial on a TMk4a Harrier. Some of the pitfalls encountered in the method used for calibration of the gages and their location are discussed. A comparison is made between the aircraft behavior/load patterns expected at the design stage and the flight results obtained when these maneuvers are flown on the aircraft. The applicability of these statutory aircraft design requirement type maneuvers is explored by comparison with maneuvers flown during Harrier development/operational flying where flap, thrust vectoring and reaction control power have been used to enhance the maneuver envelope. Here emphasis shifts from determining or confirming design load levels to ensuring that the known structure strength boundaries are observed. Conclusions are drawn as to the adequacy of present statutory design requirements. The need for accurate reliable calibrated load measurement in both the aircraft's development and operational stages is demonstrated.

Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N88-19456# Saab-Scania, Linköping (Sweden). **DESIGN LOADS FOR SWEDISH MILITARY AIRCRAFT IN A TWENTY YEARS' PERSPECTIVE**

GOESTA TOERNKVIST and JAN KLOOS / In AGARD. Workshop on Design Loads for Advanced Fighters 5 p (SEE N88-19449 12-05) Feb. 1988
(AGARD-R-746) Avail: NTIS HC A07/MF A01

The Swedish Viggen aircraft was designed according to Swedish regulations which had matured over a long period of time. The design phase is discussed as well as the need for usage data when the aircraft was in service. When the latest Swedish advanced military aircraft, the JAS39, was planned, it was the intention of the designers to use the US military specifications with minor changes. The experience during the design phase is discussed.

Author

N88-19457# Avions Marcel Dassault, Saint-Cloud (France).

DETERMINATION OF DESIGN LOADS FOR MODERN COMBAT AIRCRAFT [DETERMINATION DES CHARGES DE DIMENSIONNEMENT DES AVIONS DE COMBAT ACTUELS]

C. PETIAU / In AGARD. Workshop on Design Loads for Advanced Fighters 7 p (SEE N88-19449 12-05) Feb. 1988 / In FRENCH
(AGARD-R-746) Avail: NTIS HC A07/MF A01

The simultaneous use of sophisticated servocontrols and electric flight control systems in modern combat aircraft has led to revisions in the classical standards governing the selection of structural design loads. New guidelines for the determination of design loads are suggested and their application is discussed with reference to structural design optimization techniques, flight mechanics, structural weight and aircraft flight characteristics.

Author

N88-19459# Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn (Germany, F.R.).

MANNED SIMULATION: HELPFUL MEANS TO DETERMINE AND IMPROVE STRUCTURAL LOAD CRITERIA

ROLF BEHRMANN / In AGARD. Workshop on Design Loads for Advanced Fighters 18 p (SEE N88-19449 12-05) Feb. 1988
(AGARD-R-746) Avail: NTIS HC A07/MF A01

The evaluated data show, that a manned simulation in a scenario with its data recording and evaluation can help to optimize the structural design load envelope by recording the occurrence of given parameters in various types of air combat. It is also a means to optimize the structural envelope in relation to the operational envelope under the aspect of carefree handling. After correlation of flight trials with manned simulation, it can provide inputs to update the specifications relevant to future missions.

Author

N88-23129# Tracor Hydraulics, Inc., Laurel, MD. **AN EXPERIMENTAL STUDY TO DETERMINE THE FLOW AND THE SUBSONIC STATIC AND DYNAMIC STABILITY CHARACTERISTICS OF AIRCRAFT OPERATING AT HIGH ANGLES-OF-ATTACK**

ALEX GOODMAN and CLINTON E. BROWN / In AGARD. Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 28 p (SEE N88-23125 16-34) Jun. 1987
(AGARD-CP-413) Avail: NTIS HC A20/MF A01

A comprehensive series of experiments was conducted in the Tracor Hydraulics Ship Model Basin (HSMB) to determine the subsonic static and dynamic stability characteristics of a 3.5-foot span, 60-deg delta-high-wing fuselage model operating at high angles-of-attack up to 68 deg. In addition, typical results of flow visualization studies for a range of Reynolds numbers from 0.2 to 1.6 x 10 to the 6th, are presented. Also, the motions, force and moment coefficients resulting from a simulated pitchup maneuver are presented. Described is the HSMB Large Amplitude Horizontal Planar Motion Mechanism System (LAHPMM), 60-deg delta-wing-fuselage model, model-support systems, and the data acquisition and processing system used. The advantages of performing tests in the HSMB using the LAHPMM technique over existing wind tunnel techniques, such as curved flow and combined oscillation, for determination of the dynamic stability derivatives are presented and discussed. Results compare favorably with earlier (1950) tests of a similar configuration at angles of attack up to 32 deg.

Author

N88-26362# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

FLIGHT MECHANICS PANEL SYMPOSIUM ON ROTORCRAFT DESIGN FOR OPERATIONS: TECHNICAL EVALUATION REPORT

F. REINA (Agusta Sistemi S.p.A., Varese, Italy) / Mar. 1988
17 p / Symposium held in Amsterdam, Netherlands, 13-16 Oct 1986
(AGARD-AR-243; ISBN-92-835-0450-X; AD-A195893) Avail: NTIS HC A03/MF A01

The expanding roles of the helicopter and the intensified threat perceived by its potential users have led to proposals for future rotorcraft with characteristics significantly different from existing types. The resulting rapid evolution of rotorcraft configurations, in response to user demands, now requires a translation into design criteria to permit the aerospace research and development community to provide appropriate and cost effective responses to these demands. The objective of this symposium is to explore the impact of operational needs on the evolution of rotorcraft design and to identify priorities and neglected topics. Three specific issues are central to this problem: (1) the translation of operational mission requirements into design criteria; (2) the evaluation of techniques to incorporate user defined needs into the design and methods of test and verification; and (3) the identification of design areas where unusual or new user needs are demanding special or radical features. All papers were obtained by invitation. The Conference Proceedings, commissioned by the AGARD Flight Mechanics Panel are published separately as AGARD CP 423. This Advisory Report was prepared at the request of the Flight Mechanics Panel of AGARD.

Author

N88-27185# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

DESIGN MANUAL FOR IMPACT DAMAGE TOLERANT AIRCRAFT STRUCTURE, ADDENDUM

M. J. JACOBSON (Northrop Corp., Hawthorne, Calif) / Mar. 1988
36 p
(AGARD-AG-238-ADD; ISBN-92-835-0443-7; AD-A196775) Avail: NTIS HC A03/MF A01

In 1981 the Structures and Materials Panel of AGARD published a design manual for Impact Damage Tolerant Aircraft Structures (AG 238). Since that date, there have been significant advances in design to resist impact damage. The Panel has therefore considered it appropriate to record this information in an addendum to the AGARDograph. This Addendum has been prepared at the request of the USAF for presentation to the Structures and Materials Panel of AGARD.

Author

N88-27193# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AGARD STANDARD AEROELASTIC CONFIGURATIONS FOR DYNAMIC RESPONSE. 1: WING 445.6

E. CARSON YATES, JR. (National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.) / Jul. 1988 / 82 p / Presented at the 61st Meeting of the Structures and Materials Panel at Oberammergau, Fed. Republic of Germany, 8-13 Sep. 1985
(AGARD-R-765; ISBN-92-835-0463-1; AD-A199433) Avail: NTIS HC A05/MF A01 / CSCL 01C

This report contains experimental flutter data for the AGARD 3-D swept tapered standard configuration Wing 445.6, along with related descriptive data of the model properties required for comparative flutter calculations. As part of a cooperative AGARD-SMP program, guided by the Sub-Committee on Aeroelasticity, this standard configuration may serve as a common basis for comparison of calculated and measured aeroelastic behavior. These comparisons will promote a better understanding of the assumptions, approximations and limitations underlying the various aerodynamic methods applied, thus pointing the way to further improvements.

Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N88-28867# Aircraft Research Association Ltd., Bedford (England).

TRANSPORT-TYPE CONFIGURATIONS

A. B. HAINES and A. ELSENAAR (National Aerospace Lab., Amsterdam, Netherlands) In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 139-163 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

Various reasons can be advanced for treating transports as a separate, distinct class of aircraft for the purpose of defining a detailed viscous simulation methodology. The detailed methodology as described was based on past experience and an appreciation of how the advances in computational fluid dynamics can be exploited to place the methodology on a more scientific basis. It is recommended that, to gain experience, the proposed methodology should be applied for a significant period in parallel with whatever is the established practice. Any large differences in the extrapolated results should be assessed to find whether the reasons justify departure from existing practice: in other words, the methodology that was set forth should be better, being on a sound scientific basis, but it will still have to prove itself in the future. Author

N88-28868# Aircraft Research Association Ltd., Bedford (England).

COMBAT AIRCRAFT

A. B. HAINES In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 164-190 (SEE N88-28857 23-01) Apr. 1988 (AGARD-AR-224) Avail: NTIS HC A20/MF A01

Devising a viscous simulation methodology for model tests of a combat aircraft design is more difficult than for a subsonic transport. The geometry is more complicated and hence, more difficult to model for a computational fluid dynamics (CFD) calculation; the flow patterns are more complex and can contain various interacting features; there is more interest in the development of the flow beyond the buffet-onset boundary; the ability to manipulate the boundary layer in the model tests is more limited. The emphasis in the methodology rests on the in-depth study of the flow patterns and, in particular, the identification of the scale-sensitive viscous effects in the flow patterns over the model under test. The description of these flow patterns and of how, in principle, to construct a methodology to meet the various possible situations, is based on past experience and on an awareness of the advances in CFD methods. Author

N88-29720# National Aerospace Lab., Emmeloord (Netherlands).

MATCHING P.S.D.: DESIGN LOADS

R. NOBACK In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 12 p (SEE N88-29717 24-01) Jun. 1988 Sponsored by the Netherlands Agency for Aerospace Programs

(AGARD-R-734-ADD) Avail: NTIS HC A06/MF A01

A method to match loads obtained with the Design Envelope criterion of the power spectral density method is presented. Consistent sets of design load conditions can be generated using the correlation coefficients between the loads. Two of these sets are proposed for practical use. Author

N88-29721# Lockheed Aeronautical Systems Co., Burbank, CA. Dynamic Loads Div.

A SUMMARY OF METHODS FOR ESTABLISHING AIRFRAME DESIGN LOADS FROM CONTINUOUS GUST DESIGN CRITERIA

RICHARD N. MOON In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 40 p (SEE N88-29717 24-01) Jun. 1988

(AGARD-R-734-ADD) Avail: NTIS HC A06/MF A01

Continuous gust design criteria for airframe design are specified in FAR 25, JAR 25 and various U.S. military specs. Two forms of criterion, the design envelope approach and the mission analysis, are usually referenced as an acceptable means of compliance. However, these criteria do not provide methods of applying the statistical results of the airframe manufacturer, subject to approval of the certifying agency. Some of the methods that are currently used by U.S. airframe manufacturers are summarized. Continuous

gust design requirements from various certifying agencies are reviewed. A brief discussion is also provided on the methods employed to include the effect of the L-1011 Tnstar active controls wing load alleviation system on the loads due to corrective roll control in turbulence. Author

N88-29722# Messerschmitt-Boelkow-Blohm G.m.b.H., Hamburg (Germany, F.R.). Civil and Transport Aircraft Div.

COMPARISON OF THE INFLUENCE OF DIFFERENT GUST MODELS ON STRUCTURAL DESIGN

MANFRED MOLZOW In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 17 p (SEE N88-29717 24-01) Jun. 1988

(AGARD-R-734-ADD) Avail: NTIS HC A06/MF A01

Depending on the country of certification, different gust models and means of compliance of the airworthiness requirements have to be covered in structural design of civil transport aircraft. The influence on aircraft design from gust models, aircraft modeling, and control systems and laws is demonstrated on example of a short to medium range transport aircraft. Recommendations for future harmonized approaches in gust methods and modeling are given. Author

N88-29738# National Aerospace Lab., Amsterdam (Netherlands).

LOW-SPEED LONGITUDINAL FLYING QUALITIES OF MODERN TRANSPORT AIRCRAFT

H. A. MOOIJ In AGARD, Advances in Flying Qualities 16 p (SEE N88-29735 24-01) May 1988

(AGARD-LS-157) Avail: NTIS HC A09/MF A01

The suitability of an aircraft with respect to human control is determined by its handling qualities. In modern transport aircraft the handling qualities are determined to a high degree by the flight control system. An introduction to the following aspects of closed loop flight control systems for modern transport aircraft is given: stabilization and maneuvering functions, candidate implementation forms, manipulators for flight control, and mathematical representations of the airframe/flight control system combination required for prediction and evaluation purposes. Regarding criteria for good handling qualities of transport aircraft, the terminal flight phase (takeoff, initial climb, final approach and landing) are of prime interest. A treatise on a number of promising quantitative criteria for transport aircraft equipped with advanced flight control systems is given. Two groups of criteria are distinguished: criteria based on the dynamic characteristics of the aircraft alone and criteria based on the dynamic characteristics of the pilot/aircraft closed loop system. In the latter case, a quasi-linear describing function for the human controller behavior is used. Author

N88-29739# Systems Technology, Inc., Hawthorne, CA. ADVANCES IN FLYING QUALITIES: CONCEPTS AND CRITERIA FOR A MISSION ORIENTED FLYING QUALITIES SPECIFICATION

ROGER H. HOH In AGARD, Advances in Flying Qualities 28 p (SEE N88-29735 24-01) May 1988 (AGARD-LS-157) Avail: NTIS HC A09/MF A01

There has been considerable activity over the past 8 years to upgrade the military flying qualities specifications for conventional aircraft, as well as for V/STOLs and helicopters. The primary objectives of these upgrades has been to account for the use of high gain, high authority augmentation, and to more directly reflect the requirements of the intended missions into the specifications. The methodologies developed to accomplish the latter objective are summarized. A brief overview of the Lower Order Equivalent Systems and Bandwidth criteria follows. Problems with the specification of control sensitivity, and potential solutions are then discussed, followed by a brief presentation of the use of time vs frequency domain criteria. An empirical method to combine the Cooper-Harper Handling Qualities Ratings (HQRs) from each axis of control into an overall rating is then presented. Finally, a proposed specification for precision flare and landing is given, followed by an example application of the method. Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N88-29740# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

A SECOND LOOK AT MIL PRIME FLYING QUALITIES REQUIREMENTS

ROBERT J. WOODCOCK. In AGARD, Advances in Flying Qualities 15 p (SEE N88-29735 24-01) May 1988 (AGARD-LS-157) Avail: NTIS HC A09/MF A01

Current and projected applications of flying qualities criteria are addressed. The current state of the art, its deficiencies, and needs for further work are addressed. The rationale for the new U.S. Military Standard and Handbook on flying qualities is briefly discussed. With advanced vehicles, the scope of flying qualities is expanding, opening new areas to investigate and creating new problems. With relaxed static stability now commonly used, control margin is a prime safety consideration: control must be available for stabilization, maneuvering and recovery from any possible attitude, as well as for trim. Flying qualities aspects of agility include the need for nonlinear flying qualities metrics, and control systems that provide both rapid maneuvering and good damping for tight tracking. For all aspect engagement, the pilot needs to be thoroughly integrated with displays, automatic flight control modes and other systems. For dynamic longitudinal flying qualities, MIL-STD 1797 presents the Control Anticipation Parameter of an equivalent classical system as a primary criterion, but gives several alternatives in recognition of other problems. Author

N89-10056# Societe Nationale Industrielle Aerospatiale, Paris (France). Tactical Missile Div.

SIMULATION WITH REAL ELEMENTS OF EXOCET ANTI-SHIP MISSILES [SIMULATION AVEC ELEMENTS REELS DES MISSILES ANTI-NAVIRES EXOCET]

CHRISTIANE RENON, GUY LEGALLO, and GERARD SELINCE. In AGARD, Guidance and Control Systems Simulation and Validation Techniques 9 p (SEE N89-10048 01-08) Jul. 1988 In FRENCH (AGARD-AG-273) Avail: NTIS HC A07/MF A01

Simulation results gained on the first 1500 production anti-ship missiles of the EXOCET family (MM 38, MM 40, AM 39, SM 39) are presented. After describing the simulation facilities of the tactical missile division of Aerospatiale and in particular Subdray facility located near Bourges in France, the role of simulation is shown from the beginning of the project, through development up to the production of the missiles. The advantage of such simulation during the production phase is emphasized. It is used to improve the quality of missiles, to gain knowledge useful for the development of new versions and as a quality insurance method during production. Author

N89-10057# Rockwell International Corp., Columbus, OH.

HELLFIRE SYSTEM MODEL VALIDATION

R. V. HUPP. In AGARD, Guidance and Control Systems Simulation and Validation Techniques 13 p (SEE N89-10048 01-08) Jul. 1988 (AGARD-AG-273) Avail: NTIS HC A07/MF A01

The hybrid simulation facilities, system modeling, and validation process for a U.S. Army missile development program are discussed. Two fundamental problems in missile system design and development require an accurate, valid, proven computer simulation: analysis of errors and performance verification. The classical approach to error analysis is by Monte Carlo simulation. System performance over the entire spectrum of operating conditions cannot be verified by field tests alone due to economic constraints; it must be verified by simulation. Verification of total system performance was a major analytical effort in the development program. A complete hybrid computing facility was procured and dedicated to this end. Two independent system simulations were developed: a hybrid simulation and an all digital simulation. The development program was very successful. The computer simulation equipment procured for this effort was found to be quite adequate for the task and cost effective. Author

N89-12564# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

GUIDANCE AND CONTROL/FLIGHT MECHANICS PANELS JOINT SYMPOSIUM ON THE MAN-MACHINE INTERFACE IN TACTICAL AIRCRAFT DESIGN AND COMBAT AUTOMATION Technical Evaluation Report

RUDIGER SEIFERT (Messerschmitt-Boelkow-Blohm G.m.b.H., Munich, West Germany) 1988 21 p Symposium held in Stuttgart, Federal Republic of Germany, 28 Sep. - 1 Oct. 1987 (AGARD-AR-249) Avail: NTIS HC A03/MF A01

A Keynote address and thirty-one papers were presented at the Joint Guidance Control Panel/Flight Mechanics Panel Symposium, held in Stuttgart, Germany from 28 September to 1 October 1987, under the following headings: Combat scenarios and mission segment requirements; Human capabilities and limitations; Technological capabilities and limitations of combat automation; Crew station implementation; System integration. The Keynote Address and twenty-five papers are published in CP-425 (one paper was not available at time of printing) and the four remaining classified papers are included in CP-425(Supplement). Author

N89-17691# Saab-Scania, Linköping (Sweden)

AN ANALYSIS METHOD FOR BOLTED JOINTS IN PRIMARY COMPOSITE AIRCRAFT STRUCTURE

INGVAR ERIKSSON. In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 19 p (SEE N89-17685 10-31) Mar. 1988 Prepared in cooperation with Royal Inst. of Tech., Stockholm (Sweden). (AGARD-CP-427) Avail: NTIS HC A14/MF A01

The analysis of bolted joints in composite structure requires, like structural analysis in general, methods for determining the stress distributions and relevant failure criteria. The stress analysis procedure discussed here starts by addressing the joints as an integrated part of the overall structure. The stresses in the vicinity of the hole boundary are obtained through a series of finite element analyses, which starts with an overall load distribution analysis and ends with a two-dimensional detailed contact stress analysis of the most highly stressed region in the joint. Strength is predicted for two basic failure modes occurring in a joint, net-tension and bearing failure. The failure hypotheses for these failure modes are described. Both the stress analysis and failure hypotheses are performed and established, respectively under certain idealizations. The conditions in a real joint in an aircraft may differ from these idealizations. Hence, further work is required and is also proposed here. The analysis procedure described here is based on today's powerful computer facilities and offer great advantages compared with more empirical procedures. The procedure is presently used at Saab Aircraft Division. Author

N89-17693# Dornier-Werke G.m.b.H., Friedrichshafen, (Germany, F.R.). Technology Programs.

TYPICAL JOINTS IN A WING STRUCTURE

DIETER ROSE, MANFRED ROTHER, and HELMUT SCHELLING (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Stuttgart, Germany, F.R.) In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 14 p (SEE N89-17685 10-31) Mar. 1988 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

For the development of the Alpha-Jet carbon fiber reinforced plastic (CFRP) wing, typical connections between different components were examined both theoretically and experimentally. Environmental conditions - component humidity and temperature were considered mainly within the experimental work which was performed by the DFVLR-Stuttgart. Covered here are typical joints such as: (1) single-shear connection between skins and spars with low load transfer; (2) joints between skins and ribs due to interior tank pressure; and (3) multibolt joint between the CFRP skins and the fuselage attachment fittings with reference to bolt strength distribution and bearing stresses. Author

06 AIRCRAFT INSTRUMENTATION

N89-18652# Royal Aircraft Establishment, Farnborough (England).

THE DESIGN OF THE GARTEUR LOW ASPECT-RATIO WING FOR USE IN THE VALIDATION OF SHEAR LAYER AND OVERALL FLOW PREDICTION METHODS

M. C. P. FIRMEN and M. A. McDONALD. In AGARD, Validation of Computational Fluid Dynamics, Volume 2: Poster Papers 17 p (SEE N89-18648 11-34) Dec. 1988

(AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

A low aspect-ratio wing has been designed for use in the critical analysis of computational methods for three-dimensional shear layers, following the guidelines agreed by GARTEUR Action Group AD(AG07). The aim here is to give details of the design processes used and to indicate the flow conditions which will be explored in the detailed shear-layer tests to be made in the NLR LST (3.0 x 2.25 m) and ONERA (1.8 x 1.4 m) low-speed wind tunnels, as part of the GARTEUR program. Calculations have been made, using a selection of boundary layer methods which indicate that the design should provide very challenging tests for methods. Pilot model tests have suggested that the wing has been designed successfully and these have encouraged the Action Group to proceed with the main test program.

Author

N89-18654# Defence Research Establishment Valcartier (Quebec). Ballistics Group.

VALIDATION OF A USER-FRIENDLY CFD CODE FOR PREDICTION OF THE AERODYNAMIC CHARACTERISTICS OF FLIGHT VEHICLES

MICHEL FORTIER. In AGARD, Validation of Computational Fluid Dynamics, Volume 2: Poster Papers 19 p (SEE N89-18648 11-34) Dec. 1988

(AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

A computational fluid dynamics code based on the development of small perturbation theory for the solution of inviscid irrotational compressible fluid flow around flight vehicle configurations is described. The user-friendly feature of the code is illustrated by a guided weapon canard configuration for which are displayed computed pressure distributions on selected components. Five test cases including a simple wing shape and more complex guided weapon and aircraft configurations are presented to demonstrate the capabilities and limitations of the code. Theoretical pressure, force and moment coefficients are compared to wind tunnel data obtained from various facilities. The results of the comparison show the capabilities of the code in the subsonic and supersonic speed regimes for simple and complex configurations at low incidences, and its limitations at transonic speeds and at high angles of attack.

Author

06

AIRCRAFT INSTRUMENTATION

Includes cockpit and cabin display devices; and flight instruments.

N86-29816# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

ANALOGUE SIGNAL CONDITIONING FOR FLIGHT TEST INSTRUMENTATION

D. W. VEATCH and R. BOGUE. Apr. 1986. 179 p (AGARD-AG-160-VOL-17; ISBN-92-835-1520-X; AD-A171303)

Avail: NTIS HC A09/MF A01

The application of analog signal conditioning to flight-test data-acquisition systems is discussed. Emphasis is placed on practical applications of signal conditioning for the most common flight-test data-acquisition systems. A limited amount of theoretical discussion is included to assist the reader in a more complete understanding of the subject matter. Nonspecific signal conditioning, such as amplification, filtering, and multiplexing, is discussed. Signal conditioning for various specific transducers and data terminal devices is also discussed to illustrate signal conditioning that is unique to particular types of transducers. The purpose is to delineate for the reader the various signal-conditioning technique options, together with tradeoff considerations, for commonly encountered flight-test situations.

Author

N87-21902# Royal Aircraft Establishment, Bedford (England). Flight Systems Div.

SOME EXPERIENCES IN INTEGRATING AVIONIC SYSTEMS ON THE CIVIL FLIGHT DECK

P. ENGLAND, R. HARLOW, and N. COOKE. In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 17 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

Some of the work carried out in the Civil Avionics Research program at the Royal Aircraft Establishment, Bedford is described. After a discussion of some of the factors that are leading to a future Air Traffic Management system, the activities in navigation, flight management, displays and novel human input techniques are reviewed. The progress made and some of the lessons learned are also described. A view of how a future air traffic management system might operate is given.

Author

N87-21920# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

MICROPROCESSOR APPLICATIONS IN AIRBORNE FLIGHT TEST INSTRUMENTATION

M. J. PRICKETT. Feb. 1987. 66 p (AGARD-AG-160-VOL-18; ISBN-92-835-1542-0; AD-A178983)

Avail: NTIS HC A04/MF A01

This volume in the AGARD Flight Tests Instrumentation Series addresses flight test engineers and flight test instrumentation engineers interested in the design of microprocessors into new airborne flight test equipment. It describes general microprocessor based, system design principles and architectures suitable for flight test and flight test instrumentation applications. In preparing this volume the author has met with several engineers actively participating in aircraft and electronic flight testing at various organizations. Each of these organizations has developed microprocessor based instrumentation to solve their unique requirements and these are described in this text as case studies of current microprocessor applications.

Author

N87-22673# Army Avionics Research and Development Activity, Fort Monmouth, NJ.

THE IMPACT OF FUTURE AVIONICS TECHNOLOGY ON THE CONDUCT OF AIR WARFARE

JOSEPH A. DASARO. In AGARD Improvement of Combat Performance for Existing and Future Aircraft 9 p (SEE N87-22663 16-05) Dec. 1986

(AGARD-CP-409) Avail: NTIS HC A07/MF A01

A synopsis is given of the conclusions reached by the Systems Subpanel of the NATO AGARD workshop on the potential impact of development in electronic technology on the future conduct of air warfare. Avionic system integration technology, system architecture, data processing, data communication paths, computer programs, fault detection and isolation, and system design methodology are among the topics discussed.

Author

N87-24949# Naval Air Development Center, Warminster, PA.

NEW TECHNOLOGY IMPACTS ON FUTURE AVIONICS ARCHITECTURES

RICHARD S. MEJZAK. In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 7 p (SEE N87-24940 18-66) Feb. 1987

(AGARD-CP-404) Avail: NTIS HC A07/MF A01

An interpretation of avionics architecture is provided with respect to system components, organization, and design factors. Initially, general avionics architecture characteristics are addressed followed by discussions on emerging technologies and their impact on advanced systems. Information handling requirements are projected for future tactical aircraft. In addition, advanced avionics architecture design consideration and technical issues are addressed relative to achieving improved performance, reliability, survivability, flexibility, and low life cycle cost.

Author

06 AIRCRAFT INSTRUMENTATION

N87-29503# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

INFORMATION MANAGEMENT AND DECISION MAKING IN ADVANCED AIRBORNE WEAPON SYSTEMS

Feb. 1987 323 p In ENGLISH and FRENCH Symposium held in Toronto, Ontario, 15-18 Apr. 1986

(AGARD-CP-414; ISBN-92-835-0411-9; AD-A184044) Avail:

NTIS HC A14/MF A01

These conference proceedings focus on the significant human factors issues posed by the development of advanced aircrew stations incorporating new technologies such as adaptive and supervisory systems and multipurpose displays and computer graphics. Complimentary papers by members of the Avionics Panel focusing on the role of voice interactive systems and a summary of the findings of the Guidance and Control Panel's Working Group on Automation at the Man Machine Interface were also presented at the symposium. For individual titles, see N87-29504 through N87-29529.

N87-29519# Army Avionics Research and Development Activity, Fort Monmouth, NJ.

INTEGRATING AVIONICS SENSOR SIGNALS FOR TACTICAL AIRCRAFT

BARBARA A. BERNABE and JOHN J. WARD (Smiths Industries Ltd., Bishops Cleeve, England) In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 10 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

Current tactical aircraft must be prepared to operate in more severe threat environments than ever before. Stealth relies on conducting missions at night, at low levels, and at high speeds. Despite these adverse mission constraints, successful pilotage requires the aviator to continuously and accurately assess his own aircraft position in relation to surrounding landform configurations for navigation, for obstacle avoidance, and for masking, cover, and concealment. To assist the aviator in managing mission specific information, tactical aircraft are increasingly being equipped with sophisticated data gathering, storage, and processing systems. Data generated by these systems can be of two forms. One is that of video or digital spacially formatted images generated by an onboard sensor or processor. Typically the image represents the environmental situation surrounding the aircraft or at some remote location and is usually presented via a CRT. The other is that of alphanumeric codes which represent coordinates, elevations, ranges, or description of critical tactical locations. Typically this information is presented to the aviator via a control display unit (CDU). Conventionally, the aviator integrates and interprets the raw data output from these systems, for pilotage, tactical assessment, and decision making. Author

N87-29527# Royal Aircraft Establishment, Bedford (England). **THE FLIGHT EVALUATION OF A SPEECH RECOGNITION AND A SPEECH OUTPUT SYSTEM IN AN ADVANCED COCKPIT DISPLAY AND FLIGHT MANAGEMENT SYSTEM FOR HELICOPTERS**

R. LITTLE In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 12 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

A Wessex helicopter at RAE Bedford was used to develop and evaluate a set of electronic cockpit displays and a comprehensive suite of avionics which were integrated to form an advanced display and flight management system for both military and civil applications. Two important features of the system were automatic speech recognition and synthetic speech output. Flight trials were conducted to determine the ground rules and principles pertinent to the successful integration of these devices with other advanced avionics. The trial has shown that the combination of speech recognition and synthetic voice systems offers an element of redundancy and if correctly integrated into the cockpit will be capable of improving the man machine interface to a far greater degree than is achievable by hand or voice alone. Author

N88-11659# Royal Aircraft Establishment, Bedford (England). Flight Systems Div.

THE FLIGHT EVALUATION OF AN ADVANCED ENGINE DISPLAY AND MONITORING SYSTEM

L. ADAMS In AGARD, Rotorcraft Design for Operations 10 p (SEE N88-11649 03-05) Jun. 1987

(AGARD-CP-423) Avail: NTIS HC A14/MF A01

A Wessex helicopter was used to develop and evaluate a suite of advanced, integrated avionics. An important area of study was concerned with the display of engine and transmission data, and with a system monitor which gives audio and visual warning of any problems. The system demonstrated that the suppression of engine and transmission data at all times except when the pilot asks for it to be displayed or the system detects a problem is an acceptable technique. Author

N88-11671# Societe Nationale Industrielle Aerospatiale, Marignane (France). Div. Helicopters.

SYSTEM FOR SAR MISSIONS (SYSTEME DE MISSION SAR)

S. RIOCHE In AGARD, Rotorcraft Design for Operations 10 p (SEE N88-11649 03-05) Jun. 1987 In FRENCH

(AGARD-CP-423) Avail: NTIS HC A14/MF A01

The helicopter division of Aerospatiale developed a specially adapted system for search and rescue (SAR) missions at sea. The system allows entirely automatic piloting and guidance, particularly during the execution of search patterns and the descent to hovering flight in the proximity of the target. An electronic flight instrument system (EFIS) panel includes cathode screen displays for attitude, horizontal situation parameters, and search radar data. The horizontal situation parameters are selected as a function of the phase of flight from four modes: horizontal situation indicator, sector with or without superimposed radar data, search pattern, and hover. M.G.

N88-13331# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

WORKSHOP ON AVIONICS CORROSION CONTROL

Sep. 1987 80 p Workshop held in Hovik, Norway, 16-17 Apr. 1986 Original contains color illustrations

(AGARD-R-733; ISBN-92-835-0428-3; AD-A194868) Avail: NTIS HC A05/MF A01

This document contains the keynote and other presentations made at a Workshop held by the Structures and Materials Panel on Avionics Corrosion. The discussion covered the problem's extent, the state of the corrosion-prevention art, the prospects for innovative corrosion avoidance techniques, including the substitution of nonmetallic for metallic materials and preventive maintenance techniques. For individual titles, see N88-13332 through N88-13336.

N88-13332# Naval Air Development Center, Warminster, PA.

AVIONIC CORROSION

IRVING S. SHAFFER In AGARD Workshop on Avionics Corrosion Control 10 p (SEE N88-13331 05-06) Sep. 1987

(AGARD-R-733) Avail: NTIS HC A05/MF A01

The paper discusses the major causes of corrosion in the Navy's avionic equipment and provides specific examples of corrosion failures. Maintenance and readiness data summaries are included to denote further the corrosion problem severity. Corrective measures in design, testing, and maintenance are reviewed. Author

N88-13333# Air Force Materials Lab., Wright-Patterson AFB, OH. Electronic Failure Analysis Group.

CORROSION OF ELECTRONIC COMPONENTS

BILL DOBBS In AGARD Workshop on Avionics Corrosion Control 26 p (SEE N88-13331 05-06) Sep. 1987 Original document contains color illustrations

(AGARD-R-733) Avail: NTIS HC A05/MF A01

The Materials Laboratory Electronic Failure Analysis Group supports U.S. Air Force electronic systems in the areas of materials and manufacturing processes. A large majority of electronic failures is caused by materials and manufacturing process defects. It has been found that corrosion of electronic components is the cause of failure in about 20 percent of items submitted for testing. Airframe corrosion prevention requirements are well documented. It would be beneficial to the Air Force if corrosion prevention in electronic

06 AIRCRAFT INSTRUMENTATION

systems were as well documented. Existing documents, such as T.O. 1-1-689 and NAVAIR 16-1-540, are a step in the right direction. However, compulsory MIL specifications should be applied, since corrosion in Air Force electronic systems contributes significantly to system failure. Failure analysis investigations have been conducted for aircraft circuit breakers, antennas, printed wiring boards, fuses, linear steering position transducers, stepper motors, accelerometers, disk recorder heads, and electrical connectors. The cause of failure is identified and means of preventing future occurrence are presented. Author

N88-13334# Commanders Naval Air Forces US Atlantic and Pacific Fleets, Norfolk, VA. Material Advisor.

US NAVAL AIR FORCE AVIONIC AND ELECTRICAL SYSTEM CORROSION PREVENTION AND CONTROL MAINTENANCE

G. T. BROWNE *In* AGARD Workshop on Avionics Corrosion Control 20 p (SEE N88-13331 05-06) Sep. 1987 (AGARD-R-733) Avail: NTIS HC A05/MF A01

A study of premature failures of installed avionics, electrical equipment, and systems experienced in U.S. Fleet operational aircraft in the 1960s and 1970s has been reported. These failures were caused by corrosion, water intrusion, and other contaminating agents. To reverse this trend the Commanders Naval Air Forces U.S. Atlantic and Pacific Fleets (COMNAVAIRLANT) (COMNAVAIRPAC) requested that Commander Naval Air System Command (COMNAVAIRSYSCOM) develop a corrosion prevention and control program for avionics, electrical and installed systems used in naval aircraft. COMNAVAIRSYSCOM directed the Naval Air Development Center (NAVAIRDEVCCEN) to develop the program together with a technical manual. A conference of interested parties was held in 1976 and action initiated to develop the program and technical manual for use by the fleet technicians. Author

N88-13335# Industrial Marine Products Group Ltd., Dartmouth (Nova Scotia). Aerospace Engineering Div.

CORROSION IN AVIONICS AND ASSOCIATED EQUIPMENT; CAUSE, EFFECT AND PREVENTION

R. G. BARTLETT and E. G. EDGAR *In* AGARD Workshop on Avionics Corrosion Control 9 p (SEE N88-13331 05-06) Sep. 1987 (AGARD-R-733) Avail: NTIS HC A05/MF A01

Addressed, with examples, are the cause, effect, and prevention of corrosion as it relates to Canadian Forces aircraft. It deals particularly with aircraft operated in a marine environment and is based on the experience of the authors during previous service with the Department of National Defence and in their present employment in industry. The Canadian Forces corrosion prevention treatment program is also mentioned and discussed briefly. Author

N88-13336# Societe d'Applications Generales d'Electricite et de Mecanique, Paris (France).

AVIONICS AND CORROSION

ALAIN POINTET and CHRISTOPHE TURPIN-INVERNON *In* AGARD Workshop on Avionics Corrosion Control 6 p (SEE N88-13331 05-06) Sep. 1987 (AGARD-R-733) Avail: NTIS HC A05/MF A01

Avionic manufacturing and environmental conditions are responsible for corrosion and/or make easier the action of corrosion in the various parts of an avionics system. A brief survey is made of environmental conditions affecting avionics, how to reproduce them in accordance with norms and which associated problems might occur. All parts of an avionic system are examined, i.e., housings, printed circuit boards, hybrid and integrated circuits. For each component, examples and solutions are given. Author

N88-23767# Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine (France). Avionics Panel.

THE DESIGN, DEVELOPMENT AND TESTING OF COMPLEX AVIONICS SYSTEMS

Dec. 1987 408 p *In* ENGLISH and FRENCH Symposium held in Las Vegas, Nev., 27 Apr. - 1 May 1987 (AGARD-CP-417; ISBN-92-835-0437-2; AD-A198666) Avail: NTIS HC A18/MF A01

The design, development and testing of complex avionics systems are discussed. Design aspects for future avionics systems, managing the future system design process, and system design

tools and integration are among the topics covered. For individual titles, see N88-23768 through N88-23804

N88-23768# National Aeronautics and Space Administration. Langley Research Center, Hampton, VA.

TECHNOLOGY DEVELOPMENT PROGRAM FOR TWENTY-FIRST CENTURY AEROSPACE VEHICLES

WILLIAM T. SUIT and DOUGLAS B. PRICE *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 6 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01 CSCL 01D

A program to meet the avionics technology needs for the design of future space transportation systems is presented. The program is designed to meet as many technology goals as possible by 1996 so decisions can be made as to which vehicles are feasible and which should be constructed. Author

N88-23769# Naval Air Development Center, Warminster, PA. SYSTEMS FOR THE 21ST CENTURY

RICHARD G. DESIPIO *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 7 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

An avionic system index is proposed which allows for the definition of each function of the avionics system. The results of two demonstrations relative to the exploitation of on-board avionics built-in-test and diagnostics are presented. Author

N88-23770# Thomson-CSF, Malakoff (France).

ARCHITECTURE AND ROLE OF THE SENSOR SUBSYSTEM IN FUTURE AIRCRAFT WEAPON SYSTEMS

J. A. SALMON, C. J. C. RAVAT, and F. J. LORK *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 6 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

Today, in military aircraft systems, each external sensor (radar, ESM, electro-optical equipment, radio communications) is almost independent and reports to the central computer. Taking into account the evolution of operational context in which the aircraft is involved and the dramatic progress in processing capabilities, it appears necessary and possible to spread the intelligence aspect of the weapon system in order to optimize the global cost efficiency. This distribution enables each specialist to concentrate his efforts in order to take advantage of the ever increasing scope of knowledge associated with each discipline. Here, the sensor subsystem is dealt with, its architecture is defined and its function in the aircraft system is described. Author

N88-23771# Aerialia S.p.A., Caselle Torinese (Italy). Gruppo Sistemi Avionici ed Equipaggiamenti.

RAPID PROTOTYPING OF COMPLEX AVIONIC SYSTEM ARCHITECTURES

L. BERARDI, N. GIORGI, W. MELLANO, A. VALENTE, and E. ZUCCO *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 13 p (SEE N88-23767 17-06) Dec. 1987 Sponsored in part by Unisys, Italy (AGARD-CP-417) Avail: NTIS HC A18/MF A01

A design tool called Expert Consultant for Avionics system Transformation Exploration (ECATE) is described. ECATE, rapidly prototyping different alternatives, helps the designer in establishing the information flow architecture of the avionics system, that is, the organization of the internal data handling. The tool provides the user with an interface to assist him in describing the avionics from the point of view of the data handling and presents the results in a suitable format. It performs consistency checks and advises the user on possible architectural problems by means of expert system techniques. Author

N88-23772# British Aerospace Public Ltd. Co., Woodford (England). Civil Aircraft Div.

THE SPECIFICATION AND DESIGN OF A FUTURE MARITIME RECONNAISSANCE AIRCRAFT

J. SHEPARD *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 11 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The problems of providing specifications for system components of the highly integrated avionics systems of the future are discussed

06 AIRCRAFT INSTRUMENTATION

in the context of the avionics systems of a Future Maritime Reconnaissance Aircraft (FMRA). The need and extent of the integration of the avionics systems are discussed, as are the consequences for system definition and specification. Potential techniques for addressing these problems are reviewed. These are brought together to describe an approach which could provide the tools required. The implication of this approach for vendors and integrators is addressed. Author

N88-23773# British Aerospace Aircraft Group, Preston (England). Military Aircraft Div.

A STRUCTURED APPROACH TO WEAPON SYSTEM DESIGN
H. M. MALLEY, N. T. JEWELL, and R. A. C. SMITH In AGARD, The Design, Development and Testing of Complex Avionics Systems 12 p (SEE N88-23767 17-06) Dec. 1987 Sponsored in part by the Ministry of Defence, United Kingdom (AGARD-CP-417) Avail: NTIS HC A18/MF A01

A structured approach to the design of highly integrated weapon systems of the future is described. The approach was used in the design of the avionics system for the UK Experimental Aircraft Program (EAP) demonstrator aircraft. Brief descriptions are given of the EAP systems, the main systems design tools used, the activities carried out during the systems design process and the management and control procedures adopted. A series of observations highlighting some of the findings of the project and providing pointers to the design of future weapon systems is given. Author

N88-23774# International Business Machines Corp., Owego, NY. Federal Systems Div.

DEVELOPMENT OF A GENERIC ARCHITECTURE
CHRISTINA BERGGREN In AGARD, The Design, Development and Testing of Complex Avionics Systems 5 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

A new generation systems architecture is designed to bridge the gap between today's 1553-based systems and fault-tolerant, totally integrated systems of tomorrow. Described here is a novel approach to system functional area partitioning and the design of this generic distributed real time architecture. The architecture incorporates new military standards in development. Author

N88-23775# Agusta Sistemi S.p.A., Varese (Italy).

TEST PHILOSOPHY OF THE EH101 INTEGRATED AVIONIC
E. GALLI In AGARD, The Design, Development and Testing of Complex Avionics Systems 5 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The philosophy employed during the development and testing of the EH101 integrated avionic Naval helicopter is outlined. The avionics architecture is given in graphic form. Overall avionic integration, the aircraft management computer test, the sensor interface units test, and the aircraft management system test are described. Author

N88-23776# International Business Machines Corp., Owego, NY. Federal Systems Div.

SYSTEMS ENGINEERING TECHNIQUE
LEONARD KARAS and DONNA RHODES In AGARD, The Design, Development and Testing of Complex Avionics Systems 9 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

An overview is given of the Systems Engineering Technique (SET). SET was developed to effect an improvement in quality and productivity aspects in the development of avionics systems. The methodology synthesizes the best features of existing development methodologies into a single core procedure which is equally applicable throughout the systems development phases of complex systems. Six key areas emphasized by SET are discussed, and the concept of systems engineering measurements is introduced as the means to evaluate system quality and productivity. SET is being applied to the development of avionics systems at IBM Owego and has been effective in improving specification quality. Author

N88-23777# Avions Marcel Dassault, Saint-Cloud (France).

MODELING OF FUNCTIONAL SPECIFICATIONS FOR ONBOARD SOFTWARE: EXPERIENCE WITH THE RAFALE AVIONICS SYSTEM [MAQUETTAGE DES SPECIFICATIONS FONCTIONNELLES DU LOGICIEL EMBARQUE EXPERIENCE DU SYSTEME AVIONIQUE RAFALE]

PATRICK SCHIRLE In AGARD, The Design, Development and Testing of Complex Avionics Systems 12 p (SEE N88-23767 17-06) Dec. 1987 In FRENCH (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The avionics system of the Rafale aircraft entailed innovations such as the integration of aircraft systems and the acquisition of control information. These new functions resulted in a notable increase in, and qualitative evolution of, onboard computer software. For the improvement of quality and response characteristics of software, development was supported by an integral methodology for modeling software functional specifications. The model was constructed around a SEL computer supporting a FORTRAN listing of 3500 pages of system functional specifications. The model allows the direct validation of each individual specification and the whole ensemble of specifications. The model was used to support the analysis of the system failures, provide a base for the assessment of modifications, generate acceptance rules, and prepare a functional reference for integration. Author

N88-23778# International Business Machines Corp., Owego, NY.

THE AVIONICS SOFTWARE ARCHITECTURE IMPACT ON SYSTEM ARCHITECTURE

C. DOUGLASS LOCKE In AGARD, The Design, Development and Testing of Complex Avionics Systems 5 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

Technology developments that led to the problem of system vulnerability to software errors resulting from increased avionic system complexity and the impact of these developments on the functionality and design of new systems are considered. The current sequence for performing the physical and software architectural design, including a definition of the software architecture is discussed. The likely consequences of using these methods for designing new avionics systems are also discussed. Author

N88-23779# Litton Technische Werke, Freiburg (Germany, F.R.).

A COMPARISON OF INTEGRATED AND SEPARATE SYSTEMS FOR FLIGHT CONTROL AND NAVIGATION

H. BUIKAMP In AGARD, The Design, Development and Testing of Complex Avionics Systems 10 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

Two steps for the integration of flight control sensors, the Altitude and Heading Reference System (AHRS) and the Inertial Navigation System (INS) are discussed. It has been shown that the use of the same sensors for flight control and AHRS functions, as for example in the Aircraft Motion Sensor Unit (AMSU) system, yield excellent results. The AMSU system has demonstrated its performance capability in the Experimental Aircraft Program (EAP) inherently unstable aircraft. These aircraft, as opposed to conventional aircraft, require inertial sensor data with an extremely high bandwidth and very small data latency for flight control purposes. Author

N88-23780# Textron Bell Helicopter, Fort Worth, TX. Advanced Human Factors System Design.

DEVELOPMENT AND TESTING OF A PREDICTIVE METHODOLOGY FOR OPTIMIZATION OF MAN-MACHINE INTERFACE IN FUTURE AVIONICS SYSTEMS

ROGER E. PARKS In AGARD, The Design, Development and Testing of Complex Avionics Systems 9 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

The trend toward increasing complexity and cost in emerging avionics systems, driven by requirements for increased functional capability, has created a need for a predictive analytical methodology which accurately forecasts system performance early in the design process, and treats the human operator and the equipment as a fully integrated man-machine system. A

06 AIRCRAFT INSTRUMENTATION

methodology that meets these needs has been developed and validated by Bell Helicopter Textron. The process is being used to provide early, accurate avionics system characterization, thereby reducing design costs. Author

N88-23781# Boeing Military Airplane Development, Wichita, KS. **CREWSTATION INFORMATION AND DEVELOPMENT SYSTEM (CIDS)**

M. E. ROWLAND and W. R. WAGONER. In AGARD, The Design, Development and Testing of Complex Avionics Systems 11 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The process by which requirements for an avionics system are translated into an integrated crewstation design is discussed. The Crewstation Information Development System (CIDS) was divided into three phases of activity. In Phase 1, methodology development, a comprehensive set of requirements, resource allocation, and an information utilization assessment is derived. Phase 2, crewstation development, focuses on deriving the most effective methods of utilizing required crewstation information, taking into consideration the impact of the operational environment. The final phase, design application, concerns the details of crewstation design and the development of a crewstation information manager. Author

N88-23782# Naval Air Development Center, Warminster, PA. **A CHANGE IN SYSTEM DESIGN EMPHASIS: FROM MACHINE TO MAN**

M. L. METERSKY and J. L. RYDER (Pacer Systems, Inc., Horsham, Pa.) In AGARD, The Design, Development and Testing of Complex Avionics Systems 9 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

Even though software has increased in importance and percentage of cost in system development, it is still philosophically considered as a means to facilitate hardware performance. This thinking has had an adverse effect on system performance by relegating decision requirements to a minor or nonexistent role in the system design process. It is the premise here that system design should be dictated by decision requirements, since decisions humans make determine how well and to what degree a weapon system's inherent capabilities will be utilized. A system design approach based on an emphasis of the human's role as a decision maker is presented. Author

N88-23783# Northrop Corp., Hawthorne, CA. **ASET Development.**

MANAGING ADVANCED AVIONIC SYSTEM DESIGN
PHILIP H. SIMONS. In AGARD, The Design, Development and Testing of Complex Avionics Systems 8 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The critical requirements of advanced avionic system design are overall system requirements, configuration item requirements, interface requirements, and design process management requirements. These requirements can be met through the design process of abstract requirements definition, requirements/functional decomposition, functional recomposition, and detailed interface definition. This process can be greatly aided by computer automation, resulting in the design of more complex avionics systems in far less time than would be possible using older tools. Author

N88-23784# Centre d'Etudes et de Recherches de Medecine Aerospatiale, Paris (France). Lab. Central de Biologie Aerospatiale.

PSYCHOSENSORY COCKPIT ERGONOMICS, ADVANTAGES OF INTELLIGENT INFORMATION SYSTEMS [ERGONOMIE PSYCHOSENSORIELLE DES COCKPITS, INTERET DES SYSTEMES INFORMATIQUES INTELLIGENTS]

R. AMALBERTI, F. DEBLON, and J. P. MENU. In AGARD, The Design, Development and Testing of Complex Avionics Systems 12 p (SEE N88-23767 17-06) Dec. 1987 In FRENCH; ENGLISH summary (AGARD-CP-417) Avail: NTIS HC A18/MF A01

Psychosensory cockpit ergonomics consists of a pluridisciplinary approach focused on global consideration of man-machine interface issues. Knowledge supplied by each research field (sensory, physiology, cognitive psychology, design of intelligent

systems) is used in every concrete approach, taking into consideration aviation requirements and technological advances. Requirements that must be met to build such systems and computer system goals are discussed. Author

N88-23785# Aerospace Medical Research Labs., Wright-Patterson AFB, OH.

ADVANCED DEVELOPMENT OF A COCKPIT AUTOMATION DESIGN SUPPORT SYSTEM

PHILIP V. KULWICKI, JOE W. MCDANIEL, and LISA M. GUADAGNA. In AGARD, The Design, Development and Testing of Complex Avionics Systems 15 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

A highly disciplined and structured crew system design process is being developed to improve the efficiency and effectiveness by which advanced cockpits can be fielded. As an initial implementation of the CAT design process, a Cockpit Automation Design Support System (CADSS) is being developed to provide a computer aided design environment, including the software design tools and the simulation utilities that can facilitate the development of the crew system in synchrony with the development of the avionics and weapon system. The rationale underlying the CADSS is described in terms of the system components, which include a Designer's Computer Aided Design System (DCADS) processor, new software tools and a breadboard cockpit simulator which are envisioned to complement, but not replace, existing development facilities. This implementation of the cockpit design support system is described in relation to the overall CAT program activities and schedule. Author

N88-23786# Societe Nationale Industrielle Aerospatiale, Marignane (France). Div. Helicopteres.

DESIGN AND DEVELOPMENT OF AN AVIONICS SYSTEM ADAPTED TO HELICOPTER MISSIONS [CONCEPTION ET DEVELOPEMENT D'UN SYSTEME AVIONIQUE ADAPTE AUX MISSIONS DES HELICOPTERES]

DANIEL BOUHERET and JEAN LOUIS ROCH (Crouzet Aerospace and Systems, Valence, France) In AGARD, The Design, Development and Testing of Complex Avionics Systems 16 p (SEE N88-23767 17-06) Dec. 1987 In FRENCH (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The development of the avionics system for the Dauphin 365 F configured for search and rescue operations is discussed. A general description of flight missions and system architecture is presented with particular emphasis being given to the navigation and mission management subsystems. The system is based on a Nadir Mk2 microprogrammable computer capable of an execution rate of 1 MOPS. The interactive relationship between the system designers and integrators is described along with the design support tools that aid in achieving successful interaction. Author

N88-23787# Hughes Aircraft Co., Fullerton, CA. **OPERATION AND PERFORMANCE OF AN INTEGRATED HELICOPTER COMMUNICATION SYSTEM**

WALTER R. FRIED. In AGARD, The Design, Development and Testing of Complex Avionics Systems 8 p (SEE N88-23767 17-06) Dec. 1987 Previously announced in IAA as A87-31469 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The unique operational and performance requirements of the communication system for modern tactical Army helicopters are described. An integrated system architecture is described which satisfies these requirements and incorporates very high levels of automation, thereby reducing pilot workload. The automation concepts include the use of a preloaded communication data base and a centralized communication processor containing advanced control, reconfiguration and message formatting software. Link analysis and simulation results are presented to show the performance capabilities of the system with respect to the projected mission requirements. Author

06 AIRCRAFT INSTRUMENTATION

N88-23788# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.
DESIGNING FOR DESIGN EFFECTIVENESS OF COMPLEX AVIONICS SYSTEMS

KENNETH R. BOFF *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 9 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

The Integrated Perceptual Information for Designers (IPID) Project is a multiagency supported effort to aid the accessibility and use of human performance data in system design. It is formulated around five information management objectives: (1) identifying, collecting, and consolidating human performance data of potential value to system design; (2) human factoring these data to enable their direct use by system designers; (3) establishing an institute with responsibility for maintenance, update and analysis of these resources to support crew system design; (4) developing and sponsoring educational opportunities to train and sensitize system designers in the value and application of human performance data to crew system design; and (5) conducting exploratory research to define and evaluate requirements for an automated design support capability to aid engineers to access and tradeoff human performance data with other technical information germane to the effective design of crew systems.

Author

N88-23789# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

DESIGN FOR INTEROPERABILITY (INTERCHANGEABILITY)

GEORGE KONOMOS *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 5 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

Interoperability of the various elements used in a system is the design property which allows the intermixing of elements from various sources (manufactures) without any impact on the performance of the system or the operational hardware. Here, the line replaceable module approach is discussed. This is a new approach to avionics where a processor module is a 6 inch by 6 inch plug-in board with processing power many times higher than that of older line replaceable units.

Author

N88-23790# Aeritalia S.p.A., Caselle Torinese (Italy). Gruppo Equipaggiamenti.

THE ELECTROMAGNETIC THREAT TO FUTURE AVIONIC SYSTEMS

BRUNO AUDONE *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 10 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

The electromagnetic threat to future aircraft is studied and evaluated on the basis of the evolution of the avionics systems. The high level of integration of these systems combined with the increased number of electromagnetic sources which may interfere with the performance of the overall weapon system create the need to reexamine the usual design and testing approach in order to reach an adequate level of aircraft hardening. It is essential to design and test at system level rather than at hardware level. System design guidelines are discussed. Areas where basic research studies need to be undertaken are highlighted.

Author

N88-23791# Thorn EMI, Hayes (England). Radar Div.
THE INTEGRATION, CHARACTERISATION AND TRIALLING OF A MODERN COMPLEX AIRBORNE RADAR

ROGER ROY HOBGEN and FRANK N. MORPHET *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 5 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

The process of commissioning, testing and conducting trials of complex aircraft radar is discussed. An attempt is made to show how vital an informed and methodical approach is to achieving success. It is argued that it is essential to the approach that higher management understands and supports it.

Author

N88-23793# Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario). Human Engineering Section.

EXPERIENCE IN THE INTEGRATION OF HUMAN ENGINEERING EFFORT WITH AVIONICS SYSTEMS DEVELOPMENT

D. BEEVIS *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 9 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

Based on a review of human engineering activities in ten major acquisition projects, some conclusions aimed at facilitating the integration of human engineering activities with the development of advanced avionics are outlined. Conclusions are also drawn about the systems design and human engineering processes, and the role that mission, function, and task analysis can play in integrating human engineering and systems development activities. It is concluded that an approach that combines the interaction of hardware, software, and human functions is made especially necessary by the impact of advanced technology on the roles of human operators and maintainers, on the man-machine interface, and on the system development process itself. Finally, it is argued that there is a need to establish standardized approaches to the application of human engineering in avionics system design.

Author

N88-23794# Electronique Serge Dassault, Saint Cloud (France).
TESTING COMPLEX AVIONICS SOFTWARE: A PRACTICAL EXPERIENCE [LE TEST DE LOGICIELS AVIONIQUES COMPLEXES: UNE EXPERIENCE PRATIQUE]

M. MUENIER *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 16 p (SEE N88-23767 17-06) Dec. 1987 *In* FRENCH

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

The methods used at Dassault for testing avionics software, particularly the operational programs used on the Mirage F1 and Mirage 2000 aircraft, are presented. The MINERVE software development methodology is briefly described. The objective of MINERVE is to facilitate software production while ensuring control of quality, costs and development delays. The various software tools used to perform unitary, integration, functional and final software validation and testing are described. These tools provide hardware environment simulation, graphic output and various operational modes. A trend towards the integration of front-end tools (specification tools) and back-end tools (test tools) is noted and a natural progression from specification tool to semiformal specification, to prototype, to stimuli, to test tools is foreseen.

Author

N88-23796# Naval Postgraduate School, Monterey, CA. Dept. of Computer Science.

INTERFACING AND INTEGRATING HARDWARE AND SOFTWARE DESIGN SYSTEMS

DANIEL DAVIS *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 8 p (SEE N88-23767 17-06) Dec. 1987 Sponsored in part by the Naval Weapons Center, China Lake, Calif., and the Naval Ocean Systems Command, San Diego, Calif.

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

Fundamental problems in interfacing and integrating information between diverse design systems are examined. Specifically, design problems associated with the contexts of meaning that are required to understand information in diverse systems are examined. Increased research into a general theory of design is advocated. The resolution to some integration problems is suggested on the basis of some recent developments and experience with a functional design theory.

Author

N88-23797# Air Force Test Pilot School, Edwards AFB, CA.
A LOOK TOWARD THE FUTURE OF COMPLEX AVIONICS SYSTEMS DEVELOPMENT USING THE USAF TEST PILOT SCHOOL'S AVIONICS SYSTEMS TEST TRAINING AIRCRAFT

WILLIAM H. BROOME, JR. and MIKE PARRAG (Calspan Corp., Buffalo, N. Y.) *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 16 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

The Avionics Systems Test Training Aircraft (ASTTA) is a special configuration of the NC-131H Total In-Flight Simulator (TIFS), and was developed to fill a significant gap in the education and

06 AIRCRAFT INSTRUMENTATION

experience of the avionics systems test community. It provides a cost effective means of quickly exposing both designers and testers to the key issues of systems development and in-flight testing, especially the operator to systems interface human factors issues. Its benign flight environment is conducive to both initial and advanced training in flight test techniques. Author

N88-23799# Avions Marcel Dassault, Saint-Cloud (France).
AVIONICS SYSTEMS: DEVELOPMENT METHOD AND COMPUTER TOOLS (SYSTEME AVIONIQUE-METHODE DE DEVELOPPEMENT ET OUTILS INFORMATIQUES)
P. LAROCHE-LEVY In AGARD, The Design, Development and Testing of Complex Avionics Systems 13 p (SEE N88-23767 17-06) Dec. 1987 In FRENCH
(AGARD-CP-417) Avail: NTIS HC A18/MF A01

The avionics development system based on the use of computer automation tools is described. The problems posed in the development of avionics are defined and the various phases constituting the development life cycle for avionics systems are characterized. The capabilities of the computer tools and how they are used in various development stages are described. Finally, the benefits gained through the use of such a development methodology are discussed. Author

N88-23801# National Aerospace Lab., Amsterdam (Netherlands).
DEVELOPMENT OF AN AIRBORNE FACILITY FOR ADVANCED AVIONICS RESEARCH

N. VANDRIEL In AGARD, The Design, Development and Testing of Complex Avionics Systems 14 p (SEE N88-23767 17-06) Dec. 1987
(AGARD-CP-417) Avail: NTIS HC A18/MF A01

Based on its flight test and simulator experience, the Netherlands National Aerospace Laboratory (NLR) has started the development of an airborne avionics research facility. In the framework of the Avionics Research Testbed (ART) project, NLR's Metro research airplane is being equipped with a number of advanced avionics systems, including programmable electronic flight instrument system, flight management computer, microwave landing system, global positioning system and secondary surveillance radar. Author

N88-23802# Avions Marcel Dassault, Saint-Cloud (France).
Aerospatiale Div. Helicopteres.

WORKSHOPS FOR THE DESIGN OF AVIONICS SYSTEMS AND THE DEVELOPMENT OF ONBOARD SOFTWARE (ATELIERS DE CONCEPTION DE SYSTEMES AVIONIQUES ET DE REALISATION DE LOGICIELS EMBARQUES)

MONIQUE SLISSA and PHILIPPE LAROCHE-LEVY In AGARD, The Design, Development and Testing of Complex Avionics Systems 13 p (SEE N88-23767 17-06) Dec. 1987 In FRENCH
(AGARD-CP-417) Avail: NTIS HC A18/MF A01

An avionics development system based on an open-ended suite of integrated computer tools is described. Additions and changes to the basic tool set can be implemented to suit the requirements of the specific project or individual contractor. A hosting structure tool that ties the whole system together is described along with three other basic tools: OCS, a system design aid; DLAO, a computer aided software definition tool; and SAO, a graphic, detailed specification aid. Author

N88-23804# Service Techniques des Programmes Aeronautiques, Paris (France).

DEVELOPMENT OF COMPLEX AVIONICS SYSTEMS: EXPERIENCE FROM FRENCH MILITARY PROGRAMS (DEVELOPPEMENT DES SYSTEMES AVIONIQUES COMPLEXES: EXPERIENCE ISSUE DES PROGRAMMES MILITAIRES FRANCAIS)

ANTOINE COURSIMAULT In AGARD, The Design, Development and Testing of Complex Avionics Systems 15 p (SEE N88-23767 17-06) Dec. 1987 In FRENCH
(AGARD-CP-417) Avail: NTIS HC A18/MF A01

The principles used to guide the development of the avionics systems for the Mirage 2000 and ATL2 aircraft are discussed. In addition, the anomalies discovered during these development experiences and improvements contributing to the current ACT program are examined. The various development, verification, and production stages are characterized. Emphasis is placed on the

importance of requirements analysis and specifications development. Author

N88-29719# Technische Univ., Brunswick (Germany, F.R.). Inst. for Guidance and Control.

FLIGHT TEST EQUIPMENT FOR THE ON-BOARD MEASUREMENT OF WIND TURBULENCE

G. SCHAEZNER, M. SWOLINSKY, and P. VOERSMANN (Aerodata Flugmesstechnik G.m.b.H., Brunswick, West Germany) In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 11 p (SEE N88-29717 24-01) Jun. 1988
(AGARD-R-734-ADD) Avail: NTIS HC A06/MF A01

The knowledge of the actual wind and turbulence situation along the flight path of an aircraft is an important factor in the area of meteorological and aeronautical research. Different flight test programs for the onboard implementation of offline and online wind and turbulence measuring systems are presented. The theoretical principle of the determination of all three components of the wind vector is stated. A summary of the installed sensors, the data acquisition systems and computer equipment is presented and the essential effects of sensor errors on the accuracy of wind determination are discussed. Author

N88-29730# National Aeronautical Establishment, Ottawa (Ontario). Flight Research Lab.

THE NAE ATMOSPHERIC RESEARCH AIRCRAFT

J. I. MACPHERSON and S. W. BAILLIE In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 19 p (SEE N88-29725 24-01) Dec. 1987
(AGARD-R-734) Avail: NTIS HC A09/MF A01

The Flight Research Laboratory of the NAE of Canada operates a T-33 and a Twin Otter aircraft instrumented for atmospheric research studies. The instrumentation in the aircraft is described with emphasis on the strapped down inertial Doppler system used to derive the mean and turbulent components of the atmospheric motion. Example data from several research projects are presented to demonstrate the measurement and analysis capabilities of the aircraft and their data playback facilities. Author

N89-10834# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. Avionics Lab.

ADVANCED AVIONICS ARCHITECTURE PAVE PILLAR

JOHN C. OSTGAARD In AGARD, Computing Systems Configuration for Highly Integrated Guidance and Control Systems 8 p (SEE N89-10831 02-01) Jun. 1988
(AGARD-LS-158) Avail: NTIS HC A08/MF A01

The increased use of advanced electronics has given modern combat aircraft phenomenal levels of performance, but at a stiff price in initial cost, maintenance workload and aircraft availability. Hence, aircraft design is shifting to give equal emphasis on performance, affordability, maintainability, and reliability in the development of avionics systems. The paper discusses the challenges and benefits of an avionics architecture concept which integrates avionic functions at the system level thereby improving the system's accuracy, increasing its immunity to failure, and decreasing its reliance on multiple redundant sensors. This design philosophy, which permits resources to be shared across subsystems, requires a highly coupled system-wide management and control program (operating system) supported by a wide-band distribution network, high-speed data and signal processors, and extensive mass memory. The implementation strategy for this avionics architecture is the system-wide utilization of common modular building blocks using advanced microelectronics such as VHSIC, standard 3/4 ATR modules and integrated racks, all interconnected by fiber optic networks. The generic integration approach and architecture produced by the PAVE PILLAR program is the foundation for avionics development in the next generation aircraft for the U.S. DOD and include such aircraft as the USAF Advanced Tactical Fighter (ATF). Author

06 AIRCRAFT INSTRUMENTATION

N89-10835# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. Data and Signal Processing Group. **DATA AND SIGNAL PROCESSING ARCHITECTURES FOR FUTURE AVIONICS**

MARK T. MICHAEL. In AGARD, Computing Systems Configuration for Highly Integrated Guidance and Control Systems 12 p (SEE N89-10831 02-01) Jun. 1988 (AGARD-LS-158) Avail: NTIS HC A08/MF A01

Pave Pillar architecture incorporates a Common Signal Processor (CSP) concept as a key building block of a USAF advanced avionics suite. This concept embodies the use of standard internal interfaces, a family of modules, use of the programming language Ada to express application program for the data processors within CSP, and the use of a Graph Notation to represent signal processing functions for the signal processing components of the CSP. The modularity permits upgrading any hardware or software component with minimal disruption to the rest of the design. CSP is an open architecture in that the interfaces and module specifications are non-proprietary and can be built by other vendors. The paper will address the system concept, hardware architecture, and software philosophy comprising the CSP system. It will describe in general terms how the CSP hardware works and its expandability. Existing modules will be listed and potential future modules identified. A brief description of the Graph Notation and its advantages will be provided. The CSP Local Operating System capabilities and use will be summarized. Application studies to determine the suitability of the CSP concept for different avionics applications such as radar, electronic warfare, communications, and electro-optical sensors will be briefly summarized. The role of the MIL-STD-1750A processors in CSP and their limitations will be touched on, and future upgrades to 32-bit machines discussed. Author

N89-10836# Harris Corp., Melbourne, FL. Government Aerospace Systems Div.

FIBER OPTIC BUSES AND NETWORKS FOR ADVANCED AVIONICS ARCHITECTURES

R. W. UHLHORN. In AGARD, Computing Systems Configuration for Highly Integrated Guidance and Control Systems 15 p (SEE N89-10831 02-01) Jun. 1988 (AGARD-LS-158) Avail: NTIS HC A08/MF A01

An avionics architecture exploiting high-speed, high density VLSI and VHSIC technology by repartitioning the traditional avionics suite requires subsystem interconnection via backbone and backplane buses and networks operating at data rates far exceeding those used for avionics in the past. In fact, the rates are high enough that fiber optics is the only interconnect technology that does not impose substantial size, weight, and life cycle cost penalties on the overall system. In the Pave Pillar architecture the fiber optic multiplex bus for command and control, block transfer, and flight control functions, based on a variation of the IEEE 802.4 and 802.2 token-passing bus protocol for the physical and data link layers, operates at 50 Mbps. A number of specific implementations have emerged. The parallel internal bus protocol ties users (data processors) together in the backplane and through a bus interface unit to the multiplex bus. Other kinds of networks are used to serve subsystems connecting video terminals, sensors, signal processors, etc. An overview of the multiplexed high-speed data bus and parallel backplane bus designs and their interface is presented. The implementation details and options for the fiber optic network which supports the interconnection of avionics bus interface modules in different physical locations are discussed. Passive and active star-coupled networks are compared and conclusions drawn. The state of the art in packaging of the avionics bus interface and related line replaceable modules is illustrated. Author

N89-16780# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

ENGINE CONDITION MONITORING: TECHNOLOGY AND EXPERIENCE

Oct. 1988 462 p In ENGLISH and FRENCH Symposium held in Quebec City, Quebec, 30 May - 3 Jun. 1988 (AGARD-CP 448; ISBN-92-835-0481; AD-A203800) Avail: NTIS HC A20/MF A01

Topics addressed include: military operations; civil experience; manufacturer's perspective; turboprops and turboshafts; systems;

diagnostic methods; and advanced technologies. Questions and answers of the discussions follow each paper. For individual titles, see N89-16781 through N89-16819.

N89-16785# German Air Force Air Armament Directorate, Cologne (Germany, F.R.).

ON BOARD LIFE MONITORING SYSTEM TORNADO (OLMOS)

J. H. KUNZ and U. SCHULZ (Dornier-Werke G.m.b.H., Friedrichshafen, Germany, F.R.) In AGARD, Engine Condition Monitoring: Technology and Experience 6 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01

The development of the onboard life monitoring system (OLMOS) of the GE Tornado proved, that on-board monitoring is possible, and the received data can be used in the logistic system. The Tornado OLMOS is a system which serves engine, structure, and functional equipment. The level of integration is high, but due to the structured software approach the system can be handled. The software was developed by four companies, and in the using phase the same companies are sharing the SW maintenance. High integrated systems definitely do need a very close management on both sides, the government and the industry. The OLMOS proves that even commercial and proprietary aspects can be worked out. Author

N89-16786# Royal Air Force, London (England).

INFORMATION MANAGEMENT SYSTEMS FOR ON-BOARD MONITORING SYSTEMS

P. J. JENKINS. In AGARD, Engine Condition Monitoring: Technology and Experience 8 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01

With the advent of microprocessors is a phase which has heralded a host of advances in aircraft mounted equipment. It promises to yield rich dividends for the hard pressed maintenance engineer by providing detailed information on equipment performance to enable defects to be accurately and rapidly diagnosed. Latest developments in the propulsion field show the potential of being able to anticipate certain types of defects and thus achieve true on-condition maintenance in these cases. The aim is to highlight the vitally important role played by maintenance information management systems in storing, analyzing, and displaying the data captured by on-board monitoring systems and to make recommendations for a code of practice for the successful implementation of such systems. Author

N89-16788# Rockwell International Corp., Lakewood, CA.

B-1B CITS ENGINE MONITORING

B. LAINE and K. DERBYSHIRE. In AGARD, Engine Condition Monitoring: Technology and Experience 12 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01

The Central Integrated Test Systems (CITS) is a real-time tests system which continually monitors the performance of the 34 principal systems, onboard the B-1B aircraft, including the four General Electric F101 turbofan engines. The CITS consists of an onboard computer, four data acquisition units, a data conversion unit, a printer, a magnetic tape recorder, and a control and display panel. Approximately 19,000 parameters are available for recording and display purposes. The engine diagnostic algorithm was designed in close coordination with General Electric. Information obtained from early test cell runs was utilized in the original logic design. Many modifications were made as a result of flight test experience, but the overall test sequence has remained unchanged. The engine diagnostic software utilizes approximately 100 parameters per engine. The test logic is exercised four time per second and a fault is declared is a failure condition occurs for six consecutive passes. Every effort is made to ensure that a single failure will result in only one fault code out of 154 possible codes per engine. The B-1B engine diagnostic program is the most advanced flying test algorithm. Its inherent complexities are due to calculations of test limits based on aircraft flight mode, environmental conditions, and engine control schedules. These limits are then compared to actual engine readings, and if established limits are exceeded, a fault code is announced. Author

N89-16789# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.).

ENGINE LIFE CONSUMPTION MONITORING PROGRAM FOR RB199 INTEGRATED IN THE ON-BOARD LIFE MONITORING SYSTEM

J. BROEDE *In* AGARD, Engine Condition Monitoring: Technology and Experience 11 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01

The On-board Life Monitoring System (OLMOS) of the GE Tornado consists of on-board equipment (data acquisition unit, DAU) where the majority of the data processing is carried out, and of ground equipment (OLMOS Ground Station, OGS, connected to the Central Logistic Support System, BMS) where the majority of the data management tasks are carried out. The Engine Life Consumption Monitoring Program (ELCMP) is part of OLMOS. Its main task is LCF life consumption calculation, which consists of data acquisition and data checking, calculation of temperatures and stresses, as well as damage assessment. A general view of the calculation path within ELCMP is given, and the hardware structure of the system is presented. Some advantages of individual and complete engine monitoring are pointed out. *Author*

N89-16792# Deutsche Lufthansa A.G., Hamburg (Germany, F.R.). Maintenance Systems and Reliability.

ENGINE CONDITION MONITORING: STATE-OF-THE-ART CIVIL APPLICATION

HEINRICH SCHLUETER and ROLF SCHOEDDERT *In* AGARD, Engine Condition Monitoring: Technology and Experience 8 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

With the introduction of the AIRBUS A-310, an enhanced ECM concept was established at Lufthansa. Highlights of the theme include application areas and the economic aspects of everyday airline operation. The ECM information system supports maintenance personnel in detecting incipient engine failures, in carrying out optimum adjustment of engine controls, and in cutting down the number of engine run-ups. It also assists overhaul personnel in removal planning and overhaul planning. All data are acquired by an aircraft integrated data system through expanded engine instrumentation and are periodically reported through an on-board printer. Data printouts are entered into the Lufthansa computer network from each flight destination station. A high degree of actuality data are processed on-line in the central computer at the Frankfurt maintenance base. In addition to engine modular performance and mechanical parameter analysis, data processing also performs automatic trend recognition and alert report generation. *Author*

N89-16793# Air France, Paris. Direction du Materiel.

THE CFM 56-5 ON THE A-320 AT AIR FRANCE [LE CFM 56-5 SUR A320 A AIR FRANCE]

P. CHETAIL *In* AGARD, Engine Condition Monitoring: Technology and Experience 19 p (SEE N89-16780 09-06) Oct. 1988 *In* FRENCH

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

A brief history of engine monitoring strategies used by Air France is presented and the systems limitations encountered in service are discussed. The engine monitoring system to be used for the A-320 aircraft is described. The use of the AIRCOM system, the automatic alert function, and the use of the GEM (Ground based Engine Monitoring) program for data analysis are discussed. *M.G.*

N89-16794# Aerospatiale Usines de Toulouse (France). Aircraft Div.

IMPLICATION OF ENGINE PERFORMANCE MONITORING FOR THE AIRCRAFT MANUFACTURER [IMPLICATION DE L'AVIONNEUR DANS LE SUIVI DES PERFORMANCES DU MOTEUR]

A. VIEILLARD *In* AGARD, Engine Condition Monitoring: Technology and Experience 6 p (SEE N89-16780 09-06) Oct. 1988 *In* FRENCH

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The experience acquired by Aerospatiale in the Airbus and ATR programs has highlighted the necessity for the aircraft manufacturers to be associated with Engine Conditioning Monitoring (ECM) system implementation. The aircraft manufacturer will thus

be more involved as regards: the acquisition of information on the design of airborne systems and validation of measurement systems on the basis of flight tests; and the use of information to ensure the consistency of and engine models used by the aircraft in engine monitoring systems and familiarity with the ECM system. The predictable growth of this performance monitoring activity will necessitate closer coordination with the engine manufacturers and airlines, the objective still being to quantify the deterioration of each aircraft subassembly, i.e., the engines, the airframe and their respective components. *Author*

N89-16795# Pratt and Whitney Aircraft, West Palm Beach, FL.

F100-PW-220 ENGINE MONITORING SYSTEM

DENNIS A. MYERS and G. WILLIAM HOGG *In* AGARD, Engine Condition Monitoring: Technology and Experience 9 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The development and operational experience is reviewed of the F100-PW-220 Engine Monitoring System currently in service with the U.S.A.F. and other national defense air forces utilizing the F100-PW-220 engine and its derivatives. The F100-PW-220 Engine Monitoring System (EMS) is an advanced logistics support tools in production for the Pratt and Whitney F100 family of gas turbine engines. The introduction of the PW-220 EMS represents over 10 yrs of diagnostic system and maintenance technology development using aerospace electronic component design and digital engine control system implementation. The PW-220 EMS is a comprehensive engine support system that is fully integrated with in-flight aircraft operating systems, as well as, ground based maintenance and logistics systems. *Author*

N89-16797# Rolls-Royce Ltd., Bristol (England). Engine Data Systems.

MILITARY ENGINE CONDITION MONITORING SYSTEMS: THE UK EXPERIENCE

C. M. O'CONNOR *In* AGARD, Engine Condition Monitoring: Technology and Experience 8 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The monitoring of engine usage is probably as old as the gas turbine engine itself. However, it was not until the mid-seventies that the concept of engine monitoring became viable following the appearance and general availability of digital electronics, including the minicomputer. Since, the proliferation of engine condition monitoring has resulted in the development of many different systems and it is now customary for defense organizations to include it among their requirements for new military aircraft. The functional requirements for engine condition monitoring are usually defined in general terms, except for the life usage monitoring of major rotating components, these being the discs and the turbines. The level of importance afforded to the monitoring of these components is attributable to safety and economic factors. Engine condition monitoring in the UK military has been built on the foundations of usage monitoring. It is interesting that except for vibration and oil system monitoring, the engine parameters required for usage monitoring can provide enough data for many other condition monitoring functions. This idea is further expanded and detailed. *Author*

N89-16798# General Electric Co., Cincinnati, OH. Monitoring Systems Engineering.

MILITARY ENGINE MONITORING STATUS AT GE AIRCRAFT ENGINES, CINCINNATI, OHIO

R. J. E. DYSON and M. J. ASHBY *In* AGARD, Engine Condition Monitoring: Technology and Experience 11 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The design and development of GE Aircraft engines of recent military engine monitoring systems is described. In particular, the systems for the F101-GE-102 engine in the B-1B aircraft and the F110-GE-100 engine in the F-16C/D are used as examples. Since both of these systems have recently been introduced into service, this experience is discussed together with operational status. These present systems are compared with future evolutionary trends which are affected by the development of miniaturized, rugged electronics and by the desire to minimize the unique hardware and software required for engine monitoring. A discussion of interfaces, both airborne to the flight crew, and, through support equipment and

06 AIRCRAFT INSTRUMENTATION

ground analysis programs, to the ground crew, is included.

Author

N89-16799# General Electric Co., Cincinnati, OH. Monitoring Systems Engineering.

COMMERCIAL ENGINE MONITORING STATUS AT GE AIRCRAFT ENGINES, CINCINNATI, OHIO

R. J. E. DYSON and J. E. PAAS / In AGARD, Engine Condition Monitoring: Technology and Experience 12 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The design, introduction and development of expanded commercial engine monitoring systems by GE Aircraft Engine is described. The history of present systems is outlined, starting from the introduction of the CF6-80A3 engine for the A310 aircraft of the Propulsion Multiplexer (PMUX) which has led to similar systems on the CF6-80C2 engine. The impact of the full authority digital control on future systems is also discussed. The introduction and application of the Ground-based Engine Monitoring (GEM) software developed by GE in conjunction with several airline users is recounted. The original software development occurred in parallel with the expanded sensor complement and digitization of data. A description of the functions of a typical ground software program is provided together with proposed improvements and future directions.

Author

N89-16801# Bureau Veritas, Paris (France).

TREND MONITORING OF A TURBOPROP ENGINE AT LOW AND MEAN POWER (TREND-MONITORING DES TURBO-PROPULSEUR DE PETITE ET MOYENNE PUISSANCE)

PHILIPPE VAQUEZ / In AGARD, Engine Condition Monitoring: Technology and Experience 9 p (SEE N89-16780 09-06) Oct. 1988 In FRENCH

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

Trend monitoring relates to the observation, between two maintenance periods, of changes in certain parameters that represent the physical state of an engine. The experiences of French engineers with the use of this method are discussed. Specifically, the application of trend monitoring to the Pratt and Whitney PT6 A and PW 120, and the General Electric CT 7 turboprop engines is discussed. The engines were mounted on various single and twin engine aircraft.

Author

N89-16807# Stewart Hughes Ltd., Southampton (England).

GETTING MORE FROM VIBRATION ANALYSIS

R. M. STEWART, I. C. CHEESEMAN, and K. LIBROWSKI / In AGARD, Engine Condition Monitoring: Technology and Experience 12 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

Traditional vibration monitoring of gas turbines has been restricted to activation of alarms from overall levels and shaft orders. Use of more of the information contained in the signal could improve fault coverage and diagnostics. The practical problem is one of being able to model the vibration of an engine in sufficient detail. Furthermore, some problems experienced in the field have origins that no designer could be expected to predict, i.e., module mismatch. How then to proceed. Any practical system must incorporate an evolutionary mechanism that feeds skilled field operator experience to a computer based monitoring system. This is based on the machine designer's knowledge and improves its performance by this feedback. Fortunately, there is a growing body of technology on the vibration produced by gas turbine engines both to do with its interpretation and signal processing which make such a system feasible. Two areas of application are dealt with, the first connected with engine module roughness diagnostics and the second with fault identification of individual components such as main line bearings and accessory drive gears. For both, much of the hardware required to gather the necessary data is being specified and constructed, so overcoming a major objection to furtherance of this technology.

Author

N89-16810# National Technical Univ., Athens (Greece). Lab. of Thermal Turbomachines.

DISCRETE OPERATING CONDITIONS GAS PATH ANALYSIS

A. STAMATIS and K. D. PAPAILIOU / In AGARD, Engine Condition Monitoring: Technology and Experience 10 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The implementation of a reliable Diagnostic System based on a Gas Path Analysis (GPA) approach is not always feasible. Extra instrumentation is required in order to predict, detect, and isolate failures. Discrete Operating Conditions Gas Path Analysis (DOCGPA), presented here, is an extended version of the conventional GPA algorithm, providing the capability of increased reliability when using only existing sensors for estimating engine malfunctions.

Author

N89-16811# Hochschule der Bundeswehr, Hamburg (Germany, F.R.).

GAS PATH MODELLING, DIAGNOSIS AND SENSOR FAULT DETECTION

R. LUNDERSTAEDT and K. FIEDLER / In AGARD, Engine Condition Monitoring: Technology and Experience 13 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The gas path analysis (GPA) becomes more and more an important method for the diagnosis of jet engines. Here, a fundamental way of finding the mathematical engine model is shown, especially with regard to the adaptation of the coefficients of the system matrix to the gradients of the characteristic curves of the turbomachines. The theoretical fundamentals are applied to a two-shaft jet engine. In order to test the method some faults in the engine are simulated. All faults are detected very accurately and the method shows by this its efficiency. For practical use of the method, the faults of the measuring device (sensors) are to be taken into consideration. Therefore filter algorithms are outlined to diminish the stochastic parts of these faults. For the systematic parts (offsets), a special and new theory is developed for compensation. For both, simulation results are given based on actual test stand data.

Author

N89-16812# Technische Univ., Munich (Germany, F.R.). Inst. fuer Luft-und Raumfahrt/Flugantriebe.

SYSTEM-THEORETICAL METHOD FOR DYNAMIC ON-CONDITION MONITORING OF GAS TURBINES

F. HOERL, G. KAPPLER, and H. RICK / In AGARD, Engine Condition Monitoring: Technology and Experience 17 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

In order to ensure reliability and safety of such complex technical systems as aero-engines, model-related diagnostic techniques must be applied. The basis for this is a linear, time-invariant, dynamic engine state space model derived from system analysis. Due to the model order and the associated difficulties, order reduction procedures are used. The diagnostic parameters to be taken into account are integrated into a dynamic disturbance model. This disturbance model and the reduced engine model form the extended dynamic engine state space model. A detailed investigation of the dynamic system for observability and disturbability is essential. Because of measuring/process noise and other system disturbances, dynamic state estimation methods are applied in the diagnosis, whereby the synthesis of such observer systems is a crucial point. The usefulness of the dynamic monitoring method is demonstrated on the example of the helicopter engine using computed simulations. A sensitivity analysis allows the accuracy of the diagnostic results to be estimated.

Author

N89-16817# Stewart Hughes Ltd., Southampton (England). Centre for Advanced Technology.

GAS PATH CONDITION MONITORING USING ELECTROSTATIC TECHNIQUES

CELIA FISHER / In AGARD, Engine Condition Monitoring: Technology and Experience 10 p (SEE N89-16780 09-06) Oct. 1988 Sponsored by Ministry of Defence Procurement Executive, London, United Kingdom

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The concept of condition monitoring using electrostatics offers the opportunity to monitor gas path faults as they occur. It is based on the assumption that gas path distresses, such as blade

06 AIRCRAFT INSTRUMENTATION

ruhs and combustor burns, cause the production of minute particles of debris, which carry electrostatic charge, and can be monitored on suitable sensors mounted in the engine. The engine has a normal level of charge, which produces a background signal. The debris produced by distresses causes a change in the signal which can be monitored using suitable signal processing techniques. Described here is the research work which was necessary to provide an understanding of the mechanisms involved. This forms the basis of the technique which is described, with examples of the application of the systems to various engines. Author

**N89-16818# Atomic Energy of Canada Ltd., Pinawa (Manitoba).
AN INTELLIGENT SENSOR FOR EQUIPMENT HEALTH
MONITORING OF FERROMAGNETIC WEAR DEBRIS
CONCENTRATION IN FLUIDS**

K. W. CHAMBERS, M. C. ARNESON, J. L. MONTIN, W. DUECK, and C. A. WAGGONER (Defence Research Establishment Pacific, Victoria, British Columbia.) In AGARD, Engine Condition Monitoring: Technology and Experience 10 p (SEE N89-16780 09-06) Oct. 1988
(AGARD-CP-448) Avail: NTIS HC A20/MF A01

FERROSCAN R is a device that has been developed for the Canadian Department of National Defence by Atomic Energy of Canada Limited (AECL) for monitoring the relative concentration of ferromagnetic wear debris in fluid systems. FERROSCAN R generates a wear profile in real time and uses it to detect the onset of an increase in the rate of wear of ferromagnetic components. Described here are the background, development and operating principles of the sensor. Some engineering test results are given. Author

**N89-16819# Rolls-Royce Ltd., Derby (England).
COMPASS (TRADEMARK): A GENERALIZED GROUND-BASED
MONITORING SYSTEM**

M. J. PROVOST In AGARD, Engine Condition Monitoring: Technology and Experience 13 p (SEE N89-16780 09-06) Oct. 1988
(AGARD-CP-448) Avail: NTIS HC A20/MF A01

Condition monitoring has developed from simple hand recording and analysis of cockpit instrumentation to the use of electronic systems selecting and recording a multitude of measurements for transmission to ground-based computer systems, which store and analyze data from an entire fleet. COMPASS (Condition Monitoring and Performance Analysis Software System) is a ground-based computer system, currently being developed by Rolls-Royce plc for application on the Rolls-Royce RB211 and Tay and International Aero Engines (IAE) V2500 turbofans. After discussing the benefits of monitoring system, COMPASS, its sources of data and its analytical functions, including details of new techniques developed to improve the usefulness of the analysis that is done are described. Also shown is how COMPASS is designed in two parts: - analytical functions specific to a given application and general host routines, providing all the housekeeping functions required in any monitoring system, including smoothing and trending, alert generation, fleet averaging, compression, data management and data plotting. The use of the general host routines could be extended to cover any operation. The approach Rolls-Royce plc is adopting to enable the COMPASS host to be made available for widespread application is discussed. Author

**N89-18446# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Avionics Panel.
SOFTWARE ENGINEERING AND ITS APPLICATION TO
AVIONICS**

Nov. 1988 405 p In ENGLISH and FRENCH Symposium held in Cesme, Turkey, 25-29 Apr. 1988
(AGARD-CP-439; ISBN-92-835-0483-6; AD-A203892) Avail: NTIS HC A18/MF A01

Software engineering has evolved rapidly but the gap between demand and software output continues to grow. By the end of the decade research programs in North America, Europe, and Japan will begin to produce results in the areas such as software tools, and computer architecture. The symposium considered how their advances might be applied to the avionics systems of the nineties and beyond and their impact on the aspirations in areas such as operation, and fault tolerances. The software element of modern weapons systems continues to grow in size and complexity;

offering major advantages but also potential risks. For individual titles, see N89-18447 through N89-18486.

**N89-18447# Test Wing (6510th), Edwards AFB, CA. F-16
Combined Test Force.**

**MEASURES OF MERIT FOR ADVANCED MILITARY AVIONICS:
A USER'S PERSPECTIVE ON SOFTWARE UTILITY**

MARK C. DICKERSON and VICTOR M. LASAXON (Computer Sciences Corp., Edwards AFB, CA.) In AGARD, Software Engineering and Its Application to Avionics 14 p (SEE N89-18446 11-06) Nov. 1988
(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Recommendations are provided for improving the software development process. The recommendations are the result of discussions with F-15, F-16, and HH-60 test pilots, navigators, and flight test engineers. Because today's aircraft are becoming so software intensive, and because the development process is so involved, users and developers must redouble efforts to design systems correctly for the first time. Although 29 specific recommendations are given, they can be boiled down to four general guidelines: keep switch actions to a minimum; keep switchology consistent; tailor displays by flight phase, but keep other options visible; tailor displays by flight phase, but keep other options visible; and most important, carefully process and meter the information presented to avoid pilot overload. Author

**N89-18448# French Air Force, Paris. Div. Nouveaux Avions de
Combat.**

**RESPONSIBLE REQUIREMENTS DEFINITION FOR COMBAT
AIRCRAFT IN LIGHT OF UNCERTAINTIES LINKED TO
ARTIFICIAL INTELLIGENCE AND EXPERT SYSTEMS
TECHNIQUES (LE RESPONSABLE DE L'EXPRESSION DU
BESOIN FACE AUX INCERTITUDES LIEES AUX TECHNIQUES
DE L'INTELLIGENCE ARTIFICIELLE ET DES SYSTEMS
EXPERTS SUR LES AVIONS DE COMBAT)**

JEAN-GEORGES BREVOT In AGARD, Software Engineering and Its Application to Avionics 8 p (SEE N89-18446 11-06) Nov. 1988 In FRENCH

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The factors involved in the definition of requirements for combat aircraft are discussed with particular attention being given to the development of operational specifications, prediction of future combat mission conditions, technology advances, cost and development problems, and crew workloads. The application domains of artificial intelligence and expert systems are outlined and the advantages and disadvantages of the systems are discussed. Author

**N89-18452# Aerospatiale, Marignane (France). Div.
Helicopteres.**

**CONTROL OF ON-BOARD SOFTWARE (MAITRISE DES
LOGICIELS EMBARQUES)**

MONIQUE SLISSA and PIERRE VILLEDIEU In AGARD, Software Engineering and Its Application to Avionics 10 p (SEE N89-18446 11-06) Nov. 1988 In FRENCH

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Various aspects of the flight software development process are examined including the evolution of the industrial environment, the general strategy for system management, and the politics of software development. Productivity concepts such as code reusability and error minimization are addressed. Specific attention is given to the software development cycle and methodologies utilized by the Aerospatiale Helicopter Division. Author

**N89-18454# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich
(Germany, F.R.).**

**AVIONICS SYSTEMS ENGINEERING AND ITS RELATIONSHIP
TO MISSION SOFTWARE DEVELOPMENT**

HERBERT KLENK and HELMUT RAPP In AGARD, Software Engineering and Its Application to Avionics 13 p (SEE N89-18446 11-06) Nov. 1988
(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The introduction of digital avionics into military fighter aircraft and the accompanying transition from electromechanical to software-intensive systems are forcing the aviation industry into new approaches to systems design, development, integration, and test. The avionics systems development and methodology established and used at MBB, its relationship to software

06 AIRCRAFT INSTRUMENTATION

development and the experiences made by the application of this development methodology and its related tools to such major programs as the development of the Electronic Combat Reconnaissance Tornado, the integration of the HARM missile into the Interdiction Strike Tornado and the Improved Combat Efficiency Program of the German F-4F Phantom. As far as the weapon system Tornado is concerned, avionics system design, integration, and test as well as system software are trilateral under takings which include three different customers and different operational needs. Any systems development methodology has to reflect these prerequisites. Therefore, also addressed are the problems and solutions for international cooperation in systems and software development and their impact upon project management and control. The toolset in use for system development requires further enhancements. Potential improvements of existing and requirements for additional tools are also being described. Author

N89-18469# Allgemeine Elektrizitäts-Gesellschaft, Ulm (Germany, F.R.). Airborne Radar System Group.

AVIONICS EXPERT SYSTEMS

ULRICH D. HOLZBAUR In AGARD, Software Engineering and Its Application to Avionics 18 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Some experiences and ideas on the expert systems (XS) approach to solving problems of avionic data processing are presented. The focus is on problems concerning fighter aircraft and within these mainly on radar components. Avionics expert systems may be a development tool, part of a ground support system or integrated in an avionics data processing system. In the aircraft, main applications comprise mission oriented tasks like pilot's associate and sensor oriented tasks like navigation or radar. Areas in which more intelligent radar data processing is needed comprise situation awareness, mode selection, and electronic counter countermeasures (ECCM), noncooperative target identification (NCI), and radiation management. To show the applicability of the expert systems approach to identification tasks, a demonstration system for the recognition of aircraft from the textural description of a picture was developed and tested. Author

N89-18470# Aerospatiale, Paris (France).

CONTRIBUTION OF EXPERT SYSTEMS TO AVIONICS ADVANCE APPLICATION ON AS30 LASER WEAPON SYSTEM

SERGE DUPUY In AGARD, Software Engineering and Its Application to Avionics 7 p (SEE N89-18446 11-06) Nov. 1988 Previously announced as N88-29449

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Artificial intelligence and expert systems are introduced. The interest and difficulties relating to this technique are exposed. An example of expert system development for AS30L weapon system illustrates the points stated. Prospects of this technique for avionics are assessed. ESA

N89-18471# Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France).

INTEGRATION OF VOCAL DIALOGUE ON-BOARD A COMBAT AIRCRAFT (INTEGRATION DU DIALOGUE VOCAL A BORD D'UN AVION DE COMBAT)

J. L. BUSTAMANTE In AGARD, Software Engineering and Its Application to Avionics 10 p (SEE N89-18446 11-06) Nov. 1988 In FRENCH

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The integration and use of vocal dialogue methods in combat aircraft is examined. In particular, research related to the simulation and implementation of such methods on the Rafale demonstrator aircraft is described. Integration of voice command capabilities with head-up and other visual displays is addressed. A tapping rhythm task was performed to assess pilot performance with and without voice dialogue. Author

N89-18472# General Dynamics Corp., Fort Worth, TX.

INTEGRATION OF ADVANCED SAFETY ENHANCEMENTS FOR F-16 TERRAIN FOLLOWING

JAMES BLAYLOCK, DONALD SWIHART, and WILLIAM URSCHER (Aeronautical Systems Div., Wright-Patterson AFB, OH.) In AGARD, Software Engineering and Its Application to Avionics 10 p (SEE N89-18446 11-06) Nov. 1988 Previously announced as A88-22573

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Application of System-Wide Integrity Management (SWIM) to the maximization of flight safety for the F-16 terrain following (TF) system is considered. The architecture of the F-16 TF system is discussed, identifying areas where conventional self-test is not sufficient to ensure flight safety. Detection of flight-critical malfunctions by SWIM is followed by an automatic recovery maneuver consisting of a roll to wings-level fly-up for the F-16 system. The addition of SWIM to the single-thread configuration of the F-16 TF system results in 14 percent predicted mishap rate reduction at far less cost and installation impact than the redundant configuration (which offers a 17 percent reduction). Author

N89-18481# Thomson-CSF, Malakoff (France). Radar, Counter-Measure, Missile Div.

REAL TIME EXPERT SYSTEM FOR ONBOARD RADAR IDENTIFICATION

THIERRY SCHANG and FRANCOIS FAGES (Thomson-CSF, Orsay, France) In AGARD, Software Engineering and Its Application to Avionics 7 p (SEE N89-18446 11-06) Nov. 1988 Sponsored in part by DRET

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The use of expert system techniques for radar identification in countermeasure systems was widely discussed in literature. The main advantages of such a system are that it is easily adaptable to the ever changing operational field and that it can identify modern radars with their increasingly complex signals. These systems are however very demanding on computing resources and their adaptation to on-board, real-time processing is not straightforward. The application under consideration is first briefly described. The constraints that arise out of its real time operation are then detailed along with how each one can be eliminated. The application of these concepts to a real time radar identification function is then described. Finally, future objectives in the integration of artificial intelligence techniques for on-board processing are described. Author

N89-18483# Electronique Marcel Dassault, Saint Cloud (France).

UTILIZATION OF EMICAT FOR THE DEVELOPMENT OF AEROSPACE EXPERT SYSTEMS (UTILISATION DE EMICAT POUR LE DEVELOPPEMENT DE SYSTEMES EXPERTS AEROSPATIAUX)

BRUNO MEHU and ANTOINE VIVANCOS In AGARD, Software Engineering and Its Application to Avionics 8 p (SEE N89-18446 11-06) Nov. 1988 In FRENCH

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The major difficulties encountered during the development of PROLOG expert systems in an industrial environment are discussed. The necessity for the extension from PROLOG to an object oriented language is explained and strategies for the facilitation of expert system programming are described. In addition, the environment constructed on the PROLOG extension (EMICAT) for knowledge representation and exploitation in the form of production rules is described. Four applications in the areas of aeronautics and aerospace are discussed including: an expert system for defining aircraft electronic circuits (BASILE); an expert system for satellite battery monitoring and management (GIBUS); an expert system diagnostic aid for satellite orbit and attitude control (SCAO); and an expert system for satellite power supply management and fault detection (PCS). Author

07 AIRCRAFT PROPULSION AND POWER

N89-18486# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.) Military Aircraft Div

ADA IN EMBEDDED AVIONIC SYSTEMS

W. MANSEL. In AGARD, *Software Engineering and its Application to Avionics* 7 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A16/MF A01

Ada will be used for real-time avionic software on the Tornado aircraft upgrade program and on the EFA program. For the HARM integration program onto the Tornado aircraft an Ada crosscompiler based on the Karlsruhe compiler technology configured to a multiprocessor avionic computer is used. Software prototyping was applied to gain experience with Ada avionics application. The results will be discussed as well as the experience from benchmark tests on different Ada crosscompiler systems for the single processor MC 68000 and 68020 microprocessor targets. Special emphasis will be taken on Ada tasking and the parallelism in avionic software. Author

07

AIRCRAFT PROPULSION AND POWER

Includes prime propulsion systems and systems components, e.g., gas turbine engines and compressors; and onboard auxiliary power plants for aircraft.

N87-21184# Imperial Coll. of Science and Technology, London (England) Dept. of Mechanical Engineering

VELOCITY AND TEMPERATURE MEASUREMENTS IN A CAN-TYPE GAS-TURBINE COMBUSTOR

A. F. BICEN, M. V. HEITOR (Instituto Superior Tecnico, Lisbon, Portugal), and J. H. WHITELAW. In AGARD Advanced Instrumentation for Aero Engine Components 12 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

Velocity and temperature measurements have been obtained in a can-type combustor operating at near atmospheric pressure. Velocity characteristics were determined with a laser Doppler velocimeter and a digitally compensated fine bare-wire thermocouple was used to measure the mean and rms values of temperature fluctuations. The experimental methods are emphasized. The main sources of imprecision are identified, the estimate of the related errors are evaluated. Sample results are given so as to demonstrate the effect of air-fuel ratio on the velocity and temperature characteristics of the combustor. The imprecision in velocity measurements was mainly associated with statistical errors and velocity gradient broadening effects due to the finite size of the measurement volume. The maximum statistical errors were of the order of 2 and 3% for the mean and rms values and the broadening effects can lead to overestimation by up to 25% in the rms values of the swirl velocity component near the swirl center. The error in the mean temperature was mainly due to radiation losses which monotonically increased with temperature and were less than 8%. The catalytic effects were small and limited to regions close to the fuel injector, causing a maximum increase in the mean temperature by no more than 70 K. The uncertainties in the time constant resulted in a maximum error in the rms values of the order of 7%. The effect of AFR on the velocity and temperature characteristics was relatively weak in the primary zone of the combustor. Author

N87-21927# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

TRANSONIC AND SUPERSONIC PHENOMENA IN TURBOMACHINES

Mar. 1987 374 p. In ENGLISH and FRENCH Meeting held in Munich, West Germany, 10-12 Sep. 1986 (AGARD-CP-401; ISBN-92-835-0413-5; AD-A182996) Avail: NTIS HC A16/MF A01

The Specialists' Meeting was arranged in the following sessions: Experimental Data on Shock Structures; Shock Induced Losses Including Shock Boundary Layer Interaction; Computational Results; and Blade Design Methods. In order to maintain high efficiency and reliability of advanced engines with high speed in compressors

and turbines, a deep understanding of the influence of transonic and supersonic phenomena is essential. The meeting was aimed at providing a contribution to this goal. For individual titles, see N87-21928 through N87-21951.

N87-21929# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.

SHOCK STRUCTURE MEASURED IN A TRANSONIC FAN USING LASER ANEMOMETRY

JERRY R. WOOD, ANTHONY J. STRAZISAR, and P. SUSAN SIMONYI (Sverdrup Technology, Inc., Middleburg Heights, Ohio.) In AGARD Transonic and Supersonic Phenomena in Turbomachines 14 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01 CSCL 21E

Shock structure measurements acquired in a low aspect ratio transonic fan rotor are presented and analyzed. The rotor aspect ratio is 1.56 and the design tip relative Mach number is 1.38. The rotor flowfield was surveyed at near maximum efficiency and near stall operating conditions. Intra-blade velocity measurements acquired with a laser fringe anemometer on blade-to-blade planes in the supersonic region from 10 to 60 percent span are presented. The three-dimensional shock surface determined from the velocity measurements is used to determine the shock surface normal Mach number in order to properly calculate the ideal shock jump conditions. The ideal jump conditions are calculated based upon the Mach numbers measured on a surface of revolution and based upon the normal Mach number to indicate the importance of accounting for shock three dimensionality in turbomachinery design. Comparison of the shock locations with those predicted by a 3-D Euler code showed very good agreement and indicated the usefulness of integrating computational and experimental work to enhance the understanding of the flow physics occurring in transonic turbomachinery passages. Author

N87-21930# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Dept. of Engineering Sciences

WAKE AND SHOCK INTERACTIONS IN A TRANSONIC TURBINE STAGE

D. L. SCHULTZ, A. B. JOHNSON, D. A. ASHWORTH, M. J. RIGBY, and J. E. LAGRAFF (Syracuse Univ., N. Y.) In AGARD Transonic and Supersonic Phenomena in Turbomachines 16 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

The strong trailing-edge shock waves from the nozzle guide vanes of transonic turbine stages can give rise to interactions with the downstream rotor which are significantly more severe than is the case with lower pressure ratio stages. It is therefore important to study such effects in detail both from the point of view of stage power output and more importantly from that of heat transfer rates. Transonic rotor profile was made in a static cascade in which the effect of shock wave interaction is simulated by means of an array of bars rotating at the correct speed and spacing upstream of the stationary rotor blades. Detailed heat transfer rate measurements made with rapid response gauges enable the wake and shock phenomena to be separated. Author

N87-21931# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.) Inst. fuer Entwurfsaerodynamik.

THE BOUNDARY LAYER BEHAVIOUR OF HIGHLY LOADED COMPRESSOR CASCADE AT TRANSONIC FLOW CONDITIONS

H. HOEISEL and N. J. SEYB (Rolls-Royce Ltd., Bristol, England) In AGARD Transonic and Supersonic Phenomena in Turbomachines 17 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

The design of efficient blade profiles for gas turbine compressors can no longer be effectively carried out through the use of correlations of 2D-cascade data. For the description of the real flow field three dimensional effects have to be taken into account. Modern theoretical calculation methods which involve the determination of blade profile pressure distribution and the associated boundary layer parameters, are now becoming accepted practice. However before the engine designer can have confidence in these methods the predicted performance must be demonstrated to be in good agreement with experimental data. An accurate set of experimental measurements of blade profile pressure

07 AIRCRAFT PROPULSION AND POWER

distributions and boundary layer parameters are presented under quasi-3D-flow conditions and these are compared with the predicted performance for a high deflection transonic compressor cascade. It is shown that for conditions near minimum loss incidence the agreement between measure and predicted values is achieved to an adequate engineering standard and that the two most important aspects, choking flow and boundary layer separation are well predicted. Also the data presented could be used to further update and improve the current prediction methods. Author

N87-21932* Massachusetts Inst. of Tech., Cambridge. Gas Turbine Lab.

VORTEX SHEDDING IN COMPRESSOR BLADE WAKES

A. H. EPSTEIN, J. B. GERTZ, P. R. OWEN, and M. B. GILES. In AGARD Transonic and Supersonic Phenomena in Turbomachines 13 p (SEE N87-21927 15-07) Mar. 1987 Sponsored by NASA. Lewis Research Center and AFOSR (AGARD-CP-401) Avail: NTIS HC A16/MF A01 CSCL 21E

The wakes of highly loaded axial compressor blades were often considered to be turbulent, unstructured flows. Recent work has suggested that the blade wakes are in fact dominated by a vortex street-like structure. The work on the wake structure at MIT is reviewed, the results of a viscous numerical simulation are presented, the blade wake vortices are compared to those shed from a cylinder, and the implications of the wake structure on compressor performance are discussed. In particular, a two-dimensional, time accurate, viscous calculation shows both a periodic wake structure and time variations in the passage shock strength. The numerical calculations are compared to laser anemometer and high frequency response probe data. The effect of the wake structure on the entropy production and apparent adiabatic efficiency of the compressor rotor is discussed. Author

N87-21934* Cambridge Univ. (England). Whittle Lab.

MEASURED AND PREDICTED LOSS GENERATION IN TRANSONIC TURBINE BLADING

W. N. DAWES, J. J. CAMUS, L. P. XU, and C. G. GRAHAM (Rolls-Royce Ltd, Bristol, England). In AGARD Transonic and Supersonic Phenomena in Turbomachines 11 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

For a typical transonic turbine rotor blade, designed for use with coolant ejection, the trailing edge, or base loss is three to four times the profile boundary layer loss. The base region of such a profile is dominated by viscous effects and its seems essential to attack the problem of loss prediction by solving the compressible Navier-Stokes equations. However, such an approach is inevitably compromised by both numerical accuracy and turbulence modeling constraints. A Navier-Stokes solver written for 2D blade-blade flows and employing a simple two-layer mixing length eddy viscosity model are described. Then, measured and predicted losses and base pressures are presented for two transonic rotor blades and attempts are made to assess the capabilities of the Navier-Stokes solver and to outline areas for future work. Author

N87-21935* Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.).

INFLUENCE OF SHOCK AND BOUNDARY-LAYER LOSSES ON THE PERFORMANCE OF HIGHLY LOADED SUPERSONIC AXIAL FLOW COMPRESSORS

K. D. BROUHHAUSEN and H. E. GALLUS (Technische Hochschule, Aachen, West Germany). In AGARD Transonic and Supersonic Phenomena in Turbomachines 14 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

Performance and losses of trans/supersonic axial flow compressors are influenced by shock structure, shock-boundary layer interactions and boundary layer separation. The combination of these phenomena and their effects on the flow characteristics of supersonic compressors are discussed. For this purpose experimental results are compared with theoretical approaches involving different semi-empirical correlations for shock and boundary layer losses, for separation and flow deviation. By an appropriate combination of these models the flow characteristics of supersonic compressors are interpreted and the performance of such compressors is successfully reproduced in a wide range. Finally, generally valuable statements on the design of highly loaded

supersonic compressors are derived and possible perspectives are described. Author

N87-21936* Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

SHOCK WAVES LOSSES ANALYSIS

ANTOINE FOURMAUX and ALAIN LEMEUR. In AGARD Transonic and Supersonic Phenomena in Turbomachines 11 p (SEE N87-21927 15-07) Mar. 1987 In FRENCH; ENGLISH summary (AGARD-CP-401) Avail: NTIS HC A16/MF A01

In advanced technology turbomachinery design, reducing aerodynamic losses is an important matter. Schematically, these losses have 3 origins: losses related to the leading-edge shock; losses related to the main-compression shock; and friction losses, related to the boundary layer evolution. For given inlet and outlet conditions, a judicious designing of the blade profiles may induce a minimum loss level. In order to successfully conclude such a design, some rather experimental work was recently performed in ONERA, the main results of which are presented. Leading edge shock (the influence of the leading edge shape on the shock and on its impingement on the lower blade section surface); experimental analysis of a single blade-to-blade passage in order to validate certain principles concerning shock/boundary layer interaction; and experimental analysis of a cascade in which the blade profile is specially designed to minimize the losses are examined. All projects were done on two-dimensional flow. The alternate use of theoretical and experimental methods will be emphasized. Author

N87-21937* Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

EXPERIMENTAL INVESTIGATIONS ON SHOCK LOSSES OF TRANSONIC AND SUPERSONIC COMPRESSOR CASCADES

H. A. SCHREIBER. In AGARD Transonic and Supersonic Phenomena in Turbomachines 15 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

The losses of transonic and supersonic compressor bladings are due to viscous effects and due to entropy rises in shock waves arising in the entrance regions and passages of the blades. Depending on inlet Mach number, inlet flow angle, and back pressure the shock loss level reaches 40 to 70 percent of the overall losses. Most of the loss prediction models in use consider viscous and shock losses separately. However, very few quantitative experimental data of shock losses are available to verify these models. A separation of the viscous and shock losses is performed by the analysis of wake measurements behind some compressor cascades. The cascade tests were performed in the inlet Mach number range from 0.8 to 1.7. Detailed information is presented about the shock structure and the region of shock boundary layer interaction in the blade passage of a supersonic cascade obtained with the aid of laser anemometry. Author

N87-21938* Alfa Romeo S.p.A., Naples (Italy).

OPTIMISATION OF A TRANSONIC FLOW RADIAL VANED DIFFUSER

SALVATORE COLANTUONI and RENE VANDENBRAEM-BUSSCHE (Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese, Belgium). In AGARD Transonic and Supersonic Phenomena in Turbomachines 10 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

The transonic flow in an existing radial vaned diffuser was analyzed with a time dependent finite area calculation method. The calculated Mach number distribution indicates a strong bow shock upstream of the throat. Based on this experience, new diffusers were designed in order to optimize the Mach number distribution in the semi-vaneless space by designing for a shock-free deceleration. The best predictions are obtained with a modified version of the design method of Herbert and Came in which a radial change of diffuser width is incorporated. Experimental results obtained with this optimized design show an important increase in range and confirms the shock-free deceleration of the flow. The difference between the calculated and measured pressure distribution can be explained by incidence effect due to an incorrect estimation of the boundary layer blockage on the lateral walls. Better predictions will be possible only if a more precise definition

07 AIRCRAFT PROPULSION AND POWER

of the real flow conditions at the diffuser inlet becomes available.
Author

N87-21940# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).
THREE-DIMENSIONAL COMPUTATION AROUND TURBOMACHINE BLADES WITH FINS [CALCUL TRIDIMENSIONNEL DANS LES AUBAGES DE TURBO-MACHINES AVEC NAGEOIRE]
T. DERRIEN / In AGARD Transonic and Supersonic Phenomena in Turbomachines 15 p (SEE N87-21927 15-07) Mar. 1987 In FRENCH
(AGARD-CP-401) Avail: NTIS HC A16/MF A01

The numerical solution of the Euler equations governing the flow at finned blades of a rotating wheel is presented. An explicit domain method, selected for its simplicity, is used. The analysis of the computation results, comparing blades in the same conditions with and without fins, allowed the principle influences of the fins on the aerodynamic field to be revealed.
M.G.

N87-21941# Stuttgart Univ. (Germany, F.R.). Inst. fuer Luftfahrtantrieb.

A QUASI THREE DIMENSIONAL METHOD FOR THE CALCULATION OF TRANSONIC FLOWS IN TURBOMACHINES
JOERG HALLER / In AGARD Transonic and Supersonic Phenomena in Turbomachines 12 p (SEE N87-21927 15-07) Mar. 1987
(AGARD-CP-401) Avail: NTIS HC A16/MF A01

A procedure based on the iterative coupling of flow calculations on S1 blade-to-blade stream surfaces and a flow calculation on an S2 hub-to-tip stream surface is described. The solutions on S1 surfaces of revolution are obtained by a time marching method in finite volume form, whereas a finite difference method is used for the S2 calculation. The finite difference method uses a stream function formulation based on a passage averaging technique in order to account for non-axisymmetric flows, especially with shocks inside a blade row. Sample calculations of a single-stage and a two-stage compressor are presented and compared with measurements.
Author

N87-21942# Politecnico di Milano (Italy). Dipt. di Energetica.
TRANSONIC THREE-DIMENSIONAL INVISCID CALCULATIONS IN TURBOMACHINES

F. BASSI and M. SAVINI (National Center for Energetics and Propulsion, Peschiera Borromeo, Italy) / In AGARD Transonic and Supersonic Phenomena in Turbomachines 10 p (SEE N87-21927 15-07) Mar. 1987
(AGARD-CP-401) Avail: NTIS HC A16/MF A01

A finite volume Euler solver which was applied to the calculation of the three-dimensional transonic flow field through straight cascades is described. The numerical algorithm, based on Jameson's approach, uses a centered space discretization, with explicit adaptive dissipation terms, and a three-stage Runge-Kutta method for the time integration; the convergence to the steady state solution may be enhanced by using local time step, residual smoothing, and enthalpy damping. The calculations were performed in a O-type grid, obtained by means of a constructive approach which guarantees good properties of smoothness, orthogonality, and resolution near the body. The computational code was applied to two turbine blade cascades in transonic regime tested at the von Karman Institute. Three-dimensional effects were introduced by imposing an inlet velocity profile normal to the endwall. The computational results show good agreement with the blades pressure experimental data and the code performed well in the prediction and development of the secondary flow vortices.
Author

N87-21943# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.)
COMPUTATION OF TRANSONIC 2D CASCADE FLOW AND COMPARISON WITH EXPERIMENTS

H.-W. HAPPEL, H. J. DIETRICH, and K. LEHMANN / In AGARD Transonic and Supersonic Phenomena in Turbomachines 19 p (SEE N87-21927 15-07) Mar. 1987
(AGARD-CP-401) Avail: NTIS HC A16/MF A01

A time-marching finite area method to obtain the steady 2D blade-to-blade solution along an axisymmetric stream surface with changing radius and stream tube thickness is described. The

conservation laws are solved in a rotating frame. The numerical scheme is explicit and first order accurate in time and space. To achieve stability, explicit numerical viscosity is added. Three alternative methods of ensuring the zero normal velocity condition along the solid walls are analyzed and their application is discussed. In order to increase the convergence speed, a sequential grid-refining procedure and a multiple-grid algorithm are used in the code. The accuracy and computational efficiency of the computer code are demonstrated for agreement for turbine and compressor cascades.
Author

N87-21944# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

A NUMERICAL STUDY OF UNSTEADY FLOW EFFECTS IN A SUPERSONIC COMPRESSOR CASCADE

SCOTT M. RICHARDSON / In AGARD Transonic and Supersonic Phenomena in Turbomachines 11 p (SEE N87-21927 15-07) Mar. 1987
(AGARD-CP-401) Avail: NTIS HC A16/MF A01

Recent experimental evidence exists which suggests that compressor cascades operating supersonically may pass a higher mass flow with a periodic inflow condition than with the thermodynamically equivalent mass-averaged steady condition. Since most compressor design methods rely on the use of an axisymmetric analysis, any excursion in mass flow caused by blade row interactions will not be accounted for in the design. The two-dimensional Navier-Stokes equations are solved using the MacCormack explicit algorithm to obtain the flow in a subsonic rotor cascade for both periodic and steady flow inlet conditions. A outflow boundary condition is presented to model the unsteady cascade exit flow conditions by using localized heat addition to produce a choke point near the downstream boundary. A computational study of the wake model parameters used in the periodic inlet boundary condition is performed to determine their effect on the cascade mass flow swallowing capacity.
Author

N87-21945# Cambridge Univ. (England). Whittle Lab.
A NUMERICAL STUDY OF THE 3D FLOWFIELD IN A TRANSONIC COMPRESSOR ROTOR WITH A MODELLING OF THE TIP CLEARANCE FLOW

W. N. DAWES / In AGARD Transonic and Supersonic Phenomena in Turbomachines 12 p (SEE N87-21927 15-07) Mar. 1987
(AGARD-CP-401) Avail: NTIS HC A16/MF A01

Modeling the complex flowfield in a transonic axial compressor rotor is a considerable but worthwhile challenge for flow prediction methods. A computer code aimed at solving the equations of three dimensional viscous compressible flow in turbomachine geometries is described. The code is applied to the study of the flowfield in a transonic axial compressor rotor at design speed for both maximum flow and towards stall. The rotor was designed and tested using laser two-focus velocimetry. The rotor has a hub-tip ratio of 0.5 and design speed of 20,260 rpm. At the design point the rotor pressure ratio is 1.626 and the mass flow 17.1 kg/s. The predicted flowfield is compared with the laser measurements and the performance of the code discussed. In addition the discussion highlights the changes in the predicted endwall and tip clearance flows as the rotor operating point is moved towards stall.
Author

N87-21947# Rolls-Royce Ltd., Bristol (England). Theoretical Science Group.

SOME TURBOMACHINERY BLADE PASSAGE ANALYSIS METHODS: RETROSPECT AND PROSPECT

D. CARRAHAR and T. R. KINGSTON / In AGARD Transonic and Supersonic Phenomena in Turbomachines 16 p (SEE N87-21927 15-07) Mar. 1987
(AGARD-CP-401) Avail: NTIS HC A16/MF A01

The development of time marching methods to analyze blades started at Rolls-Royce in the mid seventies, when sufficient computing power was becoming available. It was recognized that such methods had much to offer, especially for transonic and supersonic flows. Since then several different algorithms were developed to predict both quasi-3D and 3D flows. At present the time-marching methods are used to solve the unsteady Euler/Navier-Stokes equations to produce a time steady solution. Future developments are aimed towards predicting loss accurately, and to investigated unsteady effects such as vortex shedding and incoming wakes.
Author

07 AIRCRAFT PROPULSION AND POWER

N87-21949# Technische Hochschule, Hanover (Germany, F.R.). Inst. fuer Stroemungsmaschinen.

DOWNSTREAM FLOW ANGLE CORRELATIONS FOR TURBINE CASCADES IN SUBSONIC AND TRANSONIC FLOW CONDITIONS

W. RIESS, P. DALBERT, P.-A. GIESS, and H.-J. HEINEMANN (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen, West Germany) In AGARD Transonic and Supersonic Phenomena in Turbomachines 20 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

Extensive experimental and theoretical investigations of different turbine cascades were performed within the transonic Mach number range. Some problems related to measurements in rectilinear cascades are discussed. The flow field calculations performed using a time-marching Euler code limitations can be determined when applying the computer code itself as well as when comparing the calculated data with experimental ones. Experimental and theoretical results within the subsonic Mach number range are used to check the accuracy of simplified methods for calculating the downstream flow angle. Author

N87-21950# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

A SHOCK LOSS MODEL FOR SUPERCRITICAL SUBSONIC FLOWS IN TRANSONIC AXIAL FLOW COMPRESSORS

R. J. DUNKER In AGARD Transonic and Supersonic Phenomena in Turbomachines 15 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

This investigation was aimed at developing more sophisticated models to be incorporated in an off-design performance prediction method for transonic axial flow compressor stages for more accurate flow prediction. Primary emphasis was given to the improvement of shock models used for evaluating the shock losses, especially at supercritical subsonic, but also at supersonic inflow conditions. The developed and refined methods were verified by calculating, investigating, and analyzing the losses of compressor cascades, as well as a transonic axial flow compressor. Author

N87-21951# KHD Luftfahrttechnik G.m.b.H., Oberursel (Germany, F.R.).

COMPARISON BETWEEN INVERSE DESIGNED (PVD) AIRFOILS AND STANDARD SERIES AIRFOILS FOR HIGH LOADED AXIAL TURBINE NOZZLE APPLICATION

M. HORSMANN and M. SCHMIDT In AGARD Transonic and Supersonic Phenomena in Turbomachines 6 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

Guide vane profiles with transonic flow regions in the flow field were developed for a high loaded one stage axial turbine. The profiles were designed in two different ways: first, using standard design techniques and second, using an inverse design method, where the profile shape is computed from prescribed velocity distributions (PVD). The results of both design methods will be presented. Comparison is made by using another computer program system to calculate the velocity distributions in the flow field, the boundary layer parameters, and the profile losses. The computed results of the first application of an inverse design method on axial turbine guide vanes show that improvements can be made. Author

N87-22670# Rolls-Royce Ltd., Bristol (England).

PROPULSION SYSTEM TECHNOLOGIES FOR THRUST VECTORING

P. ROUND and R. F. TAPE (Rolls-Royce, Inc., Atlanta, Ga.) In AGARD Improvement of Combat Performance for Existing and Future Aircraft 12 p (SEE N87-22663 16-05) Dec. 1986 (AGARD-CP-409) Avail: NTIS HC A07/MF A01

The Harrier/AV-8 aircraft, with its Rolls-Royce Pegasus engine, was developed primarily for vertical or short takeoff and landing operations. To achieve this it employs nozzles capable of vectoring through more than 90 deg to provide lift and a reaction control system to provide aircraft control in low or zero forward speed operation. These features of the aircraft have also been employed to advantage during combat by vectoring in forward flight (VIFFING). Operational analysis studies have identified the potential combat advantage of post-stall maneuvering (PMS) to improve rate of

turn and vehicle/weapon pointing. To achieve any or all of these capabilities will require some degree of propulsion system thrust vectoring. Some particular requirements that the need for thrust vectoring place on the engine design and the technologies involved are addressed. Author

N87-24464# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

ENGINE RESPONSE TO DISTORTED INFLOW CONDITIONS

Mar. 1987 304 p In ENGLISH and FRENCH Meeting held in Munich, West Germany, 8-9 Sep. 1986 (AGARD-CP-400: ISBN-92-835-0412-7; AD-A182635) Avail: NTIS HC A14/MF A01

The papers presented at the Propulsion and Energetics Panel 68th Specialists' Meeting are compiled. Individual sessions covered the following subjects: unsteady flow and validation of empirical distortion parameters; computation techniques for engine/compressor performance predictions of distorted inflow; distorted inflow detection; and experimental investigations of engine instability and response to flow distortion. A technical evaluation report summarizing the conference is also presented. For individual titles, see N87-24465 through N87-24480.

N87-24465# Rolls-Royce Ltd., Bristol (England). Dept. of Installation Technology.

REVIEW OF CURRENT KNOWLEDGE ON ENGINE RESPONSE TO DISTORTED INFLOW CONDITIONS

D. D. WILLIAMS In AGARD Engine Response to Distorted Inflow Conditions 32 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

An overview to the 68th Propulsion and Energetics Panel (PEP) Specialists' Meeting is presented. Some current aspects of time-variant, spatial total-pressure distortion and other forms such as swirl, static-pressure distortion, planar-wave perturbations of total pressure, and total temperature distortion are reviewed. Engine response considerations include the influence of engine spool coupling on stability, developments in the modeling of total-pressure circumferential extent effects, and swirl/total-pressure interactions. Guidelines for the formulation of distortion descriptors and performance/stability assessments are reviewed. Author

N87-24466# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).

AIR INLET/ENGINE COMPATIBILITY: IMPACT OF THEORETICAL AND EXPERIMENTAL METHODS [COMPATIBILITE ENTREE D'AIR-MOTEUR IMPACT DES METHODES THEORIQUES ET EXPERIMENTALES]

MARIUS GOUTINES and HUGUES JOUBERT In AGARD Engine Response to Distorted Inflow Conditions 20 p (SEE N87-24464 18-07) Mar. 1987 In FRENCH (AGARD-CP-400) Avail: NTIS HC A14/MF A01

Work carried out at SNECMA (Societe Nationale d'Etude et de Construction de Moteurs d'Aviation) to develop clean-flow surge line predictions and numerical distortion-response codes is reported. The experimental efforts defined a state-of-the-art, time-invariant total pressure data acquisition system and a simple means of generating and simulating dynamic pressure distortion. Parametric studies indicate that compressor inlet guide vanes, low-aspect-ratio blades, and small blade row gaps increase stall margin and reduce compressor distortion sensitivities. M.G.

N87-24467# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Group.

NEW TRENDS IN INTAKE/ENGINE COMPATIBILITY ASSESSMENT

F. AULEHLA and D. M. SCHMITZ In AGARD Engine Response to Distorted Inflow Conditions 24 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

The measurement of dynamic distortion requires considerable effort in instrumentation and data processing. Distortion measurement methods which are time and cost efficient are described. Experience gained from the Tornado aircraft indicates that the relevance of dynamic distortion on intake/engine compatibility has been overestimated and, in fact, swirl emerged as the decisive compatibility parameter. Also, during the Airbus A-300 APU intake development swirl turned out to be an important

07 AIRCRAFT PROPULSION AND POWER

criterion. In conclusion, it is argued whether in many cases dynamic distortion measurements can be avoided in favor of swirl measurements in combination with simplified methods for dynamic distortion predictions based on steady state measurements and, in some cases, on statistical models. Author

N87-24468# Technische Hochschule, Aachen (Germany, F.R.). Inst. for Jet Propulsion and Turbomachinery.

EFFECT OF STEADY STATE INLET TEMPERATURE DISTORTION ON THE ENGINE COMPRESSOR FLOW

W. KOSCHEL, H. KUENKLER, and H. TOENSKOETTER (Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn, West Germany). In AGARD Engine Response to Distorted Inflow Conditions 19 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

A prediction model for the effects of a steady state temperature distortion on the overall performance of a multistage engine compressor is presented. In contrast to the well known parallel compressor model this model takes into account the circumferential interaction of the distorted and undistorted compressor flow. An extensive experimental program was carried out on a single-spool jet engine with steady-state inlet temperature and pressure distortion tests. The experimental set-up is briefly described. Detailed results of the flow measurements obtained at the compressor inlet and exit and at the compressor interstage positions are presented and discussed. The experimental results support the validity of the prediction model developed as part of this project. Author

N87-24469# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.

VISCOUS ANALYSES FOR FLOW THROUGH SUBSONIC AND SUPERSONIC INTAKES

LOUIS A. POVINELLI and CHARLES E. TOWNE. In AGARD Engine Response to Distorted Inflow Conditions 20 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

A parabolized Navier-Stokes code was used to analyze a number of diffusers typical of a modern inlet design. The effect of curvature of the diffuser centerline and transitioning cross sections was evaluated to determine the primary cause of the flow distortion in the duct. Results are presented for S-shaped intakes with circular and transitioning cross sections. Special emphasis is placed on verification of the analysis to accurately predict distorted flow fields resulting from pressure-driven secondary flows. The effect of vortex generators on reducing the distortion of intakes is presented. Comparisons of the experimental and analytical total pressure contours at the exit of the intake exhibit good agreement. In the case of supersonic inlets, computations of the inlet flow field reveal that large secondary flow regions may be generated just inside of the intake. These strong flows may lead to separated flow regions and cause pronounced distortions upstream of the compressor. Author

N87-24470# Cambridge Univ. (England). CALCULATIONS OF INLET DISTORTION INDUCED COMPRESSOR FLOWFIELD INSTABILITY

T. P. HYNES, R. CHUE, E. M. GREITZER, and C. S. TAN (Massachusetts Inst. of Tech., Cambridge). In AGARD Engine Response to Distorted Inflow Conditions 16 p (SEE N87-24464 18-07) Mar. 1987 (Contract NSG-3208) (AGARD-CP-400) Avail: NTIS HC A14/MF A01

Calculations are presented predicting the onset of flow instability for a multistage low speed axial compressor operating in circumferentially distorted inlet flow. The most important feature of the model used is that it attempts to properly account for the fluid dynamic interaction between the spoiled and unspoiled sectors of the compressor. The calculations show that there is an approximate stability criterion, the annulus averaged slope of the compressor pressure rise characteristic equal to zero, that is valid whenever the dynamics of the compressor distorted flowfield can be considered independent of the compressor environment. This approximate criterion is used to investigate the relationship between the present model and the parallel compressor model. Further calculations are performed to investigate cases of interest when the dynamics of the flowfield are coupled to the environment. Resonant cases and cases when the distortion is unsteady are

studied. In particular, it is shown that rotating distortions which propagate in the rotor direction can have a greater effect on stability margin than stationary or counter-rotational ones. Finally, it is shown that the general predictions of the model are insensitive to the details of the unsteady blade row dynamics. Author

N87-24471# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

NUMERICAL STUDY OF THE PROPAGATION OF AN INLET FLOW DISTORTION THROUGH AN AXIAL COMPRESSOR

GERMAIN BILLET, PHILIPPE CHEVALIER, and PIERRE LAVAL. In AGARD Engine Response to Distorted Inflow Conditions 14 p (SEE N87-24464 18-07) Mar. 1987 In FRENCH; ENGLISH summary Sponsored by DRET (AGARD-CP-400) Avail: NTIS HC A14/MF A01

A model representing the response of fixed or rotating axial compressor blade rows is coupled to a 3-D numerical simulation of the flow outside the blade rows. The code can be used to study nonuniform compressible 3-D flows through turbomachines. The fluid is assumed to be inviscid in the space outside the rows, while viscous effects are taken into account inside. Numerical results are compared with experimental data in the case of a low speed single stage compressor with an inlet steady total pressure distortion. These comparisons show that the numerical approach is able to predict the global response of the compressor. This work is part of a larger project aimed at predicting the response of a compressor to a nonuniform inlet flow that is periodic in time, or fully unsteady. Author

N87-24472# Societe Bertin et Cie, Plaisir (France).

CALCULATION OF CASCADE FLOW BEHAVIOR IN A DYNAMIC STALL REGIME (CALCUL DU DPMIPRTEMENT D'UNE GRILLE D'AUBES EN REGIME DE DECROCHAGE DYNAMIQUE)

P. GILLANT, P. SAGNES, and J. P. OLLIER. In AGARD Engine Response to Distorted Inflow Conditions 20 p (SEE N87-24464 18-07) Mar. 1987 In FRENCH (AGARD-CP-400) Avail: NTIS HC A14/MF A01

An overview is presented of a singularity method coupled with an unsteady boundary layer calculation for modeling unsteady subsonic cascade flow in unstalled and dynamic stall regimes. The short term aim of the work is to provide a method for assessing the distortion sensitivity of multistage axial compressors. Good numerical results have been obtained for steady flow and unsteady attached flow but quantitative validation is difficult due to the paucity of relevant experimental data. For dynamic stall, the studies show the importance of correct modeling of the flow in the neighborhood of the separation point. M.G.

N87-24473# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

IMPROVEMENT OF THE PARALLEL COMPRESSOR MODEL BY CONSIDERATION OF UNSTEADY BLADE AERODYNAMICS

M. LECHT. In AGARD Engine Response to Distorted Inflow Conditions 13 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

The parallel compressor model has been applied to predict compressor performance with circumferential total inlet distortion. In comparison with experiment data, however, this model gives pessimistic results for the predicted stall line shift considering sector angles of distortion up to 120 deg. Detailed experimental evaluation of a compressor stage leads to unsteady performance effects obviously being responsible for this discrepancy. In order to improve the original model the performance characteristic of the compressor was extended to account for a short time overload capability analogous to an airfoil in an unsteady flow. The governing factor of this modification is the time-to-stall versus the time for a blade channel to pass the distorted sector. The model improvement was demonstrated for a DFVLR and a NASA single stage transonic compressor subjected to a screen induced total pressure distortion. Author

07 AIRCRAFT PROPULSION AND POWER

N87-24474# General Electric Co., Evendale, OH. Aircraft Engine Business Group.

TURBOFAN ENGINE POST-INSTABILITY BEHAVIOR: COMPUTER SIMULATIONS, TEST VALIDATION AND APPLICATION OF SIMULATIONS

WILLIAM G. STEENKEN. In AGARD Engine Response to Distorted Inflow Conditions 11 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

A method that can be used to predict the post-stability operation of a turbofan engine and is based upon extending the capabilities of engine transient cycle decks is described. Typical predictions are presented and compared with results obtained from the testing of a modern augmented turbofan engine. The potential manners in which this digital computer simulation tool may be utilized are also discussed. Author

N87-24475# Royal Aircraft Establishment, Farnborough (England).

TRANSMISSION OF INLET DISTORTION THROUGH A FAN

J. E. FLITCROFT, J. DUNHAM, and W. A. ABBOTT. In AGARD Engine Response to Distorted Inflow Conditions 11 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

The effect of inlet swirl on the propagation of total pressure distortion through a three-stage fan without inlet guide vanes was investigated on a compressor rig. The tests gave the unexpected finding that the presence of a swirl counter to the rotation of the fan generally reduced the level of steady state distortion transmitted to the core compressor. Dynamic pressure measurements made at the exit from the fan, however, revealed that the swirl also caused a sudden early breakdown of the flow in a sector of the hub region, resulting in high time-invariant distortion levels in the core flow. This observation is compatible with the destabilizing effect of a swirl counter to fan rotation on engines. A theoretical analysis confirmed that a swirl, concentrated at the fan tip at entry, could drive some of the hub blade rows strongly towards stall. Author

N87-24476# Alfa Romeo S.p.A., Naples (Italy). Direzione R and D.

EXPERIMENTAL INVESTIGATION ON SMALL TURBOPROP BEHAVIOUR UNDER COMPRESSOR ROTATING STALL FOR DIFFERENT INLET FLOW CONDITIONS

S. COLANTUONI and G. UOTTI. In AGARD Engine Response to Distorted Inflow Conditions 16 p (SEE N87-24464 18-07) Mar. 1987 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

An experimental investigation on compressor rotating stall and acoustic noise in a small turboprop is discussed. The intent of the study, undertaken in Alfa Romeo Avo using the engine test bed during the initial phase of the AR 318 turboprop development program, was to clarify the noisy and unstable behavior of some engines at part-speeds. The overall performances of the centrifugal compressor, the time-dependent wall static pressure measurements used to visualize impeller rotating stall regions on the compressor map, and the acoustic noise signals detected at the engine-intake inlet are presented. Finally, the engine performances in stalled compressor conditions are analyzed and main results are discussed. Author

N87-24477# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.

SUMMARY OF INVESTIGATIONS OF ENGINE RESPONSE TO DISTORTED INLET CONDITIONS

THOMAS J. BIESADNY, WILLIS M. BRAITHWAITE, RONALD H. SOEDER, and MAHMOOD ABDELWAHAB. In AGARD Engine Response to Distorted Inflow Conditions 21 p (SEE N87-24464 18-07) Mar. 1987 Previously announced as N86-26336 (AGARD-CP-400) Avail: NTIS HC A14/MF A01

A survey is presented of experimental and analytical experience of the NASA Lewis Research Center in engine response to inlet temperature and pressure distortions. Results of experimental investigations and analytical modeling are reviewed together with a description of the hardware and the techniques employed. Distortion devices successfully simulated inlet distortion, and knowledge was gained on compression system response to different types of distortion. A list of NASA research references is included. Author

N88-13231# Johns Hopkins Univ., Laurel, MD. Applied Physics Lab.

HYPERSONIC AIRBREATHING PROPULSION: EVOLUTION AND OPPORTUNITIES

P. J. WALTRUP. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 29 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

A history of the evolution of airbreathing propulsion, with emphasis on the development of supersonic combustion ramjet (scramjet) engines, is presented. The current status of scramjet engines is discussed and deficiencies in fundamental and applied data and/or knowledge, which comprise opportunities for future work, are noted. Author

N88-13344# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

APPLICATION OF MODIFIED LOSS AND DEVIATION CORRELATIONS TO TRANSONIC AXIAL COMPRESSORS

M. CETIN, A. S. UECER, CH. HIRSCH, and G. K. SEROVY. Nov. 1987 74 p (AGARD-R-745; ISBN-92-835-0346-4; AD-A191187) Avail: NTIS HC A04/MF A01

The goal was to analyze the transonic compressor tests available in the open literature and to propose possible improvements in total loss and turning correlations. From the work performed six conclusions could be drawn for the achievement of better loss predictions. A comparison with results of a two-stage compressor showed that the results of the new correlation set were satisfactory. For more accurate predictions a consistent end-wall boundary layer and secondary loss calculation method must be applied; in multi-stage compressors, spanwise loss mixing procedures must be used. Author

N88-17647# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

ADVANCED TECHNOLOGY FOR AERO GAS TURBINE COMPONENTS

Sep. 1987 541 p. In ENGLISH and FRENCH Symposium held in Paris, France, 4-8 May 1987 (AGARD-CP-421; ISBN-92-835-0133-X; AD-A198664) Avail: NTIS HC A23/MF A01

The Symposium is aimed at highlighting the development of advanced components for new aero gas turbine propulsion systems in order to provide engineers and scientists with a forum to discuss recent progress in these technologies and to identify requirements for future research. Axial flow compressors, the operation of gas turbine engines in dust laden atmospheres, turbine engine design, blade cooling, unsteady gas flow through the stator and rotor of a turbomachine, gear systems for advanced turboprops, transonic blade design and the development of a plenum chamber burner system for an advanced VTOL engine are among the topics discussed. For individual titles, see N88-17648 through N88-17681.

N88-17648# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. Turbine Engine Div.

THE COMING REVOLUTION IN TURBINE ENGINE TECHNOLOGY

JAMES S. PETTY and ROBERT E. HENDERSON. In AGARD Advanced Technology for Aero Gas Turbine Components 10 p (SEE N88-17647 10-07) Sep. 1987 (AGARD-CP-421) Avail: NTIS HC A23/MF A01

A major change in turbopropulsion technology development philosophy is now being pursued by the U.S. Air Force Wright Aeronautical Laboratories (AFWAL) which will provide revolutionary advancements in overall operational performance capability for future military aircraft and aerospace weapon systems. An historical perspective illustrates the significance of the advancements being pursued, with engine thrust-to-weight used as the principal performance figure-of-merit. The High Performance Turbine Engine Technologies (HPTET) effort, begun in 1982, is discussed. The overall goal of the effort is to provide the advanced materials, innovative structural concepts and advanced aerothermodynamics to double turbopropulsion capability by the year 2000. Author

07 AIRCRAFT PROPULSION AND POWER

N88-17649# Rolls-Royce Ltd., Bristol (England). Lift Engines and Future Technology Demonstrators

OPTIMISATION OF MILITARY COMPRESSORS FOR WEIGHT AND VOLUME

K. R. GARWOOD *In* AGARD Advanced Technology for Aero Gas Turbine Components 7 p (SEE N88-17647 10-07) Sep. 1987 Sponsored by Procurement Executive Ministry of Defence, United Kingdom (AGARD-CP-421) Avail: NTIS HC A23/MF A01

The high pressure compression system for future fighter engines has been projected at two different proven technology standards. For a given cycle of approximately 175 lbs. and 25:1 overall pressure ratio, three compressors have been evaluated, ranging from a seven stage unit with medium loading, to a five and a four stage unit with high loading. Test data of the original research parent compressors and two project specific units was commonised to the engine size and conditions. It is shown that apparent benefits between machines are negated and no significant advantage for lower work per stage could be identified at a given blading technology standard. Relative to the seven stage unit, a weight advantage of 20 percent is gained by the adoption of a four stage unit, and it is associated with an airfoil count reduction of 15 percent. Author

N88-17650# Royal Aircraft Establishment, Farnborough (England).

AN EXAMINATION OF THE IMPACT OF POTENTIAL ADVANCES IN COMPONENT TECHNOLOGY FOR FUTURE MILITARY ENGINES

M. R. LITCHFIELD and M. G. PHILPOT *In* AGARD Advanced Technology for Aero Gas Turbine Components 13 p (SEE N88-17647 10-07) Sep. 1987 (AGARD-CP-421) Avail: NTIS HC A23/MF A01

The prospects for major advances in gas turbine engine component technology over the next 20 years are examined. For future military engines and aircraft, these advances could lead to considerably higher thrust/weight ratios than are currently available. The gains in engine performance resulting from various specific technology advances are outlined and their impact on sizing and performance of a typical combat aircraft are considered. In conjunction with these future projections, an examination is also made of the influences of the main engine cycle parameters such as overall pressure ratio, bypass ratio, and rating philosophy on the mass and performance of the aircraft/engine combination. Author

N88-17651# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).

SPECIFICATION OF AN ENGINE AND ITS COMPONENTS STARTING FROM A CONSIDERATION OF AIRCRAFT MISSIONS [SPECIFICATION DU MOTEUR ET DE SES COMPOSANTS A PARTIR DES MISSIONS DE L'AVION]

A. LARDELLIER and I. DUFAU *In* AGARD Advanced Technology for Aero Gas Turbine Components 13 p (SEE N88-17647 10-07) Sep. 1987 *In* FRENCH (AGARD-CP-421) Avail: NTIS HC A23/MF A01

A computer implemented methodology for the optimization of engine cycles is described. The integrated technique considers engine size and mechanical design features, basic aircraft aerodynamic and weight/size characteristics, and aircraft mission operational requirements. Three applications of the method are discussed: the influence of engine weight on the aircraft and mission characteristics; the influence of afterburn on supersonic cruise missions; and the influence of mission parameters on engine cycle and aircraft size. Author

N88-17652# Technische Hochschule, Aachen (Germany, F.R.). Inst. fuer Strahltriebwerke und Turboarbeitsmaschinen.

APPLICATION OF HIGHLY LOADED SINGLE-STAGE MIXED-FLOW COMPRESSORS IN SMALL JET-ENGINES

R. MOENIG, K. D. BROICHHAUSEN (Motoren- und Turbinen-Union Muenchen G.m.b.H., West Germany), and H. E. GALLUS *In* AGARD Advanced Technology for Aero Gas Turbine Components 11 p (SEE N88-17647 10-07) Sep. 1987 Sponsored by Bundesamt fuer Wehrtechnik und Beschaffung, Fed. Republic of Germany (AGARD-CP-421) Avail: NTIS HC A23/MF A01

The predominant requirements on small jet engines are high power-to-weight ratio and low specific fuel consumption in combination with structural simplicity. The consequent demands on the compressor can be fulfilled either by a conventional two-stage unit or by an extremely loaded single stage. This single stage compressor has to be able to perform at a sufficiently large massflow and total pressure ratio. Consequently, the application of a mixed flow compressor with supersonic flow at rotor- or stator-inlet (supersonic mixed-flow compressor) turns out to be advantageous. The conception of a jet engine with a supersonic combustor demonstrates the significantly reduced size compared with other engines of the same thrust class. Author

N88-17653# Societe Turbomeca, Bordes (France).

THE ADVANTAGE OF VARIABLE GEOMETRY FOR TURBINE ENGINES AT LOW POWER [INTERET DE LA GEOMETRIE VARIABLE POUR LES TURBOMOTEURS DE FAIBLE PUISSANCE]

H. VIGNAU, R. RODELLAR, and J. SILET *In* AGARD Advanced Technology for Aero Gas Turbine Components 10 p (SEE N88-17647 10-07) Sep. 1987 *In* FRENCH (AGARD-CP-421) Avail: NTIS HC A23/MF A01

To reduce the specific fuel consumption of gas turbines at low power, various cycles of free and bound turbine engines were studied. A variable output engine permits a significant reduction of specific consumption at partial capacity. The variation in power is obtained through the change in the variable geometry component output; engine operating pressure, turbine intake temperature, and rotation velocity constants. The models which take variable geometry systems into account should be improved to specify the potential gains of such techniques. The results of a study on a centrifugal compressor with a compression rate of 8.5 and with a variable-setting radial diffuser show that an output variation of 50 percent can be obtained with a slight variation in efficiency and low sensitivity. Author

N88-17654# Calspan Advanced Technology Center, Buffalo, NY.

OPERATION OF GAS TURBINE ENGINES IN DUST-LADEN ENVIRONMENTS

M. G. DUNN, C. PADQVA, and R. M. ADAMS (Defense Nuclear Agency, Washington, D.C.) *In* AGARD Advanced Technology for Aero Gas Turbine Components 16 p (SEE N88-17647 10-07) Sep. 1987

(Contract DNA001-83-C-0182) (AGARD-CP-421) Avail: NTIS HC A23/MF A01

Results are reported for a measurement program designed to investigate the performance deterioration of gas turbine engines and the associated auxiliary equipment difficulties when operating in dust laden environments. Three TF33 turbofan engines and one J57 turbojet engine have been tested with two different dust blends. The predominant damage mechanism in all the engines was compressor blade erosion. The length of dust exposure time required to cause engine damage was dependent upon power setting and dust concentration. The turbine inlet temperature for these engines was too low to realize deposition of glassy material on the hot section components. The Environmental Control System (ECS) was monitored to ascertain the amount of injected material and the size distribution of material that makes its way to the ECS. A significant fraction of the dust is not centrifuged out of the flow and does end up in the control system air. These particles have a mean size on the order of 6 microns. The engine parameters most indicative of degradation were identified and are discussed. Author

07 AIRCRAFT PROPULSION AND POWER

N88-17655# National Research Council of Canada, Ottawa (Ontario). Gas Dynamics Lab.

A RESEARCH PROGRAM ON THE AERODYNAMICS OF A HIGHLY LOADED TURBINE STAGE

R. G. WILLIAMSON, S. H. MOUSTAPHA, J. P. HUOT, and U. OKAPUU (Pratt and Whitney Aircraft of Canada Ltd., Longueuil, Quebec) / In AGARD Advanced Technology for Aero Gas Turbine Components 17 p (SEE N88-17647 10-07) Sep. 1987 (AGARD-CP-421) Avail: NTIS HC A23/MF A01

The main conclusions drawn from recent work in an on-going experimental program of research on the aerodynamics of a highly loaded turbine stage are discussed. Detailed data have been secured relating to the aerodynamic performance of transonic nozzles of high turning angle (tested with two outer wall contours) and the influence of the stage environment on such measurements. Further work addresses rotor performance (as affected by blade loading), and also overall stage performance. The ultimate objective of the work is the extension of turbine design methods to regimes combining high stage loadings with high pressure ratios, with special emphasis on small blade sizes. Author

N88-17656# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.

EXPERIMENTAL EVALUATION OF A TRANSLATING NOZZLE SIDEWALL RADIAL TURBINE

RICHARD J. ROELKE and CASIMIR ROGO (Teledyne CAE, Toledo, Ohio.) / In AGARD Advanced Technology for Aero Gas Turbine Components 13 p (SEE N88-17647 10-07) Sep. 1987 (AGARD-CP-421) Avail: NTIS HC A23/MF A01 CSCL 21E

An experimental performance evaluation was made of two movable sidewall variable area radial turbines. The turbine designs were representative of the gas generator turbine of a variable flow capacity rotorcraft engine. The first turbine was an uncooled design while the second turbine had a cooled nozzle but an uncooled rotor. The cooled nozzle turbine was evaluated both with and without coolant flow. The test results showed that the movable nozzle wall is a viable and efficient means to effectively control the flow capacity of a radial turbine. Peak efficiencies of the second turbine with and without nozzle coolant were 86.5 and 88 percent respectively. These values are comparable to pivoting vane variable geometry turbines; however, the decrease in efficiency as the flow was varied from the design value was much less for the movable wall turbine. Several design improvements which should increase the turbine efficiency one or two more points are identified. These design improvements include reduced leakage losses and relocation of the vane coolant ejection holes to reduce mainstream disturbance. Author

N88-17657# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.).

AN INTEGRATED AERO/MECHANICAL PERFORMANCE APPROACH TO HIGH TECHNOLOGY TURBINE DESIGN

J. HOURMOUZADIS and G. ALBRECHT / In AGARD Advanced Technology for Aero Gas Turbine Components 12 p (SEE N88-17647 10-07) Sep. 1987 Sponsored by German Ministry for Research and Technology, Fed. Republic of Germany (AGARD-CP-421) Avail: NTIS HC A23/MF A01

Analytical and experimental experience from an advanced technology gas generator program is used to define the requirements on the engineering sciences involved in the design of gas turbine engines. Some aerodynamic, performance and cooling problems to be solved in a common approach with mechanical design for radial clearance control, hot gas path sealing and life are discussed. Author

N88-17658# Royal Aircraft Establishment, Farnborough (England).

DESIGN AND TEST OF A HIGH BLADE SPEED, HIGH WORK CAPACITY TRANSONIC TURBINE

R. C. KINGCOMBE, J. D. BRYCE, and N. P. LEVERSUCH / In AGARD Advanced Technology for Aero Gas Turbine Components 17 p (SEE N88-17647 10-07) Sep. 1987 (AGARD-CP-421) Avail: NTIS HC A23/MF A01

A high rim-speed turbine was designed and tested. A major objective in the design was to achieve high aerodynamic efficiency at high work capacity by way of reduced stage loading facilitated by high blade speed. The design includes three dimensional features such as a parabolic distribution of exit angle and compound

trailing edge lean on the nozzle guide vane and a thick root, highly tapered rotor blade - necessary in an engine turbine to reduce blade stress. Author

N88-17659# Rolls-Royce Ltd., Bristol (England). Advanced Turbine Technology Dept.

ADVANCED TECHNIQUES EMPLOYED IN BLADE COOLING RESEARCH

H. E. ROGERS, C. GRAHAM, and K. MCNICHOLAS / In AGARD Advanced Technology for Aero Gas Turbine Components 13 p (SEE N88-17647 10-07) Sep. 1987 Sponsored by Procurement Executive Ministry of Defence, United Kingdom (AGARD-CP-421) Avail: NTIS HC A23/MF A01

The design of an advance cooling system for moderately cooled second stage gas turbine engine blades was undertaken as part of a demonstration project. The design process involving complex computer modeling and hot rig testing of the blades is described. The test results confirmed that substantial increases in cooling efficiency can be gained by introducing small scale turbulators into radial hole cooling systems. A development temperature measurement technique based on a video camera operating in the near infrared region is described. The results of video pyrometry were validated from results obtained from a series of demonstrator hot rig tests. Also discussed are a number of problems relating to surface temperature measurement. Author

N88-17660# Stuttgart Univ. (Germany, F.R.). Inst. fuer Aerodynamik und Gasdynamik.

THE UNSTEADY GAS FLOW THROUGH STATOR AND ROTOR OF A TURBOMACHINE

K. M. FOERSTER / In AGARD Advanced Technology for Aero Gas Turbine Components 10 p (SEE N88-17647 10-07) Sep. 1987 (AGARD-CP-421) Avail: NTIS HC A23/MF A01

The difficulties of computing unsteady transonic flow in multiple connected domains with a minimum of neglects and approximations have been overcome by using individual computational grids fixed to each cascade, a novel gridless finite difference scheme, and physically real inflow and outflow boundaries. The resulting computer program is capable of computing the inviscid, plane gas flow through the stator and rotor of a turbomachine stage made from arbitrarily shaped (thick, round nosed) blades of arbitrary spacing, up to local Mach numbers of 1.8. Author

N88-17661# Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

DESIGN AND TESTING OF A SMALL RADIAL TURBINE FOR AUXILIARY POWER UNITS [ETUDE ET ESSAIS D'UNE PETITE TURBINE RADIALE POUR GROUPES AUXILIAIRES DE PUISSANCE]

Y. RIBAUD, C. FRADIN, and C. MISCHER (Microturbo, Toulouse, France) / In AGARD Advanced Technology for Aero Gas Turbine Components 13 p (SEE N88-17647 10-07) Sep. 1987 In FRENCH Sponsored in part by Ministere de la Defense, France (AGARD-CP-421) Avail: NTIS HC A23/MF A01

A project for the development of a small centripetal turbine with an expansion ratio of 3.6 is being undertaken by the Societe MICROTURBO with computational and test analysis support from ONERA. The design goals and strengths are outlined. Preliminary calculations for the design of the nozzle and wheel blades are discussed along with quasi-three dimensional calculations. Results from cold bench tests and corresponding hot engine tests were used to evaluate performance. Presizing and flow field calculations were confirmed in view of the high values of isentropic output obtained. The flow measurements downstream from the wheel, at a nominal operating point, gave the best picture of the fluid characteristics. Author

N88-17662# Pratt and Whitney Aircraft of Canada Ltd., Longueuil (Quebec). Turbine Aerodynamics.

DESIGN AND AERODYNAMIC PERFORMANCE OF A SMALL MIXED-FLOW GAS GENERATOR TURBINE

U. OKAPUU / In AGARD Advanced Technology for Aero Gas Turbine Components 11 p (SEE N88-17647 10-07) Sep. 1987 (AGARD-CP-421) Avail: NTIS HC A23/MF A01

Design details and results from aerodynamic rig tests are presented for four variants of a mixed flow turbine having a design

target pressure ratio of 3:1. This experimental turbine, designed to satisfy the aerodynamic requirements of a gas generator turbine in a hypothetical small turboprop engine, demonstrated a design point efficiency substantially in excess of that predicted for a single stage axial turbine of equivalent duty. Design and material implications are discussed and potential constraints identified.

Author

N88-17663# Ecole Centrale de Lyon (France).
NUMERICAL SIMULATION OF DIFFUSER/COMBUSTOR DOME INTERACTION (SIMULATION NUMERIQUE DE L'INTERACTION DIFFUSEUR TETE DE CHAMBRE)

D. JEANDEL, G. BRUN, S. MEUNIER, and M. DESAULTY (Societe Nationale d'Etudes et de Construction de Moteurs d'Aviation, Moissy-Cramayel, France) In AGARD Advanced Technology for Aero Gas Turbine Components 10 p (SEE N88-17647 10-07) Sep. 1987 In FRENCH

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

The design of a turbojet diffuser and combustion chamber dome can be realized, not only by researching low pressure loss, but also by assuring flow stability around a flame tube. A finite element method developed by Ecole Centrale de Lyon is described. The method employs an elliptic logic and a triangular type mesh which is well adapted for simulating complex geometric configurations. The application of the algorithm to various elementary and industrial configurations demonstrates the method's robustness and its ability to describe the principal flow characteristics in combustion dome regions.

Author

N88-17664# Rolls-Royce Ltd., Bristol (England).
DEVELOPMENT OF A PLENUM CHAMBER BURNER SYSTEM FOR AN ADVANCED VTOL ENGINE

J. S. LEWIS, T. W. MURRAY, and D. STEELE In AGARD Advanced Technology for Aero Gas Turbine Component 10 p (SEE N88-17647 10-07) Sep. 1987 Sponsored by Procurement Executive Ministry of Defence, United Kingdom

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

The research and development programs that were carried out on model and full size rigs to design and evaluate advanced concepts to meet the anticipated thrust requirements for a plenum chamber burner system for an advanced vertical takeoff and landing (VTOL) aircraft are described. The system characteristics of pressure loss, ignition, efficiency, thermal integrity and velocity profiles at nozzle exit under non-combusting (dry) and combusting conditions are discussed.

Author

N88-17665# Lucas Aerospace Ltd., Birmingham (England).
ENGINE SYSTEMS DIV.

PUMPING SYSTEMS AND FLOW INTERFACES FOR RAPID RESPONSE ELECTRONIC REHEAT CONTROLS

THOMAS C. YATES and TREVOR S. SMITH In AGARD Advanced Technology for Aero Gas Turbine Components 20 p (SEE N88-17647 10-07) Sep. 1987 Sponsored by Procurement Executive Ministry of Defence, United Kingdom

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

The problems of fuel pumping and metering which are associated with digital electronic reheat controls are discussed. A survey is carried out of various pumping options including reheat and main engine fuel pumping. A technical description of single, twin, and three pump systems, including rotorodynamic and positive displacement pumps is given together with comments on the relative advantages and disadvantages of the various options. A fuel flow interface designed for rapid response reheat control systems is described. The application is a digital electronic control for a future bypass engine. Comparison is made between computer simulation of the control characteristics and test results of the hardware.

Author

N88-17666# General Electric Co., Cincinnati, OH. Aircraft Engine Business Group.

AERODYNAMIC PERFORMANCE OF A SCALE-MODEL, COUNTER-ROTATING UNDUCTED FAN

THOMAS J. SULLIVAN In AGARD Advanced Technology for Aero Gas Turbine Components 16 p (SEE N88-17647 10-07) Sep. 1987 Sponsored by NASA, Washington, D.C.

(AGARD-CP-421) Avail: NTIS HC A23/MF A01 CSDL 21E

The aerodynamic performance of a scale model, counter-rotating unducted fan has been determined and the results

are discussed. Experimental investigations were conducted using the scale model propulsor simulator and uniquely shaped fan blades. The blades, designed for a high disk loading at Mach 0.72 at 35,000 feet altitude maximum climb condition are aft-mounted on the simulator in a pusher configuration. Data are compared with analytical predictions at the design point and show good agreement.

Author

N88-17667# General Motors Corp., Indianapolis, IN. Gas Turbine Div.

GEAR SYSTEMS FOR ADVANCED TURBOPROPS

DOUGLAS A. WAGNER In AGARD Advanced Technology for Aero Gas Turbine Components 9 p (SEE N88-17647 10-07) Sep. 1987 Sponsored by NASA, Washington, D.C.

(AGARD-CP-421) Avail: NTIS HC A23/MF A01 CSDL 21E

A new generation of transport aircraft will be powered by efficient, advanced turboprop propulsion systems. Systems that develop 5,000 to 15,000 horsepower have been studied. Reduction gearing for these advanced propulsion systems is discussed. Allison Gas Turbine Division's experience with the 5,000 horsepower reduction gearing for the T56 engine is reviewed and the impact of that experience on advanced gear systems is considered. The reliability needs for component design and development are also considered. Allison's experience and their research serve as a basis on which to characterize future gear systems that emphasize low cost and high reliability.

Author

N88-17668# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.). Inst. fuer Entwurfsaerodynamik.

NUMERICAL METHODS FOR PROPELLER AERODYNAMICS AND ACOUSTICS AT DFVLR

N. KROLL, D. LOHMANN, and J. SCHOENE In AGARD Advanced Technology for Aero Gas Turbine Components 15 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

Linear and nonlinear analysis methods for flow fields around propellers were developed. Here, two singularity methods are presented. In the first, a doublet point scheme was formulated for the calculation of steady and unsteady loads on surfaces having helical motion in an incompressible medium, e.g., propellers in uniform and nonuniform inflows and counter rotating propellers. The second is a surface panel method for computations of steady subsonic flows around propeller blades moving in a compressible medium. The method has been extended for the prediction of acoustic quantities. In order to predict the characteristics of transonic propeller flow fields, a Euler code for solving the three dimensional Euler equations was extended. The equations are formulated in a rotating cartesian reference frame. The solution procedure is based on a finite volume method using an explicit Runge-Kutta time stepping scheme. Numerical results for various propeller geometries are presented and compared with experimental data.

Author

N88-17669# Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

ANALYSIS OF HIGHSPEED PROPELLERS AERODYNAMICS

J. M. BOUSQUET In AGARD Advanced Technology for Aero Gas Turbine Components 12 p (SEE N88-17647 10-07) Sep. 1987 In FRENCH; ENGLISH summary

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

Highspeed propellers are studied. A synthesis of aerodynamic developments leading to the HT3 propeller definition and test in the S1 Modane wind tunnel is presented. The validity of the main calculation methods used in this research is analyzed. Counterrotating highspeed propellers are also studied. Their performance benefits against single rotation propellers are presented.

Author

07 AIRCRAFT PROPULSION AND POWER

N88-17670# Fiat Aviazione S.p.A., Turin (Italy). Direzione Progettazione.

ANALYSIS OF POSSIBLE TRANSMISSION ARRANGEMENTS APPLICABLE FOR DRIVING SINGLE OR TWIN COUNTERROTATING FANS ON PROPPAN ENGINES

L. BATTEZZATO and S. TURRA. In AGARD Advanced Technology for Aero Gas Turbine Components 11 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

A number of different designs of propfan engines are now being defined by the main engine manufacturers in the world. Some of these designs require a reduction gearbox between the LP turbine and the propfan; the propfan itself is conceived as single stage, variable pitch blade or double counterrotating stage variable pitch solution. In order to satisfy these requirements, the authors propose different mechanical arrangements of the reduction gearbox and, for given engine interfaces, compare their relative merits in order to eventually show the optimum solution. The comparison is made on the basis of various aspects: lightness, quietness, life, reliability, safety and maintainability. Author

N88-17671# Stuttgart Univ. (Germany, F.R.). Inst. fuer Aero- und Gasdynamik.

TRANSONIC BLADE DESIGN ON ROTATIONAL STREAM SURFACES

F. KLIMETZEK and E. SCHMIDT. In AGARD Advanced Technology for Aero Gas Turbine Components 11 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-42) Avail: NTIS HC A23/MF A01

A method enabling the computation of cascade profiles from prescribed velocity distributions in a relative system is presented. The optimization of the velocity distributions in a relative system is presented. The optimization of the velocity distribution to attain definite values in parameters such as turning angle, chord length or profile thickness is also included. Comparisons between the inverse design method with various analysis programs for cascades in both absolute and relative systems show good agreement. Author

N88-17672# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

INVESTIGATION OF DIHEDRAL EFFECTS IN COMPRESSOR CASCADES

F. A. E. BREUGELMANS. In AGARD Advanced Technology for Aero Gas Turbine Components 14 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

An experimental investigation of the influence of blade dihedral on the secondary flow in the two dimensional NACA 65-series compressor cascade is performed. Different inlet boundary layer thicknesses are used on the endwalls. Three different stacking lines have been chosen, namely a straight line inclined at 15, 25 and 35 degrees, a circular arc and an elliptic arc. The incidence range up to stall has been investigated and the local and overall losses are compared. The obtuse angle between the blade suction surface and the endwall has a beneficial effect on overall and secondary flow loss. Some limitations have to be accepted, depending on boundary layer thickness and incidence. Author

N88-17673# Ecole Centrale de Lyon (France). Lab. de Mecanique des Fluides.

PARAMETRIC STUDY OF CHOKE FLUTTER WITH A LINEAR THEORY

PASCAL FERRAND. In AGARD Advanced Technology for Aero Gas Turbine Components 14 p (SEE N88-17647 10-07) Sep. 1987 In FRENCH; ENGLISH summary Sponsored by Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, France

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

When the choke flutter problem arises in the stator, the incidence is slightly negative and the inlet Mach number is subsonic. A one dimensional unsteady approach is used in the blade channel and out of the cascade. The equations describe the unsteady two dimensional periodical flow field. The results are compared to experimental data from tests. A parametric study was developed to understand the influence of stationary velocity gradient and shock wave movement. The results obtained do not contradict each other, but they lead to different explanations. For instance,

the shock wave movement was found to depend highly upon upstream perturbations, but weakly upon downstream flow. For the first time, these results point toward possibilities for limiting the choke flutter domain. Author

N88-17674# Technische Univ., Hanover (Germany, F.R.). Inst. fuer Stromungsmaschinen.

POSSIBILITIES FOR ON-LINE SURGE SUPPRESSION BY FAST GUIDE VANE ADJUSTMENT IN AXIAL COMPRESSORS

W. RIESS and U. BLOECKER. In AGARD Advanced Technology for Aero Gas Turbine Components 15 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

The usual surge suppression regulation is realized by integration of a fixed limit line into the regulation system at a safe distance from the stability limit of the compressor. With appropriate means for detection of stall and surge in addition to fast response of the guide vane adjustment, an adaptive system for surge suppression which takes into account the actual state of the compressor could be realized. Experimental results for stall detection and for different modes of guide vane adjustment are presented. A six stage axial compressor is equipped with fast acting guide vane adjustment in all stages. Author

N88-17675# Norges Tekniske Hoegskole, Trondheim. Div. of Hydro- and Gas Dynamics.

RADIAL COMPRESSOR DESIGN USING AN EULER SOLVER

JAN TORE BILLDAL and ANDREW WILSON. In AGARD Advanced Technology for Aero Gas Turbine Components 12 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

The steady inviscid flow through a radial compressor is computed by solving the three dimensional Euler equations on both an H-type and O-type grid. The centered finite volume method with an explicit integration scheme is used to solve the equations. The numerical programs were developed as a tool in the design process of new, high pressure radial compressors with complex geometries and spitterblades. Author

N88-17676# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

SECONDARY FLOW MEASUREMENTS WITH L2F-TECHNIQUE IN CENTRIFUGAL COMPRESSORS

H. KRAIN. In AGARD Advanced Technology for Aero Gas Turbine Components 10 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

The flow characteristics of a 30 degree backswep impeller are analyzed by means of the L2F measurement technique. Significant cross flows, noticeable distortions of the through flow patterns and considerable velocity fluctuations were found inside the blade passages of the impeller. The distortions of the velocity patterns are smoothing towards the impeller exit. A detailed analysis of the measured data reveals the existence of two counter rotating channel vortices that are significantly influencing the overall flow character. Author

N88-17677# Centre National de la Recherche Scientifique, Marseilles (France).

METHOD FOR PREDICTING PERFORMANCE LIMITS OF CENTRIFUGAL COMPRESSORS (METHODE DE PREVISION DES LIMITES DE FONCTIONNEMENT EN DEBIT DES COMPRESSEURS CENTRIFUGES)

H. MITON, G. SENATORE, and J. CHAUVIN (LEMFI, Orsay, France) In AGARD Advanced Technology for Aero Gas Turbine Components 12 p (SEE N88-17647 10-07) Sep. 1987

In FRENCH

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

Currently, the phenomena which impose performance limits in centrifugal compressors are not clearly identifiable. If pumping and rotating stall are frequently observed at partial output, it is not certain whether the pumping limit is imposed by purely nonstationary phenomena. The approach described here consists of determining that limit t/γ specifically applying the load criteria in the axial region of the moving impeller and the diffuser semi-blade section. The performance limit is assumed to be reached when impeller and diffuser are simultaneously stalled. The results of a simple analysis method, applied to two compressors having very

07 AIRCRAFT PROPULSION AND POWER

different geometric characteristics, show a fairly good agreement between the performance limit defined with this criterion and the experimental pumping limit. M.G.

N88-17678# Pratt and Whitney Aircraft, West Palm Beach, FL. Engineering Div.
DESIGN AND DEVELOPMENT OF AN ADVANCED F100 COMPRESSOR

CHARLES M. LOVE /In AGARD Advanced Technology for Aero Gas Turbine Components 12 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

The aerodynamic and mechanical design features of an advanced F100 compressor are described. The design objectives were to increase the efficiency and stability, along with simplifying the mechanical configuration in order to reduce the number of parts. Test results from a compressor rig and core engine are shown. Comparisons of the performance to the current F100 compressor are made. Results of testing with inlet pressure distortion are shown. Configuration features to improve reliability, durability, maintainability and producibility are shown. Author

N88-17679# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).

DESIGN AND TESTING OF A FRONT STAGE FOR AN ADVANCED HIGH PRESSURE COMPRESSOR [CONCEPTION ET ESSAIS D'UN ETAGE DE TETE D'UN COMPRESSEUR HP AVANCE]

MARIUS GOUTINES and HENRI NAVIERE /In AGARD Advanced Technology for Aero Gas Turbine Components 15 p (SEE N88-17647 10-07) Sep. 1987 /In FRENCH Sponsored by Direction des Recherches, Etudes et Techniques du Ministere de la Defense, France

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

Studies of an advanced high pressure compressor show that the front stage rotor is supersonic all along the span of the blades. SNECMA designed and constructed a monostage compressor to evaluate performances, especially secondary flows. The approach used in the compressor project, the design configuration, and velocity triangles selected for nominal operation level are described. The supersonic profiles were optimized by the direct solution of the three dimensional Euler equations. The subsonic profiles were optimized by a direct potential method coupled with a boundary layer calculation. The global performances are addressed. The measured aerodynamic fields and azimuthal means are compared to the theoretical predictions for the front wall secondary flow region. Author

N88-17680# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

EXPERIMENTAL INVESTIGATION OF A SUPERCRITICAL COMPRESSOR ROTOR BLADE SECTION

R. FUCHS, R. KAYMAZ, H. STARKEN, and W. STEINERT /In AGARD Advanced Technology for Aero Gas Turbine Components 11 p (SEE N88-17647 10-07) Sep. 1987

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

A controlled diffusion rotor blade section was designed for a supercritical inlet Mach number of $M_{sub} = 1$ equals 0.85 and a flow turning of 29 degrees. The blade section has been tested in a cascade wind tunnel under various inlet flow conditions and axial velocity density ratios. A detailed investigation about transition and separation points was carried out at the design and at two off-design inlet flow conditions. The results are presented and discussed. Author

N88-17681# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).

COMPUTATION OF SECONDARY FLOWS IN AN AXIAL MULTISTAGE COMPRESSOR [CALCUL DES ECOULEMENTS SECONDAIRES DANS UN COMPRESSEUR AXIAL MULTISTAGE]

F. FALCHETTI and J. BROCHET /In AGARD Advanced Technology for Aero Gas Turbine Components 13 p (SEE N88-17647 10-07) Sep. 1987 /In FRENCH; ENGLISH summary Sponsored by Direction des Recherches, Etudes et Techniques, France and Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, France

(AGARD-CP-421) Avail: NTIS HC A23/MF A01

SNECMA has developed and extended the use of a secondary flow computation method for axial flow compressors. This method takes into account the secondary phenomena through a viscous correction applied to a through flow calculation. This correction is calculated to the complete meridian plane, including the bladerows. A set of equations deduced from three dimensional parabolized and pitchwise averaged Navier-Stokes equations are solved. A classical coupling process between the secondary flow and the through flow computations is insured through mass flow injection. After reviewing the main features of the method, an application to a multistage compressor is presented. The application of this method to the design of end-bend blades is shown. Author

N88-28926# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AGARD ENGINE DISC COOPERATIVE TEST PROGRAMME

A. J. A. MOM and M. D. RAIZENNE (National Aeronautical Establishment* Ottawa, Ontario) Aug. 1988 87 p (AGARD-R-766; ISBN-92-835-0475-5; AD-A199759) Avail: NTIS HC A05/MF A01

The initial results of an AGARD test program on fatigue behavior of engine disc materials are described. The first phase of the program, the Core Program, was aimed at test procedure and specimen standardization and calibration of the various laboratories. A detailed working document is included which describes the testing fundamentals and procedures and includes the analysis procedures used for handling the test data. Fatigue crack initiation and propagation testing was performed on Ti-6Al-4V material under room temperature and constant amplitude loading conditions using four different specimen designs. All results were statistically analyzed for possible significant differences in material behavior due to disc processing variables, specimen location in the disc or testing laboratory. Author

N88-29911# Pratt and Whitney Aircraft, West Palm Beach, FL. Engineering Div.

FUEL PROPERTY EFFECTS ON THE US NAVY'S TF30 ENGINE

S. A. MOSIER and P. A. KARPOVICH (Naval Air Propulsion Test Center, Trenton, N.J.) /In AGARD, Combustion and Fuels in Gas Turbine Engines 15 p (SEE N88-29910 24-25) Jun. 1988

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The TF30 engine was introduced into Navy service in 1972 and is scheduled to continue to power the carrier based F14 for some time. Although the engine was designed and developed to operate on specification grade JP-5 fuel, it is conceivable that during its lifetime, the TF30 might have to operate on out-of-spec or broadened-spec fuels. This contingency could arise should the availability of high grade petroleum crude oil used for aircraft fuel production be decreased. Therefore, a program of experimentation and analysis was conducted to evaluate the effects of broadened-spec petroleum fuels on the performance, durability and operability of the TF30-P-414A engine. As fuel quality deteriorated, some reductions in engine performance characteristics were observed. However, based upon limited time testing, the TF30-P-414A engine was shown to be capable of operating on liquid petroleum fuels having a wide range of properties. Author

07 AIRCRAFT PROPULSION AND POWER

N89-10008# Imperial Coll. of Science and Technology, London (England).

STRUCTURAL DYNAMIC CHARACTERISTICS OF INDIVIDUAL BLADES

D. J. EWINS and R. HENRY (Institut National des Sciences Appliquées, Lyon, France) In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 27 p (SEE N89-10006 01-02) Jun. 1988

(AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

The basic characteristics of blade vibration properties are outlined. The design features are identified which have an influence on the IR values. Simple models of blades were used, then the methods were applied to calculation of the structural dynamic properties of real blades. The natural frequencies and mode shapes of a blade in its operational environment may differ considerably from those calculated for the same blade as an isolated component. These differences are examined. Author

N89-10009# Imperial Coll. of Science and Technology, London (England). Dept. of Mechanical Engineering.

STRUCTURAL DYNAMIC CHARACTERISTICS OF BLADED ASSEMBLIES

D. J. EWINS In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 37 p (SEE N89-10006 01-02) Jun. 1988

(AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

Considerable efforts were expended in order to make accurate predictions for the essential structural dynamic properties of typical turbomachine blades. In the pursuit of accuracy in these predictions, the effect of the coupling between one blade and its neighbors via the structure connections which exist, was neglected. The patterns of both natural frequencies and mode shapes for various assemblies are illustrated and the major controlling factors in each case identified. Simplified mathematical models of a bladed assembly are used that permit detailed parametric studies necessary to determine the patterns of behavior. Author

N89-10010# Rolls-Royce Ltd., Bristol (England).

FATIGUE AND ASSESSMENT METHODS OF BLADE VIBRATION

E. K. ARMSTRONG In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 34 p (SEE N89-10006 01-02) Jun. 1988

(AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

Fatigue is the failure mode of a metal which was subjected to a large number of applications of stress. In a fatigue failure a component suffers the development of a crack, which propagates very quickly across the section of the component. In the majority of the cases this stress is a result of the vibration of the blades, compressor, or turbine, at a significant amplitude. It is necessary to appreciate the major factors controlling the fatigue of blading which are encountered in the actual operation of gas turbines and the practical steps which can be taken to assess the levels of vibration which are present, to ensure as far as possible that blade failures due to this cause are minimized. Author

N89-10011# Office National d'Études et de Recherches Aéronautiques, Paris (France).

LIFE TIME PREDICTION: SYNTHESIS ON ONERA'S RESEARCH IN VISCOPLASTICITY AND CONTINUOUS DAMAGE MECHANICS, APPLIED TO ENGINE MATERIALS AND STRUCTURES

R. LABOURDETTE In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 15 p (SEE N89-10006 01-02) Jun. 1988

(AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

Improvements in the metallurgy of superalloy materials make it possible to use them at higher temperatures. However, it follows from the increase in temperature that more severe thermomechanical problems are encountered when dealing with the design and life prediction of turbine blades. Roughly speaking, two phenomena are to be described for such a prediction: creep and fatigue. The main steps for the method of life prediction developed at ONERA are: behavior of the macroscopic volume element; damage accumulation under creep-fatigue conditions; and numerical methods of stress and damage calculation in complex

structures undergoing thermomechanical loading. The steps are described in detail. Author

N89-10012# United Technologies Research Center, East Hartford, CT.

AEROELASTIC COUPLING: AN ELEMENTARY APPROACH

FRANKLIN O. CARTA In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 16 p (SEE N89-10006 01-02) Jun. 1988

(AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

It was shown in the original 1967 paper that the energy method, using unsteady isolated airfoil theory, and applied to actual multiblade rotors, yielded results that were remarkably accurate. This fortuitous agreement was sufficiently encouraging to foster a continuing development of the technique and its constituent aerodynamic and structural dynamic components. As shown in these two volumes and in the several citations to advanced analyses, current practice has gone well beyond the relatively simplistic view of the early paper. The aerodynamic input now encompasses multiblade systems subjected to compressible flows, and structures are modeled to include nonlinearities and mistuning. Nevertheless, the paper has served its purpose well. In its original form it set the stage for the continual improvement of engine flutter prediction methods, and in this manual it provides the reader with a vehicle for coordinating the separate disciplines which, together, represent the modern approach to flutter prediction of turbomachinery blade rows. Author

N89-10013# Massachusetts Inst. of Tech., Cambridge. Gas Turbine Lab.

AEROELASTIC FORMULATION FOR TUNED AND MISTUNED ROTORS

EDWARD F. CRAWLEY In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 24 p (SEE N89-10006 01-02) Jun. 1988

(AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

The topics to be addressed are: the formulation of the aeroelastic problem, including a summary of the relations necessary to transform various diverse structural and aerodynamic models to a consistent notation; a brief review of the solution techniques applicable; the trends in aeroelastic stability for tuned rotors; and the effects of mistuning on stability. Author

N89-10014# Pratt and Whitney Aircraft, East Hartford, CT.

FAN FLUTTER TEST

HANS STARGARDT In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 35 p (SEE N89-10006 01-02) Jun. 1988

(AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

The objective is to describe an aeroelastic investigation of fan flutter. Discussion includes test procedures for flutter evaluation, data acquisition and reduction, safety, and instrumentation. Some data contents are included, but are not the primary concern. Initially, a complete sequence of preparation, testing, and analysis of an ideal fan flutter test is presented. This is followed by identification of dangerous blade vibrations, a case history of a NASA/Pratt and Whitney Subsonic/Transonic Flutter Study, and a discussion and analysis of the program results. Lastly, a summary relating this test to the overall discussion of fan flutter testing is presented. It will be noted that many of the steps in the ideal test situation were omitted in the actual case history. Most of these differences are in the test preparation area because the case history used a previously tested design in which much of the preliminary work and safety screening was already accomplished. Author

N89-10015# Jeffers (James D., III), Tampa, FL.

AEROELASTIC THERMAL EFFECTS

JAMES D. JEFFERS, III In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 6 p (SEE N89-10006 01-02) Jun. 1988

(AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

The adverse effect of increasing temperature on the stability of turbomachinery airfoils was long recognized but remains today one that is not fully understood. The quantitative effect on the

07 AIRCRAFT PROPULSION AND POWER

reduced frequency parameter, $k = \omega c/V$, which was experimentally and analytically shown to be one of the most influential stability parameters, is readily calculated. The effects of increasing temperature on the parameters that comprise reduced frequency are well known. Unfortunately, the resulting effect on aeroelastic stability, particularly for stall flutter, is not. This inability to completely assess thermal effects, among others, was dramatically underscored by an occurrence of subsonic stall flutter in the first stage fan rotor of the F100 turbofan engine early in the development program. The severity of the problem prompted an intensive experimental test program and analysis to first determine a solution and, further, to assess the design techniques used to avoid the problem. As a result, a decade of extensive analytical and experimental research was conducted at the Government Products Division of Pratt and Whitney Aircraft, the United Technologies Research Center, and the NASA Lewis Research Center. The following is a summary of some of the findings of these investigations. Author

N89-16781# NATO European Fighter Management Agency, Munich (Germany, F.R.).
OPERATIONAL REQUIREMENTS FOR ENGINE CONDITION MONITORING FROM THE EFA VIEWPOINT

J. V. GOODFELLOW. In AGARD, Engine Condition Monitoring: Technology and Experience 4 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The Engine Health Monitoring (EHM) System for the European Fighter Aircraft (EFA) is to be an integral part of the overall Weapons Systems Integrated Monitoring and Recording System. This will include both an on-aircraft element and a ground-based station which will have to interface with the different logistics ADP systems being developed. By means of measurements and analyses the EHM is required to automatically and continuously monitor the condition of the engine and to detect and accurately diagnose any need for immediate and future maintenance actions. The purpose is to provide for a rapid turn-around at the flight line and to reduce both the need and the time required for all maintenance thereby increasing the overall availability for operational use. The intention is that this shall contribute to the significant improvement in weapon system cost effectiveness that is believed to be achievable through greater attention to reliability, maintainability, and testability. Author

N89-16782# Naval Air Systems Command, Washington, DC.
AN OVERVIEW OF US NAVY ENGINE MONITORING SYSTEM PROGRAMS AND USER EXPERIENCE

ANDREW J. HESS. In AGARD, Engine Condition Monitoring: Technology and Experience 16 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The Naval Air System Command (NAVAIR) has made a commitment to require inflight engine monitoring capabilities and Engine Monitoring Systems (EMS) on all new aircraft and engine programs. The current EMS requirement and system design concepts are the end result of over 15 years of developing system capabilities and justifying system benefits. These requirements and system design concepts are based on the lessons learned from the F/A-18 and A-7E Inflight Engine Condition Monitoring System (IECMS) program. The highly successful A-7E IECMS is the cornerstone on which all Navy EMS are based today. NAVAIR has revised the general engine specifications to contain detailed requirements for a comprehensive EMS. These requirements were included for flight safety, maintenance, engineering management, and operational support benefits. These specification requirements were used on all new aircraft/engine programs (e.g., F-14A, F-14D, A-6F, AV-8B, E-2C re-engine, and V-22). When justifiable, EMS is also being considered for retrofit on several older aircraft/engine applications. An overview is given of the U.S. Navy EMS program status. Established EMS functional capabilities and requirements are discussed and detailed specification items are reviewed. Current EMS projects are examined with respect to system description, program status and individual peculiarities. Finally, conclusions are given on EMS projected benefits, user experience, lessons learned, and future directions of this technology. Author

N89-16783# Royal Air Force, London (England).

ENGINE USAGE CONDITION AND MAINTENANCE MANAGEMENT SYSTEMS IN THE UK ARMED FORCES

W. D. M. FLETCHER and N. A. BAIRSTO. In AGARD, Engine Condition Monitoring: Technology and Experience 5 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The cost effectiveness of engine condition monitoring is often questioned. The Royal Air Force (RAF) has considerable experience in engine condition monitoring based on a series of trials. Recently aircraft were introduced with comprehensive monitoring systems. Previous condition usage monitoring trials are outlined together with the reasons for changing from scheduled based maintenance to condition based maintenance. The cost effectiveness of various methods is revealed and the difficulty of justifying the retrofit of equipment fleetwide is discussed. Finally, some of the current activities in the RAF on condition monitoring are presented. Author

N89-16784# National Defence Headquarters, Ottawa (Ontario). Directorate of Transport and Helicopter Engineering and Maintenance.

CANADIAN FORCES AIRCRAFT CONDITION/HEALTH MONITORING: POLICY, PLANS AND EXPERIENCE

CHRISTOPHER SCHOFIELD, ROSS LAGRANDEUR, FRANCOIS DUBE, THOMAS HARRIS, ROBERT W. CUE, and ALAIN LEBLANC. In AGARD, Engine Condition Monitoring: Technology and Experience 10 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

Current Canadian Forces (CF) policy with respect to aircraft Engine Condition/Health Monitoring (ECM/EHM) is highlighted. In doing so, a summary of CF aircraft types and the ECM/EHM techniques applied to each is presented. The CF's experience to date with the development and application of ECM/EHM is reviewed. This includes an examination of the effectiveness of the CF Spectrometric Oil Analysis Program and the use of magnetic particle detectors and manual performance trending. Present plans for further development and implementation of policy, methodologies and techniques; and for the integration of these into an effective ECM/EHM capability that will pay benefits both in terms of life cycle costs and operational availability, are presented. Author

N89-16787# GasTOPS Ltd., Ottawa (Ontario).

CF-18 ENGINE PERFORMANCE MONITORING

D. E. MUIR, D. M. RUDNITSKI, and ROBERT W. CUE (National Defence Headquarters, Ottawa, Ontario). In AGARD, Engine Condition Monitoring: Technology and Experience 20 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The Canadian Forces (CF) have adopted a conditional maintenance concept for the engines of the CF-18 fighter aircraft. In support of this concept, advanced engine performance monitoring procedures are being developed to track the general performance level of each engine and identify problematic engine components. The procedures are based on takeoff ground roll data recorded by the aircraft in-flight Engine Condition Monitoring System and steady-state data obtained from automated Engine Test Facilities. The development and field evaluation of these procedures is described. A discussion of future development work and related research activities is also included. Author

N89-16790# Ministry of Defence, London (England). Directorate of Engines

RECENT UK TRIALS IN ENGINE HEALTH MONITORING: FEEDBACK AND FEEDFORWARD

M. J. SAPSARD. In AGARD, Engine Condition Monitoring: Technology and Experience 8 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

Engine health monitoring effectiveness had to be quantified prior to large scale commitment by the UK Services. Some of the activities undertaken in Air Staff Target 603 are described. A program was set up to assess that effectiveness. Also described are some of the incidental lessons learned from this and other related health monitoring exercises. Author

07 AIRCRAFT PROPULSION AND POWER

N89-16791# Turkish Air Force, Ankara. Aircraft Engines Branch.

F110 ENGINE MONITORING AND MAINTENANCE MANAGEMENT SYSTEMS FOR F-16 C/D

F. ALGUN / In AGARD, Engine Condition Monitoring: Technology and Experience 12 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01

The engine monitoring and management systems employed by the Turkish Air Force for F110-GE-100 engines of F-16 C/D aircraft are described. These systems include the Engine Monitoring System (EMS) and the Minimum Essential Engine Tracking System (MEETS). The EMS performs the acquisition, transfer and processing of engine data for maintenance use. The systems monitor engine operation, and determines engine exceedances and faults; isolates faults to appropriate level and processes data to interface with other data systems. The MEETS provides an automated means of managing on-condition maintenance of fighter engines. This system tracks engines and components in terms of operation time, temperature, and cycle limits, and also forecasts remaining flying and engine operation hours for an individual engine, aircraft, or the whole fleet. The operation of the systems and future plans to develop and implement a unique data automation systems are discussed. This automated data system will be capable of supporting all the base level functions of aircraft, engines, trainers, support equipment, test equipment, missiles, munitions and communications/electronics. Author

N89-16796# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Evry Cedex (France).

SERVICE LIFE CALCULATOR FOR THE M53 TURBOFAN ENGINE [LE CALCULATEUR DE POTENTIEL SUR LE REACTEUR M53]

CLAUDE SPRUNG / In AGARD, Engine Condition Monitoring: Technology and Experience 15 p (SEE N89-16780 09-06) Oct. 1988 In FRENCH (AGARD-CP-448) Avail: NTIS HC A20/MF A01

The functional requirements for a service life calculator are defined and the flight and ground equipment comprising such a system are described. A system utilization philosophy is defined and preliminary results from studies considering the application of service life calculators are presented. Author

N89-16800# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.).

THE ADVANTAGE OF A THRUST RATING CONCEPT USED ON THE RB199 ENGINE

P. THEIMER / In AGARD, Engine Condition Monitoring: Technology and Experience 15 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01

The control system of the RB199 engine was designed for a rating, using the HP-turbine inlet temperature as a limiter. The engine has now been in service for 7 years and still uses the original concept throughout all fleets in the UK, Italy and Germany, although new digital engine control units are being introduced which will allow considerable improvements. For some fleets a thrust rating concept based on the original control system design has been installed recently. The concept is described and the procedure explained. A comparison is made between the existing full thrust concept at the maximum cleared HP turbine temperature and the applied thrust rating concept. Besides the basic behavior of seal gaps, the influence of thrust rating in view of the life usage of life-limited parts as well as in the change of the maintenance material costs is explained. The assumptions for the comparison with their background are described. Finally, a refined thrust rating concept is introduced. Author

N89-16802# Aeronautical Research Labs., Melbourne (Australia).

GAS PATH ANALYSIS AND ENGINE PERFORMANCE MONITORING IN A CHINOOK HELICOPTER

D. E. GLENNY / In AGARD, Engine Condition Monitoring: Technology and Experience 14 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01

Periodic and consistent assessment of engine performance in military helicopters is essential if in-service operating margins are not to be eroded by harsh environmental conditions. Manually initiated GO-NO-GO pre-flight checks (FIT, etc.) or ad-hoc in-flight

performance checks rarely provide sufficiently reliable data for maintenance or diagnostic purposes. In contrast, performance assessment methods based on gas path analysis principles and engine/aircraft data, automatically recorded during flight, offer a potentially attractive alternative. ARL has investigated a number of these alternatives, and has carried out an in-service trial on a Boeing CH47C Chinook helicopter operated by the RAAF. In the trial existing aircraft/engine instrumentation was complemented by specially designed probes located at module interfaces while the data was recorded on an ARL designed acquisition system. The performance-fault algorithms used in the analyses were configured for a range of engine operating speeds. Results for the trial are presented in terms of deviations from pre-established baseline conditions. Statistical analyses using linear regression fits and Kalman filtering techniques have been investigated to minimize the effects of data uncertainty. The applicability of the procedures, including thermodynamic analyses and equipment are discussed in terms of fleetwide adoption of the Chinook. Author

N89-16803# National Research Council of Canada, Ottawa (Ontario).

THE EFFECTS OF A COMPRESSOR REBUILD ON GAS TURBINE ENGINE PERFORMANCE

J. D. MACLEOD and J. C. G. LAFLAMME (Canadian Forces Base, Baden-Soellingen, Germany, F.R.G.) / In AGARD, Engine Condition Monitoring: Technology and Experience 14 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

The Canadian Department of Defence, in conjunction with the Engine Laboratory of the National Research Council Canada, initiated a project for the evaluation of gas path coatings on the Allison T56 engine. The objective of this work was to evaluate blade coatings in terms of engine performance effects and material durability. The project included a study of the influence of rebuilding the compressor on performance, since dismantling and rebuilding was required in the coating process. Described is the compressor rebuild study, including the overall objectives, the test set-up, the performance effects, and the uncertainty of the measured results. The impact of this work on the coatings project is also documented. Author

N89-16804# GEC Avionics Ltd., Rochester (England) Future Systems Group.

SYSTEM CONSIDERATIONS FOR INTEGRATED MACHINERY HEALTH MONITORING

R. M. TESTER / In AGARD, Engine Condition Monitoring: Technology and Experience 14 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

Aircraft engine health monitoring, and other related machinery condition monitoring, has been gaining in credibility and implementation over recent years. It is destined to become standard fit on all new major aircraft programs in the near future. To date the monitoring systems have mainly been stand-alone in form, and have been treated as separate functions. This paper discusses the considerations for integrating health monitoring into other aircraft systems, and reviews the potential benefits to be gained by such integration. In conclusion, the paper presents two products from both ends of the spectrum, representing a simple single unit integration, and a full aircraft-wide implementation. Author

N89-16805# Societe de Fabrication d'Instruments de Mesure, Massy (France). Measurement and Flight Test Dept.

MAINTENANCE AID SYSTEM FOR WIDE BODY AIRCRAFT

ALBERT LEVIONNOIS / In AGARD, Engine Condition Monitoring: Technology and Experience 7 p (SEE N89-16780 09-06) Oct. 1988

(AGARD-CP-448) Avail: NTIS HC A20/MF A01

Aircraft maintenance personnel when troubleshooting aircraft failures, must first acquire a great deal of information about the aircraft's engines before being able to arrive at any kind of diagnosis. Computerized modern aircraft provide all necessary parameters with good precision. Aircraft condition monitoring systems centralize information from data buses, compute flight phases, determine the reports to be made per flight phase and function, and carry out automatic parameter identification. Should an incident occur, then the parameter's history is stored before and after the incident, together with its evolution. All this information

07 AIRCRAFT PROPULSION AND POWER

is stored in static memory for transmission by data link, is printed during or after the flight, or downloaded when the aircraft is back at its base. Today between 35 and 40 reports are currently produced by wide body aircraft. This technology is easily adaptable to combat aircraft. Author

N89-16806# Computing Devices Co., Ottawa (Ontario). **INSTALLED THRUST AS A PREDICTOR OF ENGINE HEALTH FOR JET ENGINES**

G. B. MACKINTOSH and M. J. HAMER. In AGARD, Engine Condition Monitoring: Technology and Experience 10 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail. NTIS HC A20/MF A01

Extensive installed and uninstalled gross thrust measurements were made over one complete maintenance cycle on 19 afterburning turbojet engines. Installed measurements utilized a sensor which can compute the thrust in real time from engine tailpipe pressure measurements. Correlation of installed thrust with maintenance history indicated a maximum degradation below which engines were removed from service. The engines were trimmed uninstalled using lapse rate charts to produce a specific value of uninstalled thrust, corrected to standard conditions. Significant variations in installed corrected thrust resulted. Higher initial values of installed corrected thrust resulted in more rapid engine degradation and a shorter time before maintenance was required. Author

N89-16808# Rolls-Royce Ltd., Bristol (England). Mechanical Technology (Military) Dept. **A JOINT STUDY ON THE COMPUTERISATION OF IN-FIELD AERO ENGINE VIBRATION DIAGNOSIS**

H. R. CARR, G. J. IVES, and P. JENKINS (Ministry of Defence, London, England). In AGARD, Engine Condition Monitoring: Technology and Experience 13 p (SEE N89-16780 09-06) Oct. 1988 Sponsored by Ministry of Defence Procurement Executive, London, United Kingdom (AGARD-CP-448) Avail. NTIS HC A20/MF A01

Test House methods used by the RAF for diagnosing causes of excessive vibration in Military Engines are based on a visual comparison of the test signatures with those from built-in-fault tests. Interpretation depends largely on operator experience. A joint program was launched in 1984 to develop a software-based analyzer to diagnose a range of mechanical abnormalities including unbalance, misalignment of bearings and shafts, and squeeze film bearing functions. The analyzer would handle a variety of engine types and would be suitable for inexperienced operators. The ensuing program between MOD and RR pic developed data acquisition and interpretive routines, and provided recorded engine signatures from both the RAF and Rolls-Royce pic test beds. Important aspects were the essential combination of intuitive operator experience, detailed, strip and inspection of problem engines, and an engineering understanding from Rolls-Royce pic. The current intention is to install an Automatic Data Processing system by 1990/1991. This paper reviews the successes achieved and problems encountered. Author

N89-16809# Pratt and Whitney Aircraft of Canada Ltd., Longueuil (Quebec). **FAULT MANAGEMENT IN AIRCRAFT POWER PLANT CONTROLS**

S. MAZAREANU and A. NOBRE. In AGARD, Engine Condition Monitoring: Technology and Experience 16 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail. NTIS HC A20/MF A01

The advent of Digital Electronics in aviation has opened new doors to fault management as a tool to enhance aircraft operability and safety in flight. Today it is possible to integrate flight control systems with power plant management systems. Operability of a battle-damaged aircraft can be enhanced under certain conditions through sophisticated fault management systems. This paper reviews some of the considerations applicable to engine control fault management systems in commercial aviation. Engine control systems have evolved in the last decade from being primarily hydromechanical to being primarily electronics. This rapid growth in acceptance of the electronic systems by the aviation industry was due to the improvement in reliability of the digital system over analog systems previously in use. The fault management system is a powerful tool to organize and optimize maintenance

logistics. Operating costs can be significantly reduced with an appropriate fault management system on board. The paper presents: (1) a brief review of the evolution of engine controls; (2) the emergence of fault management systems (as part of engine control systems); (3) maturity of fault management systems (still evolving); and (4) future potential. Author

N89-16813# Aeronautical Research Labs., Melbourne (Australia). **IDENTIFICATION OF DYNAMIC CHARACTERISTICS FOR FAULT ISOLATION PURPOSES IN A GAS TURBINE USING CLOSED-LOOP MEASUREMENTS**

G. L. MERRINGTON. In AGARD, Engine Condition Monitoring: Technology and Experience 13 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail. NTIS HC A20/MF A01

Combat aircraft, because of the mission profiles involved, tend to rarely operate with their engines in a steady-state condition for extended periods. Furthermore, current generation aircraft contain Engine Monitoring Systems (EMS) which automatically capture a record of important engine parameters when a parameter exceedance is detected. It follows then that any subsequent post-flight data analysis for fault isolation purpose will often necessitate the extraction of the required diagnostic information from transient data records. This generally contrasts with past practice where most of the available fault diagnostic procedures have been derived from steady-state information. In an attempt to overcome this, and thereby provide effective tools for diagnosing faults from transient data records, a procedure is outlined to extract information about the dynamic characteristics of gas turbines from input/output measurements. The parameter estimator technique involved has the potential to provide a means of detecting changes in some unmeasured/unrecorded parameter, such as shifts in variable geometry schedules. Thus in essence, it provides a tool for identifying problems from simple transient test data which were previously inaccessible or difficult to obtain. Author

N89-16814# Canadian Forces Base Trenton, Astra (Ontario). Aerospace Maintenance Development Unit. **CF-18/F404 TRANSIENT PERFORMANCE TRENDING**

J. R. HENRY. In AGARD, Engine Condition Monitoring: Technology and Experience 13 p (SEE N89-16780 09-06) Oct. 1988 (Contract FE220786FRMC4; ARP-3610-147) (AGARD-CP-448) Avail. NTIS HC A20/MF A01

The on condition concept of aircraft engine maintenance has led to intensive analysis of the data recorded by Engine Health Monitoring systems during steady-state operation of the engine. To date however the transient data acquired during take-off or in-flight have received far less attention. Presented here are the results of an investigation into the feasibility of utilizing engine data acquired during take-off to trend the performance of a modern turbofan engine (GE-F404). Factors influencing the repeatability of take-off data such as throttle rate, variable geometry and instrumentation effects are discussed. Using engine data from operational aircraft, various trending parameters are evaluated using a data capture window developed to minimize the scatter of nominal engine performance. A statistical tool to identify performance shifts is briefly described, and is shown to successfully detect a shift in the take-off performance of a recently repaired engine. It is concluded that the trending of transient performance data is a viable means of detecting certain engine faults and recommendations are made concerning the implementation of such a program for the F404 engine. Author

N89-16853# National Aerospace Lab., Amsterdam (Netherlands). **MEASUREMENT UNCERTAINTY OF THE AGARD/PEP UNIFORM ENGINE TEST PROGRAM**

J. P. K. VLEGHERT. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 12 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail. NTIS HC A22/MF A01

In the AGARD/PEP Uniform Engine Test Program (UETP) two engines were tested in 8 facilities in 5 different countries to compare measuring practices and results. An overview is given of the UETP with the emphasis on Uncertainty Assessment according to the method proposed by Dr. Abernethy in which the total uncertainty is split in a random error (scatter, precision) and a bias error or

07 AIRCRAFT PROPULSION AND POWER

offset. The results show that the random error is small but that appreciable bias error exists between participants. Author

N89-16854# Sverdrup Technology, Inc., Arnold Air Force Station, TN. Instrumentation and Controls.

AN OVERVIEW OF THE APPLICATION OF STANDARD MEASUREMENT UNCERTAINTY METHODOLOGY TO PROPULSION TESTING

J. W. THOMPSON, JR., W. F. KIMZEY, and W. O. BOALS, JR. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 15 p (SEE N89-16846 09-09) Jul. 1988 Prepared in cooperation with Arnold Engineering Development Center, Arnold Air Force Station, TN (AGARD-CP-429) Avail: NTIS HC A22/MF A01

In the past several years, a standard measurement uncertainty methodology has been adopted by the SAE, ASME, AIAA, ISA, JANNAF, and ISO. This standard methodology has significantly improved the ability to resolve and understand measurement systems accuracies in the engine test facility at AEDC. The measurement accuracy assessment methodology and its development background is examined. The procedural steps in making an uncertainty analysis are reviewed, and typical results of an analysis effort are illustrated by reviewing the elemental errors and uncertainties for state-of-the-art measurement systems used in simulated altitude tests of air breathing engine propulsion systems. Typical elemental and combined uncertainties for measured values of pressure, force, flow, and temperature and uncertainties of propulsion system thrust and specific fuel consumption performance parameters are included. Author

08

AIRCRAFT STABILITY AND CONTROL

Includes aircraft handling qualities; piloting; flight controls; and autopilots.

N86-30739# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AIRCRAFT RESPONSE TO TURBULENCE

1985 32 p Presented at the 61st Meeting of the Structures and Materials Panel of AGARD, Oberammergau, West Germany, 8-13 Sep. 1985 (AGARD-R-738; ISBN92-835-0393-7; AD-A171307) Avail: NTIS HC A03/MF A01

In 1985 the Structures and Materials Panel initiated an activity to consider the flight of flexible aircraft in turbulence. As a preliminary to the start of this activity, the Panel heard the two papers included in this report. One of the two papers discusses measurements of time histories of turbulence made by specially equipped aircraft and turbulence event statistics obtained from aircraft in commercial operation. The other paper considers aspects of collection and analysis of flight data, methods of calculating aircraft response and constraints in operation. Author

N86-30740# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

APPLICATION OF ADA HIGHER ORDER LANGUAGE TO GUIDANCE AND CONTROL

May 1986 106 p Presented at a Lecture Series, Ottawa, Ontario, 20-21 May 1986; London, England, 2-3 Jun. 1986; and Cologne, West Germany, 5-6 Jun. 1986; sponsored by the Guidance and Control Panel and the Consultant and Exchange Programme of AGARD

(AGARD-LS-146; ISBN92-835-1527-7; AD-A171299) Avail: NTIS HC A06/MF A01

The need to reduce escalating software life-cycle costs is the rationale for Ada. Early experience with the language suggests that the promise of increased software productivity can be fulfilled. However, many problems remain; the need for validated and efficient compilers targeted for computers suitable to the guidance and control application, and software development environments built around Ada, are two among the foremost. This Lecture Series, sponsored by the Guidance and Control Panel of AGARD, has

been implemented by the Consultant and Exchange Programme of AGARD. Author

N86-30741# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

GUST LOAD PREDICTION AND ALLEVIATION ON A FIGHTER AIRCRAFT

J. BECKER Jun. 1986 22 p Presented at the 61st Meeting of the Structures and Materials Panel of AGARD, Oberammergau, West Germany, 8-13 Sep. 1985

(AGARD-R-728; ISBN92-835-1532-3; AD-A169946) Avail: NTIS HC A02/MF A01

In 1985 the AGARD Structures and Materials Panel initiated an activity on the flight of flexible aircraft in turbulence. As a preliminary the Panel heard this paper which discusses the influence of turbulence induced dynamic loads on the structural design of fighter aircraft. Methods for calculating dynamic response are given, and the problems associated with improved ride are considered. Author

N87-21901# Technische Univ., Brunswick (Germany, F.R.). Inst. for Guidance and Control.

DESIGN CRITERIA FOR MULTI-LOOP FLIGHT CONTROL SYSTEMS

G. SCHAEZNER In AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 12 p (SEE N87-21881 15-04) Dec. 1986

(AGARD-CP-410) Avail: NTIS HC A15/MF A01

The problems of design criteria and architecture of multiloop flight control systems for a realized system to achieve precise flight path guidance, safe and economic control of the aerodynamic flow (airspeed, angle of attack and lift coefficient control) and passenger comfort are discussed. Joint root locus and quality criteria design are presented. The structure of the presented multiloop flight control system consists of nonlinear open loop control for flight performance and flight management, superposed quasilinear state vector feedback; and six control surfaces (aileron, rudder, elevator, trim, throttle, direct lift/drag control). Author

N87-22674# British Aerospace Public Ltd. Co., Preston (England).

IMPROVED COMBAT PERFORMANCE USING RELAXED STATIC STABILITY AND A SPIN PREVENTION SYSTEM (FBW JAGUAR)

J. R. NELSON and T. D. SMITH In AGARD Improvement of Combat Performance for Existing and Future Aircraft 6 p (SEE N87-22663 16-05) Dec. 1986

(AGARD-CP-409) Avail: NTIS HC A07/MF A01

The theoretical performance benefits that can be obtained by designing an aircraft that is naturally unstable in pitch and artificially stabilized by use of active control technology including an integral stall departure and spin prevention/g limiting function are described. How many of these benefits have been successfully demonstrated during flight trials on the FBW Jaguar demonstrator aircraft is discussed. The flight trials are briefly discussed including the results of the stall departure and spin prevention system assessment with examples of severe dynamic combat maneuvers made possible by such a system. The combination of leading edge wing strakes and longitudinal instability gave improvements in aircraft turn rate, acceleration, and field performance, thus providing a practical demonstration of many of the theoretical benefits described earlier. The FBW Jaguar flight control system was designed from the outset as a production system with the aim of identifying production clearance procedures so this experience leads straight into new combat aircraft such as the EFA. Author

N87-24404 Stevens Inst. of Tech., Hoboken, NJ. Dept. of Mechanical Engineering.

STALL FLUTTER

F. SISTO In AGARD Aeroelasticity in Axial-Flow Turbomachines Volume 1: Unsteady Turbomachinery Aerodynamics 11 p (SEE N87-24398 18-02) Mar. 1987

(AGARD-AG-298-VOL-1) Avail: NTIS HC A13/MF A01

A qualitative exposition of stall flutter and the closely related phenomena of choke flutter and supersonic bending stall flutter in axial flow turbomachines is given. P.J.F.

08 AIRCRAFT STABILITY AND CONTROL

N87-29526# British Aerospace Aircraft Group, Preston (England)

VOICE CONTROL OF COCKPIT SYSTEMS

P. BECKETT. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 3 p (SEE N87-29503 24-06) Feb 1987 Sponsored by Royal Aircraft Establishment, Farnborough, England (AGARD-CP-414) Avail NTIS HC A14/MF A01

The use of automatic speech recognition for cockpit management should allow more operations to be carried out head-up. In turn this should reduce the frequency and length of the periods spent looking into the cockpit. This would be particularly beneficial for the single seat pilot who could benefit from maintaining visual contact with a target or cooperating aircraft. In addition, it should generally allow more accurate flying performance and reduce the risk of collision with the ground or other aircraft. In order to assess these anticipated advantages, a simulator trial was set up at British Aerospace where a conventionally operated advanced fighter cockpit, containing electronic displays, was compared with one where Direct Voice Input (DVI) took over some of the roles normally carried out by tactile controls. The comparison was made during a simulated low level mission containing a cross section of typical cockpit activities. The comparison is discussed in detail. Author

N88-10796# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France) Guidance and Control Panel

FAULT TOLERANT CONSIDERATIONS AND METHODS FOR GUIDANCE AND CONTROL SYSTEMS

MARU J. PELEGRIN (Office National d'Etudes et de Recherches Aeronautiques, Toulouse, France) Jul 1987 136 p (AGARD-AG-289, ISBN-92-835-1554-4, AD-A188622) Avail NTIS HC A07/MF A01

This AGARDograph, prepared and edited at the request of the Guidance and Control Panel of AGARD, presents a description of recent trends and developments in analysis and design methods for fault tolerant guidance and control systems architectures. The problems and issues associated with these architectures, including both hardware and software aspects, are addressed exploring the many developments under way in NATO in the following areas: advances in fault tolerant architectures, advances in analytical fault detection methods, design considerations and methods, and analysis and testing methods. For individual titles, see N88-10797 through N88-10805.

N88-10798*# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA

THE APPLICATION OF EMULATION TECHNIQUES IN THE ANALYSIS OF HIGHLY RELIABLE, GUIDANCE AND CONTROL COMPUTER SYSTEMS

GERARD E. MIGNEAULT. In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems 12 p (SEE N88-10796 02-08) Jul 1987 (AGARD-AG-289) Avail NTIS HC A07/MF A01 CSCL 01C

Emulation techniques can be a solution to a difficulty that arises in the analysis of the reliability of guidance and control computer systems for future commercial aircraft. Described here is the difficulty, the lack of credibility of reliability estimates obtained by analytical modeling techniques. The difficulty is an unavoidable consequence of the following: (1) a reliability requirement so demanding as to make system evaluation by use testing infeasible; (2) a complex system design technique, fault tolerance; (3) system reliability dominated by errors due to flaws in the system definition; and (4) elaborate analytical modeling techniques whose precision outputs are quite sensitive to errors of approximation in their input data. Use of emulation techniques for pseudo testing systems to evaluate bounds on the parameter values needed for the analytical techniques is then discussed. Finally, several examples of the application of emulation techniques are presented. Author

N88-10799# Marconi Avionics Ltd., Rochester (England) Combat Aircraft Controls Div

SOME APPROACHES TO THE DESIGN OF HIGH INTEGRITY SOFTWARE

J. T. SHEPHERD, D. J. MARTIN, and R. B. SMITH. In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems 14 p (SEE N88-10796 02-08) Jul 1987 Sponsored by Ministry of Defence, United Kingdom (AGARD-AG-289) Avail NTIS HC A07/MF A01

As the complexity of aircraft systems has increased and the performance requirements for such aircraft have become more demanding the number of safety critical systems carried has increased. This allied to the preponderance of digital systems on board the aircraft has meant that the software requirements of safety critical systems have become one of the key items in the development of new aircraft. In the early days of high integrity systems analog techniques were used and a variety of redundancy techniques developed to cope with the need to obtain the required level of integrity from system elements whose inherent reliability was low. With the advent of digital systems it is necessary to consider how much integrity can be achieved with system software so that the total integrity of a safety critical system can be maintained. This can be achieved by fault avoidance or fault tolerance. To date the former has been the main method used to achieve high integrity software. However, fault avoidance to be effective must assume an error free system, which is near impossible to achieve. Fault avoidance is combined with fault tolerance, which adjusts the system to its inherent errors, and is added to assure greater reliability. FMR

N88-10800# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Wesseling (Germany, F.R.) Inst for Flight System Dynamics

ROBUST CONTROL SYSTEM DESIGN

J. ACKERMANN. In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems 14 p (SEE N88-10796 02-08) Jul 1987 Previously announced as N81-11275 (AGARD-AG-289) Avail NTIS HC A07/MF A01

The short period longitudinal mode of an F-4-E with horizontal canards is unstable in subsonic flight and insufficiently damped at supersonic speed. The control system has to provide acceptable pole locations according to military specifications for flying qualities. A fixed gain controller using three paralleled gyros is designed such that the pole region requirements in four typical flight conditions are robust with respect to a gain reduction to one third. Thus nothing bad happens immediately when one or two gyros fail. Failure detection and redundancy management may be performed at a higher hierarchical level, and not necessarily extremely fast. The use of accelerometers or air data sensors for angle of attack or dynamic pressure is totally avoided in this concept and no gain scheduling is necessary. The design for robustness with respect to different flight conditions and sensor failures is performed by a novel parameter space design tool. Author

N88-10801*# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA

RELIABILITY MODELING OF FAULT-TOLERANT COMPUTER BASED SYSTEMS

SALVATORE J. BAVUSO. In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems 16 p (SEE N88-10796 02-08) Jul 1987 (AGARD-AG-289) Avail NTIS HC A07/MF A01 CSCL 01C

Digital fault-tolerant computer-based systems have become commonplace in military and commercial avionics. These systems hold the promise of increased availability, reliability, and maintainability over conventional analog-based systems through the application of replicated digital computers arranged in fault-tolerant configurations. Three tightly coupled factors of paramount importance, ultimately determining the viability of these systems, are reliability, safety, and profitability. Reliability, the major driver affects virtually every aspect of design, packaging, and field operations, and eventually produces profit for commercial applications or increased national security. However, the utilization of digital computer systems makes the task of producing credible reliability assessment a formidable one for the reliability engineer. The root of the problem lies in the digital computer's unique adaptability to changing requirements, computational power, and ability to test itself efficiently. Addressed here are the nuances of

08 AIRCRAFT STABILITY AND CONTROL

modeling the reliability of systems with large state sizes, in the Markov sense, which result from systems based on replicated redundant hardware and to discuss the modeling of factors which can reduce reliability without concomitant depletion of hardware. Advanced fault-handling models are described and methods of acquiring and measuring parameters for these models are delineated. Author

N88-10802# Centre d'Etudes et de Recherches, Toulouse (France).

ISAURE: INTEGRATION OF SECURITY AND FAULT TOLERANCE IN THE REALITE 2000 SYSTEM

J. CAZIN and P. MICHEL. In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems 12 p (SEE N88-10796 02-08) Jul. 1987 (AGARD-AG-289) Avail: NTIS HC A07/MF A01

In the framework of the French SURF project sponsored by the Agence de l'Informatique (ADI), the ONERA/CERT research center and the Inter-technique Company have developed a fault-tolerant operating system called ISAURE. This system includes data protection features and error recovery mechanisms. It offers the same services as the REALITE 2000 system already available on the market. It used first the Multi 6-Inter-technique microprocessor, and later specific hardware implementing protection domains via a capability based addressing mechanism. The collaboration between the two systems is the result of converging and complementary aims: the Inter-technique Company is trying to set up a future range of systems and machines oriented towards management applications and offering a high level of functional security; and the CERT/ONERA research center wishes to apply methodological research results and thus continue its research work in the context of practical applications. This collaboration is one of the more original features of the project and it allows introduction of advanced concepts into the industrial sector. Author

N88-10803# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.). Inst. fuer Flugfuehrung.

OPTIMAL DETECTION OF SENSOR FAILURES IN FLIGHT CONTROL SYSTEMS USING DETERMINISTIC OBSERVERS

NORBERT STUCKENBERG. In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems 21 p (SEE N88-10796 02-08) Jul. 1987 (AGARD-AG-289) Avail: NTIS HC A07/MF A01

A failure detection scheme for sensors of a flight control system is presented. Based on analytic redundancy a duplex sensor configuration provides the fail-operational capability of a conventional triplex sensor system. This is achieved by using deterministic observers. It is shown how the performance of the failure detection scheme can be determined. With respect to this performance criterion the optimal observer is derived. Thus, the performance eventually achievable by an optimal failure detection scheme is also described. The operational feasibility of the proposed concept is demonstrated by flight test results. Author

N88-10804# Verilog S.A., Toulouse (France).

ASSESSMENT OF SOFTWARE QUALITY FOR THE AIRBUS A310 AUTOMATIC PILOT

R. TROY and C. BALUTEAU (Societe Francaise d'Equipements pour la Navigation Aeronne, Velizy-Villacoublay, France). In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems 13 p (SEE N88-10796 02-08) Jul. 1987 (AGARD-AG-289) Avail: NTIS HC A07/MF A01

As for the whole of the Automatic Flight Control System, the automatic pilot for the AIRBUS is a computer system with high criticality. In order to assess the quality of the software, a number of observations and measurements have been made during the development cycle. A general method of evaluation, the data collected, and some evaluation results are presented. The aims of this analysis are to assess the impact of development constraints on the quality of the product and to evaluate its operational reliability. The results show conditions in which software may be adversely affected by modifications. In particular, they make it possible to appreciate the quality of design, the effectiveness of the verification and validation processes, and the flexibility of the software. The last part gives a tentative example of operational

reliability evaluation, taking into consideration the complexity of the functions and the mission profile. Author

N88-10805# National Aeronautics and Space Administration Ames Research Center, Moffett Field, CA.

FLIGHT TEST OF A RESIDENT BACKUP SOFTWARE SYSTEM

DWAIN A. DEETS, WILTON P. LOCK, and VINCENT A. MEGNA (Draper, Charles Stark Lab., Inc., Cambridge, Mass.). In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems 9 p (SEE N88-10796 02-08) Jul. 1987 Previously announced as N86-19325 (AGARD-AG-289) Avail: NTIS HC A07/MF A01

A new fault-tolerant system software concept employing the primary digital computers as host for the backup software portion has been implemented and flight tested in the F-8 digital fly-by-wire airplane. The system was implemented in such a way that essentially no transients occurred in transferring from primary to backup software. This was accomplished without a significant increase in the complexity of the backup software. The primary digital system was frame synchronized, which provided several advantages in implementing the resident backup software system. Since the time of the flight tests, two other flight vehicle programs have made a commitment to incorporate resident backup software similar in nature to the system described here. Author

N88-10806# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

KNOWLEDGE BASED CONCEPTS AND ARTIFICIAL INTELLIGENCE: APPLICATIONS TO GUIDANCE AND CONTROL

Aug. 1987 145 p. Lectures held in Ottawa, Ontario, 10-11 Sep., in Monterey, Calif., 14-15 Sep., in Delft, Netherlands, 12-13 Oct., and in Lisbon, Portugal, 15-16 Oct. 1987 (AGARD-LS-155; ISBN-92-835-1588-7; AD-A191463) Avail: NTIS HC A07/MF A01

The intent of this lecture series was to clearly describe what artificial intelligence techniques mean with respect to guidance and control applications, to offer some concrete examples of applications to the maintenance area, some more speculative examples of applications to actual guidance and control tasks, and a projection of possible directions for the future. For individual titles, see N88-10807 through N88-10817.

N88-10807# General Electric Co., Binghamton, NY

OVERVIEW OF AGARD LECTURE SERIES NO. 155: KNOWLEDGE-BASED CONCEPTS AND ARTIFICIAL INTELLIGENCE APPLICATIONS TO GUIDANCE AND CONTROL

RICARD PAUL QUINLIVAN. In AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 5 p (SEE N88-10806 02-08) Aug. 1987 (AGARD-LS-155) Avail: NTIS HC A07/MF A01

Several lectures dealing with artificial intelligence (AI) applications to guidance and control are reviewed. The use of various forms of AI techniques to help solve problems related to guidance and control is a subject of current interest, most, if not all, of the practical applications utilize knowledge based techniques to create so-called expert systems. These systems seem to offer solutions to guidance and control problems that have a large judgment content. Examples include maintenance systems and real-time, decision aiding systems. Author

N88-10808# Analytic Sciences Corp., Reading, MA

AI EXPERT SYSTEM TECHNOLOGY ISSUES FOR GUIDANCE AND CONTROL APPLICATIONS

HAROLD L. JONES. In AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 7 p (SEE N88-10806 02-08) Aug. 1987 (AGARD-LS-155) Avail: NTIS HC A07/MF A01

A perspective is provided on a set of technical issues, which, if unresolved, could limit the capability and acceptability of expert systems decision making for avionics applications. Examples from ongoing expert system development programs are used to illustrate likely architectures and applications of future intelligent avionics systems. Author

08 AIRCRAFT STABILITY AND CONTROL

N88-10811# Lear Siegler, Inc., Grand Rapids, MI. Instrument and Avionic Systems Div.

APPLICATION OF KNOWLEDGE-BASED TECHNIQUES TO AIRCRAFT TRAJECTORY GENERATION AND CONTROL

MICHAEL W. BIRD. In AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 12 p (SEE N88-10806 02-08) Aug. 1987 (Contract F33615-84-C-3626)

(AGARD-LS-155) Avail: NTIS HC A07/MF A01

A concept that embeds the knowledge-based techniques in a trajectory generation and control system is defined. The control system is called the Unified Trajectory Control System (UTCS). The objective of the system is to aid the pilot when operating in the intense threat environment projected for the 1990's. The UTCS has an architecture of independent trajectory generation elements whose operations are integrated by a knowledge-based system. This artificial intelligence (AI) technique utilizes production rules, an interface engine, and a system of frames for communicating with the trajectory generation elements. Author

N88-11653# National Aeronautical Establishment, Ottawa (Ontario). Flight Research Lab.

INVESTIGATION OF VERTICAL AXIS HANDLING QUALITIES FOR HELICOPTER HOVER AND NOE FLIGHT

S. W. BAILLIE and J. M. MORGAN. In AGARD, Rotorcraft Design for Operations 9 p (SEE N88-11649 03-05) Jun. 1987 Sponsored in part by Canadian Department of National Defense (AGARD-CP-423) Avail: NTIS HC A14/MF A01

The preliminary results of two in-flight simulation programs on vertical axis rotorcraft handling qualities are presented. The parameters investigated in these studies were heavy damping, thrust to weight ratio (T/W), and a number of dynamic engine governor/rotor system models. Flight tasks include hover, hover maneuvering and nap of the Earth (NOE) flight. Evaluation of nine heavy damping, thrust to weight ratio configurations provides the basis to suggest Level 1 Z sub w and T/W boundary values of 0.20 sec⁻¹ and 1.08 respectively. These boundaries are compared with other relevant work on the topic. The engine governor/rotor system evaluation results tend to disagree with handling qualities predictions based on a vertical velocity shaping parameter. Author

N88-11654# Systems Technology, Inc., Hawthorne, CA.

HANDLING QUALITIES CRITERION FOR VERY LOW VISIBILITY ROTORCRAFT

ROGER H. HOH. In AGARD, Rotorcraft Design for Operations 15 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

This research was conducted to investigate the required visual cueing for low speed and hover and to determine if an increase in stabilization can effectively be used to compensate for the loss of essential cues. Two flight test experiments were conducted using a conventional helicopter and a variable stability helicopter, as well as electronically fogged lenses and night vision goggles with daylight training filters. The primary conclusion regarding the essential cues for hover was that fine grained texture is more important than large discrete objects or field of view. The use of altitude command augmentation was found to be effective as a way to make up for display deficiencies. However, a corresponding loss of agility occurred with the tested attitude command/altitude hold system, resulting in unfavorable pilot comments. Hence, the favorable control display tradeoff must be interpreted in the context that the best solution would be to improve the vision aid. Such an improvement would require an increase in the visual microtexture, an advancement in display technology that is unlikely to be available in the foreseeable future. Therefore, a criterion was developed to systematically evaluate display quality and the associated upgrade in required stabilization as a function of increasingly degraded visual cues. Author

N88-11660# Societe Nationale Industrielle Aerospatiale, Marignane (France). Dept. Systemes.

ACTIVE CONTROL OF HELICOPTER VIBRATION USING MULTILoop SELF-ADAPTIVE CONTROL (CONTROLE ACTIF DES VIBRATIONS SUR HELICOPTERE PAR COMMANDS MULTICYCLIQUES AUTOADAPTATIVES)

MARC ACHACHE and MICHEL GAUVRIT (Centre d'Etudes et de Recherches, Toulouse, France) In AGARD, Rotorcraft Design for Operations 10 p (SEE N88-11649 03-05) Jun. 1987 In FRENCH (AGARD-CP-423) Avail: NTIS HC A14/MF A01

A research program for the development of a trial multiloop control system for the active control of vibration in the main rotor blades is described. This experimentation consists of the most significant applications of self-adaptive control techniques to stochastic systems. The various stages of the program are discussed, from the research on the theoretical model of helicopter vibratory behavior under the influence of multiloop control, to the system flight tests. M.G.

N88-11661# Textron Bell Helicopter, Fort Worth, TX.

CONTROLLING THE DYNAMIC ENVIRONMENT DURING NOE FLIGHT

DENNIS R. HALWES. In AGARD, Rotorcraft Design for Operations 9 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

A six degree-of-freedom isolation system using six Liquid Inertia Vibration Eliminator (LIVE) units was installed on a Bell 206LM helicopter. The system was named the Total Rotor Isolation System (TRIS). To determine the effectiveness of TRIS in reducing helicopter vibrations, a flight verification study was conducted. The objective was to demonstrate a 90 percent (or greater) isolation of the helicopter fuselage from the main rotor forces and moments transmitted at the blade passage frequency, which is 4/rev in the case of the Bell 206LM. The flight test data indicate that the objectives were surpassed. Author

N88-11662# Westland Helicopters Ltd., Yeovil (England).

MINIMISATION OF HELICOPTER VIBRATION THROUGH ACTIVE CONTROL OF STRUCTURAL RESPONSE

S. P. KING and A. E. STAPLE. In AGARD, Rotorcraft Design for Operations 13 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

The current demonstration and installation of the Active Control Structural Response (ACSR) technique on a Westland 30 helicopter is discussed. The technique employs high frequency force actuation within the helicopter's structure. These forces are superposed onto the dominant vibratory forces in an active manner, such that the fuselage vibratory response is minimized. The basic control philosophy for ACSR is described and the current experimental demonstration status is detailed. Author

N88-13247# Waterloo Univ. (Ontario). Dept. of Applied Mathematics and Mechanical Engineering

DYNAMIC STABILITY OF HYPERSONIC CONICAL LIFTING VEHICLES ACCORDING TO NEWTON-BUSEMANN THEORY

W. H. HUI and H. J. VANROESSEL (University of Western Ontario, London) In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 13 p (SEE N88-13219 05-02) Nov. 1987 Sponsored in part by Natural Science and Engineering Research Council of Canada (AGARD-CP-428) Avail: NTIS HC A24/MF A01

A theory is given of the aerodynamic stability of hypersonic conical lifting vehicles performing small amplitude pitching motion about its steady flight by using the Newton-Busemann flow theory, which is the rational limit of gas dynamic theory as the flight Mach number M sub infinity yields infinite and the ratio of specific heat Γ yields 1. This is done by reformulating the gas dynamic equations using a set of material functions as independent variables which are a generalization of the stream functions of steady flow. In this formulation, calculations of the steady flow field are reduced to finding the geodesics of the body surface. The unsteady flow field is then calculated by perturbation of the steady flow. In particular, for conical shapes it requires only numerical quadrature. The theory is applied to conical wings of parabolic cross-section. The dependence of the stiffness and damping-in-pitch derivative on the angle of attack, the slenderness, concavity and convexity of the wing, and on the pivot axis position is studied systematically. Author

08 AIRCRAFT STABILITY AND CONTROL

N88-13319* National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

NONLINEAR LIFT CONTROL AT HIGH SPEED AND HIGH ANGLE OF ATTACK USING VORTEX FLOW TECHNOLOGY

JOHN E. LAMAR In AGARD, Special Course on Fundamentals of Fighter Aircraft Design 23 p (SEE N88-13315 05-05) Oct. 1987 Previously announced in IAA as A86-37050 (AGARD-R-740) Avail: NTIS HC A13/MF A01 CSDL 01C

Nonlinear lift control at subsonic, transonic and low supersonic speeds owes its origin to the separated but organized vortical flows interacting with the wing upper surface. Since most of this flow originates near the wing or control-surface leading edge, a variety of devices has been studied experimentally which interact with and/or control this flow in order to gain a beneficial effect. The benefits (effects) originally studied were associated only with lift enhancement. Whereas, now the studied benefits encompass performance increase, attention to changes in trimmed conditions and longitudinal stability, improvements in lateral stability, and the attendant variation with changing Mach number. For those devices that can be theoretically modeled, state-of-the-art computer codes have been used for device design and/or analysis. Comparisons at design and off-design conditions are presented for validation purposes Author

N88-13348# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

STATIC AEROELASTIC EFFECTS ON HIGH PERFORMANCE AIRCRAFT

Jul. 1987 186 p In ENGLISH and FRENCH Meeting held in Athens, Greece, 28 Sep - 3 Oct 1986

(AGARD-CP-403; ISBN-92-835-0424-0; AD-A199170) Avail: NTIS HC A09/MF A01

Modern high performance aircraft designs tend to employ very thin airfoils having a degree and a distribution of stiffness far from the ideal; in consequence, there is a loss of control effectiveness and maneuverability. Moreover, the introduction of the highly forward swept wing planform poses a static aeroelastic effect of fundamental importance; these effects are felt at model as well as at full scale. The meeting was organized not only to review instances of these problems but to see how successfully modern tools for structural and aeroelastic analysis can be applied. For individual titles, see N88-13349 through N88-13358.

N88-13349# British Aerospace Public Ltd. Co., Preston (England). Military Aircraft Div.

EXAMPLES OF STATIC AEROELASTIC EFFECTS ON PRESENT COMBAT AIRCRAFT PROJECTS

W. E. SHARPE and J. B. NEWTON In AGARD Static Aeroelastic Effects on High Performance Aircraft 10 p (SEE N88-13348 05-08) Jul. 1987

(AGARD-CP-403) Avail: NTIS HC A09/MF A01

The results of static aeroelastic calculations for a recent canard/cranked delta fighter project, in which a complete aircraft aerodynamic and structural model is used to demonstrate fully interacted free aircraft deflection modes and resulting stability effects are described. The significance of these results are illustrated by comparison with corresponding fixed root calculations, thereby indicating a requirement for complete aircraft aeroelastic modeling at the earliest possible stage in project design. Aeroelastic modeling of external stores in the context of store/aircraft integration is also discussed. Finally, the correlation of high speed wind tunnel results for aeroelastic distortion is addressed, indicating those parameters which are likely to be significantly affected. Author

N88-13350# Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France).

TRENDS IN AEROELASTIC ANALYSIS OF COMBAT AIRCRAFT

C. PETIAU and S. BRUN In AGARD Static Aeroelastic Effects on High Performance Aircraft 25 p (SEE N88-13348 05-08) Jul. 1987

(AGARD-CP-403) Avail: NTIS HC A09/MF A01

After recalling the general principles of aeroelastic coupling with structural finite element analysis, the simplifying assumptions of static aeroelasticity are explained. The technique of load basis used in a general aircraft structural analysis program is discussed.

This technique allows one to separate the big expensive computation of finite element resolutions and theoretical aerodynamic analysis from aeroelastic coupling and flight maneuver computation. Author

N88-13351# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Airplane Div.

STATIC AEROELASTIC CONSIDERATIONS IN THE DEFINITION OF DESIGN LOADS FOR FIGHTER AIRPLANES

G. SCHMIDINGER and O. SENSBURG In AGARD Static Aeroelastic Effects on High Performance Aircraft 20 p (SEE N88-13348 05-08) Jul. 1987

(AGARD-CP-403) Avail: NTIS HC A09/MF A01

Some typical effects of static aeroelastic correction factors in context with the definition of structural design loads for major aircraft components are discussed. The influences on response parameters and resulting design loads are shown as well as the aeroelastic optimization of trailing edge flaps with respect to geometry, efficiency, and hingemoments. Author

N88-13352# Aerospatiale Usines de Toulouse (France). AEROELASTIC ANALYSIS OF MODERN TRANSPORT AIRCRAFT [ANALYSE AEROELASTIQUE DES AVIONS MODERNES DE TRANSPORT]

J. ROUSTAN and M. CURBILLON In AGARD Static Aeroelastic Effects on High Performance Aircraft 27 p (SEE N88-13348 05-08) Jul. 1987 In FRENCH; ENGLISH summary

(AGARD-CP-403) Avail: NTIS HC A09/MF A01

Static aeroelastic phenomena play a very important role in modern transport aircraft with regard to both handling qualities and loads applied to the structure. Aerospatiale's method for taking these effects into consideration and calculating them is presented. Author

N88-13353* National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

STATIC AEROELASTIC EFFECTS ON THE FLUTTER OF A SUPERCRITICAL WING

E. CARSON YATES, JR. and LI CHUAN CHU (PRC Kentron, Inc., Hampton, Va.) In AGARD Static Aeroelastic Effects on High Performance Aircraft 14 p (SEE N88-13348 05-08) Jul. 1987

(AGARD-CP-403) Avail: NTIS HC A09/MF A01 CSDL 01C

The results of an effort to calculate the effects of angle of attack and the associated aeroelastic deformation on the flutter of a highly swept supercritical wing by use of the modified strip analysis employed in previous studies of this wing are discussed. The spanwise distributions of steady state section lift-curve slope and aerodynamic center required as input for these calculations were obtained from static aeroelastic calculations for the wing by use of the FLO22 transonic code and an assumed dynamic pressure. The process is iterative so that flutter can be obtained at the same dynamic pressure as that used to calculate the statically deformed shape and loading about which the flutter oscillation occurs (matched conditions). The results of this investigation show that the unconventional backward turn of the transonic dip in the experimental flutter boundary for angles of attack greater than zero is caused by variations in mass ratio and not by static aeroelastic deformation, although inclusion of the latter appears to be required for quantitative accuracy in the calculations. Author

N88-13354# Royal Aircraft Establishment, Farnborough (England).

WING DIVERGENCE OF TRIMMED

L. T. NIBLETT In AGARD Static Effects on High Performance Aircraft 9 p (SEE N88-13348 05-08) Jul. 1987

(AGARD-CP-403) Avail: NTIS HC A09/MF A01

By means of a simple theoretical model it is shown that wing divergence of a free aircraft can be defined using the static case of trimmed level flight. The same model also shows that the control angle per g goes to zero at a speed near the fixed root divergence speed and that there is a large change in the spanwise distribution of airload in going from a low speed to speeds above that of fixed root divergence. Author

N88-13355# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Helicopter and Airplane Div.

THE USE OF AEROELASTIC WIND TUNNEL MODELS TO PROVE STRUCTURAL DESIGN

H. HOENLINGER, J. SCHWEIGER, and G. SCHEWE (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen, West Germany). In *Static Aeroelastic Effects on High Performance Aircraft* 15 p (SEE N88-13348 05-08) Jul. 1987

(AGARD-CP-403) Avail: NTIS HC A09/MF A01

In a wind tunnel study on an aeroelastic carbon fiber fin/rudder model, it is demonstrated how structural design methods can be checked by experiment beginning in an early stage of the design. Emphasis was put on the static aeroelastic investigations, which became more important in high performance A/C design. Transonic measurements with a rigid balance based on an opto-electronic deformation measurement method were performed. An attempt was made to evaluate rudder efficiencies from these aeroelastic measurements. A nonlinear behavior of the rudder based on geometrical coupling with the fin box played an important role in the test evaluation. Author

N88-13356# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

PREDICTION OF WING AEROELASTIC EFFECTS ON AIRCRAFT LIFE AND PITCHING MOMENT CHARACTERISTICS

CLINTON V. ECKSTROM. In *AGARD Static Aeroelastic Effects on High Performance Aircraft* 17 p (SEE N88-13348 05-08) Jul. 1987. Previously announced as N87-15975

(AGARD-CP-403) Avail: NTIS HC A09/MF A01 CSDL 01C

The distribution of flight loads on an aircraft structure determine the lift and pitching moment characteristics of the aircraft. When the load distribution changes due to the aeroelastic response of the structure, the lift and pitching moment characteristics also change. An estimate of the effect of aeroelasticity on stability and control characteristics is often required for the development of aircraft simulation models of evaluation of flight characteristics. This presentation outlines a procedure for incorporating calculated linear aeroelastic effects into measured nonlinear lift and pitching moment data from wind tunnel tests. Results are presented which were obtained from applying this procedure to data for an aircraft with a very flexible transport type research wing. The procedure described is generally applicable to all types of aircraft. Author

N88-13357# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

INFLUENCE OF THE STATIC DEFORMATION ON A WING IN THE UNSTEADY AERODYNAMIC

R. DESTUYNDER. In *AGARD Static Aeroelastic Effects on High Performance Aircraft* 8 p (SEE N88-13348 05-08) Jul. 1987. Previously announced in IAA as A87-21054

(AGARD-CP-403) Avail: NTIS HC A09/MF A01

Wind tunnel tests and related calculations were carried out to study the influence of static deformation due to steady loads on the flutter phenomenon experienced by modern civil aircraft. Consideration is also given to the nonlinearity of unsteady forces on an engine as a function of global incidence. It is found that the spanwise untwisting effect associated with positive incidences increases the flutter limits for given Mach number and dynamic pressure values. Author

N88-13358# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

MEASUREMENT OF MODEL DEFORMATION IN WIND TUNNELS

M. CHARPIN, C. ARMAND, and R. SELVAGGINI. In *AGARD Static Aeroelastic Effects on High Performance Aircraft* 20 p (SEE N88-13348 05-08) Jul. 1987. In FRENCH; ENGLISH summary. Original language document was announced in IAA as A87-36943 (AGARD-CP-403) Avail: NTIS HC A09/MF A01

Various techniques used at ONERA for the wind tunnel measurement of the deformation of models undergoing aerodynamic and body loading are presented. Photography of reflecting targets is used to measure trailing edge deformation. Global torsion measurement of a wing at its wing tip is performed by the torsionmeter measurement of the angle between the incident and reflected laser beam. An example of the determination of

airfoil trailing edge deformation by tracking the position of light sources with an optical detector is presented. Finally, a technique for computing the strain from stress measurements is presented and demonstrated with a helicopter rotor blade model. Author

N88-17682# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

EFFECTIVENESS OF VARIOUS CONTROL SURFACES IN QUASI-STEADY AND UNSTEADY CONDITIONS [EFFICACITE DE DIFFERENTES SURFACES DE CONTROLE EN QUASI-STATIONNAIRE ET INSTATIONNAIRE]

R. DESTUYNDER, R. BARREAU, and G. ANDERS. Apr. 1986. 26 p. In FRENCH. Presented at the 6th Meeting of the AGARD Panel on Structures and Materials, Oberammergau, Fed. Republic of Germany, 8-13 Sep. 1985

(AGARD-R-735, ISBN-92-835-2113-7) Avail: NTIS HC A03/MF A01

This report describes tests conducted in the Modane S1 wind tunnel in France to measure the unsteady pressures on two half-models of wings outfitted with different control surfaces such as vented or unvented spoilers, flaperons, or ailerons. One of the wings, the ZKP model, is a standard configuration from the AGARD-SMP Compendium of Unsteady Pressure Measurements. The movements imposed on the control surfaces could be white noise, fixed frequency harmonics and ramp. A data base with a very wide range of parameters such as the Mach number, wing angle of attack, deflection of one or several control surfaces, and reduced frequencies was obtained. One of the goals was to establish semiempirical corrections to the theory of the efficiency of control surfaces. All of the excitation tests and acquisition and processing work for the unsteady condition studies were completely directed by a computer. Author

N88-19458# Aeritalia S.p.A., Turin (Italy). Combat Aircraft Group.

INTERACTION BETWEEN STRUCTURAL CONSIDERATIONS AND SYSTEM DESIGN IN ADVANCED FLIGHT CONTROLS

FRANCO SELLA and GERHART SCHMIDINGER (Messerschmitt-Boelkow-Blohm G.m.b.H., Munich, West Germany). In *AGARD Workshop on Design Loads for Advanced Fighters* 19 p (SEE N88-19449 12-05) Feb. 1988

(AGARD-R-746) Avail: NTIS HC A07/MF A01

Integration of various disciplines is the key to the optimization of a design. In particular, the integration of the flight control system (FCS) and the structural design is feasible within the currently available technology to an extent which offers significant gains over traditional approaches to the design. Realization of carefree handling features by the FCS allows the application of structural design criteria for safe structural design with significant reductions in structural mass. The impact on the FCS design is an increase in the complexity of both hardware and software and an increase in the certification effort. Author

N88-19558# Societe de Fabrication d'Instruments de Mesure, Massy (France).

AUTOMATIC FLIGHT CONTROL SYSTEM FOR MODERN HELICOPTERS [SYSTEME DE CONTROLE AUTOMATIQUE DU VOL POUR HELICOPTERES MODERNES]

J. C. DERRIEN and P. CAUVY (Societe Nationale Industrielle Aerospatiale, Paris, France). In *AGARD Advances in Air-Launched Weapon Guidance and Control* 16 p (SEE N88-19553 12-15) Dec. 1987. In FRENCH

(AGARD-CP-431) Avail: NTIS HC A06/MF A01

Research efforts in the design and development of automatic pilot systems are described. Mission operational aspects relative to helicopters in general are addressed. An attempt is made to determine the relations between operational requirements and the automatic flight control system. The theoretical aspects which are necessary for the determination of the best control laws compatible with the operational requirements of specific helicopter missions are stressed. The AP 165 automatic flight control system and the various control functions for land, air and marine missions are described. The application of this system to the Super Puma MK2 is discussed. Author

08 AIRCRAFT STABILITY AND CONTROL

N88-29718# Federal Aviation Administration, Seattle, WA.
CURRENT AND PROPOSED GUST CRITERIA AND ANALYSIS METHODS: AN FAA OVERVIEW

TERENCE J. BARNES In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 12 p (SEE N88-29717 24-01) Jun. 1988

(AGARD-R-734-ADD) Avail: NTIS HC A06/MF A01

An FAA overview is presented of the gust criteria and analysis methods used in the various types of flight vehicle certified under the FAR's. The current criteria for small airplanes, transports, and rotorcraft are presented, and the status of proposed criteria for the tilt rotor and aerospace plane are discussed. The amount of discussion on each class of vehicle depends on the significance of gust loads as design loads, and the importance of vehicle flexibility. Transport airplane gust criteria development, usage and problems are discussed in some detail. Analysis methods used by U.S. industry are covered in a separate paper. Author

N88-29723# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

MEASURED AND PREDICTED RESPONSES OF THE NORD 260 AIRCRAFT TO THE LOW ALTITUDE ATMOSPHERIC TURBULENCE

J. L. MEURZEC and F. POIRION In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 9 p (SEE N88-29717 24-01) Jun. 1988

(AGARD-R-734-ADD) Avail: NTIS HC A06/MF A01

A program of in situ measures using the Nord 260 plane equipped with accelerometers has allowed the comparison of the predicted and the measured responses of the flexible aircraft to turbulence. It shows a good agreement between the two sets of results and it emphasizes the better modeling of the turbulence using the isotropic model rather than the cylindrical one. Author

N88-29724# Civil Aviation Authority, Redhill (England). Airworthiness Div.

A REVIEW OF MEASURED GUST RESPONSES IN THE LIGHT OF MODERN ANALYSIS METHODS

V. CARD In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 14 p (SEE N88-29717 24-01) Jun. 1988

(AGARD-R-734-ADD) Avail: NTIS HC A06/MF A01

In the past simplified models of aircraft used to assess operational gust statistics have led to conservative estimates of derived gust exceedances. Modern refinements in aircraft modeling techniques have gradually introduced conservatism in the process of calculating gust loads. Gust statistics reviewed in the light of these modern analytical methods support the CAA view that gust velocities developed for use with simple rigid aircraft models are too severe for use with a modern dynamic analysis. Even in the light of improved safety targets, a 10 per cent reduction in design gust velocity can be readily justified. Further reductions may be justified on the basis of mission analysis considerations, or by investigation of more recent acceleration statistics collected by the current generation of transport aircraft. In the latter case, it will be essential to account for all relevant features of the subject aircraft in the derivation of gust velocities so as to obtain a true picture of the gust statistics. Author

N88-29726# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

STATUS REVIEW OF ATMOSPHERE TURBULENCE AND AIRCRAFT RESPONSE

J. C. HOUBOLT In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 11 p (SEE N88-29725 24-01) Dec. 1987

(AGARD-R-734) Avail: NTIS HC A09/MF A01 CSCL 01C

A brief review is made of the understanding of aircraft encounter of atmospheric turbulence, both from the point of view of describing or modeling the turbulence and with respect to the ability to calculate resulting airplane loads. Some of the more recent studies of gust measurements and of reducing airline gust response data are discussed. Special attention is given to gust analysis requirements as involved in airplane certification and whether there is a need for additional or different requirements. A review is

made of a recent study in which amazingly simple and universal gust response equations were discovered; the possible impact of these new findings on future work is indicated. Author

N88-29729# Taylor (J.), Camberley (England).

AN INTERIM COMPARISON OF OPERATIONAL CG RECORDS IN TURBULENCE ON SMALL AND LARGE CIVIL AIRCRAFT

J. TAYLOR In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 31 p (SEE N88-29725 24-01) Dec. 1987

(AGARD-R-734) Avail: NTIS HC A09/MF A01

Operational records have been made on British Airways aircraft for the period May 1980 to April 1985 and analyzed for about 650,000 flying hours on a number of different aircraft. Records were obtained for about 2 to 5 minutes of Normal Acceleration, Pitch Angle, Roll Angle, Height and Speed for nearly all those events which had an increment of 1 g or more, i.e., 29 events; similar records were also obtained for nearly all those events with an increment of 0.5 g or more with flaps down from May 1983 to April 1985, i.e., 33 events. An interim examination of the 29 events with 1 excess g or more, with special emphasis on 15 of them is made and includes an estimate of the interaction of maneuvers and turbulence, an estimate of the frequency of occurrence of high level intensity gusts and of the equiprobability relationships of gust levels and gust gradients. It was found that gusts that are important for a particular response are strongly dependent on the rate per sub 5 km at which zero crossings occur in that response. Using the Keynes formula for gust intensity and zero crossings, it was found that the equiprobability relationships of gust levels and gust gradients can be represented on a single diagram for all sizes of aircraft at all heights. Author

N88-29732# British Aerospace Aircraft Group, Weybridge (England). Military Aircraft Div.

RE-ASSESSMENT OF GUST STATISTICS USING CAADRP DATA

B. W. PAYNE, A. E. DUOMAN, and K. C. GRIFFITHS In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 22 p (SEE N88-29725 24-01) Dec. 1987

(AGARD-R-734) Avail: NTIS HC A09/MF A01

The measured incremental c.g. accelerations of the BAC 1-11 operating on scheduled flights are compared with the equivalent theoretical predictions in a gust environment. Some of the results of the study are: (1) An analysis of the measured Civil Airworthiness Authority Data Recording Program data, based upon a significant 58,733 flying hours, gave an incremental vertical c.g. acceleration of 1.25 g at the datum probability value of 2×10^{-5} exceedances per hour; (2) The theoretical predictions from all the flight segments in the Mission Analysis gave an incremental c.g. acceleration of .238 g at the datum exceedance value; and (3) Therefore in the comparison between the measured and predicted analyses for a similar mission considerable differences were found with measured frequencies of exceedance of about one half those predicted using current airworthiness requirements. Author

N89-10048# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

GUIDANCE AND CONTROL SYSTEMS SIMULATION AND VALIDATION TECHNIQUES

WILLIAM P. ALBRITTON, JR., ed. (Amtec, Inc., Athens, Ala.) Jul. 1988 133 p In ENGLISH and FRENCH (AGARD-AG-273; ISBN-92-835-0472-0; AD-A202493) Avail: NTIS HC A07/MF A01

This AGARDograph addresses simulation and validation techniques for guidance and control systems of tactical guided weapons. Many developments have taken place over the last few years. In particular, physical simulation using hybrid, hardware-in-the-loop techniques has assumed much more importance. The chapter on digital simulation techniques provides descriptions of digital simulation techniques for application to some of the more difficult aspects of tactical guided weapon guidance and control systems. Concerning hardware-in-the-loop (HITL) simulation techniques, descriptions are provided of facility design techniques for performing HITL simulation and particular information on radar simulation techniques. System Simulation and Validation

Experience presenting lessons learned type information from some of the major programs are examined. The application of the techniques to guided weapon developments is presented. For individual titles, see N89-10049 through N89-10057.

N89-10053# Boeing Aerospace Co., Seattle, WA.
COST EFFECTIVE SIMULATION FOR MILLIMETER WAVE GUIDANCE SYSTEMS

VANCE H. MAPLES and GEORGE A. EASTMAN In AGARD, Guidance and Control Systems Simulation and Validation Techniques 7 p (SEE N89-10048 01-08) Jul. 1988 (AGARD-AG-273) Avail: NTIS HC A07/MF A01

The introduction of millimeter wave (MMW) active-passive, air-to-surface missile seeker systems to counter the European armor threat has increased the need for simulators to evaluate the performance of this class of seeker. Existing simulation techniques have not proved to be cost effective, and are generally unable to obtain sufficient target spatial position control at millimeter wave frequencies to ensure high fidelity simulations. The conventional approach to simulating a target for seeker testing is to build a transponder which receives the transmitted signal to the seeker, delays it to represent range, modulates it to simulate the intended target signal, and retransmits it through an antenna array which positions the target spatially. Target modeling and position control are implemented using simulation components at the radar frequency. A concept for target simulation for FM/WC modulated radar sensors, uses the signal from the seeker transmitted to illuminate an array of target antennas. This radar scene simulation technique provides a lower cost simulation method for evaluating FM/WC modulated millimeter wave seekers. This technique is equally effective for pulse modulated seeker simulation when a millimeter wave illuminating source is added to the system. In either case, it significantly reduces the high-cost/marginal-performance millimeter wave hardware required in the simulator and can be applied to evaluation of both active and passive seeker modes.

Author

N89-10055# Raytheon Co., Bedford, MA.
SIMULATION VALIDATION EXPERIENCE: PATRIOT GUIDANCE SYSTEM

WILLIAM C. MORTON In AGARD, Guidance and Control Systems Simulation and Validation Techniques 11 p (SEE N89-10048 01-08) Jul. 1988 (AGARD-AG-273) Avail: NTIS HC A07/MF A01

The increased use of sophisticated simulations as performance prediction tools during the development of guided missiles has placed greater emphasis on comprehensive validation of the models used. Validation of several simulations was accomplished by Raytheon Company while developing the Army's PATRIOT air defense system. The validation experience is presented for two large-scale guidance simulations; the Hybrid Guidance System Simulation and the Guidance Test and Simulation Facility. Examples of the data collected are presented in the course of discussing the approach to validating all mathematical as well as hardware-in-the-loop simulations. Conclusions are drawn as to the most effective methods and the value of the validation process to the overall system development.

Author

N89-10832# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.), Aircraft Div.
COMPUTING SYSTEM CONFIGURATION FOR FIGHTER AIRCRAFT FLIGHT CONTROL SYSTEMS

H. J. KAUL, H. LUEERS, and J. RAUCH In AGARD, Computing Systems Configuration for Highly Integrated Guidance Control Systems 32 p (SEE N89-10831 02-01) Jun. 1988 (AGARD-LS-158) Avail: NTIS HC A08/MF A01

Flight Control Systems (FCS) for present and future Fighter Aircraft developments are based on three basic technologies, CCV-ACT-digital signal processing. These technologies have opened a new degree of freedom for optimizing overall weapon system performance by extending the requirements to be implemented by the FCS. The computing subsystem of the FCS is the key element of the FCS by which this performance optimization can be achieved. Digital FCS for fighter aircraft in service or under development exhibit a basically common architecture (static parallel redundancy, centralized heavily burdened computing subsystem) which has continuously evolved since the early days of CCV and ACT activities. The objectives of

09 RESEARCH AND SUPPORT FACILITIES (AIR)

the paper are to relate this classical architecture to the advancing requirements and the new emerging technologies and to analyze its potentials for future developments.

Author

09

RESEARCH AND SUPPORT FACILITIES (AIR)

Includes airports, hangars and runways; aircraft repair and overhaul facilities; wind tunnels; shock tubes; and aircraft engine test stands.

N87-15985# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

TECHNICAL EVALUATION REPORT ON THE FLIGHT MECHANICS PANEL SYMPOSIUM ON FLIGHT SIMULATION

ANTHONY M. COOK (National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.) Oct. 1986 14 p Symposium held in Cambridge, England, 30 Sep. - 3 Oct. 1985

(ISBN-92-835-0399-6; AD-A173991; ISBN-92-835-0399-6; AGARD-AR-234) Avail: NTIS HC A02/MF A01

In recent years, important advances were made in technology both for ground-based and in-flight simulators. There was equally a broadening of the use of flight simulators for research, development, and training purposes. An up-to-date description of the state-of-the-art of technology and engineering was provided for both ground-based and in-flight simulators and their respective roles were placed in context within the aerospace scene.

Author

N87-21192# Royal Aircraft Establishment, Farnborough (England).

DEVELOPMENTS IN DATA ACQUISITION AND PROCESSING USING AN ADVANCED COMBUSTION RESEARCH FACILITY

J. B. BULLARD, F. S. E. WHITCHER, and R. V. STEEDEN In AGARD Advanced Instrumentation for Aero Engine Components 16 p (SEE N87-21170 14-31) Nov. 1986 Previously announced as N87-16852

(AGARD-CP-399) Avail: NTIS HC A24/MF A01

A new combustion rig is described which is designed to acquire rapid and detailed information on the combustion processes occurring within a sector of large annular gas turbine combustors operating over a range of inlet pressures and temperature representative of engine conditions. Gas samples are extracted using a probe positioned within the volume under examination and transferred to a system designed to perform analyses with a point-to-point cycle time of less than 30 seconds. A computer is used to control and synchronize the probe positioning and gas analysis function and to present co-ordinated results to rig controllers. The system is capable of automatic traversing within a prescribed volume or of control by a dummy traverse gear which permits tracing of air and fuel flows.

Author

N87-21205# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.).

PARTICLE IMAGING VELOCIMETRY IN A LOW TURBULENT WINDTUNNEL AND OTHER FLOW FACILITIES

J. KOMPENHANS and J. REICHMUTH In AGARD Advanced Instrumentation for Aero Engine Components 13 p (SEE N87-21170 14-31) Nov. 1986

(AGARD-CP-399) Avail: NTIS HC A24/MF A01

Particle imaging velocimetry (PIV) is a new technique to measure flow velocity and flow direction at one instant in time within a large area of the flow field. For that purpose PIV utilizes the light scattered by small particles in the flow, which are illuminated by two short laser pulses. The experience gained with this method is discussed. Young's fringes method to evaluate the velocity data is discussed. Examples of first experimental results are given.

Author

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N87-23633# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

FLIGHT SIMULATION

Sep. 1986 360 p In ENGLISH and FRENCH Symposium held in Cambridge, England, 30 Sep. - 3 Oct. 1985 (AGARD-CP-408; ISBN-92-835-0394-5; AD-A173875) Avail: NTIS HC A16/MF A01

The objectives of the conference were to provide an up-to-date description of state-of-the-art technology and engineering for both ground-based and in-flight simulators, together with an indication of future possibilities; and to place the roles of ground-based and in-flight simulators into context with one another and within the aerospace industry. For individual titles, see N87-23634 through N87-23660.

N87-23634# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, CA.

VISUAL AND MOTION CUEING IN HELICOPTER SIMULATION RICHARD S. BRAY In AGARD Flight Simulation 16 p (SEE N87-23633 17-09) Sep. 1986 Previously announced as N86-11208 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The visual cues presented in the simulator are compared with those of flight in an attempt to identify deficiencies. For the low-amplitude maneuvering tasks normally associated with the hover mode, the unique motion capabilities of the Vertical Motion Simulator (VMS) at Ames Research Center permit nearly a full representation of vehicle motion. Especially appreciated in these tasks are the vertical-acceleration responses to collective control. For larger-amplitude maneuvering, motion fidelity must suffer diminution through direct attenuation through high-pass filtering washout of the computer cockpit accelerations or both. Experiments were conducted in an attempt to determine the effects of these distortions on pilot performance of height-control tasks. Author

N87-23635# Rediffusion Simulation Ltd., Crawley (England).

VISUAL DISPLAY RESEARCH TOOL

P. M. MURRAY and B. BARBER In AGARD Flight Simulation 8 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The Visual Display Research Tool (VDRT) is a new concept in visual displays which utilizes area of interest approach by matching its display parameters to those of the human eye. Two fields of view are employed, a wide-angle field corresponding to the peripheral area and an area of interest field inset at its center. The combined field is coupled to head and eye movements such that the direction of gaze is followed and a detailed scene is apparent over the whole field of regard at all times. The specific design chosen for VDRT is based on helmet mounted projection of two full color rasters onto the interior surface of a spherical dome surrounding the cockpit. The VDRT has been designed to meet the specified performance in a manner which allows a great deal of flexibility in system performance under software control. It should enable a lot of experimental results to be obtained on the performance and suitability of a head mounted eye tracker area of interest system as a training device. Author

N87-23636# Singer-Link-Miles Ltd., Lancing (England). Visual Applications Group.

ADVANCED VISUALS IN MISSION SIMULATORS

D. A. COWDREY In AGARD Flight Simulation 10 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

Modern, sophisticated full mission flight systems trainers are capable of accurate representation of the actual aircraft in many areas including handling, controls, systems, etc. The major area of inadequacy to date has been the inability to produce a satisfactory visual representation of the outside world. To produce an image to match that of the pilot's field-of-view at the required resolution is beyond the capabilities of conventional visual system technology. Various alternative techniques of satisfying this demanding field-of-view/resolution requirement including the technique developed at the Link Flight Simulation Division of the Singer Company, based on an eye-slaved area-of-interest (AOI) concept are discussed. Author

N87-23637# Toronto Univ., Downsview (Ontario). Inst. for Aerospace Studies.

THE APPLICATION OF OPTIMAL CONTROL TECHNIQUES TO THE UTIAS RESEARCH SIMULATOR

L. D. REID In AGARD Flight Simulation 13 p (SEE N87-23633 17-09) Sep. 1986 Sponsored by the Natural Sciences and Engineering Research Council and the Transportation Development Centre (AGARD-CP-408) Avail: NTIS HC A16/MF A01

Optimal control has been useful in many aerospace applications in recent years. Two such applications to flight simulators are described. The first involves the generation of wind shear effects for use in training exercises. This work included simulator trails and an assessment of the process by a number of pilots. The second application is to the generation of simulator motion-base drive signals in a six degrees-of-freedom facility. In this case the optimal controller is composed of a series of filters that act much like a classical washout algorithm. Vestibular models which predict the sensation of motion by the pilot are incorporated within the optimal controller and are also used to evaluate its overall performance. Author

N87-23638# Avions Marcel Dassault-Breguet Aviation, Istres (France).

OASIS: A MODERN TOOL FOR REAL-TIME SIMULATION

J. BENOIT In AGARD Flight Simulation 13 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The hardware and software of the OASIS real-time flight simulation system are discussed. Symbol generation, the performance of elementary graphic functions, the validation of system concepts, and training are briefly discussed. R.J.F.

N87-23639# Royal Aircraft Establishment, Bedford (England). FS(B)3 Div.

SIMULATOR MOTION CHARACTERISTICS AND PERCEPTUAL FIDELITY Progress Report

B. N. TOMLINSON In AGARD Flight Simulation 12 p (SEE N87-23633 17-09) Sep. 1986 Previously announced as X87-70218 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

Information is given on a study, commissioned by the AGARD Flight Mechanics Panel, to review existing data and try to describe a relationship between certain motion system parameters, identified in an earlier AGARD Report (AR-144), and the fidelity of the pilot's perception of flight. Motion system characteristics as a whole are discussed, thus extending AR-144's treatment of motion mechanisms to include motion drive software and other features. Some of the key parameters of AR-144 are then examined in relation to total motion system fidelity. Finally, some proposals are made for a common format data structure with which to summarise research results on motion cues. Author

N87-23640# British Aerospace Public Ltd. Co., Preston (England).

SIMULATION OF AIRCRAFT BEHAVIOUR ON AND CLOSE TO THE GROUND: SUMMARY OF AGARDOGRAPH AG-285

A. G. BARNES In AGARD Flight Simulation 4 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

A summary of a report on the simulation of aircraft characteristics on and near the ground is given. The benefits of good handling are noted. The components needed to put together a simulation - the data set, the computer, the visual system, the motion system, and other cueing devices - are considered. Modeling of the vehicle on the ground is discussed, as are visual system requirements. R.J.F.

N87-23641# Rediffusion Simulation Ltd., Crawley (England). Research and Development Dept.

USE OF VDU'S BY FLIGHT SIMULATOR INSTRUCTORS

MARK A. BRUNT In AGARD Flight Simulation 6 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The development of Visual Display Unit (VDU)-based simulator instructor stations with some ergonomics rules are compared. Design aims and practical experience are discussed. Further rules

09 RESEARCH AND SUPPORT FACILITIES (AIR)

are developed to establish a baseline for designers, procurers and users of instructor stations. Author

N87-23642# Royal Aircraft Establishment, Bedford (England). **PROGRESS IN THE IMPLEMENTATION OF AGARD-AR-144 IN MOTION SYSTEM ASSESSMENT AND MONITORING** K. J. STAPLES, W. LOVE, and D. PARKINSON (Singer-Link-Miles Ltd., Lancing, England) In AGARD Flight Simulation 11 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

After a brief explanation of the techniques defined in AGARD-AR-144, a description is given of two systems which have been built and tested to satisfy the requirements of the AGARD Report. Each system is stand-alone and only requires the user to supply the sensors on the motion system itself. One system, from Singer Link Miles, is especially suited to six degree-of-freedom, synergistic motion systems, whereas the other, from Cranfield Institute of Technology, is more appropriate to systems with independent axes. The systems have each been used on several different motion systems and some examples of measured results are given. Author

N87-23643# National Aerospace Lab., Amsterdam (Netherlands).

FLEXIBLE AND HIGH QUALITY SOFTWARE ON A MULTIPROCESSOR COMPUTER SYSTEM CONTROLLING A RESEARCH FLIGHT SIMULATOR

A. P. L. A. MARSMAN In AGARD Flight Simulation 11 p (SEE N87-23633 17-09) Sep. 1986 Previously announced as N87-18578

(AGARD-CP-408) Avail: NTIS HC A16/MF A01

The research environment and the multiprocessor computer system required for flexible software for flight simulation programs are described. The program incorporates all hardware options with different calibration tables as the most simple solution, since for example the drive laws trimming the primary control systems are different for each system. Modularity of the simulation program allows the usage of subsets of the hardware. Even the primary controls can be replaced by inputs from a file. This enables the flexibility of parallel maintenance of hardware, while testing modified modules in the software. It reduces the costs for projects which do not need all systems. Author

N87-23645# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. Flight Control Div.

TRENDS IN GROUND-BASED AND IN-FLIGHT SIMULATORS FOR DEVELOPMENT APPLICATIONS

PAUL E. BLATT and DON R. GUM In AGARD Flight Simulation 13 p (SEE N87-23633 17-09) Sep. 1986

(AGARD-CP-408) Avail: NTIS HC A16/MF A01

Current capabilities and future trends for research and development simulators - both ground-based and in-flight are described. Engineering simulators are applied as design tools for synthesis and assessment of advanced aircraft, flight control systems, avionics system design, and cockpit man-machine integration. Real-time, piloted flight simulation for dynamic applications is discussed. No training simulation implications are intended. Author

N87-23646# Textron Bell Helicopter, Fort Worth, TX. **PILOTTED SIMULATION IN THE DEVELOPMENT OF THE XV-15 TILT ROTOR RESEARCH AIRCRAFT**

ROGER L. MARR and GARY B. CHURCHILL (Army Aeromechanics Lab., Moffett Field, Calif.) In AGARD Flight Simulation 15 p (SEE N87-23633 17-09) Sep. 1986

(AGARD-CP-408) Avail: NTIS HC A16/MF A01

The effective use of simulation in the XV-15 preliminary design was demonstrated. All primary program objectives were met. The initial simulation evaluation during the source evaluation board proceedings contributed significantly to performance and stability and control evaluations. Subsequent simulation periods provided major contributions in the areas of control concepts, cockpit configuration, handling qualities, pilot workload, failure effects and recovery procedures. The fidelity of the simulation also provided a valuable pilot training aid as well as a means of evaluating the tilt rotor concept for various military and civil missions. Simulation continues to provide valuable design data for refinement of automatic flight control systems and design support for future tilt

rotor applications. Throughout, fidelity has been a prime issue and has resulted in unique data and methods to validate and update the tilt rotor math model. Researchers participation from contractor and government agencies in the development of this simulation effort has led to a generic tilt rotor simulation capability on numerous facilities.

N87-23647# Centre d'Essais en Vol, Istres (France).

SIMULATION OF FLY-BY-WIRE CONTROL FOR CIVIL TRANSPORT AIRCRAFT AT THE FRENCH CENTRE D'ESSAIS EN VOL (SIMULATION DES COMMANDES DE VOL ELECTRIQUES AU CENTRE D'ESSAIS EN VOL FRANCAIS (CEV) POUR LES AVIONS DE TRANSPORT CIVIL)

R. VADROT In AGARD Flight Simulation 13 p (SEE N87-23633 17-09) Sep. 1986 In FRENCH

(AGARD-CP-408) Avail: NTIS HC A16/MF A01

A review of the facilities and projects of the flight simulation center at Istres is presented. In particular, a joint program of the Centre d'Essais en Vol and Aerospatiale to develop simulation capabilities and conduct studies in civil aviation fly-by-wire control is discussed. The two phase project covered real-time image generation, cabin motion simulation, and control law development for the Airbus A-300 and A320 aircraft. M.G.

N87-23648# Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn (Germany, F.R.).

MANNED AIR TO AIR COMBAT SIMULATION

PAUL A. PATZNER In AGARD Flight Simulation 7 p (SEE N87-23633 17-09) Sep. 1986

(AGARD-CP-408) Avail: NTIS HC A16/MF A01

The design and the development of modern fighter aircraft weapon systems has created an ever growing need for simulation activities. Especially manned simulation of combat missions in real time can provide invaluable information to the design engineers as well as to potential users of such weapon systems. The ground based Dual Flight Simulator (DFS) described here simulates air to air combat missions in real time for two different manned aircraft including avionics and armament. Each aircraft is flown by a pilot. The type of aircraft, its avionics and armament, can be modelled by exchangeable programs. In order to enlarge realism, the simulation covers a multiple target environment both in the visible range and beyond by infrared radiation radar sensors. The engagement scenario includes short range and medium range air to air missiles as well as the gun. The task area of the simulation covers mission performance assessments as well as the investigation of technical components during the research and development phase of future fighter aircraft systems. Author

N87-23649# Grumman Aerospace Corp., Bethpage, NY. Flight Test Dept.

UTILIZATION OF SIMULATION TO SUPPORT F-14A LOW ALTITUDE HIGH ANGLE OF ATTACK FLIGHT TESTING

P. CONIGLIARO and R. GOODMAN In AGARD Flight Simulation 15 p (SEE N87-23633 17-09) Sep. 1986

(AGARD-CP-408) Avail: NTIS HC A16/MF A01

Ground-based flight simulation has been used successfully to support low altitude, asymmetric thrust, high angle of attack flight testing of the Grumman/Navy F-14A. The high risk nature of this flight testing, while representing a prime example of the application of simulation in the flight test environment, nonetheless generated particular problems regarding simulation fidelity and utilization requirements. As a result, new simulation capabilities were developed specifically for flight test support applications and were fully integrated into existing flight test computing/data analysis facilities. Results from the F-14 high angle of attack flight testing are used to illustrate how simulation can significantly enhance overall flight test safety and productivity. Using simulation support, an efficient test program was completed on time and allowed the F-14's departure characteristics to be safely demonstrated at angles of attack greater than 60 degrees with full engine thrust asymmetry at altitudes below 10,000 ft (3030 m) Author

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N87-23650# Aerialia S.p.A., Turin (Italy). Combat Aircraft Group.

THE USE OF AERITALIA FLIGHT SIMULATOR FOR THE DEVELOPMENT OF THE AM-X WEAPON SYSTEM

ARMANDO ARMANDO and MAURIZIO SPINONI / In AGARD Flight Simulation 12 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The use of the Aerialia flight simulator in the development of the AM-X weapon system is discussed. A brief description of simulator components is given. Flight mechanics, flight controls simulation, cockpit development, head-up display symbology, air-to-air gun attack simulation, in-flight refueling simulation, and aircraft formation lights positioning are among the topics covered.

R.J.F.

N87-23651# Thomson-CSF, Trappes (France).

RADAR SIMULATORS

J. C. PIETREMENT / In AGARD Flight Simulation 5 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The diversity of on-board radars, the required training in their use and the need for preliminary testing prior to their definition led to the development of a multifunction radar simulator architecture offering maximum flexibility. This modular architecture makes possible a wide variety of products from simple training equipment to the most sophisticated research simulators. In addition, it can be adapted as radar techniques develop. Author

N87-23652# Air Force Flight Test Center, Edwards AFB, CA. 6520 Test Group.

THE DEVELOPMENT OF THE T-46 NEXT GENERATION TRAINER MANNED ENGINEERING SIMULATOR AT THE US AIR FORCE FLIGHT TEST CENTER

JONATHAN C. PICK / In AGARD Flight Simulation 12 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The development and structure of the T-46A flight test simulation at the U.S. Air Force Flight Test Center is described. Two interesting aspects of the simulation are emphasized: (1) An electrohydraulic force-feel system is driven by a digital computer to model a reversible flight control system. This led to some force-feel system instabilities that had to be eliminated. (2) Data for extremely high angles-of-attack are incorporated into the simulation in order to simulate aircraft stall, departure, spin, and recovery. As a tool for supporting flight test operations, the T-46 simulation will be used for planning, practice flying of flight tests, and to facilitate the development and evaluation of aircraft modifications (especially those involving the flight control system). This necessitates the use of very versatile software which can be changed daily to support daily flight operations. In addition, a simulation that can accurately model right conditions on the edges of the flight envelope greatly enhances the safety and efficiency of flight tests. Since handling qualities is the primary area of interest in this simulation, certain elements of the simulation are of key importance. One of these is control stick feel. The use of an electrohydraulic force-feel system with digital control caused a number of challenges related to force-feel system stability, which are described along with the solutions implemented. Author

N87-23653# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

OPERATIONAL TRAINING: APPLICATION AND EXPERIENCE

HEINZ FRIEDRICH / In AGARD Flight Simulation 8 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

Possible applications and experience gained in the simulation of missions are described. At first, activities involving operational flight simulation are presented which are performed in the Dornier simulator on laboratory and on the Alpha Jet simulator. Following a brief description of the simulator, typical examples are explained. Then a specific task on the simulator is detailed - the development of an air-to-air mode for the Heads Up Display (HUD). In the final section some aspects of operational training on flight simulators in the German air force are discussed. Author

N87-23654# Air Force Flight Test Center, Edwards AFB, CA. 6520 Test Group.

A METHOD FOR AIRCRAFT SIMULATION VERIFICATION AND VALIDATION DEVELOPED AT THE UNITED STATES AIR FORCE FLIGHT SIMULATION FACILITY

G. R. ANDERSON / In AGARD Flight Simulation 7 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The flight simulators at the United States Air Force Flight Test Center (AFFTC), Aircraft Flight Simulation Facility (AFSF) are primarily used for performance and flying qualities studies. These high-fidelity, real-time simulators are used as an engineering tool during the flight development of new or modified aircraft. Emphasis is placed on fully developing, verifying and validating a simulation before the actual aircraft begins flight testing. The flexibility, accuracy and ease with which the facility's method of verification and validation can be learned and implemented are a few of its advantages. This is demonstrated by the number of simulations which have been developed using it. The F-16 A/B, B-1B, Shuttle, F-15 C/D, AFTI (Advanced Fighter Technology Integration) F-16, F-16 C/D, and the T-46 are examples of simulations presently operational at the facility which were developed using the AFSF's method. The philosophy of developing a simulation before flight test allows the most to be learned about the aircraft before testing begins. The test smarter approach taken at the AFFTC requires that aircraft simulations be built quickly and be used to make flight testing more efficient and safer. The method for verifying and validating simulations used at the AFSF assures that these requirements are fulfilled. Author

N87-23655# National Aerospace Lab., Amsterdam (Netherlands).

CORRELATION BETWEEN FLIGHT SIMULATION AND PROCESSING OF FLIGHT TESTS BASED ON INERTIAL MEASUREMENTS

A. M. H. NIEUWPOORT, J. H. BREEMAN, L. J. J. ERKELENS, and P. J. J. VANDERGEEST / In AGARD Flight Simulation 18 p (SEE N87-23633 17-09) Sep. 1986 Previously announced as N87-10863

(AGARD-CP-408) Avail: NTIS HC A16/MF A01

Flight tests and simulations were performed using conventional and dynamic techniques based on inertial measurements. The use of inertial sensors in flight testing implies that specific forces and body rates are determined which are directly employed in the flight path reconstruction procedure. This procedure uses the equations of motion governing flight. After this step, aerodynamics model identification can take place. In flight simulation, the opposite process occurs. From the available aerodynamic and engine model, specific forces and angular accelerations can be computed. Then the equations of motion can be integrated in order to determine the flight path. Consequently there is a strong similarity in the way flight test results are processed and reduced in order to obtain aerodynamic information and the way simulations are executed using a given model. Author

N87-23656# Calspan Advanced Technology Center, Buffalo, NY.

UNUSUAL AIRBORNE SIMULATOR APPLICATIONS

PHILIP A. REYNOLDS / In AGARD Flight Simulation 14 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

Airborne simulation was conceived as a general purpose flying qualities research technique. Many diverse uses, forecast for the Total In-Flight Simulator (TIFS) while it was being developed, have come to pass, but diversity of application has exceeded even the most imaginative predictions. Some of the most unusual TIFS projects since it became active in 1971 are described. The objective is to help define and illustrate the role of airborne simulation in aerospace research and development as it interfaces with analysis, ground simulation, and flight test. Author

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N87-23657# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.). Inst. fuer Flugmechanik.

DFVLR IN-FLIGHT SIMULATORS ATTAS AND ATTHES FOR FLYING QUALITIES AND FLIGHT CONTROL RESEARCH

DIETRICH HANKE and GERD BOUWER. In AGARD Flight Simulation 13 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

Two new in-flight simulators have been developed by DFVLR in recent years. These are the advanced airborne simulator Advanced Technologies Testing Aircraft System (ATTAS) based on a modified VFW-614 jet transport aircraft which will be operational in 1986, and the helicopter simulator ATTHes (Advanced Technologies Testing Helicopter System) based on a BO 105 helicopter, which has operated since 1984. The application potential, the design requirements, the vehicle modifications, the overall system performance and the simulation capabilities as well as the used model-following-control methods, showing that good simulation fidelity could be achieved are among the types discussed. Author

N87-23658# Royal Aircraft Establishment, Bedford (England) FS(B)1 Div

DEVELOPMENT OF IN-FLIGHT SIMULATION AIRCRAFT FOR RESEARCH AND TRAINING APPLICATIONS IN UK

O. P. NICHOLAS, J. A. GILES, and D. A. WILLIAMS (Cranfield Inst. of Tech., Bedford, England). In AGARD Flight Simulation 13 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The objectives and the aircraft experimental system for the Vectored thrust Aircraft Advanced Flight Control (VAAC) research program are discussed. The VAAC program studies control laws, displays and cockpit controls for advanced STOL aircraft. The objective is to develop concepts and design and assessment techniques through ground based piloted simulation, mathematical studies, and flight in a two-seat fly-by-wire research Harrier aircraft. This work seeks to free the designer from some of the traditional stability and control constraints and to maximise operational effectiveness throughout the flight envelope VSTOL aircraft. Author

N87-23659# National Aeronautical Establishment, Ottawa (Ontario). Airborne Simulation Facility.

AIRBORNE SIMULATION AT THE NATIONAL AERONAUTICAL ESTABLISHMENT OF CANADA

J. M. MORGAN. In AGARD Flight Simulation 16 p (SEE N87-23633 17-09) Sep. 1986. Sponsored in part by the Canadian Department of National Defence (AGARD-CP-408) Avail: NTIS HC A16/MF A01

The present Airborne Simulator operated by the Flight Research Laboratory (FRL) of the National Aeronautical Establishment (NAE), is based on a Bell 205A-1 host vehicle, and is the third generation of such simulators at the laboratory, the previous two being based on Bell 47 models. This aircraft was acquired by the NAE in 1969, first saw service in the simulation of variable stability role in 1971, and since then has undergone and is still undergoing a process of evolutionary development. This paper will concentrate on the operational aspects of airborne simulation using this aircraft, specifically addressing its limitations and the flight safety implications of operating in a single channel fly-by-wire mode in close proximity to the surface and obstacles. The implications of such operations, encompassing such flight phases as landing and Nap of the Earth (NCE) flight on future generations of airborne simulation are also mentioned. Recent trends in flight mechanics research at the FRL have tended to remove emphasis from classical handling qualities experiments to a more system oriented field, and following this the Airborne Simulator has, of late, been used for investigations of the inherent aspects of fly-by-wire systems and as a general research tool in the investigation of various aspects of the glass cockpit and high technology pilot/machine interfacing. Author

N87-23660# Systems Technology, Inc., Hawthorne, CA.

COLLECTED FLIGHT AND SIMULATION COMPARISONS AND CONSIDERATIONS

IRVING L. ASHKENAS. In AGARD Flight Simulation 34 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

Government-sponsored research at Systems Technology, Inc. dealing with simulation fidelity and utility is reviewed, starting with some generic effects of motion and vision system characteristics and computational artifacts. Diagnostic methods and tools useful in discovering and delineating significant qualitative and quantitative differences between simulation and flight are then exposed and illustrated. Finally, examples of both fixed and moving simulation successes and shortcomings are reviewed and examined as to root causes of either. The research-simulator equipment involved in the above comparisons ranges from modern large-scale motion systems and computer-generated imagery to fixed-base with simple CRT-generated displays.

N87-24480# Messerschmitt-Boelkow-Blom G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Div.

DEVELOPMENT OF INTAKE SWIRL GENERATORS FOR TURBOJET ENGINE TESTING

H. P. GENSSLER, W. MEYER, and L. FOTTNER (Technische Univ., Munich, West Germany). In AGARD Engine Response to Distorted Inflow Conditions 21 p (SEE N87-24464 18-07) Mar. 1987. Sponsored in part by the German Bundesministerium der Verteidigung (AGARD-CP-400) Avail: NTIS HC A14/MF A01

The main objective of this investigation is to assess the influence of different types and magnitudes of swirl on the performance and compatibility of turbojet engines. The generation of intake swirl, typical for many supersonic combat aircraft, is described. Essentially two basic types, i.e., twin swirl and bulk swirl, of varying strength and also combinations thereof, were selected in order to simulate these swirl patterns by subscale generators in a model wind tunnel. The swirl patterns measured behind these generators show good agreement with the target patterns selected at the beginning. The small scale swirl generators are being rebuilt at full scale for subsequent testing in front of the Larzac engine under static conditions with a bellmouth inlet at the engine test facility of the Jet Propulsion Institute at the Universitaet der Bundeswehr Muenchen. Author

N87-24946# Rome Air Development Center, Griffiss AFB, NY

ADVANCED SENSOR EXPLOITATION

JOSEPH ANTONIK and LEONARDE CONVERSE, JR. In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 5 p (SEE N87-24940 18-66) Feb. 1987 (AGARD-CP-404) Avail: NTIS HC A07/MF A01

The Advanced Sensor Exploitation Testbed developed by the Rome Air Development Center for the purpose of evaluating and testing advanced techniques in the area of multisensor multidiscipline correlation is described. The testbed consists of three subsystems: the scenario generation subsystem, the sensor simulation subsystem, and the correlation and exploitation algorithms. The scenario generation subsystem, referred to as Dynamic Ground Target Simulator, is a computer automated system for the development of ground truth. Ground truth is any activity that occurs in the battlefield in relation to movement or emission of opposing ground forces. The sensor simulation subsystem consists of generic moving target indicator, radio detection/location, radar detection/location and imaging type sensors that act as fillers for the ground truth. The correlation and exploitation algorithms are resident within the Advanced Sensor Exploitation Element and provide such data as military unit identification, the identification and tracking of high priority/critical targets, threat alerts, and activity level indications. The Advanced Sensor Exploitation Testbed along with built-in evaluation routines allow for the development, test, and evaluation of automated correlation and identification algorithms in as a realistic environment as possible. Author

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N88-11655# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

MBB SIMULATION FACILITIES APPLIED FOR ROTORCRAFT RESEARCH

PETER KRAUSEP, JAMES VANGAASBEEK, and HORST BORCHERT. In AGARD, Rotorcraft Design for Operations 17 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

The increasing pilot workload and environmental conditions of modern military helicopters necessitate detailed assessment of cockpit designs with regard to controls and displays. The optimization must be performed at the initialization of the concept to insure a harmonic design with minimum pilot workload. The status of the MBB Munich flight simulation facility is examined closely in light of these challenging requirements. Projections of the future development of the simulation center components are depicted, as well as priorities. Author

N88-11656# Centre d'Essais en Vol, Istres (France).

RESEARCH SIMULATORS FOR HELICOPTERS (SIMULATEURS D'ETUDES POUR HELICOPTERES)

D. JEROME. In AGARD, Rotorcraft Design for Operations 12 p (SEE N88-11649 03-05) Jun. 1987 In FRENCH (AGARD-CP-423) Avail: NTIS HC A14/MF A01

The helicopter simulation facilities of the Centre d'Essais en Vol at Istres are described. The simulator cabins, imaging techniques motion simulator methods, and related computer equipment are described. In addition, the Center's research objectives in the areas of vehicle and systems design, crew station organization, and vehicle performance evaluation are outlined. M.G.

N88-11667# Societe de Fabrication d'Instruments de Mesure, Massy (France).

HELICOPTER FIRE CONTROL: ADVANTAGES OF AN AUTOMATIC TARGET TRACKER (CONDUITE DE TIR HELICOPTERE INTERETS D'UNE POURSUITE AUTOMATIQUE DE CIBLE)

B. CERUTTI. In AGARD, Rotorcraft Design for Operations 5 p (SEE N88-11649 03-05) Jun. 1987 In FRENCH (AGARD-CP-423) Avail: NTIS HC A14/MF A01

Several advantages of target tracking as applied to helicopter fire control are discussed. The principle elements involved in fire control (sighting, armaments and computers) and their respective roles in target acquisition are briefly described. The benefits of automatic target tracking with image processing are examined in terms of operator workload, improvement in tracking rate and noise, and improvement in target kinetic information (precision, noise) for fire control. Finally, the various criteria for control design are presented. G.

N88-13220# Calspan Corp., Buffalo, NY.

A SURVEY OF EXISTING HYPERSONIC GROUND TEST FACILITIES: NORTH AMERICA

C. E. WITT. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 17 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

In the past several years there was a significant increase in the number of programs involving hypersonic vehicles, resulting in a resurgence of interest in experimental testing in hypersonic wind tunnels. Unfortunately, there are far fewer such facilities operating now than there were 10 or 15 years ago. The primary purpose is to survey the current status of hypersonic wind tunnels in North America and to describe their performance characteristics. As a part of this survey a comparison is drawn to the number and type of hypersonic wind tunnels that were active in the 1960's and 1970's relative to the current situation. Emphasis is placed on hypersonic aerodynamic and aerothermal testing and related areas. In surveying the hypersonic wind tunnels that are active in North America, all but one are located in the USA. There is a gun tunnel in Canada that will be reactivated this year. Author

N88-13221# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

EUROPEAN HYPERSONIC WIND TUNNELS

J. F. WENDT. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 24 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

Although the hypersonic flow regime will probably be the first to be dominated by computational techniques due to serious experimental simulation problems, the next generation of lifting reentry vehicles will still rely on wind tunnels not only for design validation but also to verify computer codes through benchmark test cases. Evidence for this statement is the proposal to utilize European hypersonic tunnels for upwards of 2000 occupancy days from 1986 to 1993 on the Hermes project. Basic research in hypersonics required for the post-Hermes era will also rely heavily on wind tunnels and their associated instrumentation. Thus, it is appropriate to review the present status of hypersonic tunnels. The requirements for flow simulation in the hypersonic regime are briefly discussed, and the present situation summarized. Gaps are identified and suggestions for improvements are put forward. Author

N88-13223# Queensland Univ., Brisbane (Australia). Dept. of Mechanical Engineering.

SHOCK TUNNELS FOR REAL GAS HYPERSONICS

R. J. STALKER. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 10 p (SEE N88-13219 05-02) Nov. 1987 (AGARD-CP-428) Avail: NTIS HC A24/MF A01

The application of free piston shock tunnels to the simulation of real gas effects in hypersonic flight is discussed. It is pointed out that the primary simulation variables for this purpose are the stagnation enthalpy and the binary scaling parameter. The free piston reflected shock tunnel is considered first, and it is shown how test time limitations play a major role in determining the limiting stagnation enthalpy for a given model size. Nevertheless, flight values of the two simulation variables, for vehicles similar to the Space Shuttle Orbiter, can be matched by an existing free piston shock tunnel up to speeds of 1 km/s. Experiments performed in this shock tunnel are used to demonstrate real gas effects in model flow. Radiative energy loss limits the maximum stagnation enthalpy available with reflected shock tunnels. Fortunately, operation in the nonreflected mode circumvents this limitation, and in addition, allows higher values of the binary scaling parameter, although it also leads to greatly reduced test times. The use of the prior steady flow technique to enable high enthalpy nonreflected shock tunnel operation is described, and examples of experiments performed in the facility are used to demonstrate that short test times do not preclude worthwhile experimentation. A variant of the free piston shock tunnel, which is intended for propulsion research at high velocities, also is briefly described. Author

N88-23126*# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

WATER FACILITIES IN RETROSPECT AND PROSPECT: AN ILLUMINATING TOOL FOR VEHICLE DESIGN

GARY E. ERICKSON, DAVID J. PEAKE, JOHN DELFRATE, ANDREW M. SKOW, and GERALD N. MALCOLM. Edictics International, Inc., Torrance, Calif. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 28 p (SEE N88-23125 16-34) Jun. 1987 Previously announced as N87-13403 (AGARD-CP-413) Avail: NTIS HC A20/MF A01 CSCL 14B

Water facilities play a fundamental role in the design of air, ground, and marine vehicles by providing a qualitative, and sometimes quantitative, description of complex flow phenomena. Water tunnels, channels, and low tanks used as flow-diagnostic tools have experienced a renaissance in recent years in response to the increased complexity of designs suitable for advanced technology vehicles. These vehicles are frequently characterized by large regions of steady and unsteady 3-D flow separation and ensuing vortical flows. The visualization and interpretation of the complicated fluid motions about isolated vehicle components and complete configurations in a time and cost effective manner in hydrodynamic test facilities is a key element in the development of flow control concepts, and, hence, improved vehicle designs. A historical perspective of the role of water facilities in the vehicle design process is presented. The application of water facilities to specific aerodynamic and hydrodynamic flow problems is discussed.

and the strengths and limitations of these important experimental tools are emphasized. Author

N88-23128# Societe Bertin et Cie, Plaisir (France). **QUALIFICATION OF A WATER TUNNEL FOR FORCE MEASUREMENTS ON AERONAUTICAL MODELS [QUALIFICATION DUN TUNNEL HYDRODYNAMIQUE POUR DES PESEES DE MAQUETTES AERONAUTIQUES]** B. CHEZLEPRETTE and Y. BROCARD. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 15 p (SEE N88-23125 16-34) Jun. 1987. In FRENCH; ENGLISH summary (AGARD-CP-413) Avail: NTIS HC A20/MF A01

Bertin and Company maintains a water tunnel where flow visualization, and velocity and force measurements are performed. Recently, force measurements were done on a wing-canard model which was also tested in a wind tunnel at ONERA. This paper focuses on the presentation of the facility (including its laser anemometer and the computerized data acquisition system) and on the satisfactory comparison of the balance measurements obtained in both water and wind tunnels. Author

N88-23132# National Research Council of Canada, Ottawa (Ontario). Low Speed Aerodynamics Lab. **THE USE OF THE NRC/NAE WATER FACILITIES IN CANADIAN AERONAUTICAL RESEARCH AND DEVELOPMENT** R. H. WICKENS and N. E. JEFFREYS. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 20 p (SEE N88-23125 16-34) Jun. 1987. (AGARD-CP-413) Avail: NTIS HC A20/MF A01

Described are some of the hydrodynamic facilities of the National Research Council in Ottawa and St. John's, Newfoundland. The NAE water tunnel, in particular, contributed to the understanding of the aerodynamics of various VSTOL concepts, and complex flows containing strong elements of vorticity and unsteadiness. Several projects are described in which fundamental flow observations were made, and from which data was obtained in support of theoretical investigations. The past and future potential of several water facilities of the NRC for pursuing aeronautical and marine research are described. Author

N88-23133# MATPA Service Aerodynamique, Velizy-Villacoublay (France). **DESCRIPTION OF A WATER TANK FACILITY: STUDY OF A MISSILE AT HIGH INCIDENCE [PRESENTATION DUN BASSIN HYDRODYNAMIQUE: ETUDE DUN MISSILE AUX GRANDES INCIDENCES]** J. PERINELLE and A. LUPIERI. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 20 p (SEE N88-23125 16-34) Jun. 1987. In FRENCH; ENGLISH summary (AGARD-CP-413) Avail: NTIS HC A20/MF A01

The water tank facility at Matra in which measurements are done of flows past missiles and other related research performed, is described. To assess the experimental techniques used, comparisons are made with wind tunnel test results. In terms of flow visualization, the phenomenon of vortex breakdown on a delta wing at incidence is checked against those of other installations. In addition, the characteristics of a simplified missile configuration are considered in subsonic flow at large incidences. The emphasis here is on two aspects: (1) the occurrence of side forces for angles of attack beyond a certain value, and how it is possible to correlate wind tunnel tests with the visualization of such flows, and (2) using wind tunnel data obtained with an instrumented model with a wing mounted on a balance compared with three other wings fixed to the body, a new correlation between measurements and visualization is made, indicating the strong dependency of wing lift on missile roll angle attitude. Author

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N88-23150# Stuttgart Univ. (Germany, F.R.). Inst. fuer Aerodynamik und Gasdynamik. **A NEW LAMINAR WATER TUNNEL TO STUDY THE TRANSITION PROCESS IN A BLASIUS LAYER AND IN A SEPARATION BUBBLE AND A NEW TOOL FOR INDUSTRIAL AERODYNAMICS AND HYDRODYNAMIC RESEARCH** M. STRUNZ and J. F. SPETH. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 5 p (SEE N88-23125 16-34) Jun. 1987. (AGARD-CP-413) Avail: NTIS HC A20/MF A01

Two new watertunnels of the Institute for Aerodynamics and Gas Dynamics of the University of Stuttgart are presented. The first is especially designed to study the stability of a laminar boundary layer. The second was built to solve problems in industrial aero- and hydrodynamics. Both tunnels are constructed of corrosion-resistant materials, i.e. fiberglass/reinforced plastic technology. Technical data and the first applications are discussed. Author

N88-28858# Potter (J. Leith), Nashville, TN. **MISSILES, FUSELAGE AND SIMILAR BODIES** J. LEITH POTTER. In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 5-20 (SEE N88-28857 23-01) Apr. 1988. (AGARD-AR-224) Avail: NTIS HC A20/MF A01

A review of current practices for coping with the simulation deficiency when tests of elongated bodies are conducted at Reynolds numbers appreciably lower than full-scale values is presented. High subsonic, transonic, and low-supersonic ranges of Mach number are covered; hypersonic conditions are excluded although much of the discussion is also relevant to high Mach number flows. Because the flows considered may or may not have supersonic regions and shock waves, it is important to remain alert to the differences that shock-boundary layer interaction may impose upon any conclusions that are based upon shock-free flows. Drag and side force variations generated by changes in Reynolds number receive the principal attention. The working premise is that the higher Reynolds number simulation goal implies also that a turbulent boundary layer is desired and that it has to be established by artificial means. Author

N88-28859# National Aeronautics and Space Administration Langley Research Center, Hampton, VA. **HIGH-ASPECT-RATIO WINGS** JOHN B. PETERSON, JR. In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 21-29 (SEE N88-28857 23-01) Apr. 1988. (AGARD-AR-224) Avail: NTIS HC A20/MF A01 USCL 14B

High-aspect-ratio aircraft include most transport aircraft such as commercial and military transports, business aircraft, and cargo aircraft. Generally, these types of aircraft are designed to cruise over a narrow range of lift coefficients and Mach numbers in the performance of their mission. Emphasis is therefore placed on the cruise performance of transport aircraft and every effort is made to obtain accurate wind-tunnel data to use as a basis for prediction of full-scale cruise performance. However, off-cruise performance is also important and methods were developed for extrapolating wind-tunnel data on buffet and flutter at transonic speed. Transport-type aircraft were tested extensively in various wind tunnels around the world and many different test techniques were developed to simulate higher Reynolds numbers. Methods developed for one tunnel may not be applicable to another tunnel because of differences in size, Reynolds number capability, running time, and test objectives. Many of the methods of boundary-layer control developed in two-dimensional airfoil testing can be applied in tests of transport configurations, but sometimes the three-dimensional flow fields that develop on transport aircraft can make application of the two-dimensional methods difficult or impossible. The discussion is intended to be a representative, but not exhaustive, survey of the various methods of high Reynolds number simulation in the testing of high-aspect-ratio aircraft. Author

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N88-28861# British Aerospace Public Ltd Co., Weybridge (England) Aircraft Group.

COMPLEX CONFIGURATIONS

A. G. T. CRCSS / In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 50-67 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

The practice of simulating high flight Reynolds number behavior in a low Reynolds number facility is well known. However the problems now encountered at transonic speeds are considerable and vary for different model designs such that it is difficult to predict with real confidence the actual flight conditions. In two dimensions these scale effects become more apparent as the degree of supercritical flow is increased and in particular with rearward movement of shocks. In three dimensions the problems are more severe particularly when wing sweep is high due to vortex and turbulent attachment line flows, both of which are Reynolds number dependent and when complex configurations are considered the potential for scale sensitive effects is considerable owing to the many regions where flow separation can occur. The designer will often seek to avoid scale sensitive flow separations in model tests and this amounts to designing for low Reynolds number with a reduction in the potential gains to be had for design for full scale. By furthering the understanding of scale effects more reliable use can be made of Reynolds number simulation techniques, so enabling design for conditions closer to full scale with significant gains in flight performance. The current practice with regard to high Reynolds number simulation in transonic wind tunnels for industrial standards of testing relating to complex aircraft configurations is reviewed. Author

N88-28862# National Aerospace Lab., Amsterdam (Netherlands).

REYNOLDS NUMBER EFFECTS AND THE WIND TUNNEL ENVIRONMENT

A. ELSENAAR / In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 68-79 (SEE N88-28857 23-01) Apr. 1988 Previously announced as N87-18546

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

Pseudo Reynolds number effects on wind tunnel test results are discussed. It is shown that many phenomena can be avoided or reduced. However, the natural transition position appears to be critically dependent on a large number of variables: pressure distribution, tunnel noise and turbulence, temperature non-equilibrium, surface roughness, and Reynolds number. For that reason differences in transition location between wind tunnel and flight are likely to occur for other reasons than Reynolds number differences. It remains good practice to either artificially fix the boundary layer or to measure the transition location. ESA

N88-28863# Napoli Univ. (Italy). Experimental Gasdynamics Techniques for Boundary Layer Tripping and Control

G. P. RUSSO / In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 80-90 (SEE N88-28857 23-01) Apr. 1988 (AGARD-AR-224) Avail: NTIS HC A20/MF A01

The most used techniques in industrial practice to provoke transition at the desired location on the model rely on narrow strips of sparsely distributed ballotini or carborundum grains. Carborundum is preferred for its sharp irregular shape giving rise to a superior effectiveness in tripping; ballotini are preferred for their closer dimensional control. A new technique trying to combine these two desirable features was proposed which make use of coronets produced with a sewing machine on thin metal strips. Another recently proposed technique makes use of transfer characters (Lefraset) build up in layers of the desired thickness. Methods based on the increase of the turbulence level of the stream ahead of the model are to be considered not sufficiently reliable. The two most used techniques to detect transition on 3-D models are both based on surface visualization: the first one makes use of sublimating substances, acenaphthene in high subsonic and transonic tests, the second one makes use of fluorescent oil + ultra-violet light. An alternative technique, promising for its reversibility, is the visualization of temperature distribution on the surface with an infra-red camera (thermography) or with a temperature-sensitive paint. For 2-D or axially-symmetrical models more conventional techniques can be used as measurements of velocity profiles with pitot tubes, boundary layer

thickness with optical methods, turbulence levels with hot-wire or Laser-Doppler anemometers. Author

N88-28864# Aircraft Research Association Ltd., Bedford (England).

EXPERIMENTAL TOOLS: THE TUNNEL AND THE MODEL

A. B. HAINES and A. ELSENAAR / In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 111-114 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

The aim of the report is to draw attention to experimental factors that can have a significant impact on the details of the methodology to adopt for a particular test program in a particular tunnel. First and foremost, the methodology and in particular, the choice of approach to the in-depth study of the viscous effects is likely to depend on the test Reynolds number and on whether it is possible to vary the Reynolds number by changing the tunnel stagnation pressure (or temperature). If the tests are being made in a variable density tunnel, Reynolds-number sweeps will tend to be the preferred option; if the tests are being made in an atmospheric tunnel, manipulation of the boundary layer to produce a closer representation of the full-scale boundary behavior will be the only possible approach unless one is prepared to test more than one model to a different scale. Whenever possible, both approaches should be practised but nevertheless, the type of tunnel will dictate the preference. Reynolds number, is however, not the only significant parameter. The stream turbulence and noise level are also important. The required standards of tunnel flow quality and data accuracy were set out in the report of an earlier sub-committee of the AGARD Fluid Dynamics Panel. For convenience, however, the main issues that can affect the success of applying either approach to the study of the viscous effects are summarized. Author

N88-28865# National Research Council of Canada, Ottawa (Ontario).

COMPUTATIONAL TOOLS FOR SIMULATION

METHODOLOGIES

Y. Y. CHAN / In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 115-131 (SEE N88-28857 23-01) Apr. 1988 (AGARD-AR-224) Avail: NTIS HC A20/MF A01

In the brief review of the computational capabilities for viscous flows, it was shown that the methods of solution of the governing equations were well developed. Turbulence modeling is adequate for simple flows, though further verification and developments are still needed for complex flows. Interactions of viscous and inviscid flows, which are basic characteristics of transonic flows are properly formulated and analyzed. Attached flows can be predicted accurately for a wide range of Reynolds numbers. Flows with moderate separations near the leading or trailing edges and the shock wave-boundary layer interactions can be treated by the interactive methods. Methods for two-dimensional flows are better developed while three-dimensional and unsteady flow methods are showing rapid progress. In general, computations can be applied to simple configurations or components of a complex configuration. The interaction of computational simulations with wind tunnel test programs has effectively augmented the capabilities of these tests. The information provided by computations is now essential for design and checking of the test and for interpretation and extrapolation of the results. Due to strict requirement of accuracy in aerodynamic tests, applications of computation are limited. At present, to simulation of attached flows. For complex flow simulations, especially with flow separation, further development is needed in better understanding the physical nature of the flow and its modeling. Author

N88-28866# National Aerospace Lab., Amsterdam (Netherlands).

EMPIRICAL TOOLS FOR SIMULATION METHODOLOGIES

A. ELSENAAR and A. B. HAINES (Aircraft Research Association Ltd., Bedford, England) / In AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 132-138 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

For the application of a simulation/extrapolation methodology a detailed understanding of the relevant viscous effects is essential. The most sophisticated computational methods today cannot describe all aspects of the flow development. This is particularly

09 RESEARCH AND SUPPORT FACILITIES (AIR)

true for details of the flow development that involve boundary layer transition and/or separation. For that reason an attempt is made to describe the empirical tools that can be used to supplement the theoretical calculations or the experimental information. The principle of the method is briefly indicated. Also, in many cases, alternative relations can and will be used depending on existing practice and experience of a particular design team. Where possible, in addition to a simple method a more sophisticated method was specified. In some cases the more sophisticated method is almost identical to a complete numerical simulation. In that respect the present set of empirical tools is open-ended. On the one hand, new experimental information will become available in the future to refine or extend the empirical tools as used at present. On the other hand, the ever increasing sophistication in flow modeling through computational methods will eventually supersede most empiricism. Author

N88-29742# British Aerospace Public Ltd. Co., Preston (England).

THE ROLE OF SIMULATION IN FLYING QUALITIES AND FLIGHT CONTROL SYSTEM RELATED DEVELOPMENT

A. G. BARNES In AGARD, Advances in Flying Qualities 21 p (SEE N88-29735 24-01) May 1988 (AGARD-LS-157) Avail: NTIS HC A09/MF A01

Flight simulation makes a vital contribution to the understanding of flying quality requirements and to the clearance of modern aircraft flight controls. The background to the use of simulators, both airborne and ground based is presented, and the experimental techniques, including validation and hardware requirements are discussed. The limitations which equipments can impose are presented, and examples are given of the use of flight simulation in flying qualities research. Finally, the techniques required for the clearance of current designs are highlighted, and a direction for future research is indicated. Author

N89-10054# Boeing Aerospace Co., Seattle, WA. RANGE DELAY TECHNIQUES FOR RADAR TARGET SIMULATORS

LELAND C. BUSE In AGARD, Guidance and Control Systems Simulation and Validation Techniques 9 p (SEE N89-10048 01-08) Jul. 1988 (AGARD-AG-273) Avail: NTIS HC A07/MF A01

It was recognized that the Radar Guided Seeker and countermeasure development using flight tests as a primary evaluation tool is costly and insecure from interception of signal and telemetry emanations. Radar Target Simulators were developed which provide the capability both to evaluate actual radar guided seeker hardware and software and to evaluate countermeasures against the actual seeker hardware in a secure environment. Experience with these simulators has demonstrated that with adequate simulator hardware, valid closed-loop performance evaluations can be conducted which will accurately reflect flight test performance. A critical issue in the implementation of such systems is the simulation of radar pulse range delay. This must be accomplished with sufficient fidelity to represent a range-delayed target of ECM signal credible to modern seeker signal processors. Various range delay techniques as applied to Radar Target Simulators are presented. In particular, a digital approach to the solution of the range delay problem is developed from basic concepts through actual hardware implementation. Author

N89-16846# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. AERODYNAMIC DATA ACCURACY AND QUALITY: REQUIREMENTS AND CAPABILITIES IN WIND TUNNEL TESTING

Jul. 1988 516 p In ENGLISH and FRENCH Symposium held in Naples, Italy, 28 Sep. - 1 Oct. 1988 (AGARD-CP-429; ISBN-92-835-0469-0; AD-A202496) Avail: NTIS HC A22/MF A01

The wind tunnel is the main instrument for providing experimental aerodynamic data to the aerospace industry and researcher for the purpose of load and performance evaluation and for verification of theoretical results. In both cases, it is imperative that the user has confidence in the quality of the results, which means that he must have information on what accuracy to attach to the data. The quality of wind tunnel results depends

upon both the accuracy of measurements and the imperfections provided by the wind tunnel environment. Great strides have been made on measurement accuracy and as a rule this need no longer be of much concern if properly attended to. However, imperfections provided by the wind tunnel are still extant and these are the main sources affecting the quality and accuracy of aerodynamic wind tunnel data. The capabilities of wind tunnels are compared with the demands of the user. For individual titles, see N89-16847 through N89-16880.

N89-16846# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.)

EXPERIMENTS ON THE DFVLR-F4 WING BODY CONFIGURATION IN SEVERAL EUROPEAN WINDTUNNELS

G. REDEKER, R. MUELLER, P. R. ASHILL, A. ELSENAAR, and V. SCHMITT (Office National d'Etudes et de Recherches Aeronautiques, Paris, France) In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 15 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

Attempts are made to improve design methods for three-dimensional configurations in transonic flow and to increase the confidence in wind tunnel data. The selected configuration was the DFVLR-F4 wing-body combination incorporating a transonic wing of high aspect ratio and a fuselage of Airbus type. The experimental part of the exercise is examined, where the same model of the wing-body configuration was tested in three European Transonic wind tunnels. The tests followed an agreed test program comprised of force and moment measurement as well as measurements of pressure distribution on wing and fuselage. Selected test results from the three wind tunnel tests are compared, the main emphasis being placed on the comparison of results from different wind tunnels on physically the same model. The results show that the data of the three wind tunnels are in reasonable agreement, although the severe accuracy requirements of industry for judging performance data from different wind tunnels could not be met. Author

N89-16851# Calspan Field Services, Inc., Arnold AFS, TN Aerodynamics Sect.

HIERARCHY OF UNCERTAINTY SOURCES IN TRANSONIC WIND TUNNEL TESTING

JAMES M. WHORIC and RANDY W. HOBBS In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 13 p (SEE N89-16846 09-09) Jul. 1988 Prepared in cooperation with Arnold Engineering Development Center, Arnold Air Force Station, TN (AGARD-CP-429) Avail: NTIS HC A22/MF A01

A numerical perturbation technique was employed to compute the aerodynamic coefficient uncertainties attributable to uncertainty sources associated with transonic wind tunnel testing. A force accounting system which included data from an aerodynamic reference system, a nozzle afterbody test, and an inlet test was established to develop a system of equations by which to compute nominal flight values of lift, drag, and pitching moment coefficient uncertainties. Uncertainty estimates included standard instrumentation uncertainties for such sources as wall interference, specific humidity, and viscous simulation which were based on combinations of CFD calculations and experimental data. Author

N89-16852# Naval Air Systems Command, Washington, DC Aerodynamics and Flight Controls.

WIND TUNNEL PREDICTED AIR VEHICLE PERFORMANCE: A REVIEW OF LESSONS LEARNED

E. C. ROONEY and H. F. LAUER, JR. (Calspan Field Services, Inc., Arnold AFS, TN) In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 11 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

Air vehicle development programs continue to experience difficulty in preformance prediction of new aircraft configurations. Advances in the state-of-the-art in wind tunnel simulation techniques, flight performance measurements and computational fluid dynamics have provided the basis for investigating the accuracy of the aerodynamic element used in the performance prediction process. The force accounting procedures, model and wind tunnel simulation techniques and correction procedures are reviewed, along with full scale adjustments used to predict the

09 RESEARCH AND SUPPORT FACILITIES (AIR)

performance of air vehicles. The lesson learned in this review should enhance the capability to predict aircraft performance for future air vehicle development programs. Author

N89-16855# Royal Aircraft Establishment, Bedford (England). **THE ACCURATE MEASUREMENT OF DRAG IN THE 8 FT X 8 FT TUNNEL**

M. N. WOOD and D. S. CAPPS. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 9 p (SEE N89-16846 09-09) Jul. 1988. Previously announced as X88-72373 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

The techniques currently adopted in the 8 ft by 8 ft wind tunnel at RAE for the accurate measurement of drag are described in detail. Data are presented from three series of tests on a model of the A-310 aircraft and these demonstrate the level of accuracy which can be achieved. Author

N89-16856# British Aerospace Public Ltd. Co., Preston (England). **ACCURATE DRAG ESTIMATION USING A SINGLE COMPONENT DRAG MODEL TECHNIQUE**

A. M. CASSIE. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 16 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

The design, development and operation of an advance afterbody drag rig at the high speed wind tunnel at Warton is reviewed. The rig has been extensively used over a 16 year period for minimization of modern combat aircraft afterbody drag. Accurate incremental drag data is produced by measurement of the axial force on a fully representative metric afterbody section. A full description of the rig is given along with techniques for data correction and presentation of typical data. Author

N89-16857# Aircraft Research Association Ltd., Bedford (England). **DEVELOPMENT OF TESTING TECHNIQUES IN A LARGE TRANSONIC WIND TUNNEL TO ACHIEVE A REQUIRED DRAG ACCURACY AND FLOW STANDARDS FOR MODERN CIVIL TRANSPORTS**

E. C. CARTER and K. C. PALLISTER. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 20 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

Evenness and results obtained in the ARA 9 ft by 8 ft transonic wind tunnel are used to address the questions of measurement and flow quality, data accuracy and achieved performance. The discussions relate primarily to experience with civil transports for which accurate drag prediction and efficient drag reduction through reliable experimental techniques is of major importance. The quality of results is studied via the definition of the problem areas, the correction methods and analysis of dynamics of the flow and the associated measurements. Techniques specific to a large development transonic tunnel are discussed in detail with a constant awareness of the cost and efficiency in relation to the required accuracy and repeatability standards. Author

N89-16859# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Berlin (Germany, F.R.). **FLOW UNSTEADINESS IN THREE LOW-SPEED WIND TUNNELS**

U. MICHEL and E. FROEBEL. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 10 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

The velocity unsteadiness in 6 test sections of 3 low speed wind tunnels is discussed. Large differences of the root-mean-square velocity or turbulence levels are observed in these tunnels. It is shown that these differences can be explained with the two independent contributions to the velocity unsteadiness in a wind tunnel: (1) vorticity which is convected into the test section from upstream, and (2) pressure waves which have many origins but the important ones for low speed wind tunnels are the free shear layers of open test sections and slotted wall test sections. It is further shown that the turbulence level is not sufficient to describe the effect of velocity unsteadiness on the quality of data measured in a wind tunnel and it is demonstrated with the

example of boundary layer transition that the distribution of the fluctuating energy in the frequency domain is more important. Author

N89-16860# DSMA International, Inc., Toronto (Ontario). **IMPACT OF NOZZLE DESIGN CONSTRAINTS ON TEST SECTION FLOW QUALITY**

D. VANEVRY, S. RAIMONDO, and G. M. ELFSTROM. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 11 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

A procedure is described which allows the design of relatively short adjustable nozzles without resorting to the assumption of radial flow upstream of the nozzle inflection point. This design procedure is used to generate a number of fully flexible nozzle designs for a design Mach number of 1.4. Flexible nozzle parameters such as pressure loading, number of actuators and nozzle length are varied in order that the influence of these parameters on test section flow quality may be evaluated. The influence of nozzle actuator setting accuracy is also estimated. The parametric study shows that high flow quality can be achieved for the shortest nozzle considered. The examination of jack setting errors shows that for well designed nozzles, jack setting error will be a significant source of test section flow nonuniformities. Author

N89-16861# McDonnell Aircraft Co., Saint Louis, MO. **Aerodynamics and Propulsion Labs. TRANSONIC WIND TUNNEL BOUNDARY INTERFERENCE: A CORRECTION PROCEDURE**

R. C. CRITES. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 16 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

An effort to develop a transonic wind tunnel boundary correction procedure is examined. The goal is a boundary correction procedure applicable to ventilated test sections from subsonic through transonic Mach numbers. Boundary correction is distinguished from wall correction. Boundary corrections contain wall corrections, but also contain model support, and other tunnel dependent corrections. The approach taken uses computational fluid dynamics with measured boundary conditions to provide corrections at a few points in the test envelope. Conventional similarity principles and regression techniques are used to extend these corrections over the full test range. To provide experimental data needed for development and validation, a wind tunnel test program was initiated. A set of 4 wing-body model were built. Model size was varied while maintaining precise geometric similarity. The 3 smallest models were tested from Mach 0.5 to 1.2 in a small transonic tunnel. Preliminary testing of 2 of the largest models was made in a larger tunnel. Extensive boundary pressure data were measured in both tunnels. Typical results of these tests are reviewed. Author

N89-16862# Aircraft Research Association Ltd., Bedford (England). **THE USE OF COMPUTATIONAL FLUID DYNAMIC METHODS TO ASSESS THE EFFECTS OF MODEL SUPPORT SYSTEMS AND WORKING SECTION MODIFICATIONS ON THE FLOW AROUND WIND TUNNEL MODELS**

D. R. STANNILAND. In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 16 p (SEE N89-16846 09-09) Jul. 1988 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

The continuing development of computer codes and power means that computational fluid dynamic methods can be used, in conjunction with test techniques, to provide a more thorough knowledge of measured flow phenomena. The use of various programs is demonstrated to evaluate the magnitude of the interference due to model support and flow measurement installations and to guide the design of an acoustic liner for the ARA transonic wind tunnel. Various simplifications are necessary to permit the representation of the complex geometry within the constraints imposed by the programs, and hence, care is needed in using the computed results. Within this limitation, the methods can provide a valuable aid to the interpretation of experimental results and to guide the design of wind tunnel installations.

Calculations are described using various theoretical methods, carried out in support of tests on five different wind tunnel installations
 Author

N89-16863# National Aerospace Lab., Amsterdam (Netherlands)

ACCURACY OF VARIOUS WALL-CORRECTION METHODS FOR 3D SUBSONIC WIND-TUNNEL TESTING

R. A. MAARSINGH, TH. E. LABRUJERE, and J. SMITH /in AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 13 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

On the basis of wind-tunnel measurements on a (simple, unpowered, but complete) transport aircraft model in a small and a very large solid-wall test section the accuracy of four measured-boundary-condition (MEC) methods, as well as two classical methods, was analyzed at low-speed conditions. Large reductions in the amount of in situ measured data are shown to be possible, yet yielding results which match almost with those of calculations using multiples of input data. Classical methods need not be abandoned at once in low-speed solid-wall testing. Higher priority should be given to the well-known interpretation problem: the determination of the actual model reaction upon the wall-induced flow field.
 Author

N89-16864# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA

WIND TUNNEL-SIDEWALL-BOUNDARY-LAYER EFFECTS IN TRANSONIC AIRFOIL TESTING-SOME CORRECTABLE, BUT SOME NOT

F. T. LYNCH (Douglas Aircraft Co., Inc., Long Beach, CA) and C. B. JOHNSON /in AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 16 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01 CSCL 14B

The need to correct transonic airfoil wind tunnel test data for the influence of the tunnel sidewall boundary layer is discussed, in addition to the wall accepted corrections for the analytical investigation was carried out in order to evaluate sidewall boundary layer effects on transonic airfoil characteristics, and to validate proposed correction and the limit to their applications. This investigation involved testing of modern airfoil configurations in two different transonic airfoil test facilities, the 15 x 60 inch two-dimensional insert of the National Aeronautical Establishment (NAE) 5 foot tunnel in Ottawa, Canada, and the two-dimensional test section of the NASA Langley 0.3 m Transonic Cryogenic Tunnel (TCT). Results presented included effects of variations in sidewall-boundary layer bleed in both facilities, different sidewall boundary layer correction procedures, tunnel-to-tunnel comparisons of corrected results, and flow conditions with and without separation.
 Author

N89-16865# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.), Inst. fuer Experimentelle Stromungsmechanik.

PHYSICAL ASPECTS OF VISCOUS SIMULATION AND ASSOCIATED RESEARCH REQUIREMENTS Summary Report

E. STANEWSKY /in AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 16 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

Boundary layer development and transition; nonequilibrium boundary layers; shock boundary layer interaction; classical separation, trailing edge flow and buffet; vortex flows; environmental effects on the boundary layer development and transition; and boundary layer manipulation are examined. Some selected results are presented and summarized with respect to the dominant viscous and outer inviscid flow parameters and most urgently needed research.
 B.G.

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N89-16867# Case Western Reserve Univ., Cleveland, OH.

A PROPOSED BOUNDARY LAYER SIMULATION METHODOLOGY FOR WIND TUNNEL TESTING

ELI RESHOTKO, C. ARMAND, Y. Y. CHAN, A. ELSENAAR, A. B. HAINES, J. L. POTTER, and GIUSEPPE P. RUSSO /in AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 12 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

While wind tunnels were used for about a century to obtain performance data for vehicles to be used in atmospheric flight, these are still numerous uncertainties and ambiguities in the interpretation of the data and in reliably extrapolating them to flight conditions. These issues were recently addressed. The development of a boundary layer simulation/extrapolation methodology is examined.
 Author

N89-16870# Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (Germany, F.R.)

ACCURACY REQUIREMENTS FOR HIGH-SPEED TEST WITH ENGINE SIMULATION ON TRANSPORT AIRCRAFT MODELS IN THE NLR-HST

W. BURGSMUELLER, J. W. KOOI, and K. MOELLER, W. (National Aerospace Lab., Amsterdam, Netherlands) /in AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 16 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

Air-driven turbine-powered simulators, so-called TPS units, are being used in wind tunnel testing to simulate the engine flow for an aircraft model. These simulators provide substantial improvement in testing as compared to simple through-flow nacelles used earlier. In order to fully explore the improvement potential in aerodynamic simulation it is mandatory to assure a high level of accuracy or in case of increment testing a good repeatability because the effects of engine interference drag are of the order of a few counts. For increment testing a repeatability of at least + or - 1 drag count must be achieved. The efforts made to demonstrate that this repeatability can be achieved in the NLR high speed wind tunnel (HST) for a half model with a wing-mounted TPS engine are described. The test was performed in a joint program of NLR and MBB-UT, where MBB delivered the model and TPS unit with engine cowings, while NLR was responsible for engine calibration, wind tunnel instrumentation, and the test. To obtain the desired quality of the final test results the investigation was subdivided into several steps. These steps and the technical problems and questions encountered will be described in detail.
 Author

N89-16871# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.).

ENGINE SIMULATOR TESTS: COMPARISON OF CALIBRATION AND WIND TUNNEL RESULTS

W. BAUMERT, B. BINDER, and W. STAEGER /in AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 11 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

A turbine powered simulator (TPS) was tested with a bellmouth inlet in the calibration tank and with a flight inlet in the low speed wind tunnel at DFVLR Gottingen. Local Mach number distribution shows good agreement in both facilities. The Pitot pressure distribution behind the fan however is different. This is probably due to the different inlet configurations. The nozzle coefficients obtained in the calibration tank are used to calculate the thrust of the simulator in the wind tunnel. The comparison with the thrust measured in the wind tunnel shows that additional corrections have to be applied when evaluating wind tunnel measurements with TPS.
 Author

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N89-16872# Office National d'Etudes et de Recherches Aérospatiales, Modane (France).

INSTANTANEOUS FORCE MEASUREMENT ON A MODEL SUBJECTED TO RAPID CONTROL VARIATIONS

J. P. DREVER and M. ROBERT In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 20 p (SEE N89-16846 09-09) Jul. 1988 In FRENCH; ENGLISH summary. Original language document was announced in IAA as A88-22599.

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

The development of a wind-tunnel model using a lateral-jet system to enact rapid control variations is discussed, and the results of instantaneous force measurements obtained with the model without wind in the supersonic test section of the ONERA S2MA facility are reported. The range of frequencies to be avoided in controlling the generator are identified, and a mathematical model for calculating the model motion is developed. Torsion applied to the model is measured with a precision of \pm or \pm 5 percent in roll and \pm or \pm 10 percent in pitch and yaw over a range of frequencies from 0 to 60 Hz. Good correlation is found between the applied and measured forces. Author

N89-16873# Technische Univ., Darmstadt (Germany, F.R.).

BALANCE ACCURACY AND REPEATABILITY AS A LIMITING PARAMETER IN AIRCRAFT DEVELOPMENT FORCE MEASUREMENTS IN CONVENTIONAL AND CRYOGENIC WIND TUNNELS

B. EWALD In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 12 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

The success of a commercial transport development is heavily influenced by the accuracy of drag measurements during the aerodynamic development in the wind tunnel. It is shown, that the internal balance in one limiting factor of accuracy. The accuracy standard of modern internal balances is compared to the accuracy and repeatability requirement of the aerodynamicist. The comparison with high precision single component load cells promises a large improvement potential in multi-component balance design and calibration. The following fields of improvement are discussed: balance design, balance material selection and treatment, calibration methods, calibration software, and thermal effects. Perfect correction of the thermal effects is the key to the successful use of cryogenic tunnels. An approach for the crucial problem of balance body distortion due to temperature gradients is demonstrated. Author

N89-16874# Arnold Engineering Development Center, Arnold Air Force Station, TN.

CHARACTERIZATION OF HYPERSONIC WIND TUNNEL FLOW FIELDS FOR IMPROVED DATA ACCURACY

ALBERT H. BOUDREAU In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 9 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

Hypersonic test facilities produce flow fields which are difficult to characterize. In the past, many hypersonic facilities were reputed to produce test data of inferior quality, when, in fact, it was poor characterization of the flow field principally at fault. With the renaissance in hypersonics at hand, experimentalists face anew the challenge of accurately characterizing flow fields. The U.S. Air Force's Arnold Engineering Development Center has faced these complex problems and developed techniques to accurately determine free-stream conditions. Those tools of characterization are highlighted and a standard by which all hypersonic wind tunnels should be compared. Author

N89-16877# Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (Germany, F.R.).

ACCURACY PROBLEMS IN WIND TUNNELS DURING TRANSPORT AIRCRAFT DEVELOPMENT

GUENTER KRENZ In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 9 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

Wind tunnel test data accuracy requirements for transport aircraft are derived. Airline performance guarantees, model and tunnel test techniques available and the quality of prediction

methods used form the concept for wind tunnel test programs and set accuracy requirements for test data. Procedures which were followed in high speed cruise and low speed takeoff and landing are described. The accuracy of the wind tunnel tests is limited by several parameters, the most important being flow quality, model and model suspension quality, and balance accuracy. Problems which occurred during the test with small models in the transonic regime led to the concepts presented: the use of large models on a specific suspension with a range-limited balance and the improvement of small model test techniques in connection with the requirements for measurements in cryogenic facilities. Low speed tests are ambitious and extensive due to the many configurations at takeoff and landing. Furthermore, the work is complicated by the many details like closing plates and shutters, which can have a strong effect on the performance data. Some examples are presented. Author

N89-16878# National Aerospace Lab., Amsterdam (Netherlands).

REQUIREMENTS AND CAPABILITIES IN UNSTEADY WINDTUNNEL TESTING

R. D. DENBOER, R. HOUWINK, and R. J. ZWAAN In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 18 p (SEE N89-16846 09-09) Jul. 1988

(AGARD-CP-429) Avail: NTIS HC A22/MF A01

The accuracy required for aeroelastic applications concerning full-scale aircraft is discussed, after which the accuracy in current unsteady wind tunnel testing is considered. Author

N89-16879# Institut de Mecanique des Fluides de Lille (France).

PARTICULAR FLIGHT MECHANICS SPECIFICATIONS RELATED TO WIND TUNNEL TEST RESULTS [SPECIFICATIONS PARTICULIERES CONCERNANT LES RESULTATS DES ESSAIS EN SOUFFLERIE POUR LA MECANIQUE DU VOL]

MARC PIANKO In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 19 p (SEE N89-16846 09-09) Jul. 1988 In FRENCH. Original language document was announced in IAA as A88-28859 (AGARD-CP-429) Avail: NTIS HC A22/MF A01

A flight mechanics analysis of requirements and recommendations for the quality and precision of wind tunnel measurements is presented. The effect of imprecision in modeling flight behavior is examined in order to determine the sensitivity of the individual aerodynamic coefficients. Problems in the characterization of flight at large angles of incidence and sideslip, where unsteady phenomena and perturbations play a large role, are considered. Difficulties in the use of the wind tunnel for aircraft design are also reviewed. Author

N89-16880# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

WIND TUNNEL REQUIREMENTS FOR COMPUTATIONAL FLUID DYNAMICS CODE VERIFICATION

JOSEPH G. MARVIN In AGARD, Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing 13 p (SEE N89-16846 09-09) Jul. 1988 Previously announced as N87-27150

(AGARD-CP-429) Avail: NTIS HC A22/MF A01 CSCL 14B

The role of experiments in the development of computational fluid dynamics (CFD) and aerodynamic flow field prediction is discussed. Requirements for code verification from two sources that pace the development of CFD are described for: (1) development of adequate flow modeling, and (2) establishment of confidence in the use of CFD to predict complex flows. The types of data needed and their accuracy differs in detail and scope and leads to definite wind tunnel requirements. Examples of testing to assess and develop turbulence models, and to verify code development, are used to establish future wind tunnel testing requirements. Versatility, appropriate scale and speed range, accessibility for nonintrusive instrumentation, computerized data systems, and dedicated use for verification were among the more important requirements identified. Author

14

GROUND SUPPORT SYSTEMS AND FACILITIES (SPACE)

Includes launch complexes, research and production facilities; ground support equipment, e.g., mobile transporters; and simulators.

N87-24489# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

ROCKET ALTITUDE TEST FACILITIES REGISTER

P. DUCASSE Mar. 1987 84 p (AGARD-AG-297; AGARDOGRAPH-297; ISBN-92-835-0404-6; AD-A181679) Avail: NTIS HC A05/MF A01

In 1982, the Propulsion and Energetics Panel Working Group 17 endeavored to investigate test techniques applied to solid rocket motors with metallized propellants. It was stated that there is a large number of related test facilities in existence with a large variety of technologies applied and test possibilities offered. It was decided to compile a register showing the major altitude test facilities with their characteristic data. Emphasis was put on facilities capable of performing research and development tests. Author

15

LAUNCH VEHICLES AND SPACE VEHICLES

Includes boosters; operating problems of launch/space vehicle systems, and reusable vehicles.

N87-16000# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

GUIDANCE, CONTROL AND POSITIONING OF FUTURE PRECISION GUIDED STAND-OFF WEAPONS SYSTEMS

Jun. 1986 263 p In ENGLISH and FRENCH Symposium held in Ottawa, Ontario, 8-11 Oct. 1985

(AGARD-CP-388; ISBN-92-835-0390-2; AD-A173353) Avail: NTIS HC A12/MF A01

Topics addressed include: tactical operational requirements; weapon systems concepts; design criteria and integration issues; tactical mission planning and management; communication; sensor aspects for guidance and control, position, and navigation; computational techniques and data processing; and system demonstrations. For individual titles see N87-16001 through N87-16011.

N87-16003# Singer Co., Wayne, NJ. Kearfott Div. DESIGN/DEVELOPMENT TRADEOFFS TO ACHIEVE A MISSION EFFECTIVE SOW GUIDANCE SYSTEM

ALBERT J. SHAPIRO In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems (date) 14 p (SEE N87-16000 08-15) Jun. 1986 (AGARD-CP-388) Avail: NTIS HC A12/MF A01

The increasing role of Precision Guided Standoff Weapons (PGSOW) places special requirements on the navigation systems conventionally provided to this class of vehicles. The standoff mission requires innovative system concepts altogether different from the conventional system configurations that have become almost a standard approach to fighter and bomber navigation systems. This need for innovation is even more necessary if the SOW navigation system is to be affordable and mission effective in the context of these small relatively low cost vehicles. The navigation requirements are developed and reviewed. A trade-off of the alternatives as a function of guidance effectiveness are identified and performed. From the spectrum of navigation system alternatives, the specifics of a multiple sensor self-contained system is developed showing the benefits to be derived by optimum integration of low cost sensors. The key elements of this integrated multiple sensor navigation system are described. Author

15 LAUNCH VEHICLES AND SPACE VEHICLES

N87-16005# System Dynamics, Inc., Gainesville, FL. MIDCOURSE GUIDANCE FOR THE US ARMY'S LOW COST FIBER OPTIC GUIDED MISSILE

WILLIAM BOYKIN and PAUL JACOBS (Army Missile Lab., Redstone Arsenal, Ala.) In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 17 p (SEE N87-16000 08-15) Jun. 1986 (AGARD-CP-388) Avail: NTIS HC A12/MF A01

A method for achieving midcourse guidance using a digital correlator and known white rocks, or positions of objects that appear in the seeker video is analyzed. A variety of filtering techniques and filter mechanizations are analyzed and the results presented. Algorithms are developed which use updates from the ensemble of white rocks or waypoints to correct the missile attitude at each waypoint and predict time or range to go to the target area. Models for the system dynamics and the measurement process were formulated and six extended Kalman filter designs were developed and tested for state estimation accuracy and efficiency. Work was also performed to improve the efficiencies of the algorithms so that the estimates are available in a timely manner for midcourse navigation and to aid the operator. B.G.

N87-16007# Laboratoire de Recherches Balistiques et Aerodynamiques, Vernon (France).

COLLISION PROBABILITY OF CRUISE MISSILES FLYING IN FORMATION (PROBABILITE DE COLLISION DE MISSILES DE CROISIERE VOLANT EN FORMATION)

MICHEL FERRAND and PHILIPPE RIOT In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 8 p (SEE N87-16000 08-15) Oct. 1985 In FRENCH

(AGARD-CP-388) Avail: NTIS HC A01/MF A01

A collision rule for Cruise missiles flying in formation at the same altitude is established mathematically. The mean rate of loss for a multi-missile mission with a trajectory including several segments is then determined. The presentation concludes with a numerical application B.G.

N87-16008# Societe Nationale Industrielle Aerospatiale, Paris (France). Div. Engins Tactiques.

STRAPDOWN INERTIAL SYSTEMS APPLICATIONS FOR TACTICAL MISSILES (STAND-OFF MISSILES)

PUECH In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 16 p (SEE N87-16000 08-15) Jun. 1986

(AGARD-CP-388) Avail: NTIS HC A12/MF A01

Strapdown Inertial Systems (SDIS) are particularly well suited for tactical standoff missile applications. This certainty was made clear by several years of theoretical design work and trials. Initial theoretical work made wide use of parameters giving detailed definition of missile trajectories and motions as obtained from measurements made on weapon systems then in development or production. Sensors (principally gyroscopes) were laboratory tested. These preliminary design efforts led to selection of various technologies such as the laser gyro and the mechanical gyro, each being adapted to the weapon system in question. Share-out of functions between various equipment items was defined. Comparison of the advantages and disadvantages of these technologies shows that today the laser gyro is principally retained for high and medium range levels of precision, with the mechanical (spin-stabilized) gyro serving in the medium and low precision range. Since requirements are ever increasing in the fields of dynamic performance and robustness, it is here that most progress is expected. Author

N87-16010# Rockwell International Corp., Duluth, GA. Missile Systems Div.

PRECISION DELIVERY OF UNGUIDED SUBMUNITIONS FROM A TACTICAL STANDOFF MISSILE

R. D. EHRICH and J. R. BEATY In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 17 p (SEE N87-16000 08-15) Jun. 1986

(AGARD-CP-388) Avail: NTIS HC A12/MF A01

The extension of a low cost tactical weapon to missions involving area targets requires the accurate dispensing of unguided submunitions. For a terminally guided weapon, proportional navigation can no longer be used, since it cannot compensate for the ballistics of the submunition. A terminal guidance algorithm

15 LAUNCH VEHICLES AND SPACE VEHICLES

was developed to control the weapon trajectory between the midcourse flight path and the point of dispense. The algorithm incorporates submunition drag characteristics to assure high accuracy. The algorithm also assures adequate arming time for the submunitions and adequate time for the pattern to develop. The second element of accurate submunition delivery is the dispensing or expulsion mechanism, which ejects the payload out of the canister. The ejection mechanism must provide the desired pattern size, shape, and density. Air bag technology is employed to assure satisfactory ejection forces with adequate repeatability. The current study is theoretical in nature, relying on digital simulation to substantiate conclusions on patterns and accuracy.

Author

N87-29482# Rheinmetall G.m.b.H. Duesseldorf (Germany, F.R.). Guided Munition Dept.
JET REACTION CONTROL SYSTEM FOR AUTONOMOUS PRECISION MUNITION

H. PELLER and S. BUECHELE-BUECHER. In AGARD, Advances in Guidance and Control Systems and Technology 18 p (SEE N87-29474 24-04) Jul. 1987 Original contains color illustrations
(AGARD-CP-411) Avail: NTIS HC A07/MF A01

The essential differences between missile and projectile application which are very important for actuations system designs are featured. A short trade study compares two methods of steering missiles and projectiles using aerodynamic or impulsive control, where the last mentioned one will be presented more exactly. The described hot gas reaction jet control actuation block is mounted in a submunition called EPHRAM which stands for terminal guided artillery munition. In this actuation system the gases produced by a gas generator are controlled by four individual thrusters. All these important and necessary components of a jet reaction control are explained and demonstrated by photographs and figures. Results of computer computation and simulation will finally verify that jet reaction control is the ideal application for such a cannon-launched guided projectile.

Author

N87-29483# Naval Surface Weapons Center, Dahlgren, VA. Weapons Systems Dept.
APPLICATION OF OPTIMAL ESTIMATION AND CONTROL CONCEPTS TO A BANK-TO-TURN MISSILE

E. J. OHLMEYER. In AGARD, Advances in Guidance and Control Systems and Technology 12 p (SEE N87-29474 24-04) Jul. 1987
(AGARD-CP-411) Avail: NTIS HC A07/MF A01

The design and evaluation of optimal estimators and optimal control laws for application to bank-to-turn missiles was addressed. Two guidance laws, one based on modern control theory and the other on an augmented form of proportional navigation, were compared to the classical implementation of proportional navigation. The former two control laws require the use of a state estimator. An extended Kalman filter was devised for that purpose. Performance of the three guidance laws was compared on the basis of average miss distance achieved for a number of engagement scenarios.

Author

N88-19553# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

ADVANCES IN AIR-LAUNCHED WEAPON GUIDANCE AND CONTROL

Dec. 1987 118 p. In ENGLISH and FRENCH Symposium held in Athens, Greece, 5-8 May 1987
(AGARD-CP-431; ISBN-92-835-0439-9; AD-A194648) Avail: NTIS HC A06/MF A01

Air to air and air to surface missile systems are discussed with an emphasis upon guidance and control technology advances and guidance impacts from other areas. For individual titles, see N88-19554 through N88-19562.

N88-19554# British Aerospace Public Ltd. Co., Stevenage (England). Precision Products Group.

A PROTOTYPE FIBRE OPTIC GYROSCOPE FOR MISSILE GUIDANCE APPLICATIONS

C. J. KAY. In AGARD, Advances in Air-Launched Weapon Guidance and Control 13 p (SEE N88-19553 12-15) Dec. 1987 (AGARD-CP-431) Avail: NTIS HC A06/MF A01

The design of a prototype fiber optic gyro intended for missile guidance operations is discussed. Important design constraints for the next generation of missiles are wide dynamic range, rapid switch-on, extreme ruggedness, low cost, and digital operation. These features are all embodied in the design described, which employs optical phase modulation in an integrated optical waveguide device. A Y-branch beam splitter is also incorporated into the design. Serrodyne phase ramps are impressed on the light propagating around the fiber optic sensor coil connected to the integrated optics chip. Rotation rate is measured by the serrodyne frequency needed to null the rotation induced Sagnac phase shift. The gyro performance (drift and random walk) and errors up to 1000 degrees per second are presented.

Author

N88-19555# Defence Research Establishment Valcartier (Quebec).

AN INVESTIGATION OF STEEP DESCENT GUIDANCE FOR TERMINALLY-GUIDED SUB-MUNITIONS

G. TROTTIER. In AGARD, Advances in Air-Launched Weapon Guidance and Control 16 p (SEE N88-19553 12-15) Dec. 1987 (AGARD-CP-431) Avail: NTIS HC A06/MF A01

The lateral acceleration requirement of a hit-to-kill terminally-guided sub-munition (TGSM) aimed at hitting tanks near the top is examined. An analytic development of proportional navigation against stationary targets shows that a TGSM flying level at 150 m above the ground can hit a target 150 m in front of it with near vertical impact and without acceleration saturation if it can pull an initial 13.6 g. With acceleration saturation, a hit is theoretically possible with 6.8 g. TGSM configurations capable of hitting stationary and moving targets are then defined and tested with a nonlinear 6-DOF computer simulation. The footprint of a selected configuration is selected to hit most stationary and moving tanks likely to be found on the battlefield with impact angles above 60 degrees and reasonable angles of attack.

Author

N88-19556# Naval Weapons Center, China Lake, CA. Research Dept.

EFFECTS OF CLOSING SPEED UNCERTAINTY ON OPTIMAL GUIDANCE

W. W. WILLMAN. In AGARD, Advances in Air-Launched Weapon Guidance and Control 8 p (SEE N88-19553 12-15) Dec. 1987 (AGARD-CP-431) Avail: NTIS HC A06/MF A01

An idealized planar intercept is analyzed in which an air-to-air homing missile has singular measurements of the line of sight to a randomly maneuvering target and seeks to use a guidance law which optimizes a specific performance criteria. If the closing speed were known precisely, the optimal guidance law for this case would be proportional navigation with a certain navigation gain. There is uncertainty in the closing speed because of the target maneuvers and lack of range measurements. The effect of this uncertainty on the optimal guidance law is to increase the nominal value of the navigation gain and to add a rapid weaving component if the fractional uncertainty in the inverse target range exceeds a certain level.

Author

N88-19557# Avions Marcel Dassault, Saint-Cloud (France).

GUIDANCE AND CONTROL OF AIR-LAUNCHED ARMAMENTS: AN AEROENGINEER'S PERSPECTIVE (GUIDAGE ET PILOTAGE DES ARMEMENTS TIRES D'AVION: POINT DE VUE DE L'AVIONNEUR)

P. PAGNIEZ and F. CHIVOT. In AGARD, Advances in Air-Launched Weapon Guidance and Control 6 p (SEE N88-19553 12-15) Dec. 1987 In FRENCH
(AGARD-CP-431) Avail: NTIS HC A06/MF A01

Aircraft armament engineers conceive and develop products of higher and higher sophistication. However, obtaining a total operational manner which results in the optimal performance of these arms is a consequence of the homogeneity of the aircraft-aircrew-weapons association. The engineer is faced with the task of solving an increasing number of problems whose severity increases with weapon sophistication. The aeroengineer

15 LAUNCH VEHICLES AND SPACE VEHICLES

must therefore make increasingly complex decisions regarding the compromise among weapon requirements, aircraft vulnerability, and crew workloads. The various constraints relating to the design and development of air/air missiles with passive, active and semi-active homing are examined along with specific design considerations for air/sea and air/ground missiles. Author

N88-19560# Standard Elektrik Lorenz A.G., Stuttgart (Germany, F.R.).

A FIBER OPTIC GYRO STRAPDOWN REFERENCE SYSTEM FOR GUIDED WEAPONS

D. RAHLFS, W. AUCH, O. GLASER, and D. RUPPERT. In AGARD. Advances in Air-Launched Weapon Guidance and Control 11 p (SEE N88-19553 12-15) Dec. 1987 (AGARD-CP-431) Avail: NTIS HC A06/MF A01

Simulations based on the error behavior of the phase modulated fiber optic gyro have shown that this kind of rate sensor is becoming a serious competitor in the field of strapdown system sensors. Potential applications include missile attitude reference systems and high quality line-of-sight stabilization systems for high dynamic environments. These features encourage the development of integrated concepts where attitude reference system and line-of-sight stabilization system are merged into one simple strapdown sensing and controlling unit. Author

N88-19561# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Unternehmensbereich Apparate.

SPEED CONTROL OF A MISSILE WITH THROTTLEABLE DUCTED ROCKET PROPULSION

DIETER THOMAER. In AGARD. Advances in Air-Launched Weapon Guidance and Control 15 p (SEE N88-19553 12-15) Dec. 1987 (AGARD-CP-431) Avail: NTIS HC A06/MF A01

The Mach number controller computes the suitable nominal value for gas generator pressure while accounting for the pertinent gas generator dynamics. This procedure requires the knowledge of the pressure sensitive burning rate with adequate narrow tolerance limits. In the case of high-g flight maneuvers, the system can optionally switch over to a simple command for the pressure nominal value. An adaptive controller is nested within the Mach number loop to keep the gas generator pressure in closed loop control. Thus, an open loop control of the mass flow rate is provided. This loop is controlled by the flight Mach number loop, its value being derived from flight data. The installation of prototype engines on test stands in a hardware-in-the-loop configuration and the required additional simulation procedure is described. Test results are given. Author

N88-19562# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

THE USE OF HARDWARE-IN-THE-LOOP-TECHNIQUES IN THE DEVELOPMENT OF A MODERN AIR-TO-SURFACE MISSILE SYSTEM

THOMAS KUESTNER. In AGARD. Advances in Air-Launched Weapon Guidance and Control 6 p (SEE N88-19553 12-15) Dec. 1987 (AGARD-CP-431) Avail: NTIS HC A06/MF A01

Because of their increasing requirements, modern guided missiles have a very high degree of complexity. To improve cost effectiveness and reduce risk and uncertainty, new test concepts are necessary. Realtime simulations like Software-in-the-Loop (SIL) and Hardware-in-the-Loop (HIL) represent such new concepts. This means closed loop simulation with actual missile components in a laboratory environment where the physical environment is simulated and controlled by special computer equipment. After a definition of SIL/HIL simulation, the configuration of such test equipment is presented. Author

N89-17605# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

GUIDANCE AND CONTROL OF PRECISION GUIDED WEAPONS

Nov. 1988 81 p. In ENGLISH and FRENCH Symposium held in Geilo, Norway, 3-6 May 1988 (AGARD-CP-435; ISBN-92-835-0486-0; AD-A203595) Avail: NTIS HC A05/MF A01

Topics relative to the guidance and control of guided missiles are discussed. Operational requirements and considerations; guidance sensors and components; guidance and control techniques and signal processing; system effectiveness and evaluation; and systems demonstration are among the topics considered. For individual titles, see N89-17606 through N89-17611.

N89-17607# Societe Francaise d'Equipments pour la Navigation Aeronne, Chatelleraut (France).

AQM: ACCELEROMETER FOR PRECISION-GUIDED WEAPONS [LAQM: ACCELEROMETRE POUR MUNITIONS DE PRECISION]

A. BOURA, O. AUJAY, and J. L. BOST. In AGARD. Guidance and Control of Precision Guided Weapons 8 p (SEE N89-17605 10-15) Nov. 1988 In FRENCH (AGARD-CP-435) Avail: NTIS HC A05/MF A01

Pendular, monolithic accelerometer structures with surface areas of a few millimeters have been designed, fabricated and tested. The results support the possibility of applying this technology to homing weapons and projectile drift correction. Around these small monolithic structures it is possible to construct accelerometers which occupy a volume of between 1 and 4 cu cm. Certain prototypes have shown resistance to shocks up to 20,000 G, while others exhibit a static measuring range greater than 100 G. Recent experimental results and the extrapolations that can be deduced with regard to usable sensors for precision-guided weapons are discussed. Author

N89-17609# Prins Maurits Lab TNO, Rijswijk (Netherlands). DEMONSTRATION OF FOG-M (FIBRE OPTIC GUIDED MISSILE) CAPABILITIES BY MEANS OF SIMULATION AND EFFECTS OF PROPRIOCEPTIVE FEEDBACK ON THE CONTROL

B. J. DAMEN, R. N. H. W. VANGENT, and H. SCHUFFEL (Institute for Perception RVO-TNO, Soesterberg, Netherlands). In AGARD. Guidance and Control of Precision Guided Weapons 16 p (SEE N89-17605 10-15) Nov. 1988 (AGARD-CP-435) Avail: NTIS HC A05/MF A01

A simulated scenario with the Fiber Optic Guided Missile (FOG-M) with the aid of a 6 degree of freedom simulation model for investigating maneuverability and footprint areas against stationary and moving ground targets is described. The performance against moving helicopters is discussed. A simulator built for research on the FOG-M system, including man-in-the-loop control, is described. Demonstration studies indicated some problem areas, such as the manual control characteristics. A study was started concerning which type of joystick system would enhance the performance of persons with minimal experience. It was shown that providing the operator with proprioceptive feedback on the maneuverability would enhance control performance. Author

N89-17610# Norwegian Defence Research Establishment, Kjeller.

APPLICATIONS OF IMAGE ANALYSIS IN PRECISION GUIDED WEAPONS

S. GRINAKER. In AGARD. Guidance and Control of Precision Guided Weapons 17 p (SEE N89-17605 10-15) Nov. 1988 (AGARD-CP-435) Avail: NTIS HC A05/MF A01

An autonomous fire and forget weapon will have to automatically navigate from the launch site to the target area, detect and recognize the target, home on to it, and select an aim-point in the terminal phase. All of these tasks can be performed by using an imaging seeker-head. Image based target acquisition and tracking are well established ideas and implemented in weapons in operation or under development. A brief survey of the involved image processing techniques are provided, including a few examples of state-of-the-art algorithms. The basic ideas of image based navigation and aim-point selection are introduced and

16 SPACE TRANSPORTATION

accompanied by examples, and the possibility of replacing the gyro stabilization by image processing is discussed. Finally, the problems concerning the implementation of image analysis for real time processing are addressed, and some principles for system design are provided. Author

16

SPACE TRANSPORTATION

Includes passenger and cargo space transportation, e.g., shuttle operations, and space rescue techniques.

N87-20369# British Aerospace Public Ltd. Co., Stevenage (England). Space and Communications Div.

INFLUENCE CO-EFFICIENT TESTING AS A SUBSTITUTE FOR MODAL SURVEY TESTING OF LARGE SPACE STRUCTURES

T. F. KEATES / In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 9 p (SEE N87-20355 13-18) Jul. 1986

(AGARD-CP-397) Avail: NTIS HC A12/MF A01

The American Space Transportation System is capable of placing large payload into low earth orbit. Since the presence of the payload has a significant effect on the behavior of the Shuttle under the low frequency and transient loading during launch and return, a flight loads analysis is performed using a mathematical model of the payload coupled to that of the Shuttle. The process of clearing a payload for launch involves performing this coupled analysis with a validated mathematical model of the payload. This validation usually includes modal survey testing on a structurally representative model which may also be used for static load testing. The advantages and disadvantages of modal survey testing (either fixed base or free/free) and of Static Influence Co-efficient (Flexibility) Testing are discussed. It is concluded that for parts of certain types of payload the latter is a cheaper and sufficient alternative to modal survey testing. Author

N87-20370# National Aeronautical Establishment, Ottawa (Ontario).

USE OF A VIDEO-PHOTOGRAMMETRY SYSTEM FOR THE MEASUREMENT OF THE DYNAMIC RESPONSE OF THE SHUTTLE REMOTE MANIPULATOR ARM

G. L. BASSO and R. B. KULCHYSKI / In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 12 p (SEE N87-20355 13-18) Jul. 1986

(AGARD-CP-397) Avail: NTIS HC A12/MF A01

A video-photogrammetry system was used to obtain the dynamic response of the Canadian developed, space transportation system remote manipulator arm from video tape recordings of two space based test events - specifically, an auto-trajectory and a backup mode test sequence. The application of this system to this task represented a non-generic use in that no pre-launch preparations were made for implementing this technique. The procedures used to extract the response information from the video tapes are outlined. The stated resolution of the video-photogrammetry system is 1 part in 5000 (1 sigma) - typically, 0.03mm for a 12.5mm image plane size. Within this capability, the amplitude of the response for the auto-trajectory sequence was obtained with an estimated resolution of 1mm with a camera-to-object spacing of 2.18m; and for the backup mode, 3mm at a spacing of 13.78m. In both instances, dynamic parameters such as frequency and damping were readily derived from the response measurements. Author

N87-26962# Air Force Geophysics Lab., Hanscom AFB, MA POLAR-AURORAL CHARGING OF THE SPACE SHUTTLE AND EVA ASTRONAUT

WILLIAM N. HALL, PHILIP LEUNG, IRA KATZ, GARY A. JONGEWARD, JOHN R. LILLEY, JR., JOSEPH E. NANEVICZ, JEFFREY S. THAYER, and N. JOHN STEVENS (TRW, Inc., Redondo Beach, Calif.) / In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 9 p (SEE N87-26937 21-18) May 1987 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

The evidence indicates that an astronaut carrying out extra-vehicular activity (EVA) in the Shuttle wake in polar orbit could have his EVA equipment charge up to significant voltages if an intense aurora is encountered. Arc discharges are expected to occur that are similar to those that have caused system upsets and failures in geosynchronous orbits. The possibility of hazard to the astronauts must be evaluated quickly, since polar orbit Shuttle launches will soon begin. Author

18

SPACECRAFT DESIGN, TESTING AND PERFORMANCE

Includes satellites; space platforms; space stations; spacecraft systems and components such as thermal and environmental controls; and attitude controls

N87-20355# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

MECHANICAL QUALIFICATION OF LARGE FLEXIBLE SPACECRAFT STRUCTURES

Jul. 1986 269 p. In ENGLISH and FRENCH Meeting held in Oberammergau, West Germany, 9-13 Sep. 1985

(AD-A175529; AGARD-CP-397; ISBN-92-835-0396-1) Avail: NTIS HC A12/MF A01

An account is given of Conference Proceedings of a Specialists' Meeting held by the Structures and Materials Panel in Oberammergau in the Fall of 1985. The problems associated with the mechanical qualification of flexible spacecraft are discussed, and details of relevant methods and techniques are given. The final discussion highlights the difficulties associated with advanced methods of experimental and theoretical dynamic analysis and the handling of larger and larger amounts of data. For individual titles see N87-20356 through N87-20374.

N87-20356*# National Aeronautics and Space Administration, Washington, DC. Materials and Structures Div.

FUTURE TRENDS IN SPACECRAFT DESIGN AND QUALIFICATION

SAMUEL L. VENNERI, BRANTLEY R. HANKS (National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.), and LARRY D. PINSON / In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 9 p (SEE N87-20355 13-18) Jul. 1986

(AGARD-CP-397) Avail: NTIS HC A12/MF A01 CSCL 22A

Material and structures issues that must be resolved in order to develop the technology data base needed to design and qualify the next generation of large flexible spacecraft are discussed. This involves the development of new ground test and analysis methods and the conduct of appropriate instrumented in-space flight experiments for final verification. A review of present understanding of material behavior in the space environment and identification of future needs is presented. The dynamic verification and subsequent qualification of a spacecraft structure currently rely heavily on ground-based tests, coupled with the verified analysis model. Future space structures, such as large antennas, Space Station and other large platforms, will be of sizes difficult to test using current ground test methods. In addition to size, other complex factors, such as low natural frequencies, lightweight construction and many structural joints, will also contribute significant problems to the test and qualification process in an Earth-gravity environment. These large spacecraft will also require

new technology for controlling the configuration and dynamic deformations of the structures. Future trend in large flexible structures will also involve long-life design missions (10 to 20 years). In low earth orbit (LEO), materials will be subjected to repeated thermal cycles, ultraviolet radiation, atomic oxygen and vacuum. For high orbits such as geo-synchronous earth orbit (GEO), the materials will also be subjected to large doses of high energy electrons and protons. Understanding degradation and material stability over long-mission time periods will confront the designer with many issues that are unresolved today.

N87-20357# Messerschmitt-Boelkow-Blohm/Entwicklungspring Nord, Bremen (Germany, F.R.).

RECENT DEVELOPMENTS AND FUTURE TRENDS IN STRUCTURAL DYNAMIC DESIGN VERIFICATION AND QUALIFICATION OF LARGE FLEXIBLE SPACECRAFT

E. HORNING, E. BREITBACH (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen, West Germany), and H. OERY (Technische Univ., Aachen, West Germany). In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 43 p (SEE N87-20355 13-18) Jul. 1986 (AGARD-CP-397) Avail: NTIS HC A12/MF A01

A comprehensive dynamic verification concept is proposed, focusing on a multi-axis transient qualification test to be performed on the primary structure or on modular segments of it, respectively. First, practical experiences and development areas identified are addressed. Former existing barriers preventing the practical performance of this verification concept are no longer relevant because of the extended analytical capabilities due to the positive developments in computer techniques and software and because of the availability of large multi-axis vibration simulators. A vital prerequisite for the applicability of this verification concept is the ability for analytical flightload identification and identification of the true dynamic characteristics on a high quality and reliability level. For this a comparative discussion is presented about the suitability of analytical methods for flightload predictions (shock spectra versus transient methods). The state of the art of design identification tests and of updating methods on mathematical models is summarized and discussed with respect to necessary development areas and the implementation into the proposed structure verification concept. First experience with this new verification cycle was made on a real satellite structure. The results and open development areas identified are discussed. Author

N87-20358# Societe Nationale Industrielle Aerospatiale, Cannes (France).

DYNAMIC MODELING AND OPTIMAL CONTROL DESIGN FOR LARGE FLEXIBLE SPACE STRUCTURES

L. PASSERON, CH. GARNIER, and B. SEVENNEC. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 14 p (SEE N87-20355 13-18) Jul. 1986 (AGARD-CP-397) Avail: NTIS HC A12/MF A01

Some advanced results in dynamic modeling and control areas are unforgingly reviewed. Dynamic modeling for complex assemblies of interconnected, rigid or flexible bodies subject to wide latitude motions is achieved through a Lagrangian formulation using quasi-coordinates. Lagrange multipliers are explicitly eliminated by way of singular value decomposition resulting in a minimized set of equations. An original software program using element shape functions interfaces the dynamic model with NASTRAN-performed individual substructure analyses. Section 3 summarizes the now classical results in optimal control, while section 4 gives a comprehensive coverage of robustness aspects. Last section is devoted to model order reduction. The Internal Balancing Approach is generalized to systems with rigid body modes. Moreover, an error bound between full order and reduced order transfer function is evidenced, which bridges truncation and robustness. Author

N87-20360# Societe Nationale Industrielle Aerospatiale, Cannes (France).

DYNAMIC ANALYSIS OF DIRECT TELEVISION SATELLITE TV-SAT/TDF.1

Y. PLUMAT. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 8 p (SEE N87-20355 13-18) Jul. 1986 (AGARD-CP-397) Avail: NTIS HC A12/MF A01

An application of the methods of analysis for the structural behavior of spacecraft whose bottom is affected by a vibrational environment is discussed. The application concerns the Direct

Broadcast satellites TV-SAT and TDF.1, for which sine vibration qualification and acceptance are achieved through combination of the theoretical analysis (finite element method and frequential response) and of the experimental (sine vibrations test) verification of some subsystems and system assemblies. This procedure requires highly detailed mathematical models, which are validated by way of in depth correlation between the test predictions and test dynamic results. TV-SAT and TDF.1 satellites are a specially worthwhile illustration for the said type of studies as they are a pair of large, wholly European built spacecrafts whose structures are made up of several major subassemblies, namely: main body, propellant tanks, Antenna module complete with reflectors, solar array. Author

N87-20361# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

STRUCTURAL QUALIFICATION OF LARGE SPACECRAFT

BEN K. WADA. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 19 p (SEE N87-20355 13-18) Jul. 1986 (AGARD-CP-397) Avail: NTIS HC A12/MF A01 CSCL 22A

Over the past twenty-five (25) years of the space program, the major challenge in the structural qualification of the primary structure has shifted from conducting a test that simulated the environment to accurately predicting the structural member loads in flight. Once the flight loads are available, a number of different test methods are used to qualify the structure by subjecting it to the proper loads. The qualification challenge for future large spacecraft will be to adequately predict its dynamic characteristic in space to assure that it can be controlled to meet the mission objectives. A new test concept that may allow acquisition of modal data by ground tests for verification of mathematical models of large flexible space structures which can't be ground tested by conventional methods is discussed. Author

N87-20362# Rome Univ. (Italy) Dipt. Aerospaziale
EFFECT OF MODAL DAMPING IN MODAL SYNTHESIS OF SPACECRAFT STRUCTURES

LUIGI PALIS CREMA and ANTONIO CASTELLANI. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 11 p (SEE N87-20355 13-18) Jul. 1986 (AGARD-CP-397) Avail: NTIS HC A12/MF A01

In the modal synthesis of a large space structure, by a substructuring approach, a focal point is in the evaluation of the modal characteristics of the single components. As a matter of fact it is required to get the non-diagonal terms of the damping substructure matrix to acquire an efficient estimate of the damping characteristics of the whole structure. In this work it has been considered important to understand and to predict the physical causes of complex modes also in an elementary substructure as a sandwich carbon fiber plate. The results of the experimental work indicate that the modal analysis has to be gained in a very tight frequency range, with many averaged data, and the possibility of complex modes is increasing with the increase of the mode order. Author

N87-20363# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.) Inst. of Aeroelasticity.

DYNAMIC QUALIFICATION OF SPACECRAFT BY MEANS OF MODAL SYNTHESIS

A. BERTRAM and P. CONRAD (Messerschmitt-Boelkow-Blohm Entwicklungspring Nord, Bremen, West Germany). In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 11 p (SEE N87-20355 13-18) Jul. 1986 Sponsored in part by ESA, ESTC (AGARD-CP-397) Avail: NTIS HC A12/MF A01

The dynamic qualification process is essentially based on tests verification tests and qualification tests. In order to render ground testing feasible, the structure has to be subdivided into modules. After performing tests on the module level, the dynamic behavior of the entire structure is obtained by modal synthesis. The experience gained in applying modal synthesis concepts to simple models and spacecraft-type structures is discussed. It is shown that the success of a modal synthesis approach is considerably dependent on the input data, i.e., the results of the modal survey tests. Accordingly, test data requirements are outlined. Finally, the discussion includes the way in which the coupling analyses can

18 SPACECRAFT DESIGN, TESTING AND PERFORMANCE

be improved by precise consideration of the coupling conditions in substructure tests and calculations. Author

N87-20364# Centre National d'Etudes Spatiales, Toulouse (France).

LOW FREQUENCY VIBRATION TESTING ON SATELLITES

A. GIRARD, A. MAMODE, and F. MERCIER. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 9 p (SEE N87-20355 13-18) Jul 1986 In FRENCH, ENGLISH summary and title

(AGARD-CP-397) Avail: NTIS HC A12/MF A01

Except the well known POGO phenomenon, the low frequency dynamic flight environment for a satellite consists of transient vibrations, mainly thrust transients. The qualification is generally achieved by a sine sweep on a shaker according to contractual specifications. Far from the POGO frequencies and near the main resonant frequencies of the satellite, notches based on quasi static load criteria or launch vehicle/satellite coupled analysis results are applied to avoid overtesting. However this approach becomes unsatisfactory for complex structures with large appendages, where the initial specifications are widely modified, disturbing the qualification of secondary structures. In order to improve the representativity of these tests, transient vibration testing has been recently investigated. The feasibility of such tests on electrodynamic shakers using digital control techniques was demonstrated several years ago and the main problem remaining prior to their operational use has been the definition of an adequate specification for satellite qualification purposes. Several approaches are presented, including shock synthesis, production of a specified transient, and simulation of the launch vehicle impedance. Author

N87-20365# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. of Aeroelasticity

MODAL-SURVEY TESTING FOR SYSTEM IDENTIFICATION AND DYNAMIC QUALIFICATION OF SPACECRAFT STRUCTURES

N. NIEBAL and H. HUENERS. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 13 p (SEE N87-20355 13-18) Jul 1986

(AGARD-CP-397) Avail: NTIS HC A12/MF A01

Modal-survey testing is an increasingly common part of the qualification procedure for spacecraft structures, since it offers an experimental verification of normal mode parameters determined by dynamic finite-element analysis. Moreover, it permits identification of structural damping, knowledge of which is essential for reliable flight-load calculations. A state of the art survey of modern modal-survey testing is given here, covering the phase-resonance method and various phase-separation methods. The use of modal-survey results in the dynamic qualification of spacecraft structures is discussed, emphasizing the correlation of analytical and experimental modal data. This aspect has attracted growing interest in recent years, due to the obvious need for convenient tools that allow finite-element models to be updated with measured modal data. Author

N87-20366# Spar Aerospace Ltd., Weston (Ontario).

MODAL TESTING OF THE OLYMPUS DEVELOPMENT MODEL STOWED SOLAR ARRAY

C. DRAISEY, M. ELZEKI, A. S. JONES, and G. MARKS. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 14 p (SEE N87-20355 13-18) Jul 1986

(AGARD-CP-397) Avail: NTIS HC A12/MF A01

The modal testing portion of the structural verification of the stowed solar array configuration of the Olympus S/C, a high powered communication satellite is discussed. The Olympus S/C was designed for both Ariane and Shuttle launches. This versatility of launch configurations requires an emphasis on the ability to accurately predict loads and structural performance. The stowed array is comprised of: release mechanisms, a tip tensioning mechanism, a stowed astromast and a folded flexible blanket to which solar cells have been mounted. The blanket is held in place between a pallet and pressure plate. The prediction of accurate structural response for such a complicated arrangement from analytical data only would be difficult. Over the past few years Spar has undertaken several development studies in the area of modal analysis. Within these studies a technique, using base excitation of the structure has been established. The use of base

input as the excitation for a modal test has provided an economical means of incorporating a modal test into a structural acceptance test procedure. Author

N87-20367# Politecnico di Milano (Italy) Dipt di Ingegneria Aerospaziale

ACTIVE STRUCTURAL CONTROLLERS EMULATING STRUCTURAL ELEMENTS BY ICUS

AMALIA ERCOLI FINZI, MASSIMILIANO LANZI, and PAOLO MANTEGAZZA. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 13 p (SEE N87-20355 13-18) Jul 1986

(AGARD-CP-397) Avail: NTIS HC A12/MF A01

An approach is presented to the active control design of Large Space Structures that is based on the adoption of decentralized control units. These control units use collocated sensors and actuators and adopt a control law that generates forces proportional to local motions in order to emulate real structural elements, discrete tuning masses and grounding spring-damper combinations. Some numerical examples are used to demonstrate the application of the Independent Control Unit (ICU) concept to a beam and a plate for which the active structure controls are obtained by using a suboptimal design procedure. It is shown how the use of this type of control unit allows the development of an intrinsic fail-safe design. The results obtained with the application of the concepts developed here are demonstrated by their application to an experiment in which a thin beam, suspended from the ceiling, is controlled by different combinations of the independent analogy control units making use of a velocity transducer, an integrator and an electrodynamic actuator. Author

N87-20368# Industrieanlagen-Betriebsgesellschaft m b H., Ottobrunn (Germany, F.R.). Modal Testing Sect

SPACECRAFT QUALIFICATION USING ADVANCED VIBRATION AND MODAL TESTING TECHNIQUES

K. MUEHLBAUER and U. SCHILDT. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 9 p (SEE N87-20355 13-18) Jul 1986

(AGARD-CP-397) Avail: NTIS HC A12/MF A01

The classical single-shaker vibration test has played a dominant role in the mechanical qualification of flexible spacecraft. Due to the substantially increased payload capacity of modern carrier vehicles the existing test facilities have reached their limits in terms of test article mass and size. These limits are being extended by implementing multi-shaker systems for uni-axial testing. At the same time digital data acquisition and analysis techniques are employed to get a better understanding of the test results and of the test article itself. An alternative approach which overcomes the limitations imposed by the test article size is the analytical qualification. Besides static testing this is in particular supported by modal testing accomplished on system or on sub-system level. For modal testing a broad spectrum of computerized or computer-based techniques is now available which are capable of meeting manifold requirements. The dynamic testing techniques mentioned here are outlined and illustrated using actual examples of installations and applications. Author

N87-20371# Martin Marietta Aerospace, Denver, CO.

BENEFITS OF PASSIVE DAMPING AS APPLIED TO ACTIVE CONTROL OF LARGE SPACE STRUCTURES

R. N. GEHLING, H. W. HARCROW, and G. MOROSOW. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 8 p (SEE N87-20355 13-18) Jul 1986

(AGARD-CP-397) Avail: NTIS HC A12/MF A01

Active vibration and shape control of large space structures (LSS) has received a great deal of attention recently, while passive damping measures have been somewhat neglected. However, benefits may be derived from simultaneously considering both passive and active control measures to achieve certain performance requirements. Presented are results of a preliminary study of the role passive damping plays in the design and performance of active vibration control strategies. Passive dampers were incorporated into a representative LSS and their effect on candidate active control laws was investigated. Viscous dampers were implemented in time simulations with direct velocity feedback and optimal quadratic regulator control laws. The impact of passive damping on overall closed-loop performance, control system spill over and robustness, and active control requirements was

18 SPACECRAFT DESIGN, TESTING AND PERFORMANCE

evaluated. Numerical results are presented for a representative model. The merit of designing a LSS to incorporate discrete passive dampers in the overall approach to vibration suppression is demonstrated through a reduction in demands placed upon an active control system.

N87-20373# Industrieanlagen-Betriebsgesellschaft m.b.H. Ottobrunn (Germany, FR) Abteilung Maschinenbau und Fahrzeuge.

MULTI-AXIS VIBRATION TESTS ON SPACECRAFT USING HYDRAULIC EXCITERS

H. HAHN and W. RAASCH. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures. 23 p (SEE N87-20355 13-18) Jul 1986.

(AGARD-CP-397) Avail NTIS HC A12-MF A01

Based on performance data that are specified for a spacecraft multi-axis hydraulic vibration test facility by ESA, the feasibility of such a test facility is investigated. Technical problems and possible solutions concerning test table stiffness, elasticity of actuator oil column, actuator joints and oil consumption are discussed. More sophisticated problems may arise concerning the control and safety systems. The designed solutions include controllers for each individual actuator, controllers for a coordinated control of the multiple actuator system and a safety and monitoring system. The control system has to be based on a control strategy using a combination of analog fixed algorithm controllers and a digital variable algorithm controller both together performing individual degree of freedom control including suitable decoupling procedures. The safety system has to be based on a triple redundancy concept for critical system components. It is recommended to build it by a digital multi-processor system. The investigations lead to the statement that multi-axis vibration tests of spacecrafts are realizable with respect to the necessary test equipment. Author

N87-20374# Air Force Flight Dynamics Lab., Wright-Patterson AFB, OH.

DEVELOPMENT OF PRECISION STRUCTURAL JOINTS FOR LARGE SPACE STRUCTURES

HAROLD C. CROOP and ANDREW R. ROBERTSON (General Dynamics Corp., San Diego, Calif.) In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures. 7 p (SEE N87-20355 13-18) Jul 1986.

(AGARD-CP-397) Avail NTIS HC A12-MF A01

Many anticipated future space systems will employ deployable structural assemblies to meet the packaging constraints of the Space Transportation System. Recent developments in deployable structures are described relative to the use of advanced composite materials in the joint designs of such systems. Specific design requirements of interest are dimensional stability, zero free play, minimum weight, and thermal-electrical conductivity through the joints. Several design approaches are presented, along with results of material characterization tests. Author

N87-26937# Advisory Group for Aerospace Research and Development, Neuilly Sur Seine (France) Electromagnetic Wave Propagation Panel.

THE AEROSPACE ENVIRONMENT AT HIGH ALTITUDES AND ITS IMPLICATIONS FOR SPACECRAFT CHARGING AND COMMUNICATIONS

May 1987. 296 p. In ENGLISH and FRENCH. Symposium held in The Hague, Netherlands, 2-6 Jun 1986.

(AGARD-CP-406) ISBN 92-835-0418-6 AD A1858899 Avail

NTIS HC A13-MF A01 (CSCL 22B)

The symposium examined how the magnetosphere and polar plasmas vary as a result of natural causes and man-made perturbations, and the implications of these variations for the charging and differential charging of spacecraft with their effects on spacecraft systems and communications. A better understanding of these phenomena can help to design of spacecraft systems and subsystems to minimize the effects of these disturbances. For individual titles, see N87-26938 through N87-26962.

N87-26944# California Univ., San Diego, La Jolla. Center for Astrophysics and Space Sciences.

HIGH SPACECRAFT POTENTIALS ON ISEE-1 IN SUNLIGHT

E. C. WHIPPLE, JR. and R. C. OLSEN (Alabama Univ., Huntsville) In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 10 p (SEE N87-26937 21-18) May 1987 (Contract NAG-320).

(AGARD-CP-406) Avail NTIS HC A13-MF A01 (CSCL 22B)

Data from two electric field experiments and from the plasma composition experiment on ISEE-1 show that the spacecraft charged to close to -70 V in sunlight at about 0700 UT on March 17, 1978. Data from the electron spectrometer experiment show that there was a potential barrier of some -10 to -20 V about the spacecraft during this event. The potential barrier was effective in turning back emitted photoelectrons to the spacecraft. Potential barriers can be formed by differential charging on the spacecraft or by the presence of space charge. The stringent electrostatic cleanliness specifications imposed on ISEE made the presence of differential charging seem unlikely, if these precautions were effective. Modeling of the event to determine if the barrier was produced by the presence of space charge suggested that this could not explain the observed barrier. The angular shape of the distribution could be successfully modeled as a product of differential charging on the solar arrays. This implies that the conductive coating was not completely effective in preventing differential charging, and that differential charging did occur. Author

N87-26945# Utah State Univ., Logan.

ACTIVE VEHICLE CHARGING MEASUREMENTS IN SOUNDING ROCKET AND SPACE SHUTTLE ORBITER ENVIRONMENTS AT LOW EARTH ORBIT (LEO) ALTITUDE

W. J. RAITT, J. V. ECCLES, N. B. MYERS, D. C. THOMPSON, P. M. BANKS, P. R. WILLIAMSON, R. I. BUSH, J. HAWKINS, S. SASAKI, K. I. OYAMA (Tokyo Univ., Japan) et al. In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 16 p (SEE N87-26937 21-18) May 1987.

(Contract NAS8-36011, F19628-86-K-0015)

(AGARD-CP-406) Avail NTIS HC A13-MF A01 (CSCL 22B)

It was concluded that for electron beam emission up to 100-mA vehicle charging is not a significant problem with the Space Shuttle Orbiter. Similarly, sounding rocket payloads have no serious charging problems up to this level of beam current provided that the maximum amount of the rocket skin is available to collect ionospheric electrons from the LEO altitude range. However, sounding rockets are marginal in their collecting area capability and other effects may occur to balance the beam current when operated at lower altitudes during the night. Author

N87-26946# Alabama Univ., Huntsville, Dept. of Physics.

ELECTRON BEAM EXPERIMENTS AT HIGH ALTITUDES

R. C. OLSEN. In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 8 p (SEE N87-26937 21-18) May 1987 (Contract NAG-320).

(AGARD-CP-406) Avail NTIS HC A13-MF A01 (CSCL 22B)

Experiments with the electron gun on the SCATHA satellite produced evidence of beam-plasma interactions, and heating of the low energy electrons around the satellite. These experiments were conducted near geosynchronous orbit, in the dusk bulge and plasma sheet with one short operation in the lobe regions, providing a range of ambient plasma densities. The electron gun was operated at 50 eV, with beam currents of 1, 10, and 100 micro-A. Data from electrostatic analyzers and the dc electric field experiment show that the satellite charged to near the beam energy in sunlight, if the beam current was sufficient. Higher ambient densities required higher beam currents. The electrostatic analyzers showed distribution functions which had peaks or plateaus at energies greater than the satellite potential. These measurements indicate heating of the ambient plasma at several Debye lengths from the satellite, with the heated plasma then accelerated into the satellite. It is likely that the ambient plasma is in fact the photoelectron sheath generated by the satellite. Author

18 SPACECRAFT DESIGN, TESTING AND PERFORMANCE

N87-26947* Physikalisch-Technische Studien G.m.b.H., Freiburg (Germany, F.R.).

GIOTTO-SPACECRAFT CHARGING DUE TO IMPACT GENERATED PLASMA IN THE PRESENCE OF DIELECTRIC MATERIALS

H. THIEMANN, R. W. SCHUNK, N. SINGH, and R. GRARD (European Space Agency, European Space Research and Technology Center, ESTEC, Noordwijk, Netherlands) / In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 7 p (SEE N87-26937 21-18) May 1987

(Contract NAGW-77; NSF ATM-84-17880)

(AGARD-CP-406) Avail: NTIS HC A13/MF A01 CSCL 22B

The charging effects of a conducting/dielectric model spacecraft in the impact induced plasma environment are contrasted. The results of dynamic model calculations indicate larger charging times and higher positive spacecraft potentials for a conducting/dielectric spacecraft. The potential and particle distributions around the spacecraft differ quantitatively and qualitatively in both cases.

Author

N87-26948# Air Force Geophysics Lab., Hanscom AFB, MA.

COMPUTER MODELS OF THE SPACECRAFT WAKE

M. HEINEMANN, A. RUBIN, M. TAUTZ, and D. COOKE (RADEX, Inc., Carlisle, Mass.) / In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 9 p (SEE N87-26937 21-18) May 1987

(AGARD-CP-406) Avail: NTIS HC A13/MF A01

The Mesothermal Auroral Charging (MACH) code, an inside-out particle tracking code, was developed for the purpose of validating the physics of the Potential Of Large Spacecraft in the Auroral Regions (POLAR) code in regimes where there can be no comprehensive theoretical or experimental results. While the spacecraft that can be treated by MACH are restricted to simple geometries, the methodology is more fundamental than POLAR. MACH generates self-consistent solutions within the context of quasisteady Vlasov plasma flow and achieves Debye ratios previously unobtainable. POLAR and MACH solutions are shown for the particle and electrostatic potential structure of the wake of a charged disk in a low altitude flow for Mach numbers 4, 5, and 8. The results of the codes are compared to each other and to simple analytic approximations as part of an effort to compute the nature of the spacecraft wake and to establish the validity of the code.

Author

SPACECRAFT CHARGING IN THE AURORAL PLASMA: PROGRESS TOWARD UNDERSTANDING THE PHYSICAL EFFECTS INVOLVED

J. G. LAFRAMBOISE and L. W. PARKER (Parkes, Lee W., Inc., Concord, Mass.) / In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 16 p (SEE N87-26937 21-18) May 1987

(Contract F19628-83-K-0028)

(AGARD-CP-406) Avail: NTIS HC A13/MF A01

The main differences between the plasma environments in geostationary orbit and low polar orbit with respect to high-voltage charging situations are reviewed. Results are presented from a calculation of secondary electron escape currents from negatively charged spacecraft surfaces having various orientations relative to the local magnetic field direction. A simple rough estimate of the required conditions for high-voltage auroral-zone charging is developed. The results suggest that for any given spacecraft, surface potentials are likely to depend more strongly on the ratio of ambient flux of high-energy electrons to that of all ions, than any other environmental parameter. Preliminary results of simulation work directed toward testing this hypothesis are presented.

Author

N87-26950* National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.

SECONDARY ELECTRON GENERATION, EMISSION AND TRANSPORT: EFFECTS ON SPACECRAFT CHARGING AND NASCAP MODELS

IRA KATZ, MYRON MANDELL (Systems Science and Software, La Jolla, Calif.), JAMES C. ROCHE, and CAROLYN PURVIS / In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 12 p (SEE N87-26937 21-18) May 1987

(AGARD-CP-406) Avail: NTIS HC A13/MF A01 CSCL 22B

Secondary electrons control a spacecraft's response to a plasma environment. To accurately simulate spacecraft charging, the NASA Charging Analyzer Program (NASCAP) has mathematical models of the generation, emission and transport of secondary electrons. The importance of each of the processes and the physical basis for each of the NASCAP models are discussed. Calculations are presented which show that the NASCAP formulations are in good agreement with both laboratory and space experiments.

Author

N87-26951# University Coll., London (England). Space Science Lab.

SPACECRAFT CHARGING: METEOSAT EXPERIENCE

G. L. WRENN and A. D. JOHNSTONE / In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 14 p (SEE N87-26937 21-13) May 1987

(AGARD-CP-406) Avail: NTIS HC A13/MF A01

Operational problems with Meteosat 1 led to a collaborative effort to furnish subsequent spacecraft with simple charging monitors and to study the geosynchronous environment in an attempt to better understand the charging process. The electron spectrometer on Meteosat 2 has yielded a continuous 3-year data set which has clarified the role of plasma sheet electrons in the detailed current balance which controls spacecraft potentials. Continual observation of eclipse and partial shadowing features has illuminated the dominant role of photoelectrons and demonstrated that the safe clamping of differential voltages can be obtained. An electron albedo index has been developed as an aid to assessing spacecraft liability to charging. The majority of anomalies experienced by Meteosat 2 are not directly caused by charging; an alternative natural cause has not been found.

Author

N87-26952# Toronto Univ. (Ontario). Dept. of Electrical Engineering.

ARC PROPAGATION, EMISSION AND DAMAGE ON SPACECRAFT DIELECTRICS

K. G. BALMAIN / In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 7 p (SEE N87-26937 21-18) May 1987

(AGARD-CP-406) Avail: NTIS HC A13/MF A01

A review is given of the literature on the subject of arc discharges on spacecraft dielectric materials which have become charged by energetic electrons and ions. Arcs resulting from the charging of spacecraft dielectrics can be very strong because the charge over a large area is mobilized through the phenomenon of arc propagation. The resultant damage patterns on the dielectric are shown to be related to arc patterns, and to the optical anisotropy and crystallinity of the material. The evidence for dielectric melting is suggestive of likely contamination of nearby surfaces. The effectiveness of arc barriers sheds light on arc propagation mechanisms.

Author

20 SPACECRAFT PROPULSION AND POWER

N6-26953# Centre d'Etudes et de Recherches, Toulouse (France) Dept. Technologie Spatiale.

ON THE POSSIBILITY OF A SEVERAL-KILOVOLT DIFFERENTIAL CHARGE IN THE DAY SECTOR OF A GEOSYNCHRONOUS ORBIT [SUR LA POSSIBILITE DE CHARGE DIFFERENTIELLE DE PLUSIEURS KILOVOLTS DANS LE SECTEUR JOUR DE L'ORBITE GEOSYNCHRONE]

L. LEVY, D. SARRAIL, J. P. PHILIPPON, J. P. CATANI, and J. M. FOURQUET (MATRA Service Aerodynamique, Toulouse, France) In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 12 p (SEE N87-26937 21-18) May 1987 In FRENCH (AGARD-CP-406) Avail: NTIS HC A13/MF A01

Day-sector charging events detected with the Telecom 1-A satellite were analyzed. The temporal distribution of the events, seasonal variations, and correlations with geomagnetic activity are discussed. In addition, several covering materials were subjected to quasi-monoenergetic electron bombardment in a simulation chamber. It was found that floating metallic surfaces, although small, produced enduring discharges with short rise times. M.G.

N87-26956# Societe Nationale Industrielle Aerospatiale, Cannes (France).

SPACECRAFT PROTECTION AGAINST ELECTROSTATIC DISCHARGE APPLICATION TO THE ARABSAT SPACECRAFT

LAURENT BROIHANNE In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 11 p (SEE N87-26937 21-18) May 1987 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

The protections against electrostatic discharge (ESD) phenomena effects which were implemented on the ARABSAT spacecraft are summarized. The origins of ESD phenomena on geostationary spacecraft are recalled. The basic design rules concerning ESD which were applied to ARABSAT are given.

Author

N87-26957# European Space Agency, European Space Research and Technology Center, ESTEC, Noordwijk (Netherlands). Community Satellites Dept.

ELECTROSTATIC IMMUNITY OF GEOSTATIONARY SATELLITES

HORST G. LECHTE In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 8 p (SEE N87-26937 21-18) May 1987 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

It is demonstrated that electrostatic immunity of telecommunication satellites can be achieved to a large extent by relatively simple means. Those means include the selection of antistatic external materials and the desensitization of electronic actuators and memories regarding fast transients. The dual approach is considered necessary because not all external surfaces can be made antistatic. Protection of operationally critical circuitries against single event upsets is achieved by the same means.

Author

N87-26958# Telesat Canada, Ottawa (Ontario). Satellite Engineering Group.

THE EFFECTS OF ELECTROSTATIC DISCHARGE PHENOMENA ON TELESAT'S DOMESTIC COMMUNICATIONS SATELLITES

P. N. WADHAM In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 10 p (SEE N87-26937 21-18) May 1987 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

A number of anomalies believed to have been caused by electrostatic discharges are discussed. In particular, an unusually severe event which resulted in a temporary loss of control and a consequent loss of fuel is discussed. Each class of satellite is covered in sequence by launch date. Mention is made of the configuration of the thermal blankets because they are considered to be the prime cause of electrostatic discharges.

Author

N87-26960# Air Force Geophysics Lab., Hanscom AFB, MA.

AUTOMATIC CHARGE CONTROL SYSTEM FOR GEOSYNCHRONOUS SATELLITES

B. M. SHUMAN, H. A. COHEN, J. HYMAN, R. R. ROBSON, J. SANTORU, and W. S. WILLIAMSON (Hughes Research Labs., Malibu, Calif.) In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 17 p (SEE N87-26937 21-18) May 1987 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

An autonomous system to detect both absolute and differential spacecraft charging aboard high altitude satellites and to reduce those potentials before hazardous arcing levels are reached is being developed. The principle of safely reducing spacecraft charging levels by the emission of a low energy neutral plasma, effectively shorting the spacecraft and charged dielectric surfaces to the ambient space plasma, was demonstrated. The Charge Control System will utilize a xenon-based plasma source capable of igniting within one second, and capable of emitting a quasi-neutral plasma containing more than 1 mA of ions. Author

N87-26961# Aerospace Corp., Los Angeles, CA. Space Sciences Lab.

THICK DIELECTRIC CHARGING ON HIGH ALTITUDE SPACECRAFT

A. L. VAMPOLA In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 7 p (SEE N87-26937 21-18) May 1987 Previously announced as N87-13480 (Contract F04701-82-C 83) (AGARD-CP-406) Avail: NTIS HC A13/MF A01

Thick dielectric charging, in which energetic electrons embed within bulk dielectrics and build up to potentials in excess of the breakdown potential of the dielectric, is shown to be a causative factor in the anomalous operation of high altitude satellites. Results of laboratory studies are reviewed and a table of maximum expected electron fluxes orbits of various altitudes is presented. The combination of maximum expected electron fluxes and the small energy associated with a bulk dielectric breakdown permits the elimination of bulk charging as a spacecraft problem through the minimum shielding (400 mg/sq cm) of all cables and circuit boards otherwise exposed to the environment, and through the desensitizing of digital logic inputs that are serviced by cables.

Author

20

SPACECRAFT PROPULSION AND POWER

Includes main propulsion systems and components, e.g., rocket engines; and spacecraft auxiliary power sources.

N87-18610# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

PERFORMANCE OF ROCKET MOTORS WITH METALLIZED PROPELLANTS

D. REYDELLET, ed. Sep. 1986 84 p (AGARD-AR-230: ISBN-92-835-1534-X; AD-A175565) Avail: NTIS HC A05/MF A01

Different methods were used to calculate and predict the performance of solid rocket motors with metallized propellants. An AGARD Working Group was formed in order to compare the different prediction methods, to investigate the sources of inaccuracy and to make recommendations for future applications. The Working Group performed calculations and predictions with different methods for two test cases and compared the results with each other and with the results of experimental investigations. Finally, the Working Group came up with some conclusions and the recommendations for the application of a simplified semi-empirical method for a specific impulse prediction accuracy of 1 percent.

Author

20 SPACECRAFT PROPULSION AND POWER

N87-28589# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

DESIGN METHODS IN SOLID ROCKET MOTORS

J. P. DENOST *In* AGARD, Design Methods in Solid Rocket Motors 44 p (SEE N87-28589 23-20) Mar. 1987 (AGARD-LS-150) ISBN-92-835-0415-1; AD-A184476) Avail: NTIS HC A11/MF A01

A compilation of lectures summarizing the current state-of-the-art in designing solid rocket motors and their components is presented. The experience of several countries in the use of new technologies and methods is represented. Specific sessions address propellant grains, cases, nozzles, internal thermal insulation, and the general optimization of solid rocket motor designs. For individual titles, see N87-28590 through N87-28599.

N87-28590# Air Force Rocket Propulsion Lab., Edwards AFB, CA.

ADVANCES IN SOLID ROCKET NOZZLE DESIGN AND ANALYSIS TECHNOLOGY IN THE UNITED STATES SINCE 1970

JOSEPH H. HILDRETH *In* AGARD, Design Methods in Solid Rocket Motors 15 p (SEE N87-28589 23-20) Mar. 1987 (AGARD-LS-150) Avail: NTIS HC A11/MF A01

The evolution of solid rocket nozzle design and analysis in the United States over the past decade is examined. Generalized design requirements are briefly summarized and the evolution from tungsten and graphite based designs to the current carbon-carbon designs is discussed. The main causes for the incorporation of new technologies are identified. The analysis processes employed in the design cycle are described. The portions of the analysis activities where advanced technologies have been incorporated are identified as well as the current trends for improved capabilities. Finally, activities directed towards the verification of analysis technology are summarized. These activities include code versus code comparisons as well as code versus laboratory measurement efforts. The code versus measurement efforts include investigations into threaded interfaces between the throat and exit cone parts and the behavior of carbon-carbon involute exit cones subjected to multiaxial loads. Author

N87-28591# Societe Europeenne de Propulsion, Saint-Medard-en-Jalles (France).

DESIGN AND SIZING OF SOLID ROCKET NOZZLES [CONCEPTION ET DIMENSIONNEMENT DES TUYERES DE PROPULSEURS A POUVRE]

ANDRE TRUCHOT *In* AGARD, Design Methods in Solid Rocket Motors 27 p (SEE N87-28589 23-20) Mar. 1987 *In* FRENCH (AGARD-LS-150) Avail: NTIS HC A11/MF A01

Design and sizing of solid propellant rocket nozzles is discussed and examples from the field of tactical propulsion systems are given. The principle specifications and parameters necessary for the analysis of nozzles (pressure, time, throat diameter, over-all dimensions, etc.) are outlined. The various design stages are detailed: nozzle configuration analysis, section profiling, selection and pre-sizing of section and insulation materials, and structural components design. The different systems utilized for thrust vector control (nozzle movement, fluid injection, etc.) are then discussed. Finally, the various stages of nozzle sizing are examined. For every phase (aerodynamic, thermal or thermomechanical), the computation codes utilized are described. M.G.

N87-28592# Hercules, Inc., Rocket Center, WV. Aerospace Products Group.

COMPOSITE MOTOR CASE DESIGN

P. R. EVANS *In* AGARD, Design Methods in Solid Rocket Motors 11 p (SEE N87-28589 23-20) Mar. 1987 (AGARD-LS-150) Avail: NTIS HC A11/MF A01

Information is presented on the design of composite cases for rocket motors. Typical design requirements are discussed, including pressure, axial and bending loads and thermal loading. Material technology discussed includes filament winding resins and glass, Kevlar and graphite fibers. Design features discussed include the pressure vessel body, skirts, polar adapters and other attachments. Typical qualification testing and inspection techniques are presented. Author

N87-28593# Societe Nationale Industrielle Aerospatiale, Saint-Medard-en-Jalles (France). Program for Filament-Wound Structures.

DESIGN OF FILAMENT-WOUND ROCKET CASES

J. P. DENOST *In* AGARD, Design Methods in Solid Rocket Motors 44 p (SEE N87-28589 23-20) Mar. 1987 (AGARD-LS-150) Avail: NTIS HC A11/MF A01

The methods of design and justification of filament wound rocket cases are described. A critical analysis of rapid light-weight design methods and computer aided design methods is presented and the complementary utilization of the techniques is illustrated. Consideration is also given to materials, their implementation and performance, and to the major principles of fabrication of this type of structure. Author

N87-28594# IMI Summerfield, Kidderminster (England). Rocket Motor Design and Development.

CONSIDERATIONS FOR DESIGNERS OF CASES FOR SMALL SOLID PROPELLANT ROCKET MOTORS

H. BADHAM and G. P. THORP *In* AGARD, Design Methods in Solid Rocket Motors 20 p (SEE N87-28589 23-20) Mar. 1987 (AGARD-LS-150) Avail: NTIS HC A11/MF A01

When manufacturing the initial design of the case or load bearing components for a solid propellant rocket motor a number of possible solutions may be apparent and many factors need consideration before the design of the individual components can be finalized. The process of optimization involves consideration of material properties, methods of manufacturing, inspection and proof as well as interactions with other rocket motor and missile components. The various factors are considered and indications are given of the interactions to be taken into account. Particular emphasis is given to the design of metallic motor cases. Both homogeneous and non-homogeneous body structures are considered, the latter being fiber overwound metallic and strip laminate structures. The relatively recent requirement of munitions insensitivity (resistance to fragment attack and fuel fire) is also discussed in relation to body construction. Author

N89-16815*# National Aeronautics and Space Administration, Marshall Space Flight Center, Huntsville, AL.

SPACE SHUTTLE MAIN ENGINE MONITORING EXPERIENCE AND ADVANCED MONITORING SYSTEMS DEVELOPMENT

HARRY A. CIKANEK *In* AGARD, Engine Condition Monitoring: Technology and Experience 20 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01 CSDL 21H

Advanced space transportation systems must provide improved availability, reliability, safety, and reduced cost in order to make a new, more vigorous level of space activity economically feasible. Earth-to-Orbit (ETO) propulsion monitoring systems are a major factor in progress toward these improvements, and in the success of current systems. Operational experience with the Space Shuttle Main Engine (SSME), the first reusable ETO rocket engine, is valuable for examining current rocket engine monitoring capability and technology developments. Here, Space Shuttle Main Engine (SSME) monitoring practice and experience are surveyed. Unique aspects of rocket engine mission requirements are highlighted to provide improved understanding of engine monitoring practices and technology needs. Current ETO engine transportation systems mission needs are outlined. With this foundation, the techniques and components addressed within current technology programs are discussed to complete a picture of ETO propulsion monitoring status and development. Author

N89-16816*# National Aeronautics and Space Administration, Marshall Space Flight Center, Huntsville, AL.

PLUME SPECTROMETRY FOR LIQUID ROCKET ENGINE HEALTH MONITORING

WILLIAM T. POWERS, F. G. SHERRELL, J. H. BRIDGES, III, and T. W. BRATCHER (Sverdrup Technology, Inc., Arnold Air Force Station, TN.) *In* AGARD, Engine Condition Monitoring: Technology and Experience 10 p (SEE N89-16780 09-06) Oct. 1988 (AGARD-CP-448) Avail: NTIS HC A20/MF A01 CSDL 21H

An investigation of Space Shuttle Main Engine (SSME) testing failures identified optical events which appeared to be precursors of those failures. A program was therefore undertaken to detect plume trace phenomena characteristic of the engine and to design a monitoring system, responsive to excessive activity in the plume.

capable of delivering a warning of an anomalous condition. By sensing the amount of extraneous material entrained in the plume and considering engine history, it may be possible to identify wearing of failing components in time for a safe shutdown and thus prevent a catastrophic event. To investigate the possibilities of safe shutdown and thus prevent a monitor to initiate the shutdown procedure, a large amount of plume data were taken from SSME firings using laboratory instrumentation. Those data were used to design a more specialized instrument dedicated to rocket plume diagnostics. The spectral wavelength range of the baseline data was about 220 nanometers (nm) to 15 microns with special attention given to visible and near UV. The data indicates that a satisfactory design will include a polychromator covering the range of 250nm to 1000nm, along with a continuous coverage spectrometer, each having a resolution of at least 5A degrees. The concurrent requirements for high resolution and broad coverage are normally at odds with one another in commercial instruments, therefore necessitating the development of special instrumentation. The design of a polychromator is reviewed herein, with a detailed discussion of the continuous coverage spectrometer delayed to a later forum. The program also requires the development of applications software providing detection, variable background discrimination, noise reduction, filtering, and decision making based on varying historical data. Author

N89-16906# Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine (France). Propulsion and Energetics Panel.

DESIGN METHODS IN SOLID ROCKET MOTORS

Apr. 1988 243 p. In ENGLISH and FRENCH. Lecture series held in London, United Kingdom, 18-19 Apr. 1988, in Saint-Aubin de Medoc, France, 21-22 Apr. 1988, in Neubiberg, Fed. Republic of Germany, 25-26 Apr. 1988, and in Rome, Italy, 28-29 Apr. 1988. Revised.

(AGARD-LS-150-REV. ISBN-92-835-0454-2; AD-A199356) Avail: NTIS HC A11/MF A01

The current state of the art in designing solid rocket motors and their components are summarized. The aim is to collect the experience of several countries in using new technologies and new methods which have been developed over the past ten years. Specific sessions dealt with propellant grain, cases, nozzles, internal thermal insulations. The question of the general optimization of a solid rocket motor is emphasized. For individual titles, see N89-16907 through N89-16916.

N89-16907# Air Force Rocket Propulsion Lab., Edwards AFB, CA.

ADVANCES IN SOLID ROCKET NOZZLE DESIGN AND ANALYSIS TECHNOLOGY IN THE UNITED STATES SINCE 1970

JOSEPH H. HILDRATH. In AGARD, Design Methods in Solid Rocket Motors 15 p (SEE N89-16906 09-20) Apr. 1988 (AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

The evolution of the nozzle design and analysis in the U.S. in the past decade is examined. A brief summary is given of generalized design requirements along with a description of the design evolution from tungsten and graphite based designs to the current carbon-carbon designs. The main causes for the incorporation of new technologies in the design are identified. A technical description of the analysis processes that are employed in the design cycle is given. The verification of the analysis procedure is a vital aspect of improving the analysis capabilities. A description is also given of some of the activities which have occurred to demonstrate the validity of the new analysis technology. These activities include code vs. code comparisons as well as code vs. lab measurement efforts. The code vs. measurement efforts include investigations into threaded interfaces between the throat and exit cone parts and the behavior of carbon-carbon involute exit cones subjected to multiaxial loads. Author

N89-16908# European Space Agency, Paris (France).

DESIGN AND ANALYSIS OF SOLID ROCKET MOTOR NOZZLE

A. TRUCHOT. In AGARD, Design Methods in Solid Rocket Motors 22 p (SEE N89-16906 09-20) Apr. 1988 (AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

The different methods are presented which are used to design and analyze solid rocket motor nozzles. In a preliminary phase, the typical requirements and parameters required to design a nozzle

are discussed. Afterwards, the general process of the design is detailed: nozzle configuration, aerodynamic contour design, selection and sizing of liners and insulators, etc. In a second step, the different systems used to control the motor thrust or to improve the performance, such as extendible exit cones, are presented. For each step (aerodynamic, thermal and structural) the different computer programs used are presented. Author

N89-16909# Hercules, Inc., Rocket Center, WV. Aerospace Products Group.

COMPOSITE MOTOR CASE DESIGN

P. R. EVANS. In AGARD, Design Methods in Solid Rocket Motors 11 p (SEE N89-16906 09-20) Apr. 1988. Previously announced as N87-28592.

(AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

Information is presented on the design of composite cases for rocket motors. Typical design requirements are discussed, including pressure, axial and bending loads and thermal loading. Material technology discussed include filament winding resins and glass, Kevlar and graphite fibers. Design features discussed include the pressure vessel body, skirts, polar adapters and other attachments. Typical qualification testing and inspection techniques are presented. Author

N89-16910# Societe Nationale Industrielle Aerospatiale, Saint-Medard-en-Jalles (France). Programs for Filament-Wound Structures.

DESIGN OF FILAMENT-WOUND ROCKET CASES

J. P. DENOST. In AGARD, Design Methods in Solid Rocket Motors 22 p (SEE N89-16906 09-20) Apr. 1988 (AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

Aerospatiale began developing methods for design and sizing of filament-wound rocket cases in the early 1970's. Such methods have since evolved to the extent that rapid design and precise verification means are now available. These two approaches are outlined, criticized, and their complementarity is determined. The principle rules are outlined. The theory is completed by considerations relating to materials, their implementation and performances, and by a description of the major principles of fabrication of this type of structure. Author

N89-16911# IMI Summerfield, Kidderminster (England). Rocket Motor Design and Development.

CONSIDERATIONS FOR DESIGNERS OF CASES FOR SMALL SOLID PROPELLANT ROCKET MOTORS

H. BADHAM and G. P. THORP. In AGARD, Design Methods in Solid Rocket Motors 20 p (SEE N89-16906 09-20) Apr. 1988. Previously announced as N87-28594.

(AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

When manufacturing the initial design of the case or load bearing components for a solid propellant rocket motor, a number of possible solutions may be apparent and many factors need consideration before the design of the individual components can be finalized. The process of optimization involves consideration of material properties, methods of manufacturing, inspection and proof as well as interactions with other rocket motor and missile components. The various factors are considered and indications are given of the interactions to be taken into account. Particular emphasis is given to the design of metallic motor cases. Both homogeneous and nonhomogeneous body structures are considered, the latter being fiber overwound metallic and strip laminate structures. The relatively recent requirement of munitions insensitivity (resistance to fragment attack and fuel fire) is also discussed in relation to body construction. Author

N89-16915# European Space Agency, Paris (France).

DESIGN AND ANALYSIS OF SOLID ROCKET MOTOR INTERNAL INSULATION

A. TRUCHOT. In AGARD, Design Methods in Solid Rocket Motors 13 p (SEE N89-16906 09-20) Apr. 1988 (AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

The main purpose of internal insulation is to protect the motor case from the thermal environment of propellant combustion products. Several secondary objectives must also be met. Internal insulation must bond to propellant and case, transmit case strain into propellant and sometimes seal the case. In the first step, the general process of internal insulation is presented: evaluation of thermal environment, selection of material, thermal and structural

20 SPACECRAFT PROPULSION AND POWER

analyses. For each phase, the different analysis methods are described: aerodynamic, thermal and structural. Also the different phases of internal insulation fabrication are presented: elastomer formulation, fabrication of parts and integration into the motor case. Author

N89-16916# European Space Agency, Paris (France).
OVERALL OPTIMIZATION OF SOLID ROCKET MOTOR
A. TRUCHOT. In AGARD, Design Methods in Solid Rocket Motors 10 p (SEE N89-16906 09-20) Apr. 1988
(AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

The overall optimization of a solid rocket motor consists of determining the most efficient configuration of the motor in terms of range or payload of the vehicle. After a presentation of the general requirements of a solid rocket motor, the different design parameters are detailed: operating conditions, geometric parameters and technologies used for each component. In order to achieve parametric studies, a computer program was developed by SEP. The principle and main characteristics of this program are presented and two examples of application are given in order to illustrate the possibilities of the program. Author

24

COMPOSITE MATERIALS

Includes physical, chemical, and mechanical properties of laminates and other composite materials.

N86-27425# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

IMPACT DAMAGE TO COMPOSITE STRUCTURES
Feb. 1986 40 p
(AGARD-R-729; ISBN-92-835-1517-X; AD-A167594) Avail: NTIS HC A03/MF A01

The impact of ballistic penetrators in fuel filled tanks generates high dynamic pressure loading. This damage process is generally referred to as *hydraulic ram*. Hydraulic ram in aircraft fuel tanks results in large damage of structural components, which in turn can lead to fuel loss or ingestion into the engines, fire and explosion. To determine the effect of hydraulic ram to an integral fuselage fuel tank with carbon/epoxy skin, a firing program was established. Plane carbon/epoxy plates, bolted to an impact box, were impacted with single cuboid fragments. Different shock-absorbing materials used to reduce hydraulic ram pressures on the impact plate, were investigated to prevent propagation of the shock wave. Multiple fragments were projected against the simulated fuel tank sections with carbon/epoxy skins and sandwich design at a hit density of 25 fragments per square meter. Author

N87-20178# Societe Nationale Industrielle Aerospatiale, Toulouse (France). Composite Structure Design Dept.

A.T.R. 42 CARBON FIBRE FLAP REPAIR DESIGN AND INSPECTION

GUY HELLARD. In AGARD The Repair of Aircraft Structures Involving Composite Materials 9 p (SEE N87-20174 13-01) Oct. 1986

(AGARD-CP-402) Avail: NTIS HC A11/MF A01
The new commuter aircraft known as ATR.42 developed jointly by Aerospatiale and Aeritalia is the first aircraft of its category to be equipped with carbon fabric flaps. All the airlines which have placed orders for this aircraft are not equipped with the heavy installations required for working on the composite materials. Repair schemes using a simple technology have therefore to be developed. Partial or complete tests have shown that a perfect understanding of the structural ability to withstand the different types of damage was required beforehand. Repair methods using in situ pre-impregnation of dry fabrics have been developed with the relevant method. The mechanical strength of the various repairs and the effects of inadequate damage repairs have been investigated through tests. Author

N88-20190# British Aerospace Aircraft Group, Warton (England). Structural Engineering.

STRUCTURAL MATERIALS: THE CHANGING SCENE

R. I. HARESCOUGH. In AGARD, Flight Vehicle Development Time and Cost Reduction 6 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

Structural materials for use on aircraft have, in the main, evolved by minor development from a previously existing base. These developments, which have been by small increments, have taken place at a fairly leisurely pace. The major exception to this in the last two decades has been the introduction of fiber composites which, while achieving a revolutionary change, has been effected against a protracted time scale. Developments are currently under way, or anticipated, which will require other revolutionary materials to be introduced but to much tighter time scales and against aircraft project requirements. Examples are identified where this development should be directed and action is proposed necessary to ensure that the materials are developed to a common requirement in the required time scale. Author

N89-17696# Royal Armament Research and Development Establishment, Christchurch (England).

TEST SPECIMENS FOR BEARING AND BY-PASS STRESS INTERACTION IN CARBON FIBRE REINFORCED PLASTIC LAMINATES

M. B. SNELL and G. P. BURKITT. In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 21 p (SEE N89-17685 10-31) Mar. 1988 Original document contains color illustrations

(AGARD-CP-427) Avail: NTIS HC A14/MF A01

Compact test specimens for measuring the strength interaction behaviour of bolted joints subject to combined bearing and by-pass stresses have been studied. Multi-bolt specimens which have been successfully used to study these effects in aluminum alloy were found to be unsatisfactory because of the uncertainty in load transfer, and a new specimen based on parallel plates was developed. Bearing load at the holes is achieved through load transfer from the central carbon fiber reinforced plastic (CFRP) coupon to the parallel plates. The maximum ratio of bearing to bypass loads is limited by the initial fit of the bolt and by subsequent bolt/hole deformation under load. However the specimens recommended are capable of applying a wide range of bearing/bypass load ratios. Sample strength interaction envelopes were produced for a Hercules IM6 fiber and Ciba-Geigy Fibredux 6376 resin laminate of typical wing skin lay-up, 5.5 mm thick. Both tension and compression quadrants were studied, with two hole sizes, in both double shear and single shear. The interaction behavior was similar in both tension and compression for 6.35 mm holes in double shear, but in the case of 9.5 mm bolts there was less interaction in compression than in tension. Countersunk fasteners in tension appeared to suffer little reduction in net strength due to bearing stresses. Author

N89-17699# Imperial Coll. of Science and Technology, London (England). Dept. of Aeronautics.

THE STATIC STRENGTH OF BOLTED JOINTS IN FIBRE REINFORCED PLASTICS

F. L. MATTHEWS. In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 9 p (SEE N89-17685 10-31) Mar. 1988

(AGARD-CP-427) Avail: NTIS HC A14/MF A01

Joints in glass fiber reinforced plastics (GFRP) and Kevlar fiber reinforced plastics (KFRP) laminates show similar characteristics to those in carbon fiber reinforced plastics (CFRP) but with differences brought about by the low elastic modulus of glass fibers, and the low compressive strength of Kevlar fibers. Data is presented for GFRP laminates manufactured from layers of unidirectional fiber prepreg, and for KFRP laminates manufactured from layers of balanced, bi-directional, woven fabric prepreg. Comparative data for CFRP is also given. As far as GFRP is concerned, test on single-hole joints show that the effects of width, and distance, hole size, bolt clamping pressure and stacking sequence are similar to those in CFRP. In general, strength levels for GFRP are about 20 pct below those for CFRP. A stronger interaction between failure modes is found for GFRP, which also shows a greater tendency to delaminate rather than showing in-plane shear or tensile cracking. Due to the nature of the prepreg

INORGANIC AND PHYSICAL CHEMISTRY

Includes chemical analysis, e.g., chromatography; combustion theory; electrochemistry; and photochemistry.

the range of possible lay-ups for KFRP is restricted. Bearing strengths are generally in the range 50 to 600 MN/sq m. Overall behavior is found to be similar to other FRP although the ultimate failure mode is almost invariably tensile. There is evidence that the inherent compressive characteristics of Kevlar fiber contribute to the low bearing strength. Surprisingly, although very large hole distortions are seen at failure, there is very little evidence of resin cracking. Author

N89-17701# Aeritalia S.p.A., Naples (Italy).

JOINING OF CARBON FIBER COMPOSITE WITH FASTENERS
SALVATORE PAGLIUSO In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 5 p (SEE N89-17685 10-31) Mar. 1988
(AGARD-CP-427) Avail: NTIS HC A14/MF A01

This paper deals with the Aeritalia experience on drilling techniques and fastener selection for advanced composite assembly. Details are provided on fabrication techniques. Information is given on corrosion prevention. Author

N89-17702# Avions Marcel Dassault, Saint-Cloud (France).

BOLTED SCARF JOINTS IN CARBON COMPOSITE MATERIALS. COMPARISON BETWEEN ASSEMBLIES WITH AN INTERFERENCE FIT AND THOSE WITH PLAY (ENTURES BOULONNEES EN MATERIAUX COMPOSITE CARBONE COMPARAISON ENTRE MONTAGES A INTERFERENCE ET MONTAGE A JEU)

DANIEL CHAUMETTE In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 10 p (SEE N89-17685 10-31) Mar. 1988 In FRENCH
(AGARD-CP-427) Avail: NTIS HC A14/MF A01

Experimental results on the behavior of carbon assemblies with mechanical fasteners mounted with and without interference are presented. Interference tests have been conducted for the cases of unstressed joints and scarf joints. In contrast to the predictions of elastic stress theory, interference fit is not found to have a significant influence on the static strength of test specimens, even after fatigue loading. The present results can be explained by the fracture mode of the drilled composite parts which leads to delamination. Author

N89-17705# National Aeronautical Establishment, Ottawa (Ontario). Structures and Materials Lab.

BEHAVIOUR OF MECHANICALLY FASTENED JOINTS IN ADVANCED COMPOSITES

C. POON and R. GOULD In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 14 p (SEE N89-17685 10-31) Mar. 1988
(AGARD-CP-427) Avail: NTIS HC A14/MF A01

Experimental results obtained to date from an on-going test program are presented. The purpose of this program is to evaluate the performance of mechanical fastener systems in Narmco IM6/5245C, a high strain/tough resin composite identified as a promising material system for new aircraft designs. Preliminary results obtained from tensile tests on open-hole specimens and double-lap joints were used to characterize the notch strength and the bearing strength as influenced by the effect of design parameters involving geometric ratios, hole size and fastener torque. A constant amplitude tension-compression ($R = -1$) fatigue test was performed on a double-lap composite joint to assess a simple and effective technique based on hysteresis measurements for monitoring progressive elongation by as much as 26 pct at the end of the fatigue test. This was explained by the observation that graphite particles formed during the fatigue test reduce the clearance between the hole and the pin. Single-shear composite/titanium joints were tested to evaluate three fastener systems designed specifically for composite applications. Four single-shear joints were tested to date to the ultimate tensile strength. Author

N87-21171# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Stuttgart (Germany, F.R.). Inst. fuer Physikalische Chemie der Verbrennung.

SIMULTANEOUS TEMPERATURE MEASUREMENTS WITH RAMAN AND CARS IN LAMINAR FLAMES

W. STRICKER, W. KREUTNER, and TH. JUST In AGARD Advanced Instrumentation for Aero Engine Components 11 p (SEE N87-21170 14-31) Nov. 1986
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

Spatially resolved temperature measurements in laminar premixed flames were made using Coherent Anti-Stokes Raman Scattering (CARS) and spontaneous Raman spectroscopy. In the case of narrowband (scanning) CARS, the experimental arrangement allows the performance of simultaneous temperature measurements with both techniques. For broadband (multiplex) CARS the measurements have to be made successively. Three different Raman linewidth models were used for CARS data evaluation. The results were compared with the independently recorded rotational Raman temperatures. Temperature differences up to 10% were observed, depending on the linewidth model used. For two, more complicated linewidth models the CARS and Raman temperatures are in good agreement. Author

N87-21172# United Kingdom Atomic Energy Authority, Harwell (England). Combustion Centre.

CARS THERMOMETRY FOR LOW AND HIGH PRESSURE COMBUSTION SYSTEMS

DOUGLAS A. GREENHALGH In AGARD Advanced Instrumentation for Aero Engine Components 26 p (SEE N87-21170 14-31) Nov. 1986
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

The theory and application of broadband Coherent Anti-Stokes Raman Spectroscopy (CARS) for ambient (low) and high pressure combustion thermometry is discussed. The accuracy of broadband CARS is assessed from 300 to 3500 Kelvin for pressures around 1 bar, and from 300 to 700 Kelvin for pressures from 1 to 20 bar. The use of CARS thermometry for both average and instantaneous measurements is discussed. Systematic accuracy strongly depends on the quality of the spectral model used in the CARS data analysis step. CARS spectral modeling methods are discussed with particular reference to important recent developments. Instantaneous CARS accuracy is importantly influenced by noise arising in both the broadband dye laser and the multichannel detector. Both of these factors, and their relative influences are assessed. The application of CARS thermometry is illustrated by application to both in-cylinder studies of an operating production i.c. petrol engine and to turbulent combustion in an oil-fired 30 kilowatt furnace. Author

N87-21173# Sandia National Labs., Albuquerque, NM. Combustion Research Facility.

ACCURATE MEASUREMENTS OF COMBUSTION SPECIES CONCENTRATIONS USING CARS

R. L. FARROW In AGARD Advanced Instrumentation for Aero Engine Components 16 p (SEE N87-21170 14-31) Nov. 1986
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

Results are given of research at the Combustion Research Facility, Sandia National Laboratories, on improving the capabilities of Coherent Anti-Stokes Raman Spectroscopy (CARS) for species concentration measurements in combustion gases. Scanning CARS experiments based on single- and multi-mode Nd:YAG lasers, and on pulse-amplified and conventional pulsed dye lasers have been used to evaluate an in situ normalization technique, to measure Raman linewidths in flames, and to determine nonresonant electronic susceptibilities. Experimental and theoretical considerations affecting concentration measurement accuracy are discussed. Author

25 INORGANIC AND PHYSICAL CHEMISTRY

N87-21174# Defence Research Establishment Ottawa, (Ontario).

NONLINEARITY AND SINGLE SHOT NOISE PROBLEMS IN CARS SPECTROSCOPY

D. R. SNELLING, G. J. SMALLWOOD, R. A. SAWCHUK, and T. PARAMESWARAN. In AGARD Advanced Instrumentation for Aero Engine Components 19 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

The design and operation of a Coherent Anti-Stokes Raman Spectroscopy (CARS) spectrometer and its use to perform accurate temperature measurements in a simple laboratory flat-flame burner are discussed. Instrumental sources of systematic error and noise in CARS temperature measurements are discussed. An analysis of the system noise is presented and the use of the measured noise to perform weighted least mean squares fits of experimental and theoretical CARS spectra is discussed. The use of a weighted fit is shown to markedly improve the precision of single pulse CARS temperature measurements. Finally, the incorporation of some recent advances in CARS theory which have resulted in more computationally efficient algorithms for calculating theoretical CARS spectra and their effect on the accuracy of temperature measurements are discussed. Author

N87-21175# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

APPLICATION OF CARS THERMOMETRY TO A TURBULENT FLAME [APPLICATION DE LA METHODE DRASC A LA MESURE DE LA TEMPERATURE DANS UNE FLAMME TURBULENTE]

PHILIPPE MAGRE, PIERRE MOREAU, GERARD COLLIN, and MICHEL PEALAT. In AGARD Advanced Instrumentation for Aero Engine Components 19 p (SEE N87-21170 14-31) Nov. 1986 In FRENCH; ENGLISH summary (AGARD-CP-399) Avail: NTIS HC A24/MF A01

The good spatial and temporal resolution of broad-band Coherent Anti-Stokes Raman Spectroscopy (CARS) diagnostic is suitable for turbulent flows and allows instantaneous temperature measurements in the reaction zone. From these instantaneous values, temperature probability density functions (PDF) are built. CARS thermometry is applied to a high velocity premixed flame. The combustion of an air-methane flow (u approx. equal to 55 m/s, T approx. equal to 560 K, equivalence ratio = 0.8) in the combustor is ignited and stabilized by a parallel flow of hot gases (u approx. equal to 110 m/s, T approx. equal to 2000 K). The mixing of the two flows without combustion (equivalence ratio = 0) is also studied as well as combustion stabilized by a step replacing the hot gases. Author

N88-29910# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

COMBUSTION AND FUELS IN GAS TURBINE ENGINES

Jun. 1988 515 p In ENGLISH and FRENCH Symposium held in Chania, Greece, 19-23 Oct. 1987 (AGARD-CP-422; ISBN-92-835-0465-8; AD-A202495) Avail: NTIS HC A22/MF A01

The attention of combustor designers and researchers has focused upon two main factors: the identification of the significance of fuel degradation upon combustion design and performance, and the potential prizes to be gained by the development of better design techniques. The aim of the conference was to review progress made in these areas under four main subject headings: namely, alternative fuels and fuel injection, combustor development, soot and radiation, and the development of mathematical models for the design of gas turbine combustors. For individual titles, see N88-29911 through N88-29951.

N88-29912# Illinois Univ., Urbana-Champaign. Dept. of Mechanical and Industrial Engineering.

ALTERNATIVE FUEL SPRAY BEHAVIOR

J. P. ASHEIM and J. E. PETERS. In AGARD, Combustion and Fuels in Gas Turbine Engines 16 p (SEE N88-29910 24-25) Jun. 1988

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The effects of alternative fuels on the combustion characteristics of a liquid fuel sprays were examined. Fuel properties were systematically varied and the effects of these variations on the structure of the spray flames were calculated. In addition, a comparison was made of the differences in two spray flames fueled

by the standard NATO F-40 fuel and a proposed alternative fuel, the AGARD Research Fuel. The calculations were performed using a reacting, two phase, two-dimensional flow code which utilizes a Lagrangian calculation of droplet trajectories and an Eulerian approach for the gas phase flow field. Interactions between the drops and the gas phase were accomplished through the particle in cell technique with exchange of mass, momentum and energy between the two phases. A global reaction scheme was used with the reaction rate determined by the minimum of either an Arrhenius rate or mixing rate. Fuel property changes which affect droplet size and volatility were shown to have significant effects on droplet trajectory patterns. However, for the flow field examined, these trajectory changes only moderately modify the fuel vaporization pattern within the spray. Author

N88-29913# Purdue Univ., West Lafayette, IN. School of Mechanical Engineering.

ATOMIZATION OF ALTERNATIVE FUELS

ARTHUR H. LEFEBVRE. In AGARD, Combustion and Fuels in Gas Turbine Engines 14 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

The influence of atomization quality on several key aspects of combustion performance is reviewed. The performance parameters considered include combustion efficiency, lean blowout, and lean lightup, and also the pollutant emissions of carbon monoxide, unburned hydrocarbons, oxides of nitrogen, and smoke. The fuel properties of importance are described and equations are presented for estimating the effects of changes in fuel properties on spray characteristics for the main types of fuel nozzle employed in aero gas turbines, namely plain orifice, pressure swirl, and airblast atomizers. The anticipated effects on atomization of changes from conventional to alternative fuels is discussed. Author

N88-29914# Centre d'Etudes et de Recherches, Toulouse (France).

SIMULATION STUDY OF SPRAYING, STREAMING AND VAPORIZATION PHENOMENA ASSOCIATED WITH FUEL INJECTION [ETUDE PAR SIMULATION DES PHENOMENES DE PULVERISATION, DE RUISSELEMENT ET DE VAPORISATION LIES A L'INJECTION DE CARBURANT]

P. HEBRARD and G. LAVERGNE. In AGARD, Combustion and Fuels in Gas Turbine Engines 13 p (SEE N88-29910 24-25) Jun. 1988 In FRENCH

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

Combustion modeling requires a knowledge of the limit conditions and the physical models that can often be provided only through experience. Such an experimentally-based approach for studying injection-associated phenomena, involving simulation starting from experimental measurements, is presented. An evaluation of the performances of the different types of injectors used in the combustion chambers is carried out through particle size analysis: local distribution of size, the Sauter mean diameter, and measurements of drop concentration. Models describing the phenomena of evaporation, acceleration and impact of drops on a hot wall were tested experimentally. The modeling of premixed fuel injection with a prevaporization type injector is discussed as an example of a modeling approach using experimental results. Author

N88-29915# Karlsruhe Univ. (Germany, F.R.). Lehrstuhl und Inst. fuer Thermische Stromungsmaschinen.

TURBULENCE EFFECTS ON THE DROPLET DISTRIBUTION BEHIND AIRBLAST ATOMIZERS

S. WITTIG, W. KLAUSMANN, and B. NOLL. In AGARD, Combustion and Fuels in Gas Turbine Engines 13 p (SEE N88-29910 24-25) Jun. 1988 Sponsored in part by the Forschungsvereinigung Verbrennungskraftmaschinen, e.V., and German National Science Foundation, Fed. Republic of Germany (AGARD-CP-422) Avail: NTIS HC A22/MF A01

Turbulent fluctuations of the airflow in gas turbine combustion chambers have decisive influence on the mixing of fuel droplets and air both in premixing regions and primary zones. Detailed measurements in a recirculating, droplet charged airflow in a combustor model are conducted with an optical diffraction type particle sizer. These investigations yield information about the local fuel concentrations as well as the local concentration weighted diameter distributions under cold and hot airflow conditions. The spray is produced by a prefilming airblast nozzle, which is built

25 INORGANIC AND PHYSICAL CHEMISTRY

into the combustor model. The calculation of the above mentioned quantities using a new computational model shows that in considering turbulence fluctuations significant improvement of the results is obtained and excellent agreement between predicted and measured values is achieved. Therefore, the results indicate that turbulence can be one of the major influencing parameters on droplet distribution. Author

N88-29916# United Technologies Research Center, East Hartford, CT.

NOZZLE AIRFLOW INFLUENCES ON FUEL PATTERNATION
T. J. ROSFJORD and W. A. ECKERLE (Clarkson Univ., Potsdam, N.Y.) In AGARD, Combustion and Fuels in Gas Turbine Engines 12 p (SEE N88-29910 24-25) Jun. 1988 Previously announced in IAA as A88-44765 (Contract F33615-85-C-2515) (AGARD-CP-422) Avail: NTIS HC A22/MF A01

The velocity and turbulence levels downstream of eight variations of a model gas turbine, aerating, fuel nozzle were measured. The nozzle configurations were assemblies which purposefully altered the airflow in a swirler or contouring swirl vane trailing edges. Data were acquired by a traversing, two component laser velocimeter in planes 0.060 in. or 2.50 in. downstream from the nozzle exit. Analyses of these data indicated that very symmetric flow fields can be produced. Such control was easier to achieve for the airflow than the fuel, supporting the position that nozzle patternation quality was more dependent on the fuel distribution in the nozzle. The presence of swirler wakes could always be discerned at the nozzle exit; the extreme variations imposed by coarse swirlers could dominate the flow. Such airflow influences were not apparent in the velocity profiles at downstream locations. However, their influence in convecting a higher fuel mass flux persisted from the nozzle exit and produced extreme variations in the spray pattern. Author

N88-29917# National Research Council of Canada, Ottawa (Ontario). Div. of Mechanical Engineering.

MULTIPLE SCATTERING EFFECTS IN DROP SIZING OF DENSE FUEL SPRAYS BY LASER DIFFRACTION
OEMER L. GUELDER In AGARD, Combustion and Fuels in Gas Turbine Engines 15 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

Practical schemes to correct the effect of multiple scattering in a dense drop field on the measured distribution parameters by laser light scattering based spray sizing techniques are presented. An experimental study, involving multi-modal distributions and drop field which can not be adequately described by single mode two parameter distribution, is described. Data from the experimental program were employed to develop empirical expressions to correct the measured spray parameters at high obscuration levels. Accuracies of the proposed expressions are acceptable for engineering applications, and comparable to the accuracies involved in conversion of light scattering data to drop size information. Author

N88-29918# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

INFLUENCE OF OPERATING CONDITIONS ON THE ATOMIZATION AND DISTRIBUTION OF FUEL BY AIR BLAST ATOMIZERS

M. CAO, H. EICKHOFF, F. JOOS, and B. SIMON (Technische Univ., Munich, West Germany) In AGARD, Combustion and Fuels in Gas Turbine Engines 8 p (SEE N88-29910 24-25) Jun. 1988 Sponsored by the Federal German Ministry of Research and Technology, Berlin (AGARD-CP-422) Avail: NTIS HC A22/MF A01

The performance of a gas turbine combustion chamber depends essentially on the distribution of the fuel in the primary zone. Ignition, stability of combustion, wall temperatures, and smoke and pollutant emission are all affected. Maintaining a fixed geometry, the droplet size and spray angle under variation of the air pressure drop at constant temperature were measured using two test liquids in an air blast atomizer system. Correlation equations were provided for both variables. Known correlations were confirmed for the droplet size. The spray angle is pressure related, increasing very rapidly with increasing pressure. Author

N88-29919# Cranfield Inst. of Tech., Bedford (England). School of Mechanical Engineering.

SPRAY PERFORMANCE OF A VAPORIZING FUEL INJECTOR
A. K. JASUJA and H. C. LOW (Rolls-Royce Ltd., Bristol, England) In AGARD, Combustion and Fuels in Gas Turbine Engines 13 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

The spray performance of a vaporizer fuel injector of a type that has accumulated extensive service experience in sub- and super-sonic commercial and military aircraft applications is examined. Spray performance data covers a wide range of operating conditions including the effects of fuel quality as well as the atomizing air temperature. The objective is to further not only the current level of understanding regarding the fundamental functional aspects of vaporizer technology but also the data base for future designs. Author

N88-29920# Laval Univ. (Quebec). Dept. du Genie Mecanique.
THE CHARACTERIZATION OF COMBUSTION BY FUEL COMPOSITION: MEASUREMENTS IN A SMALL CONVENTIONAL COMBUSTOR

D. KRETSCHMER and J. ODGERS In AGARD, Combustion and Fuels in Gas Turbine Engines 10 p (SEE N88-29910 24-25) Jun. 1988 Sponsored by National Defence Canada (AGARD-CP-422) Avail: NTIS HC A22/MF A01

In a continuing program on the effects of fuel properties on combustion, some 20 pure hydrocarbons and synthesized fuels were tested at atmospheric conditions in a one third scale version of an aircraft type combustor. This combustor used a Simplex type pressure jet atomizer. Each fuel was burned over a range of air-fuel ratios, and at each condition, a full exhaust gas analysis was done, exhaust temperature distribution was measured, as also weak extinction. The results and their implications are discussed. Author

N88-29921# Office National d'Etudes et de Recherches Aeronautiques, Palaiseau (France).

FLAME STABILIZATION IN A REHEAT COMBUSTOR
A. CADIOU In AGARD, Combustion and Fuels in Gas Turbine Engines 10 p (SEE N88-29910 24-25) Jun. 1988 In FRENCH; ENGLISH summary (AGARD-CP-422) Avail: NTIS HC A22/MF A01

In a reheat burner, combustion is stabilized with flameholders. The stabilization depends on the following parameters: Mach number, temperature, pressure and equivalence ratio of the flow, flameholder geometry. Many experimental measurements have allowed the calculation of a correlating parameter including the Mach number and the temperature. For the geometry, studies on linear stabilizers in two-dimensional flows have shown that the height of the stabilizer is a convenient parameter. An accurate experimental study of the recirculation zone downstream annular flameholders in a axisymmetric flow have pointed out the effect of another geometrical parameter, the diameter of the flameholder. The experimental results have improved the knowledge of the flame stabilization mechanism downstream annular flameholders. Author

N88-29922# Rolls-Royce Ltd., Bristol (England)

HIGH PERFORMANCE TURBOFAN AFTERBURNER SYSTEMS
A. SOTHERAN In AGARD, Combustion and Fuels in Gas Turbine Engines 10 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

The modern turbofan afterburner is characterized by its high boost and efficiency and by its compact geometry which is achieved by locating the flameholding baffles immediately downstream of the turbine exhaust plane of the engine core and bypass gas stream. At the confluence, the stream divider may be a simple cylinder or it may be of lcbcd configuration to encourage mixing between the two gas streams in the downstream jet pipe in order to improve the unboosted thrust of the engine. The geometry of the afterburner hardware must be adapted to suit the choice of mixed or unmixed configurations. In flight, selection of the afterburner must be fast and reliable under all flight conditions with times to full thrust of the order of only a second or two. Both the light up and the subsequent acceleration to full thrust are expected to be smooth with no excessive initial thrust jump. Synchronization and matching of the afterburner fuel with the variable final nozzle must be accurate at all times to maintain the

25 INORGANIC AND PHYSICAL CHEMISTRY

engine turbomachinery on its required running lines. The afterburner must always be free of combustion driven pressure oscillations which can occur either in cross stream modes or in longitudinal modes, both of which can be mechanically damaging and, in some cases, cause fan surge and other intolerable effects in the engine. The afterburner must incorporate appropriate measures to avoid various potential thermal problems including fuel boiling and gumming in the supply manifolds and excessive heat transfer to the jet pipe and aircraft engine bay. Author

N88-29923# Technische Univ., Munich (Germany, F.R.). MTU Motoren- und Turbinen-Union.

COMPARISON OF THE PERFORMANCE OF A REVERSE FLOW ANNULAR COMBUSTION CHAMBER UNDER LOW AND HIGH PRESSURE CONDITIONS

F. JOOS and B. SIMON. In AGARD, Combustion and Fuels in Gas Turbine Engines 10 p (SEE N88-29910 24-25) Jun. 1988 Sponsored by the Federal German Ministry of Research and Development, Berlin.

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

Combustor development testing is usually carried out under different pressure conditions; low pressure burning test for the optimization of the fuel distribution inside the combustor and high pressure tests for demonstrating the desired performance. Comparison of the results under these two test conditions often reveal discrepancies, especially in wall temperatures and exit temperature patterns, which cannot be attributed simply to the greater flame radiation and heat release rate associated with the tests at high pressure. Another cause, in particular, lies in differences in the fuel distribution in the primary zone as a function of pressure conditions. This phenomenon is demonstrated by measurements and 3-D 2-phase flow field calculations. Author

N88-29924# Imperial Coll. of Science and Technology, London (England). Fluids Section.

FLOW CHARACTERISTICS OF A MODEL ANNULAR COMBUSTOR

A. F. BICEN, D. TSE, and J. H. WHITE LAW. In AGARD, Combustion and Fuels in Gas Turbine Engines 13 p (SEE N88-29910 24-25) Jun. 1988 Sponsored by Rolls Royce Plc and the Ministry of Defence, United Kingdom.

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

Measurements are reported of the velocity and passive scalar characteristics of the isothermal flow in a model combustor which comprises a T-vaporizer and two rectangular sectors of an annular combustor similar to one used in small gas turbine engines. Mean temperatures were also obtained in a reacting flow with an overall equivalence ratio similar to that of takeoff conditions. The results were obtained with a combination of laser velocimetry, thermocouples and probe techniques and quantify the effects of flow asymmetries in the vaporizer fuel arrangement and of different alignments of the primary holes with respect to the vaporizer position. Flow visualization results are also included to indicate the general features of the combustor flow. Author

FUEL EFFECTS ON FLAME RADIATION AND HOT-SECTION DURABILITY

C. A. MOSES and P. A. KARPOVICH (Naval Air Propulsion Test Center, Trenton, N.J.). In AGARD, Combustion and Fuels in Gas Turbine Engines 16 p (SEE N88-29910 24-25) Jun. 1988

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The results of combustor experiments relating to fuel effects on combustor durability are summarized and analyzed with respect to Navy aircraft operations and maintenance. By combining life ratio models with data on mission profiles, models were developed that predict the impact of flying an aircraft on a fuel of reduced hydrogen content in terms of the combustor life lost in flying a typical mission. To determine the effect of decreasing hydrogen content on maintenance requirements, the life ratio models were combined with data obtained from maintenance depots on combustor life along with information on the importance of combustor life in determining engine overhaul schedules. From this, it was possible to identify which engines or aircraft would be most affected by decreases in hydrogen content, and at what point increases in maintenance requirements are likely to be realized. Author

N88-29926# California Univ., Irvine. Combustion Lab.

THE PERFORMANCE OF A SURROGATE BLEND IN SIMULATING JP-4 IN A SPRAY-FUELED COMBUSTOR

G. S. SAMUELSEN and C. P. WOOD. In AGARD, Combustion and Fuels in Gas Turbine Engines 6 p (SEE N88-29910 24-25) Jun. 1988 Sponsored in part by the Naval Air Propulsion Center (Contract F08635-86-C-0309)

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

A surrogate fuel was developed to simulate the atomization and combustor performance of a practical distillate JP-4. The surrogate is comprised of 14 pure hydrocarbons and formulated based on the distillation curve and compound of the distillate parent. In previous work, the atomization performance (evaluated in terms of the atomization quality in an isothermal chamber), and the combustor performance (evaluated in terms of the velocity and thermal field in a spray fueled combustor) were found to be equivalent for the parent and surrogate JP-4. The sooting performance of the two fuels is addressed, as well as two reference fuels (a JP-5 and isooctane) of purposefully disparate properties. The sooting performance of the parent and surrogate JP-4 are nearly identical, and distinctly different from that of either the JP-5 or the isooctane. The surrogate represents, as a result, an attractive fuel blend for the study of fuel compositional effects on the sooting performance of petroleum fuels in spray fueled combustor. Author

N88-29927# Michigan Univ., Ann Arbor. Dept. of Aerospace Engineering.

RADIATION FROM SOOT-CONTAINING FLAMES

G. M. FAETH, J. P. GORE, and Y. R. SIVATHANU. In AGARD, Combustion and Fuels in Gas Turbine Engines 12 p (SEE N88-29910 24-25) Jun. 1988

(Contract NBS-60-NAN-135D-0576)

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The thermal radiation properties of turbulent soot containing diffusion flames are considered, treating: scalar structure, excluding soot; soot properties; and turbulence/radiation interactions. The laminar flamelet concept, implying universal correlations of scalar properties as a function of mixture fraction appears to be effective for estimates of scalar structure needed for analysis of flame radiation. Extension of the laminar flamelet concept to soot volume fractions was also encouraging; however, universality is cruder than for gas properties due to effects of finite rate chemistry. Turbulence/radiation interactions were studied by comparing radiation predictions based on statistical simulation of scalar properties along a radiation path (stochastic analysis) with conventional results using time averaged properties along the path. Stochastic predictions of spectral radiation intensities are found to be 40 to 100 percent higher than mean property predictions in luminous turbulent diffusion flames, suggesting significant effects of turbulence/radiation interactions. Author

N88-29928# Cranfield Inst. of Tech., Bedford (England). School of Mechanical Engineering.

FLAMELET CHEMISTRY MODELLING OF SOOT FORMATION FOR RADIATION

J. B. MOSS, C. D. STEWART, and K. J. SYED. In AGARD, Combustion and Fuels in Gas Turbine Engines 12 p (SEE N88-29910 24-25) Jun. 1988 Sponsored in part by Ministry of Defence, Pyestock, United Kingdom, Science and Engineering Research Council and British Gas, United Kingdom

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The development of generalized models for radiative heat transfer in the gas turbine requires the detailed prediction of the turbulent scalar fields, most notably for temperature, the principal gaseous species and particulate soot. Mixing limited descriptions of the turbulent combustion process have proved quite successful in modeling the effects of heat release on the flow field. However, the chemical aspects of the problem, fuel specific features and the multi component composition, are poorly reproduced. Laminar flamelet modeling currently offers the best prospect for incorporating realistic complex chemistry into the computations. A strategy is described to extend laminar flamelet modeling of turbulent non-premixed hydrocarbon combustion to include a simplified mechanism for soot formation. In the absence of a widely applicable multistep kinetic mechanism the formation rate must be inferred from detailed measurement but comparatively comprehensive flow field modeling is necessary to distinguish fluid

25 INORGANIC AND PHYSICAL CHEMISTRY

mechanic and chemical kinetic effects and hence interpret the observations in model terms. Author

N88-29929# Instituto Superior Tecnico, Lisbon (Portugal). Dept. of mechanical Engineering.
RADIATION TRANSFER IN GAS TURBINE COMBUSTORS
M. G. CARVALHO and P. J. M. COELHO. In AGARD, Combustion and Fuels in Gas Turbine Engines 22 p (SEE N88-29910 24-25) Jun. 1988. Sponsored by Instituto Nacional de Investigacao Cientifica, Lisbon, Portugal
(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The prediction of the local flow, heat transfer and combustion processes inside a three-dimensional can combustor chamber of a gas turbine is presented. A 3-D numerical solution technique is used to solve the governing time averaged partial differential equations and the physical modeling for the turbulence, combustion and thermal radiation. The heat transfer modeling is emphasized. A method to calculate the distribution of temperature, radiative heat flux and total heat flux of the liner is described. The implications of neglecting radiative heat transfer in gas turbine combustion chamber calculations are discussed. The influence of working pressure on the radiative heat transfer is investigated comparing the radiative heat flux and the temperature distribution of the liner for three different working pressures: 5, 15 and 25 bar. Author

N88-29930# Royal Aircraft Establishment, Farnborough (England). Propulsion Dept.
GAS TURBINE SMOKE MEASUREMENT: A SMOKE GENERATOR FOR THE ASSESSMENT OF CURRENT AND FUTURE TECHNIQUES

S. P. GIRLING. In AGARD, Combustion and Fuels in Gas Turbine Engines 10 p (SEE N88-29910 24-25) Jun. 1988
(AGARD-CP-422) Avail: NTIS HC A22/MF A01

Smoke measurement from gas turbine engines is one instrumentation technique that remains, literally, a black art. Current methods are inaccurate, slow, insensitive and unable to detect transients. A smoke generator was developed capable of generating by pyrolysis of aviation kerosene, stable levels of smoke for prolonged periods, representative of that from engines. Particle size measurements have enabled the comparison of smokes from different sources and provided a greater understanding of the problems of representative sampling using currently approved methods. Several alternative measurement techniques were evaluated using the smoke generator, precluding the need for expensive engine testing. This has promoted research into instrumentation that will give a truer indication of particulate criteria of interest to the engine designer and customer, for example truer visibility and erosiveness. Author

N88-29931# Karlsruhe Univ. (Germany, F.R.). Lehrstuhl und Inst. fuer Thermische Stromungsmaschinen.
PARTICLE SIZE MEASUREMENTS IN SOOTING COMBUSTION SYSTEMS

S. WITTIGN and H.-J. FELD. In AGARD, Combustion and Fuels in Gas Turbine Engines 11 p (SEE N88-29910 24-25) Jun. 1988. Sponsored in part by Stiftung Volkswagen AG, Fed. Republic of Germany
(AGARD-CP-422) Avail: NTIS HC A22/MF A01

Radiation effects caused by the presence of soot particles are of dominant influence in gas turbine combustors, especially on the stress distribution in the flame tube. In studying the two-phase flow within and after the combustor experimentally, a wide spectrum of soot particle and fuel droplet sizes is to be considered. Two optical measuring techniques were used throughout. First, the dispersion quotient (DQ) technique was applied to determining the size of the early soot particles, i.e., in the small-diameter range. The second method, the well established Multiple-Radio-Particle Counter (MRSPC), was used to measure the larger particle sizes, i.e., fuel droplets and soot. Furthermore, attention was focused on data acquisition- and analysis-techniques. Experimental results were obtained from measurements in a combustor with high concentration of soot particles and in the exhaust gas of a gas turbine. Author

N88-29932# Technische Hochschule, Darmstadt (Germany, F.R.). Inst. fuer Physikalische Chemie.

LARGE IONIC SPECIES IN SOOTING ACETYLENE AND BENZENE FLAMES

PH. GERHARDT, K. H. HOMANN, S. LOEFFLER, and H. WOLF. In AGARD, Combustion and Fuels in Gas Turbine Engines 11 p (SEE N88-29910 24-25) Jun. 1988. Sponsored by Deutsche Forschungsgemeinschaft and Fonds der Chemischen Industrie, Fed. Republic of Germany
(AGARD-CP-422) Avail: NTIS HC A22/MF A01

Ionic species with masses from 24 to 10,000 u were studied in premixed, fuel-rich, low-pressure acetylene and benzene flames by means of a time-of-flight mass spectrometer. Total positive and negative ion concentrations in the flame were also determined by sampling ions from a beam. The mass spectrum of positive poly-yne ions corresponds to two different Poisson distributions for the groups C sub 2nH sub 3(+) and C sub 2n + 1H sub 3(+) respectively. These ions are not related to soot formation. The growth of polycyclic aromatic hydrocarbon ions, however, could be followed up to a mass of about 2000 u where coagulation started resulting in ions of about 4000 u which then grew further. The relative volume fractions of charged and neutral soot was determined using a method of soot deposition in vacuum. The results can be interpreted by a partial-equilibrium model. Polyhedral carbon ions were detected as a completely new class of flame ions similar to those found in the laser-evaporation of graphite. The C sub 60(+) is the dominant positive ion of this group, while C sub 50(+) and a broad distribution of C sub 2n(-) with 2n up to about 210 are characteristic for the negative polyhedral ions. Author

N88-29933# Leeds Univ. (England). Dept. of Fuel and Energy.
RATES OF FORMATION OF SOOT FROM HYDROCARBON FLAMES AND ITS DESTRUCTION

J. MULLINS, B. SIMMONS, and A. WILLIAMS. In AGARD, Combustion and Fuels in Gas Turbine Engines 14 p (SEE N88-29910 24-25) Jun. 1988. Sponsored by IEA, Lucas-CAV Ltd, British Gas Plc and SERC, United Kingdom
(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The equations that were proposed in the literature to describe the rate of soot formation in hydrocarbon flames are surveyed. Recent work using a shock tube to measure soot formation rates is outlined and the correlation equation proposed compared with that of other workers. Data on the rate of combustion of soot particles are also outlined and combined with recent measurements to give an overall soot oxidation rate expression. The two equations are combined to give an expression suitable to describe soot formation and burn out for gas turbines and tested to a limited degree. Author

N88-29934# Goettingen Univ. (Germany, F.R.). Inst. fuer Physikalische Chemie.

THE INFLUENCE OF PRESSURE ON SOOT FORMATION

H. GG. WAGNER. In AGARD, Combustion and Fuels in Gas Turbine Engines 11 p (SEE N88-29910 24-25) Jun. 1988
(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The influence of pressure on soot formation was investigated for pyrolysis, premixed flames, and diffusion flames. Detailed kinetic studies are available for the first two. It is shown that the essential steps: particle inception, induction time (τ), coagulation, and surface growth remain similar for different pressures, also the influence of temperature on the maximum amount of soot formed. τ for pyrolysis depends on the carbon density, strongly on temperature, and only slightly on pressure. The coagulation rate constant decreases slightly towards higher pressures. The amount (f sub v) of soot formed per cubic cm for a given fuel-air mixture increases with pressure P like P sup n , n was found for C(sub 2)H(sub 4)-air up to 3, for other fuels near one, it depends on pressure. Larger (f sub v) means larger soot particles, larger radiation losses and longer oxidation time at a given temperature and therefore higher chance for smoke emission. Author

25 INORGANIC AND PHYSICAL CHEMISTRY

N88-29935# General Electric Co., Cincinnati, OH. Aircraft Engines.

NUMERICAL MODELS FOR ANALYTICAL PREDICTIONS OF COMBUSTOR AEROTHERMAL PERFORMANCE CHARACTERISTICS

D. L. BURRUS, W. SHYY, and M. E. BRAATEN (General Electric Co., Schenectady, N.Y.) In AGARD, Combustion and Fuels in Gas Turbine Engines 25 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

An overview of the work performed at GE Aircraft Engines under an ongoing program to develop and improve the sophisticated analytical models for the design and analysis of aircraft turbine engine combustors is presented. This effort has focused on the full three-dimensional (3-D) elliptic combustor internal flow model. The objectives of the program are reviewed. The progress made in the past five years is discussed starting with the initial application and assessment of first generation 3-D combustor models based on cartesian grids, progressing to the development and recent application of an improved second generation 3-D combustor model based on a body fitted generalized curvilinear grid. Finally, a brief review of planned future modeling activities to be conducted under this program will be discussed.

Author

N88-29936# General Motors Corp., Indianapolis, IN. Gas Turbine Div.

GAS TURBINE COMBUSTION MODELING Status Report

HUKAM C. MONGIA In AGARD, Combustion and Fuels in Gas Turbine Engines 14 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

To effectively use multidimensional models for gas turbine combustor design and development activities, a method is presented to compute aerothermal performance parameters including CO, unburned hydrocarbon, NOx and smoke emissions, lean blowout and ignition fuel/air ratios, and pattern factor. To further improve modeling accuracy, advances are required in numerics and physical submodels of turbulence and spray transport processes. A status report is presented on the ongoing Allison modeling activities.

Author

N88-29937# Sheffield Univ. (England). Dept. of Chemical Engineering and Fuel Technology.

THREE-DIMENSIONAL GAS TURBINE COMBUSTOR MODELLING

P. N. WILD, F. BOYSAN, J. SWITHENBANK, and X. LU In AGARD, Combustion and Fuels in Gas Turbine Engines 14 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

A mathematical model of the finite difference type is employed to predict the three-dimensional reacting flows within realistic combustor geometries. Both algebraic stress and k-epsilon submodels were employed for turbulence, together with combustion models of the Magnussen type and a detailed fuel spray model. A Lagrangian type model for the calculation of residence time distribution has also proved useful in validating the predicted flow fields. Modeling is carried out for a cylindrical combustor can and for a sector of an annular gas turbine burner. Both of these possess swirl stabilized primary zones. Experimental measurements of gas velocity, combustor residence time distribution, composition and temperature were employed for model validation and results obtained to date were encouraging.

Author

N88-29938# Karlsruhe Univ. (Germany, F.R.). Lehrstuhl und Inst. fuer Thermische Stromungsmaschinen.

ON THE APPLICATION OF FINITE-DIFFERENCE TECHNIQUES FOR THE COMPUTATION OF THE FLOW FIELD IN GAS TURBINE COMBUSTORS WITH COMPLEX GEOMETRIES

S. WITTIG, H.-J. BAUER, and B. NOLL In AGARD, Combustion and Fuels in Gas Turbine Engines 14 p (SEE N88-29910 24-25) Jun. 1988 Sponsored by German National Science Foundation, Fed. Republic of Germany (AGARD-CP-422) Avail: NTIS HC A22/MF A01

A finite-volume method is presented for solving the time-averaged two-dimensional Navier-Stokes equations in non-orthogonal curvilinear coordinates. In contrast to most existing codes, a non-staggered grid is employed for the discretization of the momentum equations avoiding the onset of pressure and velocity oscillations by additional steps. In a first step, turbulent

transport is taken into account by the standard k, -model. As a test-case, the turbulent flow through a model combustor with variable cross-sectional area and dilution air jets is considered. The results of the computations are compared with measurements as well as with finite-difference calculations of other available codes utilizing orthogonal coordinates especially adapted for this geometry. The advantages of the new non-orthogonal approach are demonstrated. It is shown that the proposed mathematical model serves as a powerful tool for the computation of turbulent separated flows in ducts with complex geometries pertinent to modern gas turbine combustors, especially those of the reverse-flow type.

Author

N88-29939# Politecnico di Milano (Italy). Dipt. di Energetica.

NUMERICAL MODELING OF COMBUSTION PROCESSES IN GAS TURBINES

L. GOLFETTI, M. BELLI, and C. BRUNO (Consiglio Nazionale delle Ricerche, Peschiera Borromeo, Italy) In AGARD, Combustion and Fuels in Gas Turbine Engines 14 p (SEE N88-29910 24-25) Jun. 1988 Prepared in cooperation with National Center for Energetics and Propulsion, Peschiera Borromeo, Italy (AGARD-CP-422) Avail: NTIS HC A22/MF A01

The indications coming from fundamental turbulence research were incorporated in combustor modeling without a systematic analysis of their effect on predictions. Comparisons are presented between finite rate (overall) kinetics and equilibrium in their influence on the structure of the recirculation region attached to a disk flame-holder. The effect of including density gradient terms in the k-epsilon turbulence model is also examined. The results indicate that the fluid dynamic field may determine whether equilibrium or kinetics produces higher temperatures, and that the temperature difference predicted with the two approaches tends to become small with increasing pressure. The effect of introducing density gradients has a moderate effect on temperature.

Author

N88-29940# Imperial Coll. of Science and Technology, London (England). Fluids Section.

THREE-DIMENSIONAL COMBUSTOR PREDICTORS: A COMPARISON OF EQUILIBRIUM AND LAMINAR FLAMELET CHEMISTRY MODELS

J. J. MCGUIRK In AGARD, Combustion and Fuels in Gas Turbine Engines 11 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

Numerical calculations are reported for the three-dimensional reacting flow inside a can-type combustor geometry. Several flow features found in current combustor designs are included, a swirl driven primary zone and a single row of radially inward dilution air jets. The particular aspect of the mathematical formulation given special attention concerns the mode for the chemical reaction. Alternative descriptions of the instantaneous thermochemistry are adopted which correspond to either full chemical equilibrium or the laminar flamelet approach. In the latter case the flamelet structure is taken over from published calculations of laminar propane-air diffusion flames. All other aspects of the mathematical model such as numerical discretization and solution algorithm, turbulence model and turbulence/chemistry interaction are common in the predictions obtained (the two k-epsilon model and a beta-probability density function (pdf) were used). The results obtained indicate that the predicted flow patterns are essentially the same for both chemistry models, even though differences of almost 100 percent are observed for the density field. The predictions with both models indicate, however, a deficiency in the representation of CO burn out and it is probable this will require an alternative chemistry description. Finally, although the calculations have used an unstrained laminar flame description, predictions of the mean scalar dissipation rate are presented to assess the likelihood of local quenching due to flame stretching.

Author

25 INORGANIC AND PHYSICAL CHEMISTRY

N88-29941# National Technical Univ., Athens (Greece). Thermal Engineering Section.

THE EFFECT OF PARTICLE PROPERTIES ON RADIATIVE HEAT TRANSFER

EM. KAKARAS, M. FOUNTI, and N. PAPAGEORGIOU. In AGARD, Combustion and Fuels in Gas Turbine Engines 7 p (SEE N88-29910 24-25) Jun. 1988

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

Radiative heat transfer in combustion chambers is strongly influenced by the presence among the gaseous combustion products of solid particles of various size and chemical composition such as soot, char, and fly-ash. The particle parameters of these products are of great importance for the calculation of radiative heat transfer and insufficient knowledge of their magnitude can often lead to erroneous simplifications. The importance of absorption or scattering phenomena in radiative transfer is also sometimes misinterpreted. It is the aim of this work to provide computational data in order to demonstrate and explain the importance of solid particles, present in the combustion products, on absorption and scattering phenomena occurring in the radiative heat transfer. Author

N88-29942# Centre National de la Recherche Scientifique, Chateaufort-Malabry (France).

FLAMELET MODELING OF TURBULENT PREMIXED FLAMES

N. DARABIHA, V. GIOVANGIOLI, A. TROUVE, S. M. CANDEL, and E. ESPOSITO. In AGARD, Combustion and Fuels in Gas Turbine Engines 17 p (SEE N88-29910 24-25) Jun. 1988 Sponsored by Societe Nationale d'Etude et de Construction de Moteurs d'Aviation and DRET, France Prepared in cooperation with Ecole Centrale des Arts et Manufactures, France

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

Some aspects of the effort to analyze turbulent combustion on the basis of an extension of the coherent flame model initially proposed by Marble and Broadwell are described. At this stage the model comprises a local description (flamelets) and a global representation of the turbulent flow-field including a balance equation for the mean flame area per unit volume. The flamelets are non-adiabatic premixed strained flames, a model suggested by Libby, Linan, and Williams. Complex chemistry calculations were carried out for a large number of propane-air flames and a large data-base of flamelets is being constructed. These calculations provide consumption rates, extinction, and ignition characteristics which are used in the global turbulent calculation to model the mean reaction terms. Numerical results obtained for turbulent premixed flames stabilized in a duct are discussed. Experiments performed on a model combustor provide distributions of the mean heat release rate. These distributions are compared with those determined numerically. This comparison indicates that the coherent flame description accounts for important features found in this experiment. Author

N88-29943# Centre d'Etudes et de Recherches, Toulouse (France).

MODELING THE STABILITY OF A TURBULENT PREMIXED FLAME, DOWNSTREAM FROM A STEP BY A LAGRANGIAN METHOD [MODELISATION DE LA STABILISATION D'UNE FLAMME TURBULENTE PREMELANGEE, EN AVAL D'UNE MARCHE PAR UNE METHODE LAGRANGIENNE]

A. GIOVANNINI. In AGARD, Combustion and Fuels in Gas Turbine Engines 11 p (SEE N88-29910 24-25) Jun. 1988 In FRENCH (AGARD-CP-422) Avail: NTIS HC A22/MF A01

Calculations are carried out for a backward facing step, by solving numerically the Navier-Stokes equations utilizing a Lagrangian method of singularity type. The combustion of premixed gas is modeled by utilizing the concept of a thin flame separating burning and mixing gases (treated as incompressible). The exothermicity of the reaction is represented with the aid of volumetric sources positioned in front of the flame. The advancement of the later is realized through advection, and normally with the combustion velocity as a function, not only of the thermodynamic mixing state, but also of the local curve of the front and of the front in its entirety. Thus, the combustion aerodynamics can be discussed from the point of view of coherent structures, and the velocities compared with the work of Pitz and Daily with and without chemical reaction. Author

N88-29944# Institut National de Recherche d'Informatique et d'Automatique, Valbonne (France).

NUMERICAL MODELLING OF PREMIXED FLAMES IN GASEOUS MEDIA

B. LARROUTOUROU. In AGARD, Combustion and Fuels in Gas Turbine Engines 13 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

Numerical methods and numerical results for the propagation of premixed flame fronts in a two-dimensional gaseous flow are presented. The study is restricted to simple rectangular geometries, and considers both open and closed vessels. The methods use essentially finite-element approximations and adaptive gridding procedures. The results include curved flame propagation, cellular front instabilities and quenching phenomena due to non-adiabatic walls. Author

N88-29945# Centre National de la Recherche Scientifique, Poitiers (France).

GASEOUS PREMIXED FLAMES IN NON-UNIFORM FLOWS

P. CAMBRAY, B. DESHALES, and G. JOULIN. In AGARD, Combustion and Fuels in Gas Turbine Engines 6 p (SEE N88-29910 24-25) Jun. 1988 Prepared in cooperation with Ecole Nationale Supérieure de Mécanique et d'Aérotechnique, Poitiers, France (Contract DRET-85/130)

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

A theoretical analysis led to an evolution law for a flame front propagating in a nonuniform flow when the scales of the nonuniformity of the flow are much larger than the flame thickness. This law gives the local burning velocity of the flame front as a function of the flame stretch which can be split in two parts, one accounting for the geometry of the front and the other for the nonuniformity of the flow. In such a law, all the physico-chemical properties of the mixture are lumped in only two scale factors. A theoretical determination of one of these two scale factors (i.e., the so-called Markstein length) is developed. An experimental test of the evolution law is presented in different flame and flow configurations, which leads to experimental values for the two scale factors in the case of lean propane-oxygen-nitrogen mixtures. Finally experimental and theoretical values are compared. Author

N88-29946# Centre National de la Recherche Scientifique, Poitiers (France). Lab. d'Energetique et de Detonique.

MODELING AND EXPERIMENTAL STUDY OF A REACTIVE FLOW CONFINED WITH WELL INJECTION [MODELISATION ET ETUDE EXPERIMENTALE D'UN ECOULEMENT REACTIF CONFINÉ AVEC INJECTION PARIETALE]

P. BRUEL, M. CHAMPION, M. BOUTOUILLI, and J. C. BELLET. In AGARD, Combustion and Fuels in Gas Turbine Engines 9 p (SEE N88-29910 24-25) Jun. 1988 In FRENCH Prepared in cooperation with Ecole Nationale Supérieure de Mécanique et d'Aérotechnique, Poitiers, France

(AGARD-CP-422) Avail: NTIS HC A22/MF A01

The combustion of premixed fuel injected into a two-dimensional channel is studied numerically and experimentally. In the case of a high injection rate, a model of turbulent combustion with second-order closure for mass and energy transport is developed taking into account prior results obtained in the case of reactive shear flows in a simpler structure. The corresponding code is tested by comparing one part with the exact solution from the case of a Couette flow, and the other part with the experimental results obtained from the velocity fields in a two-dimensional channel. Author

N88-29947# Rascal Defence Electronics (Radar) Ltd., Walton-on-Thames (England).

MODELLING OF CO OXIDATION IN DILUTION JET FLOWS

P. V. CHLEBOUN, K. P. HUBBERT, and C. G. W. SHEPPARD (Leeds Univ., England). In AGARD, Combustion and Fuels in Gas Turbine Engines 11 p (SEE N88-29910 24-25) Jun. 1988 Sponsored in part by Rolls-Royce Plc, United Kingdom (AGARD-CP-422) Avail: NTIS HC A22/MF A01

Existing equilibrium chemistry and laminar flamelet computer codes are inadequate for calculation of post-flame carbon monoxide burn-up in gas turbine combustion chamber dilution zones. The amount of reaction occurring in such zones is small, but significant in terms of CO emissions, especially under low power conditions. A method was developed, based on a small departure from

25 INORGANIC AND PHYSICAL CHEMISTRY

equilibrium concept, which shows promise in modeling dilution zone carbon monoxide oxidation rate. The procedure, when incorporated into the Rolls-Royce PACE program, still only requires specification of a one-dimensional probability function and entails just one extra conservation equation. Output data were compared with those measured experimentally in an idealized dilution zone. Author

N88-29946# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

INFLUENCE OF THE CONVECTION ON EVAPORATION AND COMBUSTION OF A FUEL DROPLET

DOMINIQUE SCHERRER In AGARD, Combustion and Fuels in Gas Turbine Engines 8 p (SEE N88-29910 24-25) Jun. 1988 In FRENCH; ENGLISH summary (AGARD-CP-422) Avail: NTIS HC A22/MF A01

A numerical model is presented for the combustion of a droplet in a gaseous flow. The method is based on the integration of the unsteady balance equations in the two phases. It uses a finite volumes implicit scheme. The results for the vaporization law are compared with the empirical law of Ranz-Marshall: a good agreement is found only in the case of pure vaporization (without combustion) at a sufficient Reynolds number. The other results are the following: the data of the droplet is decreased by the vaporization; the unsteady effects in the gaseous phase become negligible with convection (except those due to finite rate reaction which are not studied here); and the velocities inside the droplet are not sufficient to neglect the unsteady effects due to heat transfer in the liquid phase. Author

N88-29949# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

ANALYSIS OF THE FLOW THROUGH DOUBLE SWIRL AIRBLAST ATOMIZERS

E. BLUEMCKE, H. EICKHOFF, C. HASSA, and J. KOOPMAN In AGARD, Combustion and Fuels in Gas Turbine Engines 13 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

The flow field resulting from a counterswirl airblast atomizer was investigated numerically and experimentally. The flow pattern shows the typical features of a swirling flow with an inner recirculation zone. Comparison of calculated results with experimental data shows that general features of the flow can be predicted with reasonable accuracy. The propagation of the spray downstream from the atomizer was investigated theoretically using a deterministic flow model for the liquid phase. The predictions demonstrate the influence of operating conditions on the spray characteristics. Author

N88-29950# Laval Univ. (Quebec). Dept. du Genie Mecanique. THE BEHAVIOUR OF SYNTHETIC FUELS IN A SMALL TRANSPARENT COMBUSTOR

J. ODGERS and D. KRETSCHMER In AGARD, Combustion and Fuels in Gas Turbine Engines 11 p (SEE N88-29910 24-25) Jun. 1988 Sponsored by Canadian National Defence and Canadian National Science and Engineering Research Council (AGARD-CP-422) Avail: NTIS HC A22/MF A01

In a continuing program on the effects of fuel properties on combustion, some 20 pure hydrocarbons and synthesized fuels were tested at atmospheric conditions in a small transparent combustor. This combustor used a very efficient air assist atomizer, such that droplet size was nearly constant. Each fuel was burned over a range of air/fuel ratios, and at each condition, a full exhaust gas analysis was done, exhaust temperature distribution was measured, as also flame radiation and weak extinction. The results and their implications are discussed. Author

N88-29951# KHD Luftfahrttechnik G.m.b.H., Oberursel (Germany, F.R.).

A SMALL ANNULAR COMBUSTOR OF HIGH POWER DENSITY, WIDE OPERATING RANGE AND LOW MANUFACTURING COST

K. H. COLLIN In AGARD, Combustion and Fuels in Gas Turbine Engines 12 p (SEE N88-29910 24-25) Jun. 1988 (AGARD-CP-422) Avail: NTIS HC A22/MF A01

A short description will be given of the design and manufacturing philosophy, testing, and optimization of a combustion chamber. The features and design layout of the burner are characterized by

the requirements for a low cost propulsion system for an unmanned flight vehicle, such as RPV and drones. Rig test results for the ignition and the performance over a wide operating range will be discussed. Ignition by hot gas from a cartridge as well as experience with testing this combustor in the demonstrator turbojet engine will be described. Author

26

METALLIC MATERIALS

Includes physical, chemical, and mechanical properties of metals, e.g., corrosion; and metallurgy.

N86-16374# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AGARD CORROSION HANDBOOK. VOLUME 1: CORROSION, CAUSES AND CASE HISTORIES

W. WALLACE (National Research Council, Ottawa, Canada), D. W. HOEPPNER (Toronto Univ.), and P. V. KANDACHAR (Fokker, Schiphol, Netherlands) Jul. 1985 205 p refs (AGARD-AG-278-VOL-1; ISBN-92-835-1505-6; AD-A160638) Avail: NTIS HC A10/MF A01

A need exists to keep aircraft operators and maintenance personnel aware of the science and technology of corrosion as it applies to aircraft structures. Information is provided on the aircraft operating environment, corrosion theory, common airframe materials and their response to corrosion, the detection of corrosion, and methods employed to control corrosion in aircraft structures and materials. Also given are case histories of the deterioration or failure of components in typical aircraft and the means of detection are detailed and the remedial action taken. Microbiological corrosion is also discussed. The handbook is intended to assist in the early diagnosis of developing corrosion problems and in the selection of appropriate corrective measures. Author

N86-29245# Army Materials and Mechanics Research Center, Watertown, MA. Physical Metallurgy Branch.

DIRECTION OF R AND D AND CURRENT STATUS OF UNDERSTANDING OF ADVANCED GEAR STEELS

P. J. FOPIANO, J. E. KRZANOWSKI, and G. M. CRAWFORD In AGARD Aircraft and Bearing Tribological Systems 15 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

High performance gears in the modern helicopter must operate at ever increasing torque and RPM. A major consequence of this increased torque and RPM is a significant increase in the surface temperature and increased scuffing of the gears. In response to this problem, Boeing-Vertol introduced a new class of steel (hot work tool steel) as a high performance aircraft gear steel and started a trend which all subsequent work has confirmed to be a correct decision. The three most prominent candidate critical high temperature aircraft gear steels including Vasco X-2M, CARTECH X-53 (PYROWEAR 53), and CBS600 are discussed. The heat treatment responses of these alloys will be compared. Three additional alloys (M50NiL, CBS1000M, and AMAX B) are discussed in less detail. Author

N87-24553# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

AGARD CORROSION HANDBOOK. VOLUME 2: AIRCRAFT CORROSION CONTROL DOCUMENTS: A DESCRIPTIVE CATALOGUE

J. J. DELUCCIA, R. D. GERGAR, and E. J. JANKOWSKY (Jaylards, Inc., Philadelphia, Pa.) Mar. 1987 48 p (AGARD-AG-278-VOL-2; AGARDOGRAPH-278; ISBN-92-835-1545-5; AD-A181680) Avail: NTIS HC A03/MF A01

This is the second part of a handbook of Aircraft Corrosion produced by the AGARD Structures and Materials Panel. This volume catalogs sources of information and requirements for corrosion control obtained from documents issued by NATO, France, UK, and US authorities. IATA (International Air Transport

Association) documents are also cited as a commercial reference. Author

N87-29641# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

SUPERPLASTICITY

Aug. 1987 201 p. Lecture series held at Wright-Patterson AFB, Ohio, 8-9 Sep. 1987; in Luxembourg, 24-25 Sep. 1987; and in London, England, 28-29 Sep. 1987.

(AGARD-LS-154; ISBN-92-835-1557-9; AD-A191551) Avail: NTIS HC A10/MF A01

Several topics relating to superplasticity in metals are discussed. Superplastic sheet forming, bulk forming of superplastic alloys, cavitation and superplasticity, diffusion bonding of metals, mechanical properties of superplastically formed titanium and aluminum alloys, and designing for superplastic alloys are among the topics covered. For individual titles, see N87-29642 through N87-29649.

N87-29642# Cranfield Inst. of Tech., Bedford (England). School of Industrial Science.

SUPERPLASTICITY: AN OVERVIEW

ROGER PEARCE In Advisory Group for Aerospace Research and Superplasticity 24 p (SEE N87-29641 24-26) Aug. 1987

(AGARD-LS-154) Avail: NTIS HC A10/MF A01

An overview is given of superplasticity. Certain alloys, when deformed in tension at particular temperatures and strain rates, show very high elongations. This phenomenon is called superplasticity. Importantly, the flow stresses at which this phenomenon occurs are extremely low. There are two kinds of superplasticity: isothermal superplasticity (ISP) and cycling superplasticity (CSP). Only the former is dealt with here. For ISP, the alloy must possess an ultra-fine grain size which is relatively stable at greater than or equal to 0.5T sub m, where T sub m is the melting point of the lowest melting constituent in the alloy, in absolute units, while for CSP the alloy must be capable of being cycled through a phase change. Stable and unstable tensile flow, the relationship of m to total elongation, production and maintenance of ultrafine grains, dynamic recovery, crystallization, and forming techniques are among the topics discussed in more detail. Author

N87-29643# Washington State Univ., Pullman.

SUPERPLASTIC SHEET FORMING NATO/AGARD LECTURE SERIES ON SUPERPLASTICITY

C. H. HAMILTON In Advisory Group for Aerospace Research and Superplasticity 23 p (SEE N87-29641 24-26) Aug. 1987

(AGARD-LS-154) Avail: NTIS HC A10/MF A01

The exceptional ductility of superplastic alloys can be utilized in the shaping and forming of parts, components, and structures which could not be easily or economically produced by materials of more limited ductility. The forming methods which have been demonstrated for superplastic alloys include: blow forming, vacuum forming, thermo-forming, die-less drawing, deep drawing, forging, and superplastic forming with combined diffusion bonding. The technology of superplastic forming (SPF) has been found to benefit from modelling of the process, the results of which can guide the selection of pressurization parameters as well as predict the thinning characteristics and tendency to rupture. These concepts are reviewed. Concepts for minimizing or eliminating cavitation are also discussed. Author

N87-29644# Stanford Univ., CA. Dept. of Materials Science and Engineering.

BULK FORMING OF SUPERPLASTIC ALLOYS

OLEG D. SHERBY and ROBERT D. CALIGIURI In Advisory Group for Aerospace Research and Superplasticity 17 p (SEE N87-29641 24-26) Aug. 1987

Prepared in cooperation with SRI International Corp., Menlo Park, Calif. Sponsored in part by Navy and Army

(AGARD-LS-154) Avail: NTIS HC A10/MF A01

The commercial process of gatorizing is a prime example of a successful bulk forming process of a superplastic nickel-based alloy. In this case the one-step production of an integrated unit consisting of turbine blades with disk is achieved. This success is based on the high strain rate sensitivity inherent in superplastic materials. High strain rate sensitivity exponents, m, in crystalline

solids can be achieved by one of two methods: the presence of ultra-fine grains or the presence of an internal stress. Ultra-fine grains lead to a high m value ($m = 0.5$) when the conditions of temperature and strain rate permit grain boundary sliding to be the dominating deformation process. On the other hand, internal stress, which is readily created by thermal cycling conditions in anisotropic expansion materials and in metal-matrix composites, leads to Newtonian viscous behavior ($m = 1.0$) and is attributed to a slip deformation process. Author

N87-29645# Manchester Univ. (England). Dept. of Metallurgy and Materials Science.

CAVITATION AND SUPERPLASTICITY

NORMAN RIDLEY In Advisory Group for Aerospace Research and Superplasticity 14 p (SEE N87-29641 24-26) Aug. 1987

(AGARD-LS-154) Avail: NTIS HC A10/MF A01

Cavitation occurs in many alloy systems during superplastic flow. Cavities either pre-exist or nucleate on grain boundaries and their subsequent growth, coalescence and interlinkage leads to premature failure. The presence of cavities in superplastically formed components to be used for load bearing applications is clearly undesirable. It is apparent that cavity growth is dominated by matrix plastic flow and that coalescence plays an important role in the development of large cavities. If cavitation damage is to be prevented, it is necessary to inhibit the nucleation event and to avoid the presence of pre-existing defects by careful control of the processing required to produce the superplastic microstructure. The influence that microstructural features and deformation conditions have on cavity nucleation is examined for a number of alloy systems. Cavitation can be eliminated by the application of a hydrostatic pressure during forming. This reverses the sense of the driving force for cavity growth. Cavitation damage can be prevented by superimposed pressures of 0.5 and 0.75 of the uniaxial flow stress, although lower levels of pressure can substantially reduce the extent of cavitation. Author

N87-29647# Royal Aircraft Establishment, Farnborough (England).

THE MECHANICAL PROPERTIES OF SUPERPLASTICALLY FORMED TITANIUM AND ALUMINIUM ALLOYS

P. G. PARTIDGE, D. S. MCDARMAID, I. BOTTOMLEY, and D. COMMON In Advisory Group for Aerospace Research and Superplasticity 23 p (SEE N87-29641 24-26) Aug. 1987

(AGARD-LS-154) Avail: NTIS HC A10/MF A01

The behavior of aluminum and titanium alloys under superplastic forming conditions is well documented but there is less published data on the effect of the superplastic forming process on the mechanical properties. These data are essential for the design of structures. The effect of superplastic forming parameters such as temperature, strain rate, strain and post forming heat treatments upon the tensile, fatigue and fatigue crack growth performance of these alloys is reviewed and the mechanical property variations are related to changes in microstructure. During superplastic forming of aluminum alloys, intergranular cavities are formed with increasing strain, which degrades the material and reduces the mechanical properties. Ways to prevent cavitation during and after superplastic forming have been developed and the effect of these treatments on the mechanical properties is discussed. Author

N89-15267# Ecole Nationale Supérieure des Mines, Valbonne (France). Centre d'Etude de Mise en Forme des Matériaux.

A COMPUTER PROGRAM SIMULATING THE HOT FORGING OF METAL POWDER

E. WEY, C. LEVAILLANT, and J. L. CHENOT In AGARD Aerospace Materials Process Modelling 10 p (SEE N89-15262 07-31) Aug. 1988

(AGARD-CP-426) Avail: NTIS HC A12/MF A01

A computer program for the simulation of hot forging of metal powder was developed using a finite element technique. The constitutive equation for powder behavior includes viscoplastic effects and porosity. The relationship between flow stress and equivalent strain rate is given. This model involves also unilateral contact conditions friction with the dies. A remeshing module permits the calculation of very large deformation with complex dies. This simulation program is applied to the forging of an automotive part. The simulation allows one to optimize the die's geometry to achieve complete densification and good strain range everywhere in the worked piece. Author

26 METALLIC MATERIALS

N89-15268# Middle East Technical Univ., Ankara (Turkey). Dept. of Metallurgical Engineering.

MICROSTRUCTURES, FLOW PROPERTIES AND PROCESSING OF Ti6242 ALLOY

ALPAY, ANKARA and TAYLAN ALTAN (Ohio State Univ., Columbus.) *In* AGARD, Aerospace Materials Process Modelling 13 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

The physical phenomena that occurs during metal deformation process of Ti 6242 alloy is reviewed. Data on flow properties is obtained by compression tests. Also covered are the flow stress variations with the type of equipment used, deformation heating, effects of temperature, strain, strain rate and microstructural variations. Author

N89-15270# Ecole Nationale Supérieure des Mines, Valbonne (France).

SUPERPLASTIC BEHAVIOUR OF SOME Ti-6Al-4V ALLOYS INVESTIGATED BY TORSION TESTING

Y. COMBRES, C. LEVAILLANT, and F. MONTHEILLET (Ecole Nationale Supérieure des Mines, Sainte-Etienne, France) *In* AGARD, Aerospace Materials Process Modelling 13 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

The work done at CEMEF in the past five years was to compare microstructurally different Ti-6Al-4V alloys and to set down their flow rules for further implementation in computer aided forming process design. Experiments were carried out on a torsion device. Torsion testing is particularly well adapted to the simulation of the forming processes such as rolling or forging. The modeling of isothermal forging and isothermal superplastic bulging are discussed. Author

N89-15271# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Gennévilliers (France).

THE FORGE 2 ISOTHERMAL FORGING MODEL [LE MODELE DE FORGEAGE ISOTHERME FORGE 2]

P. E. MOSSER and Y. GERMAIN *In* AGARD, Aerospace Materials Process Modelling 11 p (SEE N89-15262 07-31) Aug. 1988 *In* FRENCH, ENGLISH summary (AGARD-CP-426) Avail: NTIS HC A12/MF A01

A Forge 2 isothermal forging model is described which is based on a fluid-type formulation. The model employs the Tresca (Baquet, 1973) friction law, and is used to determine the friction coefficients. A method of the analysis of the ring test is presented. The isothermal forging variables of the compressor disk are numerically studied for the cases of the forging of actual TA6V specimens and model specimens of a Pb-Sn alloy. Even using simple rheological or tribological laws, the program makes possible the selection of the forging process variables on the basis of criteria such as the texture development and the distribution of deformations. Author

N89-15272# Liege Univ. (Belgium)

COMPUTER PREDICTION OF INTERNAL STRESSES DURING HEAT TREATMENT

D. ASSAKER and M. HOGGE *In* AGARD, Aerospace Materials Process Modelling 15 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

The problem of determining stresses due to thermal and transformation-induced volume changes during the quenching of hot steel bodies is investigated. Since there is no proper experimental way to determine the local stress field during the heat treatment, a finite element model that addresses this problem is developed, which allows for stress history knowledge and prediction of the residual stress field in the finished body. All thermophysical properties are temperature dependent. In case of steel bodies an additional parameter related to the cooling rate enables to localize microstructure state on a Continuous Cooling Transformation diagram. The efficiency of the model is demonstrated through a detailed computation of stresses in a quenched steel cylinder. Author

N89-15281# Cameron Force Co., Houston, TX.

THE APPLICATION OF PROCESS MODELLING TO HEAT TREATMENT OF SUPERALLOYS

R. A. WALLIS, N. M. BHATHENA, P. R. BHOWAL, and E. L. RAYMOND *In* AGARD, Aerospace Materials Process Modelling 15 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

Quenching experiments have been carried out with a flat disk having thermocouples embedded in it. Cooling curves from such tests have provided input data for an inverse heat conduction model which has been used to determine the relationship between the heat transfer coefficient and the part surface temperature for different quenching media. The coefficients obtained have been used in finite element models to predict the temperature and stress distribution within components during heat treatment. The quenching models were validated by trials carried out with instrumented subscale and full size turbine disk forgings. The models have been used to determine the quenching media required to give the cooling rates necessary to meet the property specifications for superalloy components. They have also been used, qualitatively, to reduce the residual stresses developed during quenching with a subsequent reduction in distortion problems during machining. A further application has been the elimination of cracking during the quenching of crack sensitive alloys. Author

27

NONMETALLIC MATERIALS

Includes physical, chemical, and mechanical properties of plastics, elastomers, lubricants, polymers, textiles, adhesives, and ceramic materials.

N86-29242# Boeing Vertol Co., Philadelphia, PA.

A STUDY OF THE POTENTIAL BENEFITS ASSOCIATED WITH THE DEVELOPMENT OF A DEDICATED HELICOPTER TRANSMISSION LUBRICANT

R. J. DRAGO, P. J. MANGIONE (Naval Air Propulsion Test Center, Trenton, N.J.), and R. D. WENDRZYCKI *In* AGARD Aircraft and Bearing Tribological Systems 11 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

A common oil is now used in both the engines and transmissions of virtually all U.S. military helicopters. While this provides significant logistic advantages, these advantages are attained only by compromising the optimization of the oil for either system. The results of two studies undertaken to determine what benefits would accrue through the development of a special oil tailored specifically to meet the unique requirements of high-speed, heavily loaded helicopter transmission systems are summarized. These studies, conducted independently by two major helicopter manufacturers under the direction of the Naval Air Propulsion Center, addressed specific problem areas as related to typical production aircraft in order to reach well-documented conclusions. In addition, the effect of the availability of such a special gearbox lubricant on the development of other advanced-technology components was evaluated and documented. Author

N86-29244# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

REQUIREMENTS ON LUBRICANT OIL FROM THE VIEW OF A HELICOPTER MANUFACTURER

J. HARTMANN and W. JONDA *In* AGARD Aircraft and Bearing Tribological Systems 6 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

Experience with known oil types, used in helicopters for transmissions, engines, hydraulics and brakes has shown that 3 main conditions if available, would improve drastically the performance of the aircraft. These 3 main conditions are: the same type of oil should be usable for all the above mentioned systems; the oils brands, produced according to a common specification, but by different manufacturers, should be mixable without restrictions; and some features of the oil, which are specially important for helicopter operations, should be improved. Author

28 PROPELLANTS AND FUELS

N86-29249# Air Force Aero Propulsion Lab., Wright-Patterson AFB, OH.

MILITARY AIRCRAFT PROPULSION LUBRICANTS: CURRENT AND FUTURE TRENDS

G. A. BEANE, IV, L. J. GSCHWENDER, C. E. SNYDER, JR., and J. T. SHIMSKI (Naval Air Propulsion Test Center, Trenton, N.J.) In AGARD Aircraft and Bearing Tribological Systems 16 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

An assessment of the performance of MIL-L-7808J and MIL-L-23699C Military Specification lubricating oils in turbine engines and helicopter gear boxes is presented along with predicted performance of current and upgraded military specification oils in advanced and growth engine designs. Data is presented on advanced ester base engine lubricants, corrosion inhibited engine oils, and separate helicopter gear box oils evolving from current developmental research efforts. Future high temperature candidate fluids representing the ultimate stability for turbine engine oils are also discussed. Their use, in most cases, entails engine design considerations to accommodate their unique properties. The advantages and disadvantages of the various classes of synthetic lubricants for turbine engine applications are discussed, and deficiencies are identified where additional research programs are needed. Author

N86-29250# Imperial Coll. of Science and Technology, London (England).

FUTURE TRENDS IN HELICOPTER TRANSMISSION LUBRICANTS

H. A. SPIKES In AGARD Aircraft and Bearing Tribological Systems 10 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

Some recent fundamental studies relating to the lubrication of helicopter transmissions are presented, as well as implications for future oil development. The resulting enhanced understanding of lubrication mechanisms has shown that real potential exists both for improved performance and for the ability to cater to higher temperatures, by means of the formulation and use of improved transmission oils. If such benefits are recognized and if the new knowledge is correctly applied, there is no reason why helicopter gearbox reliability should not be appreciably improved by the end of the decade. Author

N86-29251# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.)

AIRCRAFT ENGINE OILS AND THEIR BEHAVIOUR AT HIGH TEMPERATURES

K. MAIER In AGARD Aircraft and Bearing Tribological Systems 12 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

Characteristics of aero-engine oils are changed considerably under high-temperature conditions (200 to 250 C). Consequences of this are the formation of aging products and deposits, deficiencies in the tribological behavior and spontaneous ignition, in extreme cases. The problems arising from these are illustrated using several selected examples, and their effects on engine functioning are described. Author

N86-29252# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

PERFORMANCE MODELLING: A TOOL FOR LUBRICANT DEVELOPMENT

H. E. BANDOW In AGARD Aircraft and Bearing Tribological Systems 11 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

A basic requirement for the development of lubricants and aerospace fluids is to understand the physical properties of these fluids required to optimize performance of the lubricated system. Computer models have been used to predict the effects of lubricant properties on rolling element bearing performance. Studies were performed to validate models, to predict performance under various operating conditions, and to predict the effects of proposed design or lubricant changes on system performance. The results of some of these studies are described and compared with experimental measurements. Models which predict traction forces in lubricated contacts from thermal and rheological properties of the lubricant and bearing materials, and the geometry and operating conditions of the contact are compared with experimental results from a two

disk traction device with a micro-computer based control/data acquisition system. The capabilities of models with the ability to predict the performance of hydraulic systems, the components making up these systems and lubricated contacts within the components are described and the methodology of studies to determine required fluid properties discussed. Author

N86-29253# Technische Univ., Munich (Germany, F.R.). SCORING TESTS OF AIRCRAFT TRANSMISSION LUBRICANTS AT HIGH SPEEDS AND HIGH TEMPERATURES

H. WINTER and K. MICHAELIS In AGARD Aircraft and Bearing Tribological Systems 9 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

Aircraft engines always contain gears that have to be lubricated under conditions of high speeds and extremely high temperatures. In this field of application scoring damage is likely to occur. In Europe and partly also in the USA the scoring load capacity of gear oils is expressed in terms of FZG Scoring Load Stage. The FZG Gear Test Rig is described. The normal test procedure A/8.3/90 as standardized in DIN 51 354 using A-type gears at a pitch line velocity of $v = 8.3$ m/s and a starting oil temperature of 90 C is presented. A modified procedure at double speed and increased oil temperature A/16.6/140 is discussed. Because of the high costs and problems with the availability of test gears a modified FZG Ryder Test was developed. The method is presented and comparative results of typical aircraft engine oils in the FZG, the FZG-Ryder and the original Ryder Gear Test are shown. From this experience it becomes obvious that alternative test methods for the evaluation of scoring load capacity of aircraft transmission lubricants can be available in the near future. Author

28

PROPELLANTS AND FUELS

Includes rocket propellants, igniters, and oxidizers; their storage and handling procedures; and aircraft fuels.

N86-26468# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

SMOKELESS PROPELLANTS

Jan. 1986 178 p In ENGLISH and FRENCH Conference held in Florence, Italy, 12-13 Sep. 1985 (AGARD-CP-391; ISBN-92-835-0387-2; AD-A166652) Avail: NTIS HC A09/MF A01

Eleven papers are presented from the conference. The specialist meeting was arranged in the following sessions: A review of smokeless propellant technology; Prediction and measurement of signature; Chemistry of smokeless propellants; and Smoke measurements. The purpose of the meeting was to bring together specialized experts in the field of smokeless propellants in order to discuss the definitions of the various degrees of smokelessness, and provide the results of the investigations performed in the last years. The achievements were discussed in the technical evaluation report, which suggests also several subjects for future investigations. For individual titles see N86-26469 through N86-26479.

N86-26469# Royal Ordnance PLC, Waltham Abbey (England). Research and Development Centre.

SMOKELESS PROPELLANTS OF IMPROVED PERFORMANCE

E. A. BAKER In AGARD Smokeless Propellants p 6-1 - 6-5 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

For double base propellants the high density of nitramines compared with nitrocellulose/nitroglycerine matrices of equivalent energy levels is particularly attractive where propellant energy levels or charge volumes are restrictive. The inclusion of nitramines generally reduced plateau burning rates and impairs plateau quality, but RDX filled extruded propellants with good plateau ballistics and low temperature dependence, suitable for boost applications were developed. No departure from conventional EDB processing is involved. Author

28 PROPELLANTS AND FUELS

N86-26470# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

PROPERGOL COMBUSTION BASED ON OCTOGENESIS (COMBUSTION DES PROPERGOLS A BASE D'OCTOGENE)

G. LENGELLE and J. DUTERQUE. In AGARD Smokeless Propellants p 8-1 - 8-17 (SEE N86-26468 17-28) Jan. 1986. In FRENCH; ENGLISH summary (AGARD-CP-391) Avail: NTIS HC A09/MF A01

The investigation of the combustion of solid propellants based on HMX and energetic binder was carried out through the study of HMX and the energetic binder in self-burning, as well as that of their combination in propellants. The condensed phase behavior of the components was looked into by means of thermogravimetric analysis, differential scanning calorimetry, ignition and temperature (microthermocouples) profile measurements, as well as sampling and analysis of the gases produced from the condensed phase. At very low pressure, HMX sustains a staged flame, much like that of homogeneous propellants. The behavior of the binder is close to that of homogeneous propellants. The burning rate of the propellant is a compromise between the rates of the components, without interaction between the HMX flame and that of the binder. Author

N86-26471# Prins Maurits Lab. TNO, Rijswijk (Netherlands).

STABILITY OF NITROCELLULOSE PROPELLANTS ASSESSED VIA THERMAL DECOMPOSITION AND ALTERATION OF THE STABILIZER COMPOSITION

P. VANDEMEY and A. H. HEEMSKERK. In AGARD Smokeless Propellants p 9-1 - 9-8 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

In the Netherlands the surveillance of propellants is performed by investigating the thermal behavior of the propellant at a temperature of 358 K. This procedure is accepted to represent a degradation equivalent to a storage period of at least ten years at ambient temperatures. To obtain additional information about the degradation of propellants thermal stability tests were performed at various temperatures and under several environmental conditions. Both the thermal behavior of the propellants and the chemical behavior of the stabilizing amine compound were determined during these experiments. The composition of the amine compounds was analyzed using HPLC techniques developed for these experiments. Author

N86-26472# Consiglio Nazionale delle Ricerche, Milan (Italy).

BURNING STABILITY OF DOUBLE BASE PROPELLANTS

L. DELUCA, C. ZANOTTI, G. RIVA, R. DONDE, A. VOLPI, C. GRIMALDI, and G. COLOMBO. In AGARD Smokeless Propellants p 10-1 - 10-17 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

The nonsteady combustion and intrinsic burning stability of double base propellants are studied. Experimental results show that, over a large pressure range, the energetics and the dynamics of double base combustion is controlled by the fizz zone. This permits the classical quasi-steady gas phase assumption to be applied. However, a novel transient flame model is required, since the fizz zone, although thin in time, is thick in space. This novel transient flame model includes several previous models as particular cases; in addition it allows an already existing nonlinear burning stability theory to be immediately applied to double base combustion. In general, double base burning is found to be less stable than composite propellant burning, both statically and dynamically. This is due to the relatively little energy stored in the condensed phase and elongated fizz zone yielding a weak energy coupling at the burning surface. Author

N86-26473# IMI Summerfield, Kidderminster (England).

ELASTOMER MODIFIED CAST DOUBLE BASE PROPELLANTS

G. I. EVANS and L. FACER. In AGARD Smokeless Propellants p 13-1 - 13-17 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

Cast double base propellants have many attractive features for tactical missile systems, not least where plume signature transparency is at a premium. However, such propellants are limited in mechanical properties, particularly strain capability at low temperatures of -40 C or less. The development of a new class of CDB propellants is described utilizing an elastomer in the binder. The advantages, properties and performance of these EMCDB propellants are given. The field of candidate polymer systems is

explored with test results and chemistry of the binder together with the criteria leading to the selection of suitable elastomer binders. Author

N86-26474# IMI Summerfield, Kidderminster (England).

THE REDUCTION OF EXHAUST SIGNATURE IN SOLID PROPELLANT ROCKET MOTORS

G. I. EVANS and P. K. SMITH. In AGARD Smokeless Propellants p 16-1 - 16-16 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

An important feature of cast double base propellants is that during combustion the propellant itself produces extremely low levels of exhaust smoke. Developments in insulation material and, in particular, charge inhibitors have allowed the low smoke potential of the propellant to be fully realized in rocket motor firings. A further dramatic reduction in exhaust signature was obtained by suppressing secondary combustion in the rocket motor. This was achieved over a wide range of typical propellant charge and motor configurations using propellant additives. Flame suppressed plumes offer the desirable property of low exhaust emissions both in the visible and IR regions of the electromagnetic spectrum. Similarly missile communications both at optical and radio frequency wavelengths are improved by the absence of secondary combustion. The inhibitor and propellant developments concerned are reviewed and the reductions in exhaust signature which are obtained by the optimized use of secondary flame suppression is quantified. Author

N86-26475# Nobel's Explosives Co. Ltd., Stevenston (England).

Defence and Aerospace Research.

THE CHEMICAL INTERACTION OF BALLISTIC MODIFIERS IN CDB PROPELLANT: ITS EFFECT UPON BALLISTICS AND STABILITY

J. D. M. PEARSON, A. C. J. SHEDDEN, and I. A. DUNCAN. In AGARD Smokeless Propellants p 17-1 - 17-15 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

During the development of a platonized cast double base propellant it was noted that a spread of burning rates from batch to batch was obtained. Subsequently batches of the propellant pre-stantly showed a marked decrease in gas crack lifetime, on accelerated aging, compared with earlier satisfactory results. Extensive work showed the stability problem to be associated with a chemical reaction between the ballistic modifiers. This reaction was reproduced in the laboratory, while at the same time the ballistic variability of the propellant was under investigation. It became apparent that the chemical interaction between the modifiers affected the propellant platonized burning rate and that the by products of this reaction cause the accelerated aging problem. This understanding allowed a new ballistic modifier to be developed which helped solve the stability problem while at the same time gave much more reproducible ballistics. Author

N86-26476# Defence Research Establishment Valcartier (Quebec).

DIRECT EROSION BURNING MEASUREMENTS OF A REDUCED-SMOKE SOLID PROPELLANT ROCKET BY FLASH X-RAYS

T. CONSTANTINOU and D. GREATRIX (Toronto Univ., Ontario). In AGARD Smokeless Propellants p 18-1 - 18-13 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

Despite the multitude of models available, proper erosive burning modelling continues to be a difficult task in the internal ballistic prediction of solid propellant rockets with high volumetric loading. The majority of models are based on erosive burning measurements using small motors, window motors and with such techniques as imbedded probes or interrupted burning. Such methods, however, are not believed to exhibit the real combustion process. The flash X ray technique using full sized motors gives a more realistic measurement of burning rates. This technique can be used to evaluate the internal ballistic code with different erosive burning models, a pressure-time record can be obtained and compared to experimental data. A comparison and evaluation of the different models, is thus possible. Data based on static firings of reduced smoke motors were analyzed by the above method and the results are presented. Author

N86-26477# Naval Postgraduate School, Monterey, CA.
EXPERIMENTAL TECHNIQUES FOR OBTAINING PARTICLE BEHAVIOR IN SOLID PROPELLANT COMBUSTION
 D. W. NETZER and J. P. POWERS /in AGARD Smokeless Propellants p 19-1 - 19-17 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

A continuing investigation is being conducted to develop techniques to obtain quantitative data that can be used to relate solid rocket propellant composition and operating environment to the behavior of solid particulates within the grain port and exhaust nozzle. The techniques employed are high speed motion pictures of propellant strand burners and slab burners in a cross flow environment, SEM analysis of post fire residue (strand, slab, and motor), determination of D sub 32 across the exhaust nozzle using measurements of scattered laser light, and holograms of burning propellant strands, slabs and motors. In addition, techniques are being studied for automatic retrieval of particle size distributions from holograms taken of the combustion of solid propellants. Actual particle sizes of burning aluminum particles were obtained in high speed motion pictures by using high intensity rear illumination of the burning propellants to eliminate the flame envelopes surrounding the burning particles. Measurements of diffractively scattered light were made for determination of changes in D sub 32 across a solid propellant rocket motor exhaust nozzle. Two dimensional motors were employed to obtain holograms of propellant burned in a cross flow environment. Other efforts were directed at reduction of speckle in the recorded holograms and optimization of techniques for minimizing excessive smoke in the recorded scenes. A computer controlled Quantimet 720 is being used in an effort to obtain particle size distributions from reconstructed holograms. Author

N86-26478# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).
GAS ANALYSIS FOR THE INVESTIGATION OF THE COMBUSTION OF DOUBLE-BASE PROPELLANTS AND HMX
 J. F. TRUBERT /in its Smokeless Propellants (AGARD-CP-391) p 20-1 - 20-14 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

The linear pyrolysis method under vacuum by conduction and radiation, with analysis by mass spectrometry is used to obtain the composition of the gases produced by solid propellant condensed phase degradation, while minimizing the secondary reactions and under conditions close to actual burning. This method was elaborated with reference to double base propellants, and in the presence of additives. Important quantities of formaldehyde, glyoxal and carbon dioxide are obtained. The presence of low amounts of nitrogen and carbon monoxides, carbon dioxide and water indicates that the gases result mostly from the degradation. The small difference between the quantitative compositions shows that the additive does not act on the condensed phase degradation. This method was applied to HMX. The analysis shows large amounts of several nitrogen oxides (NO₂, NO, N₂O), formaldehyde, and cyanhydric acid, and small quantities of water, nitrogen and carbon oxides. Author

N86-26479# Brigham Young Univ., Provo, UT. Dept. of Chemical Engineering.
MEASUREMENTS OF DISTRIBUTED COMBUSTION
 M. W. BECKSTEAD, P. C. BRAITHWAITE, and D. L. GORDON /in AGARD Smokeless Propellants p 21-1 - 21-12 (SEE N86-26468 17-28) Jan. 1986 (AGARD-CP-391) Avail: NTIS HC A09/MF A01

Acoustic suppressants are commonly added to low smoke and smokeless propellants to avoid the problem of combustion instability. Although some suppressants are considered to be inert, most actually react with the combustion products. If a particle reacts while traversing a relatively large portion of the system, the interchange of energy between the burning particle and the acoustic environment can result in either a driving or damping contribution to the acoustics of the system, which is referred to as distribution combustion. Instead of using actual solid propellants, and experimental technique was developed to study this mechanism utilizing a gas fired Rijke burner. Advantages of this approach allow testing an additive independent of the propellant burning surface, avoiding the use of solid propellants, and allowing for independent control of frequency, O/F ratio, temperature, and particle addition. Al and ZrC are additives commonly used in solid

propellants to suppress combustion instability. Experimental results obtained using Al and ZrC in the Rijke burner indicate that both additives cause an increase in the acoustic growth rate when compared to growth rates obtained without any particles in the system. The increase caused by Al is significantly greater than that caused by ZrC, which is expected because the reaction of Al releases more than twice the energy ZrC does. The increase in the acoustic growth rate due to distributed combustion was found to be directly related to the heat of reaction. Author

N86-29064# Ballistic Research Labs., Aberdeen Proving Ground, MD.
LIQUID PROPELLANT GUN TECHNOLOGY
 W. F. MORRISON, J. D. KNAPTON, and P. G. BAER /in AGARD Interior Ballistics of Guns 16 p (SEE N86-29063 20-31) Jan. 1986 (AGARD-CP-392) Avail: NTIS HC A10/MF A01

Research and development efforts on liquid propellant guns have increased steadily in the United States over the past five years as a result of progress in both liquid propellant and propulsion technology. The research program is directed toward the use of hydroxyl ammonium nitrate (HAN) based liquid monopropellants in a regenerative liquid propellant gun. The HAN-based liquid monopropellants offer a number of advantages over both solid propellants and other liquid propellant formulations. The regenerative process is based on the injection of propellant into the combustion chamber during the ballistic cycle. The interior ballistic process is summarized to provide a basis for the discussion of experimental gun firing data. A simple inline piston with multiple cylindrical injectors is used as an example. Regenerative investigation in the United States have focused on annular injection configurations, in which the propellant enters the chamber in the form of an annular sheet. A simple version of the configuration was built and tests in 25, 30, and 105 mm. Ballistic data are presented, along with discussions of ballistic repeatability and efficiency. Four computer models of the regenerative interior ballistic process are compared. Author

N86-29065# Royal Armament Research and Development Establishment, Fort Halstead (England).
IGNITION, COMBUSTION, AND PHYSICAL PROPERTIES OF LIQUID PROPELLANTS AT GUN PRESSURES
 G. G. COOK and T. O. ANDREWS /in AGARD Interior Ballistics of Guns 13 p (SEE N86-29063 20-31) Jan. 1986 (AGARD-CP-392) Avail: NTIS HC A10/MF A01

The internal ballistics of a regenerative injection liquid propellant gun depend on the rate of injection of the liquid propellant rather than on the burning rate, owing to the small size of the droplets produced. The rate of injection is determined by the effect of the compressibility of the liquid on the motion of the piston and by its flow characteristics through the injector. The force constant of the propellant is important as it determines the combustion pressure resulting from any given flow rate. A standard closed vessel was modified and used with a specially developed igniter to investigate the combustion of Otto Fuel II at gun pressure. It was also used to investigate the compressibility of inert liquid at pressures up to 600 MPa. A liquid propellant test vessel was constructed for use in the investigation of the compressibility of live liquids and the flow of liquids at high pressure. Author

N86-29066# Fraunhofer-Inst. fuer Kurzzeitdynamik, Weil am Rhein (Germany, F.R.). Abteilung fuer Ballistik.
MECHANICAL BEHAVIOUR OF PROPELLANT GRAINS UNDER HEAVY DYNAMIC LOAD
 G. ZIMMERMAN /in AGARD Interior Ballistics of Guns 15 p (SEE N86-29063 20-31) Jan. 1986 (AGARD-CP-392) Avail: NTIS HC A10/MF A01

Special test devices were constructed to simulate the dynamic forces on gun propellant grains during shots at ambient and low temperatures (-40 C). With these devices the dynamic stress at failure, the fragmentation type (pasty, brittle), and other correlated physical characteristics of several propellant types were measured. Conclusions are drawn for the propellant behavior under real gun conditions. Author

28 PROPELLANTS AND FUELS

N86-29067# Bombrini Parodi-Delfino S.p.A., Rome (Italy). **FIELD ARTILLERY GUN PERFORMANCES RELATED TO TRIPLE-BASE POWDER QUALITY**

B. DANDREA, M. PETRUCCI, and M. DILORENZO *In* AGARD Interior Ballistics of Guns 15 p (SEE N86-29063 20-31) Jan. 1986 (AGARD-CP-392) Avail: NTIS HC A10/MF A01

In order to achieve the best results in the 155-39 mm field artillery gun, several parameters affecting the triple-base powder quality were investigated. Mainly nitro-cellulose molecular weights (MW) and molecular weight distributions (MWD), determined by means of gel-permeation chromatography (GPC) related to the powder rheological properties are reported. In addition theoretical interior ballistic evaluations, tailored on powders manufactured with different nitrocellulose samples, based on computer program calculation, are compared with the firing test results. Author

N86-29073# Etablissement Technique de Bourges (France). **EXPERIMENTAL STUDY OF THE IGNITION OF EXPLOSIVE CHARGES USING VISUALIZATION OF THE PHENOMENA [ETUDE EXPERIMENTALE DE L'ALLUMAGE D'UNE CHARGE PROPULSIVE PAR VISUALISATION DU PHENOMENE]**

C. BERTHOMMIER *In* AGARD Interior Ballistics of Guns 7 p (SEE N86-29063 20-31) Jan. 1986 *In* FRENCH (AGARD-CP-392) Avail: NTIS HC A10/MF A01

A three point visualization process was used to study the ignition and combustion phenomena of propulsive charges for large caliber ammunition. The visualization process was made possible by using a translucent sleeve as the barrel. The phenomena studied included the pressure, displacement and the speed of the flame front. The procedure studied made possible an examination of the ignition and combustion processes of various charge configurations. Two examples were studied; the first study pertained to a comparison of two igniter, and the second to a pre-programmed igniter. B.G.

N86-29077# Dynamit Nobel A.G., Fuerth (Germany, F.R.) Dept. of Research and Development-Ammunition. **IGNITION OF HIGH-PERFORMANCE GUN AMMUNITION**

H. PENNER *In* AGARD Interior Ballistics of Guns 7 p (SEE N86-29063 20-31) Jan. 1986 (AGARD-CP-392) Avail: NTIS HC A10/MF A01

Modern high performance cartridges are designed for high loading densities of propelling charges. Sometimes they exceed the normal filling density of the propellant grains. The conditions for fast and complete ignition are discussed and a group of primers for 105 mm-rounds which will ignite the propelling charge in an optimum manner is presented. Author

N87-28595# Bombrini Parodi-Delfino S.p.A., Colleferro (Italy). **PROPELLANT GRAIN DESIGN**

S. SCIAPPA *In* AGARD, Design Methods in Solid Rocket Motors 20 p (SEE N87-28589 23-20) Mar. 1987 (AGARD-LS-150) Avail: NTIS HC A11/MF A01

A general overview of the current methodologies used at SNIA BPD (Bombrini Parodi-Delfino) in designing solid rocket motor propellant grains is presented. The internal ballistics aspect of grain design is emphasized. The general requirements (thrust versus time curve, volumetric constraints, etc.), the available technologies (propellant types, manufacturing processes, etc.), and the methodology for the selection of the most appropriate technology are described. In particular, propellant characterization, design of internal geometry, and methods for propellant formulation choice are discussed. An analysis of the predictability factors and how they can be taken into account for contingency planning is reported. Finally, the experimental tests commonly used for grain design validation are summarized. Author

N87-28596# Societe Nationale des Poudres et Explosifs, Vert-Le-Petit (France). **TECHNIQUE AUTOPROPUSSION. SIZING SOLID PROPELLANT ENGINE CHARGES**

[DIMENSIONNEMENT DES CHARGEMENTS DES MOTEURS A PROPERGOL SOLIDE]

BERNARD ZELLER *In* AGARD, Design Methods in Solid Rocket Motors 33 p (SEE N87-28589 23-20) Mar. 1987 *In* FRENCH (AGARD-LS-150) Avail: NTIS HC A11/MF A01

The goal of solid propellant charge sizing is to design charges which satisfy diverse specifications. Methods utilized to carry out this task are described. The general specifications which must be satisfied for solid rocket engines are discussed with regard to tactical and strategic missiles and space launch vehicles. The various charge types and solid propellant families are reviewed and the specific requirements for propellant charges are addressed. The methods employed to define precisely the propellant, the geometry and the organization of the charge are described. These methods aim at obtaining specific ballistic performances and assuring the overall integrity of the charge when subjected to mechanical stresses. Finally, a reliability estimation technique for propellant charges is briefly described. M.G.

N87-28597# Air Force Rocket Propulsion Lab., Edwards AFB, CA. **STATE OF THE ART OF SOLID PROPELLANT ROCKET MOTOR GRAIN DESIGN IN THE UNITED STATES**

DURWOOD I. THRASHER *In* AGARD, Design Methods in Solid Rocket Motors 21 p (SEE N87-28589 23-20) Mar. 1987 (AGARD-LS-150) Avail: NTIS HC A11/MF A01

A brief discussion of the basic ground rules and overall considerations in solid rocket motor design is presented. Ballistic design considerations, grain features related to ballistic design and their purposes, primary factors which determine stress and strain levels, and design approaches for avoiding structural weak points are discussed. Emphasis is given to propellant grain structural integrity assurance, including materials characterization, structural analysis, and structural capability verification. Additional topics discussed include: viscoelastic material behavior and the requisite thermomechanical characterization testing and analysis approaches; failure criteria; experimental structural methods including in-situ stress and strain measurement technology; and service life considerations. Unresolved problems are addressed and important ongoing work is summarized. Author

N87-28598# Societe Europeene de Propulsion, Saint-Medard-en-Jalles (France). **DESIGN AND SIZING OF INTERNAL THERMAL INSULATORS FOR SOLID PROPELLANT ROCKET ENGINES [CONCEPTION ET DIMENSIONNEMENT DES PROTECTIONS THERMIQUES INTERNES D'UN PROPULSEUR A POUDRE]**

ANDRE TRUCHOT *In* AGARD, Design Methods in Solid Rocket Motors 13 p (SEE N87-28589 23-20) Mar. 1987 *In* FRENCH (AGARD-LS-150) Avail: NTIS HC A11/MF A01

The principal objective of internal thermal insulators is to protect the engine structural walls from overheating by combustion gas. They also perform certain secondary functions: adhere the propellant to the structure, accept the relative deformations of the charge and structure and eventually seal the chamber. The general design processes for internal thermal insulators are presented: analysis of the working environment and conditions, materials selection, and thermal and mechanical dimensioning. The calculation methods used for each of these processes are described along with various laboratory and firing tests. Finally, fabrication processes for internal thermal insulation are discussed. M.G.

N87-28599# Societe Europeene de Propulsion, Saint-Medard-en-Jalles (France). **COMPREHENSIVE OPTIMIZATION OF SOLID PROPELLANT ROCKET ENGINES [OPTIMISATION D'ENSEMBLE D'UN PROPULSEUR A POUDRE]**

ANDRE TRUCHOT *In* AGARD, Design Methods in Solid Rocket Motors 12 p (SEE N87-28589 23-20) Mar. 1987 *In* FRENCH (AGARD-LS-150) Avail: NTIS HC A11/MF A01

The goal of comprehensive optimization of solid propellant engines is to determine the configuration of the highest performance taking into account certain optimization criteria involving the range or payload carrying capability of the vehicle.

31 ENGINEERING (GENERAL)

31

ENGINEERING (GENERAL)

Includes vacuum technology; control engineering; display engineering; cryogenics; and fire prevention.

An overview of the various specifications (geometric envelope, performance, etc.) and design parameters (operating conditions, geometric parameters, and the technologies of each component) is presented. The development of computer aided design programs is discussed and some example applications are described in order to illustrate the potential uses of the programs for engine pre-design studies. M.G.

N89-16912# Bombrini Parodi-Delfino S.p.A., Colleferro (Italy). Defense and Space Div.

PROPELLANT GRAIN DESIGN

S. SCIPPA *In* AGARD, Design Methods in Solid Rocket Motors 20 p (SEE N89-16906 09-20) Apr. 1988 Previously announced as N87-28595

(AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

A general overview of the current methodologies used at SNIA BPD in designing solid rocket motor propellant grains is presented. The internal ballistics aspect of grain design is emphasized. The general requirements (thrust vs. time curve, volumetric constraints, etc.), the available technologies (propellant types, manufacturing processes, etc.), and the methodology for the selection of the most appropriate technology are described. In particular, propellant characterization, design of internal geometry, and methods for propellant formulation choice are discussed. An analysis of the predictability factors and how they can be taken into account for contingency planning is reported. Finally, the experimental tests commonly used for grain design validation are summarized.

Author

N89-16913# Societe Nationale des Poudres et Explosifs, Vert-Le-Petit (France). Direction Technique Autopropulsion.

SOLID PROPELLANT GRAIN DESIGN

BERNARD ZELLER *In* AGARD, Design Methods in Solid Rocket Motors 29 p (SEE N89-16906 09-20) Apr. 1988

(AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

To design a solid propellant grain is to conceive and to define a grain which satisfies various requirements. The methods and procedures are described which are used today in France to design propellant grains. Described and analyzed are: (1) the various types of grain and the various families of propellant which are available and used today; (2) the detailed requirements that a solid propellant grain must satisfy; (3) the methods which are used to precisely define the propellant, the architecture and the configuration of the grain, and more specifically the methods used in order to ensure required ballistic performance though maintaining structural integrity of the grain; and (4) an overview on a method of solid propellant grain reliability assessment. The improvements needed in the area of grain design analysis and the related technical breakthroughs are briefly presented. Author

N89-16914# Air Force Rocket Propulsion Lab., Edwards AFB, CA.

STATE OF THE ART OF SOLID PROPELLANT ROCKET MOTOR GRAIN DESIGN IN THE UNITED STATES

DURWOOD I. THRASHER *In* AGARD, Design Methods in Solid Rocket Motors 21 p (SEE N89-16906 09-20) Apr. 1988

(AGARD-LS-150-REV) Avail: NTIS HC A11/MF A01

A brief discussion is presented of the basic ground rules and overall considerations in solid rocket motor design. This discussion includes ballistic design considerations, grain features related to ballistic design and their purposes, primary factors which determine stress and strain with solid rocket motor propellant grain structural integrity assurance, including materials characterization, structural analysis, and structural capability verification. The topics addressed include viscoelastic material behavior and the requisite thermomechanical analysis testing and approaches; failure criteria and the appropriate testing approaches; experimental structural methods, including in situ stress and strain measurement technology; and service life considerations. Author

N86-29063# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

INTERIOR BALLISTICS OF GUNS

Jan. 1986 220 p Meeting held in Florence, Italy, 9-11 Sep. 1985; sponsored by the Propulsion and Energetics Panel

(AGARD-CP-392; ISBN-92-835-0388-0; AD-A167107) Avail:

NTIS HC A10/MF A01

Topics addressed include: liquid propellant guns; characteristics of solid gun propellants; gun barrel erosion; low vulnerability propellants for guns; experimental and test techniques in interior ballistics; gun ignition systems; new problems in guns; and traveling charge gun theory. For individual titles see N86-29064 through N86-29078.

N86-29069# Royal Military Coll. of Science, Shrivenham (England).

BORE TEMPERATURE AND HEAT FLUX IN A 40 MM GUN BARREL

B. LAWTON *In* AGARD Interior Ballistics of Guns 12 p (SEE N86-29063 20-31) Jan. 1986

(AGARD-CP-392) Avail: NTIS HC A10/MF A01

A method of measuring the bore surface temperature fluctuation in a 40 mm gun is described. Fast response, 1 microsecond, eroding type, surface thermocouples are used and a feature is that they can tolerate up to 3 mm wear and pressures up to 2000 bar. The bore temperature is measured at three positions along the barrel and the pressure is measured at the breech. All three signals are captured using digital oscilloscopes and are transferred to a digital computer. The signals are processed to give instantaneous heat flux, shot velocity, shot travel, and total heat transfer. Gas leakage past the shot is found to be significant. A simple theory is proposed for calculating the maximum bore temperatures and the total heat transfer and this theory is confirmed by measurements on fourteen different rounds made up using three propellants and various charge masses and grain formulations. Author

N86-29070# Prins Maurits Lab. TNO, Rijswijk (Netherlands).

ON THE THERMAL BEHAVIOUR OF THE BARREL DURING THE INTERIOR BALLISTIC CYCLE OF PROPELLANT GUNS

W. J. KOLKERT, M. WAAS, and N. G. THE *In* AGARD Interior Ballistics of Guns 13 p (SEE N86-29063 20-31) Jan. 1986

(AGARD-CP-392) Avail: NTIS HC A10/MF A01

Thermal stress cycling during firing constitutes a major mechanism for erosion, wear, and fatigue in gun barrels and cannon tubes. In order to predict spatial and temporal temperature distributions at the inner envelope of and through the barrel and in the gas dynamic flow accompanying the interior ballistic cycle, a two-dimensional, quasi two-phase flow (turbulent, viscous, and compressible) model, was developed. A one-dimensional model treating radial heat conduction in the barrel was coupled to this flow model. Input parameters for these models were calculated with a one-dimensional, two-phase flow, burning routine, describing propellant deflagration. Besides a description of these models, results of a prediction of heat loss, projectile travel and pressure, temperature and flow velocity distributions in the gas dynamic flow, and temperature-time histories in the barrel wall are given for the interior ballistic cycle of a caliber .50in gun. Although predicted results for heat flow into and through the barrel and predicted temperature-time histories in the barrel cannot be compared with experimental results in a reliable way at this time, predicted results for pressure-time distributions and projectile-travel fit the experimental results in a promising way. Author

31 ENGINEERING (GENERAL)

N86-29076# Royal Armament Research and Development Establishment, Fort Halstead (England).

NOVEL IGNITION SYSTEMS FOR HEAVY CALIBRE GUNS

C. N. BOWDEN, G. G. COOK, and P. S. HENNING / In AGARD Interior Ballistics of Guns 11 p (SEE N86-29063 20-31) Jan. 1986
(AGARD-CP-392) Avail: NTIS HC A10/MF A01

In recent years there was a trend towards steadily rising gun pressures, especially in direct fire weapons and this has caused many functional problems to arise with conventional vent tube ignition systems. To overcome these problems and to allow the process of gun development to continue, the United Kingdom is performing a program of research into a number of ignition systems for heavy caliber guns. These include: spark ignition, laser ignition, and electrical impulse ignition. A number of different spark plug configurations were evaluated. Extensive trials were performed on the ignition characteristics of black powders and black powder substitutes using an experimental 4 J neodymium laser. Work was also performed on the development of high pressure sapphire windows. A study into methods of charge ignition by electrical impulse techniques was also performed. Author

N86-29078# Institut Franco-Allemand de Recherches, Saint-Louis (France).

HIGH-PRESSURE COMBUSTION: COMPARISON OF THEORETICAL AND ACTUAL RESULTS [COMBUSTION SOUS HAUTES PRESSIONS CONFRONTATION THEORIE EXPERIENCE]

D. GRUNE and M. SAMIRANT / In AGARD Interior Ballistics of Guns 7 p (SEE N86-29063 20-31) Jan. 1986 In FRENCH
(AGARD-CP-392) Avail: NTIS HC A10/MF A01

Following the observation of important variances (30 to 50%) between the theoretical and actual values obtained during a study of the combustion pressure of powders of approximately 1,500 MPa, the differences for several tests were compared. The composition of the combustion gases were analyzed. In addition, the deformation of a manometer explosive device was studied during the ignition stage. Data was obtained concerning the deformation resulting from the high pressure. B.G.

N87-21170# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Propulsion and Energetics Panel.

ADVANCED INSTRUMENTATION FOR AERO ENGINE COMPONENTS

Nov. 1986 556 p In ENGLISH and FRENCH Symposium held in Philadelphia, Pa., 19-23 May 1986
(AGARD-CP-399; ISBN-92-835-0401-1; AD-A182954) Avail: NTIS HC A24/MF A01

The Symposium was addressed to research scientists and development engineers for aero engines in order to discuss the state-of-the-art and to be informed on new measurement possibilities. The scope included Coherent Anti-Stokes Raman Spectroscopy (CARS), laser anemometry, pyrometry, clearance measurement including X-ray, high speed data acquisition and processing, stress measurement and vibration and thin layer technique, unsteady and transient phenomena, and future prospects. For individual titles see N87-21171 through N87-21205.

N87-21176*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.

LASER FRINGE ANEMOMETRY FOR AERO ENGINE COMPONENTS

ANTHONY J. STRAZISAR / In AGARD Advanced Instrumentation for Aero Engine Components 32 p (SEE N87-21170 14-31) Nov. 1986 Sponsored by NASA
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

Advances in flow measurement techniques in turbomachinery continue to be paced by the need to obtain detailed data for use in validating numerical predictions of the flowfield and for use in the development of empirical models for those flow features which cannot be readily modelled numerically. The use of laser anemometry in turbomachinery research has grown over the last 14 years in response to these needs. Based on past applications and current developments, the key issues which are involved when considering the application of laser anemometry to the measurement of turbomachinery flowfields are discussed. Aspects

of laser fringe anemometer optical design which are applicable to turbomachinery research are briefly reviewed. Application problems which are common to both laser fringe anemometry (LFA) and laser transit anemometry (LTA) such as seed particle injection, optical access to the flowfield, and measurement of rotor rotational position are covered. The efficiency of various data acquisition schemes is analyzed and issues related to data integrity and error estimation are addressed. Real-time data analysis techniques aimed at capturing flow physics in real time are discussed. Finally, data reduction and analysis techniques are discussed and illustrated using examples taken from several LFA turbomachinery applications. Author

N87-21179# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

HOW TO SELECT A LASER VELOCIMETER FOR A GIVEN APPLICATION? [COMMENT CHOISIR UN VELOCIMETER LASER POUR UNE APPLICATION DONNEE]

A. BOUTIER / In AGARD Advanced Instrumentation for Aero Engine Components 18 p (SEE N87-21170 14-31) Nov. 1986 In FRENCH
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

The different types of laser velocimeters are described with reference to their domains of utilization, their qualities, and their limitations. The fringe velocimeters are suited for acquiring local and instantaneous velocity vectors, mean velocity vectors and complete Reynolds Tensors. Their most serious limitation is their inability to measure velocities near the wall which the beams normally strike. This is why two-point velocimeters have been developed for applications with turbomachines where fluid flows are confined to very narrow channels. On the other hand these two-point velocimeters cannot probe flows with a turbulence rate exceeding 10 to 15%. A model of a two-beam velocimeter at ONERA has given very promising results with highly turbulent flows. A conspectus is presented with the objective of providing guidance in the selection of the most appropriate laser velocimeter for a given experimental condition. Author

N87-21183*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.

COMBINED FRINGE AND FABRY-PEROT LASER ANEMOMETER FOR 3 COMPONENT VELOCITY MEASUREMENTS IN TURBINE STATOR CASCADE FACILITY

RICHARD G. SEASHOLTZ and LOUIS J. GOLDMAN / In AGARD Advanced Instrumentation for Aero Engine Components 15 p (SEE N87-21170 14-31) Nov. 1986 Previously announced as N86-24967 Sponsored by NASA
(AGARD-CP-399) Avail: NTIS HC A24/MF A01 CSCL 14B

A laser anemometer is described that was developed for use in a 508 mm diameter annular turbine stator cascade facility. All three velocity components are measured through a single restricted optical port, both within the stator vane row and downstream of the vanes. The measurements are made through a cylindrical window in the casing that matches the tip radius of the cascade. The stator tested has a contoured hub endwall that results in a large radial flow near the hub. The anemometer uses a standard fringe configuration (LFA) with a fluorescent aerosol seed to measure the axial and circumferential velocity components. The radial component is measured with a confocal Fabry-Perot interferometer. The two configurations are combined in a single optical system and can operate simultaneously. Data are presented to illustrate the capabilities of the system. Author

N87-21203# Oxford Univ. (England). Dept. of Engineering.

A STUDY OF PASSAGE FLOW THROUGH A CASCADE OF TURBINE BLADES USING IMAGE PLANE HOLOGRAPHIC INTERFEROMETRY

M. L. G. OLDFIELD, P. J. BRYANSTON-CROSS (Rolls-Royce Ltd., Derby, England), J. H. NICHOLSON, and C. T. J. SCRIVENER / In AGARD Advanced Instrumentation for Aero Engine Components 12 p (SEE N87-21170 14-31) Nov. 1986 Previously announced as N87-15970
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

Holographic interferograms showing the flow through two passages of a cascade of turbine rotor blades in an isentropic light piston tunnel with full-scale Reynolds numbers, Mach numbers, and gas-to-wall temperature ratios are presented. Double exposure absolute and differential image plane holograms of the complete

31 ENGINEERING (GENERAL)

flow field under a range of conditions were obtained. The isodensity contours predicted by a time marching throughflow calculation compare well with the positions of the interference fringe on the holograms. The intersections of these fringes with the blade surfaces give blade surface Mach numbers which agree well with those from surface pressure measurements. Wakes, shock waves, and the presence of upstream and side wall turbulence are all evident in the holograms. Author

N87-21204* National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.

BEAM-MODULATION METHODS IN QUANTITATIVE AND FLOW-VISUALIZATION HOLOGRAPHIC INTERFEROMETRY

ARTHUR J. DECKER In AGARD Advanced Instrumentation for Aero Engine Components 16 p (SEE N87-21170 14-31) Nov. 1986 Sponsored by NASA

(AGARD-CP-399) Avail: NTIS HC A24/MF A01 CSCL 20F

Heterodyne holographic interferometry and time-average holography with a frequency shifted reference beam are discussed. Both methods will be used for the measurement and visualization of internal transonic flows where the target facility is a flutter cascade. The background and experimental requirements for both methods are reviewed. Measurements using heterodyne holographic interferometry are presented. The performance of the laser required for time-average holography of time-varying transonic flows is discussed. Author

N87-29484* Norwegian Defence Research Establishment, Kjeller.

AN INTELLIGENT MULTI-TARGET TRACKING SYSTEM

E. HEYERDAHL In AGARD, Advances in Guidance and Control Systems and Technology 9 p (SEE N87-29474 24-04) Jul. 1987 (AGARD-CP-411) Avail: NTIS HC A07/MF A01

An implementation of a general tracking system, integrating the target acquisition and tracking subsystems, was developed. It is based on image analysis and extensive use of models. The system permits improvements compared to in-service trackers in the sense that it enables multi-target tracking, automatic acquisition also during tracking and tracking through obscurations. The system is an implementation of a general tracking system. This system produces alternative estimates of a target and projects the corresponding objects into the image plane. To do this estimates of the projecting function are used. The different projections are synthesized through a thresholding process. The implemented system uses parallel Kalman filters to produce the object estimates and estimates the sensor position through a model of sensor dynamics and measurements of sensor angle velocity. Results, produced by the implemented system from IR imagery of a moving target in field are presented. Author

N87-29648* British Aerospace Public Ltd. Co., Bristol (England). Production Improvements.

DESIGNING FOR SUPERPLASTIC ALLOYS

D. STEPHEN In Advisory Group for Aerospace Research and Superplasticity 37 p (SEE N87-29641 24-26) Aug. 1987 (AGARD-LS-154) Avail: NTIS HC A10/MF A01

Substantial evidence exists to support the claim that titanium alloys, when processed by the superplastically formed (SPF) diffusion bonded (DB) route, can compete in weight and more particularly cost, with conventional aluminum fabrication. This is likely to be a major factor in the future exploitation of these processes and clearly requires a revision to the designers traditional views of the areas of application for titanium alloys. However, the development of a combined SPF/DB process for aluminum alloys, with the full range of capabilities provided currently by titanium alloys, remains to be established. Author

N87-29649* Alcan International Ltd., London (England).

THE MANUFACTURE OF SUPERPLASTIC ALLOYS

R. GRIMES In Advisory Group for Aerospace Research and Superplasticity 16 p (SEE N87-29641 24-26) Aug. 1987 (AGARD-LS-154) Avail: NTIS HC A10/MF A01

Amongst aluminum alloys, the Al-6 percent Cu-0.4 percent Zr system that typifies the Supral alloys requires a specially developed casting system in order to achieve a very high level of supersaturation with zirconium. Subsequent manufacturing is fairly conventional, the sheet product recrystallizing dynamically during superplastic forming. The higher strength aluminum alloys are

conventionally cast but achieve a very fine grain size at sheet stage by careful thermal mechanical treatment during the later stages of semi-fabrication. With titanium, the standard production route for the Ti-6Al-4V alloy results in a product with superplastic capabilities perfectly adequate for most applications. Author

N89-15262* Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

AEROSPACE MATERIALS PROCESS MODELLING

Aug. 1988 263 p In ENGLISH and FRENCH Meeting held in Cesme, Turkey, 2-4 Oct. 1987 (AGARD-CP-426; ISBN-92-835-0476-3; AD-A202494) Avail: NTIS HC A12/MF A01

The modeling behavior of metallic materials, and in particular the forming of components such as castings and forgings, are discussed. For individual titles, see N89-15263 through N89-15281.

N89-15263* Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

PROCESSING SCIENCE AND MATERIALS DEVELOPMENT

HAROLD L. GEGEL In AGARD, Aerospace Materials Process Modelling 15 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

The development of advanced technologies for the fabrication of close-tolerance parts, in conjunction with the development of advanced materials, plays a key role in the design and manufacturing of affordable aerospace systems. New process and product-design concepts must be evolved in parallel with the development of advanced materials for future systems in order to exploit the achievements being made in materials science and to tailor specific properties while simultaneously producing controlled geometrical shapes. A scientific description of production equipment and, in general, physical objects, media, fields, and interface and material-related phenomena requires theoretical models which are capable of predicting the response of the fabricating system to the initial inputs. The design of a product and the corresponding manufacturing process generally requires both deterministic models and expert systems which utilize designer intuition and logic in finding acceptable solutions. Reviewed here are some of the recent developments in process modeling as related primarily to metalworking systems and how they aid in the understanding of the role of computer and human expertise in modern computer-aided engineering (CAE). Author

N89-15264* Military Academy, Ankara (Turkey).

MODELLING OF DEFORMATION AND MICROSTRUCTURAL CHANGES IN P/M RENE 95 UNDER ISOTHERMAL FORGING CONDITIONS

O. ALNIAK, D. D. MORPHY, T. TERADA, A. K. KOUL, and J-P. IMMARIGEON (National Aeronautical Establishment, Ottawa, Ontario) In AGARD, Aerospace Materials Process Modelling 18 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

The changes in microstructure induced by forging and their influence on flow strength in hot isostatically pressed P/M Rene 95 as revealed by constant true strain compression tests under simulated isothermal forging conditions are discussed. Results are presented for initially fine (7 micron) and coarse (50 micron) grained compacts tested at temperatures of 1050, 1075 and 1100 C and at strain rates in the range from 10 to the minus 4th powers (-1) to 1 s(-1). Under these tests conditions, both the fine and coarse grained compacts recrystallize and their grain size is refined during flow. This grain refinement gives rise to softening in both materials. Ultimately, their microstructures transform into the same equiaxed fine grained microduplex structure at which point their flow strength becomes identical. Continued deformation at that point produces no further change in grain size or flow strength. Under this steady state regime of deformation, the microduplex grain size and flow strength are independent of the original microstructure but are conditioned by the strain rate at a given temperature. The steady state grain size increases whereas the steady flow strength decreases with a decrease in strain rate and/or an increase in temperature. It is shown how changes in microstructure and flow strength during isothermal forging can be modelled in P/M Rene 95 compacts by means of established deformation models for predicting peak flow strength, using the steady state deformation

31 ENGINEERING (GENERAL)

data as a boundary condition for the evolution of microstructure and flow strength and a model for deformation-induced recrystallization during forging that has been recently developed for this class of materials. Author

N89-15265# Marmara Research Inst., Gebze (Turkey). Materials Research Dept.

PREDICTION OF TEMPERATURE DISTRIBUTION IN AXISYMMETRIC EXTRUSION

S. ONURLU In AGARD, Aerospace Materials Process Modelling 8 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

In extrusion, the knowledge of temperature distribution is helpful in selecting process variables such as speed, initial temperatures and cooling conditions to optimize the process. This study describes a computer-aided numerical technique for the calculation of temperature distribution in the billet, extruded product and tools. The model is based upon Avizur's spherical velocity field and extended to include transient heat conduction, heat generations and mass transport effects on the basis of local temperatures and strain rates. The finite difference formulation of the problem considers the heat generation and conduction in each time step of the solution. A computer program is developed to solve the problem. Temperature distributions are calculated as a function of time. Predicted temperatures for the extrusion of aluminum alloys AA 2014 and 2024 are compared with experimental data. Author

N89-15266# University Coll. of Swansea (Wales). Reader in Materials Engineering.

METALLURGICAL MODELLING OF SUPERALLOY DISC ISOTHERMAL FORGINGS

R. W. EVANS In AGARD, Aerospace Materials Process Modelling 17 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

The metallurgical structure of superalloy aeroengine disc forgings is a complex function of the forging operation parameters and the post forging heat treatment. It is often desirable to obtain certain specific structures in parts of the disc which are, for instance, resistant to crack propagation and this has traditionally been accomplished by means of a series of production trials. This expensive and time consuming procedure can be considerably shortened if the development of microstructure during the forging can be accurately modelled by a suitable computer code. Described here is such a model and its use in the design of isothermal forged components. The model described is a fully thermally coupled visco-plastic finite element algorithm. It treats nodal velocities as the basic unknowns and both the mesh geometry and the various metallurgical structural terms are updated by a single step Euler scheme. Facilities are available for ensuring that surface nodes follow die shapes after impingement, that flow is incompressible and that suitable surface friction forces are applied. Throughout the whole forging process (which may involve the re-meshing of severely distorted elements), the metallurgical history of elements is retained so that the effects of subsequent heat treatments can be assessed. Author

N89-15269# Dayton Univ., OH. Dept. of Mechanical Engineering.

PHYSICAL MODELING AND VISIOPLASTICITY STUDIES OF THE FORGING PROCESS

V. K. JAIN and R. SRINIVASAN (Wright State Univ., Dayton, OH.) In AGARD, Aerospace Materials Process Modelling 13 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

An analytical technique, which employs the approach of viscoplasticity for evaluating large plastic strains such as those occurring in metalforming, is presented. The distortion of a quadrilateral element of a grid was tracked to compute strains during deformation. Here, two lines of a quadrilateral are used (length before and after deformation and direction cosines before deformation) to determine the true effective strain in the element. Although the method can be applied to any mode of deformation, its application plane-strain deformation is considered. The method has been verified by application to basic cases of deformation such as uniaxial compression, tension, pure shear, and rotation of element. Wedge testing was used for verification of the analytical results of a visco-plastic finite-element program ALPID which was

developed to simulate metal flow in deformation processes such as forging and extrusion. Wedge-shaped specimens were machined from plates of 1100-F and 6061-T6 aluminum, and grids were engraved on the meridian plane by means of a CNC engraver. The specimens were annealed and compressed in a channel-shaped segmented die at room temperature. Author

N89-15273# Structural Dynamics Research Corp., Milford, OH. SIMULATION AND DESIGN OF HIGH PRECISION UNIT PROCESSES VIA NUMERICAL METHODS

ROGER STAFFORD In AGARD, Aerospace Materials Process Modelling 21 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

SDRC has developed new computer codes specifically tailored for precise and fast simulations of manufacturing processes. Critical aspects of unit processes involve nonlinear transient heat transfer coupled with slow creeping flow. Finite element methods are chosen. Numerical algorithms are adopted which are specifically suited to the problem. Key elements of these simulations are outlined. SDRC has integrated unit process simulations with CAD/CAM design systems, analysis graphics systems, automated inspection, and data base. An example will illustrate data flow, simulation results, and how engineers are using these tools to design new processes for large complex parts. Author

N89-15274# Technische Hogeschool Twente, Enschede (Netherlands). Dept. of Mechanical Engineering.

A MIXED EULERIAN-LAGRANGIAN FINITE ELEMENT METHOD FOR SIMULATION OF THERMO-MECHANICAL FORMING PROCESSES

J. HUETINK and J. VANDERLUGT In AGARD, Aerospace Materials Process Modelling 8 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

A mixed Eulerian-Lagrangian finite element method is developed by which nodal point locations can be adapted independently from the actual material displacements. Numerical difficulties due to large element distortions, as many occur when the updated Lagrange method is applied, can be avoided by this method. Movement of (free) surfaces can be taken into account by adapting nodal surface points in a way that they remain on the surface. Hardening and other deformation path dependent properties are determined by incremental treatment of convective terms. A local and a weighed global smoothing procedure is introduced in order to avoid numerical instabilities. The method has been applied to simulations of an upsetting process, a wire drawing process and a cold rolling process. In the simulation of the rolling process, both workpiece and roll are simultaneously analyzed in order to predict the flattening of the roll. Special contact-slip elements are developed for the tool-workpiece interface. Author

N89-15275# Middle East Technical Univ., Ankara (Turkey). Dept. of Mechanical Engineering.

FINITE-ELEMENT-SIMULATION OF METAL-FORMING PROCESSES

A. E. TEKKAYA In AGARD, Aerospace Materials Process Modelling 13 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

For the metal forming industry, numerical simulation procedures, through which the tremendous costs for process development and experimental tools can be reduced, are gaining an increasing significance. Here, a finite element code, based on the well-known elastic-plastic formulation by McMeeking and Rice will be given and some interesting industrial metal forming applications are discussed. The finite element approach is of updated Lagrangian type utilizing a generalized Prandtl-Reuss flow rule together with the v.Mises yield criterion. Nonlinearities resulting from the material response and the complex kinematics of the problem are handled numerically through the self-correcting and the midpoint stiffness methods. Examples of application cover the analysis of residual stresses in extrusion, the simulation of the Sachs boring-out method, as well as the simulation of instabilities and deep-drawing. Author

31 ENGINEERING (GENERAL)

N89-15276# Argonne National Lab., IL.

GENERIC CASTING MODELING

WILLIAM T. SHA. In AGARD, Aerospace Materials Process Modelling 16 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

A detailed model is given of fluid flow coupled with heat transfer of a liquid melt for casting processes. The model is an extension of the COMMIX code and is capable of handling castings of any shape, size, and material. While much of the emphasis is placed on fluid flow and heat transfer, a brief mention of R and D needs in modeling of metallurgical aspects, as well as stress/deformation is also outlined. A feature of this model is the ability to track the liquid/gas interface and liquid/solid interface. It can also calculate alloy element distributions providing that constitutive relations such as interfacial drag between alloy elements are available. The flow of liquid melt through the sprues, runners, and gates into the mold cavity is calculated, along with three-dimensional temperature and velocity distributions of the liquid melt throughout the casting process. Author

N89-15277# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Gennevilliers (France).

A NUMERICAL MODEL OF DIRECTIONAL SOLIDIFICATION OF CAST TURBINE BLADES

GHISLAINE LAMANTHE and L. VERMOTDESROCHES. In AGARD, Aerospace Materials Process Modelling 5 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

A finite element model of the thermokinetics of the directional solidification of cast turbine blades is discussed. The main difficulty to be solved to obtain an appropriate modelling of the phenomenon lies in the high amount of radiative heat transfers, in a case where geometry is complex, thermal gradients high and boundary conditions variable with time. The model treats these transfers by meshing the radiant surfaces and applying shape factors. The other requirements of such an approach are: an appropriate knowledge of the boundary conditions of the furnace, and the thermal properties of materials (ceramic shells, etc.). Experiments have shown a fair consistency between the thermal fields predicted by the model and temperature data recorded during the solidification of a cluster of complex bars representative of turbine blades. Author

N89-15278# General Electric Co., Cincinnati, OH. Aircraft Engines Dept.

USE OF VENDOR CONSORTIUMS FOR IMPLEMENTATION OF PROCESS SIMULATION TECHNOLOGY

SULEKH C. JAIN and KENNETH C. MADDUX (Structural Dynamics Research Corp., Milford, OH.) In AGARD, Aerospace Materials Process Modelling 22 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

The aerospace Vendor Supplier Industry in the United States is now moving from the Trial and Error approach to the Plan, Predict and Produce philosophy. This new discipline offers reduced development time, near net shapes, improved part quality, reduced inspection, and hence reduced overall cost. The emphasis now is to make it right the first time in the shortest time and at least cost. During the last decade there has been a tremendous amount of progress in the development of fundamental Computer Aided Engineering (CAE) tools for unit manufacturing process simulation. Much of this effort in the United States has been sponsored and funded by the United States Air Force and other government agencies. The tools have been correlated and validated to actual problems in laboratories and shop floors and a reasonable level of confidence and vendor acceptance has been achieved. These tools include simulation for: forging, extrusion, heat treatment, investment casting, ring rolling, chip removal. The challenge now is to implement these tools at vendor sites and to utilize these technologies on an ongoing basis to assist in preventing real world problems. The success and the status of implementation of this technology with major United States aerospace forging vendors are discussed. Author

N89-15279# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Evry Cedex (France).

INDUSTRIAL INTRODUCTION OF THE MODELING OF AERONAUTICAL FORGING AND FOUNDRY PROCESS SIMULATION (INTRODUCTION INDUSTRIELLE DE LA MODELISATION DE SIMULATION DE PROCEDES EN FORGE ET Fonderie AERONAUTIQUE)

ERIC BACHELET and YVES HONNORAT. In AGARD, Aerospace Materials Process Modelling 9 p (SEE N89-15262 07-31) Aug. 1988 In FRENCH (AGARD-CP-426) Avail: NTIS HC A12/MF A01

Problems encountered in the industrial application of aeronautical forging and foundry process simulation modeling which arise from both the complexity of the processes simulated and the geometries considered are reviewed. It is noted that current three-dimensional meshes are useful in modeling complex geometries. Such simulation programs make possible: (1) detailed process analysis; (2) the study of the sensitivity of various fabrication parameters; (3) equipment optimization; and (4) the efficient automation of fabrication. The most advanced modeling integration has been in the industrial production of large axisymmetric forged parts. Author

N89-15280# Inco Engineered Products Ltd., Birmingham (England).

AN APPLICATION OF COMPUTER MODELLING TO ISOTHERMAL FORGING

P. S. BATE. In AGARD, Aerospace Materials Process Modelling 10 p (SEE N89-15262 07-31) Aug. 1988 (AGARD-CP-426) Avail: NTIS HC A12/MF A01

In isothermal forging the workpiece is maintained at a reasonably constant temperature throughout the deformation. Because the dies must withstand high temperatures and the process times are long, the method is restricted to the production of high value components. This makes the process inherently expensive and so a reliable simulation is useful for process design. Within certain constraints, mainly those concerned with adequate representations of material behavior, finite element methods can provide such a simulation. The method used to model disc and blade-section forging is described. This is a two-dimensional finite element analysis using a finite incremental/iterative technique for elasto-viscoplastic materials. The mesh is defined by material points, and can be readily redefined during the simulation. Graphical display of the material deformation allows likely problems to be identified. Experiments using simple stress state testing have revealed that commonly used relationships are inadequate for predicting the flow stress of important materials. The type used in the modelling described here attempts an improved relationship, involving a structure related state variable. The evolution of this variable in the model can, together with experimental simulations, give a reasonable indication of the development of microstructure during forging. Author

N89-17685# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

BEHAVIOUR AND ANALYSIS OF MECHANICALLY FASTENED JOINTS IN COMPOSITE STRUCTURES

Mar. 1988 307 p In ENGLISH and FRENCH Meeting held in Madrid, Spain, 27-29 Apr. 1987 Original contains color illustrations (AGARD-CP-427, ISBN-92-835-0431-3; AD-A199171) Avail: NTIS HC A14/MF A01

The rapidly increasing use of composite structures in NATO aerospace has intensified interest in methods of strength, and life analysis. At the same time the introduction of new tough resins has increased the static strength of composite joints with implications for the corresponding strength in fatigue. A number of NATO nations have built up data bases and developed methods for strength and life analyses; in order to take advantage of these resources the Structures and Materials Panel held a Specialists' Meeting, in conjunction with the 64th Panel Meeting, at Madrid, Spain on 27th-29th April 1987, under the chairmanship of Professor Vittorio Giavotto, to provide a focus for methods of analysis and the identification of research needs. This volume contains the papers presented at this Specialists' Meeting. For individual titles, see N89-17686 through N89-17705.

31 ENGINEERING (GENERAL)

N89-17706# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Electromagnetic Wave Propagation Panel.

SCATTERING AND PROPAGATION IN RANDOM MEDIA

Mar. 1988 538 p. In ENGLISH and FRENCH Meeting held in Rome, Italy, 18-22 May 1987
(AGARD-CP-419; ISBN-92-835-0444-5; AD-A194694) Avail: NTIS HC A23/MF A01

The topic of scattering and propagation in random media has implications for the design, development, and operation of most military systems that radiate energy as a means of accomplishing their functions. Primary emphasis is on scattering and transmission in the atmosphere; however, other related random medium effects are not excluded. Modern methods of characterizing random media, mathematical methods and their applicability, effects on electromagnetic waves and the interpretation of these effects to specific system applications are described. The region of the spectrum considered is essentially unlimited and ranges from very long waves to optics. The performance of existing surveillance communication and navigation systems as well as the design of future systems is influenced by the propagation of energy via random media. An understanding of the nature of the medium and its impact on system design and performance is. For individual titles, see N89-17707 through N89-17752.

N89-18441# Organisatie voor Toegepast Natuurwetenschappelijk Onderzoek, Delft (Netherlands). Road-Vehicles Research Inst.

MADYMO CRASH VICTIM SIMULATIONS: A FLIGHT SAFETY APPLICATION

J. WISMANS and J. A. GRIFFIOEN. In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 6 p (SEE N89-18421 11-03) Dec. 1988
(AGARD-CP-443) Avail: NTIS HC A15/MF A01

MADYMO is a computer program for two- or three-dimensional simulation of human body gross motions. The program was designed particularly for crash analyses. In the past years the program was applied and validated extensively for vehicle safety research. An application is described in the field of flight safety: the simulation of a space shuttle crew escape system. Author

32

COMMUNICATIONS AND RADAR

Includes radar; land and global communications; communications theory; and optical communications.

N86-27566# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Electromagnetic Wave Propagation Panel.

PROPAGATION IMPACT ON MODERN HF COMMUNICATIONS SYSTEM DESIGN

Mar. 1986 187 p. Lecture series held in Brussels, Belgium, 21-22 Apr. 1986; in Issy-les-Moulineaux, France, 24-25 Apr. 1986; and in Copenhagen, Denmark, 28-29 Apr. 1986
(AGARD-LS-145; ISBN-92-835-1521-8; AD-A171300) Avail: NTIS HC A09/MF A01

AGARD Lecture Series 145 is concerned with high frequency communications and is sponsored by the Electromagnetic Wave Propagation Panel of AGARD and implemented by the Consultant and Exchange Program. The aim of these lectures is to survey problems in the field of HF Communications. The lectures cover needs of both the civil and military communities for high frequency communications. They discuss concepts of real time channel evaluation, system design, as well as advances in equipment, in propagation, and in coding and modulation techniques. The lectures are aimed to bring non-specialists in the field up to date so that HF communications can be considered as a viable technique at this time. The problems, difficulties and limitations of HF are also outlined. For individual titles see N86-27567 through N86-27576.

N86-27567# Hull Univ. (England). Dept. of Electronic Engineering.

THE DESIGN OF STATIC AND MOBILE HF COMMUNICATION SYSTEMS

M. DARNELL. In AGARD Propagation Impact on Modern HF Communications System Design 25 p (SEE N86-27566 18-32) Mar. 1986
(AGARD-LS-145) Avail: NTIS HC A09/MF A01

The lecture deals with more specific aspects of HF communication system design arising from a previous lecture entitled HF system design principles presented as part of AGARD Lecture Series 127 in 1983. The major topics considered are: (1) the design of point-to-point systems; (2) the design of systems involving mobile terminals; (3) system control and frequency management; (4) resistance to interception and disruption. The lecture is intended to provide a technical framework for later lectures covering the more detailed aspects of HF communication system design. Author

N86-27568# Norwegian Defence Research Establishment, Kjeller.

PROPAGATION 1: STATE OF THE ACT OF MODELLING AND PREDICTION IN HF PROPAGATION

E. V. THRANE. In AGARD Propagation Impact on Modern HF Communications System Design 21 p (SEE N86-27566 18-32) Mar. 1986 Previously announced as N83-30864
(AGARD-LS-145) Avail: NTIS HC A09/MF A01

The lecture reviews the state of the art in HF propagation modelling and describes the principles of radio frequency predictions. As a basis for the discussions, a brief introduction is given to the ionospheric parameters of importance to HF-propagation. Current methods for frequency prediction are semi-empirical, that is they depend upon a large data base of ionospheric physical models of the ionosphere and of radio wave propagation through the medium. In addition models of the noise and interference environment must be included. The lecture discusses the principles on which the methods are based, as well as their limitations. Examples are given of the use of predictions in system planning and communications. The relative importance of skywave and ground wave communications in the HF-band is discussed. Author

N86-27569# Hull Univ. (England). Dept. of Electronic Engineering.

EMBEDDED REAL-TIME CHANNEL EVALUATION TECHNIQUES

M. DARNELL. In AGARD Propagation Impact on Modern HF Communications System Design 16 p (SEE N86-27566 18-32) Mar. 1986
(AGARD-LS-145) Avail: NTIS HC A09/MF A01

The requirement for real-time channel evaluation (RTCE) in HF systems is identified and discussed in detail. Various scenarios in which RTCE is applicable are examined and classified. Specific RTCE techniques and systems are then described including: Pulse/modulated pulse sounding, chirp sounding, limited channel monitoring, interference characterization, and in-band RTCE. The application of RTCE to practical HF systems is discussed and the benefits accruing from its use quantified. Author

N86-27570# Harvard-Smithsonian Center for Astrophysics, Cambridge, MA.

AN INTRODUCTION TO ERROR-CONTROL CODING WITH APPLICATION TO HF COMMUNICATIONS

M. D. GROSSI. In AGARD Propagation Impact on Modern HF Communications System Design 16 p (SEE N86-27566 18-32) Mar. 1986
(AGARD-LS-145) Avail: NTIS HC A09/MF A01

The increasing demand for reliable, low error-rate, high-speed digital data transmission at HF has created the need for the adopting of coding schemes. As it is well appreciated by the practicing communicator, a problem in high-speed data transmission is the occurrence of errors. Codes provide an effective approach for the reduction of the error rate. Linear block codes (of which cyclic codes are a subclass) and convolutional codes are the main categories of codes of interest to HF communications. They are capable of correcting random errors due to white Gaussian noise, as well as burst errors due to impulse noise. In block codes, a block of information bits is followed immediately by a group of

check bits. The latter verify the presence of errors in the former. In convolutional codes, check bits are continuously interleaved with information bits, and they check the presence of errors not only in the block immediately preceding them, but in other blocks as well. For the various coding schemes reviewed in the lecture, several numerical examples are given, to help in the quantitative appraisal of the merits of a code, versus required equipment complexity. Author

N86-27571# Signatron, Inc., Lexington, MA.
MODERN HF COMMUNICATIONS, MODULATION AND CODING

P. MONSEN / In AGARD Propagation Impact on Modern HF Communications System Design 13 p (SEE N86-27566 18-32) Mar. 1986 Previously announced as N83-30867 (AGARD-LS-145) Avail: NTIS HC A09/MF A01

Digital communications over High Frequency radio channels are limited by the effects of time varying multipath signals and an impulsive noise characteristic. Modulation techniques which utilize adaptive receiver structures in conjunction with advanced error correction coding concepts can provide quality communication at both low data rates around 10 bps and high data rates around 2400 bps. The multipath channel is examined and two basic constraints are introduced. When the learning constraint is satisfied, it is possible to estimate the channel multipath gain and phase components. The diversity constraint establishes the necessary condition for implicit diversity. For low data rate applications where Intersymbol Interference (ISI) is negligible, adaptive receivers are discussed when both learning and diversity constraints are satisfied. An incoherent adaptive receiver is discussed for applications where the learning constraint is not satisfied. For high data rate applications, both constraints are satisfied in an HF application but ISI effects are severe. Adaptive techniques including equalizers and maximum likelihood sequence estimators are discussed. Experimental results from HF channel simulator tests are presented in a comparison of nonadaptive and adaptive high speed modems. We discuss the use of error correction coding to protect against impulsive noise and show that multipath fading reduces the theoretical performance capability by only 1 to 3 dB when proper coding and interleaving are employed. Performance of practical coding schemes using channel state information are used to show the potential performance on an HF channel. Author

N86-27572# Petrie Telecommunications, Nepean (Ontario).
EQUIPMENT: ANTENNA SYSTEMS

L. E. PETRIE / In AGARD Propagation Impact on Modern HF Communications System Design 5 p (SEE N86-27566 18-32) Mar. 1986 Previously announced as N83-30868 (AGARD-LS-145) Avail: NTIS HC A09/MF A01

Some antenna fundamentals as well as definitions of the principal terms used in antenna engineering are described. Methods are presented for determining the desired antenna radiation patterns for HF communication circuit or service area. Sources for obtaining or computing radiation pattern information are outlined. Comparisons are presented between the measured and computed radiation patterns. The effect of the properties of the ground on the antenna gain and the pattern are illustrated for several types of antennas. Numerous examples are given of the radiation patterns for typical antennas used on short, intermediate and long distance circuits for both mobile and fixed service operations. The application of adaptive antenna arrays and active antennas in modern HF communication systems are briefly reviewed. Author

N86-27573# Mitre Corp., Bedford, MA.
DEVELOPMENTS IN HF EQUIPMENT AND SYSTEMS MOBILE AND PORTABLE TERMINALS

Q. C. WILSON / In AGARD Propagation Impact on Modern HF Communications System Design 19 p (SEE N86-27566 18-32) Mar. 1986 (AGARD-LS-145) Avail: NTIS HC A09/MF A01

Before the advent of satellite platforms, sophisticated high frequency (HF) propagation and system research promised improved capability during disturbed ionospheric propagation conditions. However, satellite relays captured the imaginations and pocketbooks of the communications community in the mid-1960s. Consequently, extant HF systems aged while satellite systems were implemented. During peacetime, satellite systems transmit quality low data rate communications and navigation aids to mobile

users, but there is now renewed interest in the low cost and survivability attributes of HF radio. At this time, when old HF prime systems need replacement for logistical reasons, the need for low cost communications that can survive jamming, nuclear effects, and space warfare is not satisfied. The HF renaissance is the response to this challenge. Logistical replacement procurements that provide new capabilities are redressing the attrition of vacuum-tube radio equipment over the last decade. Procuring organizations typically compile specifications comprising state-of-the-art and new capabilities offered by competing vendors. Integrated circuits, which include microprocessors, synthesizer elements, and other evolving components, have led to new circuit architectures. The first of the following three sections describes: Receivers; Transceivers and Antenna Couplers; Antenna Kits; and Audio Channel Peripherals. Author

N86-27574# Norwegian Defence Research Establishment, Kjeller.
PROPAGATION 2: PROBLEMS IN HF PROPAGATION

E. V. THRANE / In AGARD Propagation Impact on Modern HF Communications System Design 17 p (SEE N86-27566 18-32) Mar. 1986 Previously announced as N83-30870 (AGARD-LS-145) Avail: NTIS HC A09/MF A01

The ionosphere is not a perfect reflector for HF-waves, and the lecture will review some of the resulting propagation problems. Some of these are encountered during undisturbed ionospheric conditions, such as multipath reflections, but most problems are associated with geophysical disturbances. Solar flares and associated magnetic storms cause absorption, low MUF (Maximum Usable Frequency), scatter due to irregularities, etc.. The ionosphere is particularly variable in high latitudes where auroral phenomena influence the reflecting properties of the ionospheric layers. The lecture discussed the presently available short term forecasting techniques, and it also deals with possible ways of minimizing the effects of ionospheric disturbances, such as path and time diversity, the use of early warnings, and back-up systems. Author

N86-27575# Harvard-Smithsonian Center for Astrophysics, Cambridge, MA.
MEASUREMENTS OF HF PROPAGATION PARAMETERS FOR REAL-TIME CHANNEL EVALUATION (RTCE) SYSTEMS

M. D. GROSSI / In AGARD Propagation Impact on Modern HF Communications System Design 14 p (SEE N86-27566 18-32) Mar. 1986 (AGARD-LS-145) Avail: NTIS HC A09/MF A01

HF propagation paths are time-spread and frequency-spread channels, and are characterized by severe variability in the time domain of all their properties, inclusive of path losses. In addition, even when path conditions would be affordable, the link may be severely interfered with by other transmitters. Improvements over present-day link's performance in terms of circuit reliability, data rate and error rate can be achieved through the use of adaptive schemes capable of coping with the variability of the channel. Recent advances in microprocessor technology, in frequency-agile HF equipment and in the understanding of the propagation medium, make it feasible and practical to use adaptive schemes at HF. The simplest approach is to make the link adaptive to a selected channel parameter such as the Signal-to-Noise ratio. At the other extreme, the adaptive links can be designed to respond to all relevant channel functions, such as Signal-to-Noise ratio, multipath spread, Doppler spread, etc. In all cases, a necessary prerequisite for link's adaptivity is Real-Time Channel Evaluation (RTCE). The RTCE data gathering must match in scope and complexity the adaptivity scheme that is meant to serve. For instance, if the link's data rate is adjusted only to the Signal-to-Noise ratio, the RTCE must be kept very simple and must be reduced to the sole measurement of the signal intensity and to the level of the noise, inclusive of interference. Measurement of pertinent link's parameters by the RTCE must be performed at several spot frequencies in the band of interest, in order to identify automatically the most suitable channels for the transmission of the information. RTCE is at present in the R&D phase, and the related activities consist almost solely of the measurement of signal amplitude and noise levels, inclusive of interference, at several frequencies in specific HF paths of interest, with only a few instances of inclusion of multipath spread measurements. At the successful completion of the R&D activity, it is expected that in a form or another,

32 COMMUNICATIONS AND RADAR

RTCE and the related adaptive schemes will enter the practice of modernized HF communications. Author

N86-27576# Petrie Telecommunications, Nepean (Ontario).

ADAPTIVE SYSTEMS IN OPERATION

L. E. PETRIE *In* AGARD Propagation Impact on Modern HF Communications System Design 10 p (SEE N86-27566 18-32) Mar. 1986

(AGARD-LS-145) Avail: NTIS HC A09/MF A01

The development and evolution of channel evaluation techniques is described. A recently developed fully automatic HF radio telephone system is discussed which automatically selects the suitable channel and also provides a telephone inter-connects. Also described is a HF message terminal which automatically requests, repeats and confirms message status for sender and receiver. Author

N86-30931# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

DETERMINATION OF ANTENNAE PATTERNS AND RADAR REFLECTION CHARACTERISTICS OF AIRCRAFT

H. BOTHE, D. MACDONALD, and A. POOL, ed. May 1986 138 p

(AGARD-AG-300-VOL-4; ISBN92-835-1530-7; AD-A169584)

Avail: NTIS HC A07/MF A01

The different types of aircraft antennas, their radiation characteristics and their preferred siting on the airframe are described. Emphasis is placed on the various methods for determining aircraft antenna radiation patterns (ARP) and advantages, disadvantages and limitations of each method are indicated. Mathematical modelling, model measurements and in-flight measurements in conjunction with the applied flight test techniques are included. Examples of practical results are given. Methods of determining aircraft radar characteristics are also described, indicating advantages, disadvantages and limitations of each method. Relevant fundamentals of radar theory are included only as necessary to appreciation of the real meaning of radar cross section (RCS) and angular glint. The measuring methods included are dynamic full-scale, static full-scale, sub-scale optical, ultrasonic and radio modelling. References are made to RCS measuring facilities in the USA and Europe and the UK Radio Modelling Facility is used extensively to exemplify the sub scale technique. Author

N87-13291# Rome Univ (Italy). Dipt. di Energetica.

BISTABILITY IN NONLINEAR WAVEGUIDES

M. BERTOLOTTI, C. SIBILIA, and I. ANSELMINI *In* AGARD Guided Optical Structures in the Military Environment 8 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

The propagation of electromagnetic waves in a nonlinear waveguide is studied. For simplicity a three layer structure is considered with the two external media of semi-infinite extent. The mode dispersion equation is derived together with the power carried by the single mode in the structure, showing that bistability can occur in some case. Author

N87-13294# Communications Research Centre, Ottawa (Ontario). Optical Communications Program.

OPTOELECTRONIC BROADBAND SWITCHING FOR COMMUNICATIONS AND SIGNAL PROCESSING

R. I. MACDONALD and D. K. W. LAM *In* AGARD Guided Optical Structures in the Military Environment 10 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

By employing a hybrid technology using electronic and optical integration, optical isolation levels can be attained in a switch matrix without the need to switch light. Bandwidths of several GHz, subnanosecond switching time and crosstalk below 50 dB were demonstrated in monolithically integrated optoelectronic switch matrices. These devices show high promise as central switches in star configuration communication systems where very high bandwidth or very large array size is required. Advantages over foreseeable alternative technologies include size and power consumption as well as performance. In addition, optoelectronic switch matrices have unique properties that suggest their application in a number of signal processing situations where

precise broadband signal delays are required, such as in the phasing of arrays, or the production of tunable filters. Recent work in these areas are described. Author

N87-18703# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Electromagnetic Wave Propagation Panel.

SPECIAL COURSE ON INTERACTION OF PROPAGATION AND DIGITAL TRANSMISSION TECHNIQUES

Oct. 1986 308 p Special course held in Jevnaker, Norway, 13-14 Oct. 1986, in Copenhagen, Denmark, 16-17 Oct. 1986, and in Lisbon, Portugal, 20-21 Oct. 1986

(AD-A175698; AGARD-R-744; ISBN-92-835-1539-0) Avail: NTIS HC A14/MF A01

This Special Course has three main objectives: (1) To provide an opportunity for engineers and scientists to learn more of propagation mechanisms and communications system design in frequency bands other than those with which they may be closely associated, thus enabling a cross-fertilization of ideas to take place; (2) To attempt to identify, for the various classes of systems, the propagation measurements/data still required to enable digital communication system design to be made more precise and effective; and (3) To identify trends in the requirements and design techniques for future digital communication systems. This Special Course, sponsored by the Electromagnetic Wave Propagation Panel of AGARD, has been implemented by the Consultant and Exchange Program of AGARD, and was presented at Jevnaker, Norway, 13 to 14 October 1986, at Copenhagen, Denmark, 16 to 17 October 1986 and in Lisbon, Portugal, 20 to 21 October 1986. For individual titles see N87-18704 through N87-18711.

N87-18704# Hull Univ. (England). Dept. of Electronic Engineering.

REVIEW OF MODULATION, CODING AND SPEECH DIGITISATION TECHNIQUES

M. DARNELL *In* AGARD and Special Course on Interaction of Propagation and Digital Transmission Techniques 17 p (SEE N87-18703 11-32) Oct. 1986

(AGARD-R-744) Avail: NTIS HC A14/MF A01

As a basis for the more detailed discussion of specific forms of digital communication system in this special course, this lecture introduces the following topics in general terms: (1) modulation; (2) coding for error control; (3) coding for multiple-access; (4) coding for encryption; and (5) speech digitization. Author

N87-18705# Naval Research Lab., Washington, DC. Ionospheric Effects Branch.

ELF/VLF/LF PROPAGATION AND SYSTEM DESIGN

FRANCIS J. KELLY *In* AGARD and Special Course on Interaction of Propagation and Digital Transmission Techniques 110 p (SEE N87-18703 11-32) Oct. 1986

(AGARD-R-744) Avail: NTIS HC A14/MF A01

The effects of propagation conditions in the ELF/VLF/LF frequency band on the design and performance of digital communications systems are discussed. The communications channel from a ground-based or airborne transmitting antenna through the Earth-ionosphere waveguide to the receiver is discussed. Questions of coverage, noise, dispersion, time variance and propagation disturbances are summarized. Author

N87-18706# Deutsche Welle, Cologne (Germany, F.R.).

HF GROUNDWAVE AND SKYWAVE PROPAGATION

KLAUS-JUERGEN HORTENBACH *In* AGARD and Special Course on Interaction of Propagation and Digital Transmission Techniques 25 p (SEE N87-18703 11-32) Oct. 1986

(AGARD-R-744) Avail: NTIS HC A14/MF A01

The principles of HF ground- and skywave propagation are reviewed with regard to regular conditions as well as anomalous phenomena which may effect the signal characteristics and thus may have an influence on the performance of digital communication systems. Particular consideration is given to the statistics of signal fading as a basis for system design. Author

N87-18707# Hull Univ. (England). Dept. of Electronic Engineering.

HF SYSTEM DESIGN

M. DARNELL *In* AGARD and Special Course on Interaction of Propagation and Digital Transmission Techniques 24 p (SEE N87-18703 11-32) Oct. 1986

(AGARD-R-744) Avail: NTIS HC A14/MF A01

This lecture is intended to complement the companion lecture dealing with the propagation aspects of HF communications. The major topics covered are as follows: (1) the design of point-to-point systems; (2) the design of systems involving mobile terminals; (3) system control and frequency management; and (4) resistance to interception and disruption. The lecture attempts to show how the propagation effects discussed in the previous lecture on HF groundwave and skywave propagation are taken into account in the design of HF communications systems for various purposes.

Author

N87-18708# Danish Research Center for Applied Electronics, Hoersholm.

METEOR BURST PROPAGATION AND SYSTEM DESIGN

JENS OSTERGAARD *In* AGARD and Special Course on Interaction of Propagation and Digital Transmission Techniques 19 p (SEE N87-18703 11-32) Oct. 1986

(AGARD-R-744) Avail: NTIS HC A14/MF A01

The first truly operational meteor scatter communication system (JANET) was operated in Canada in the mid 1950's at approximately 40 MHz. However the system was severely impaired during a Solar Proton Event, and experimental interest in meteor scatter propagation essentially vanished. SHAPE Technical Center developed and tested a new meteor scatter communication system (COMET) in the mid 1960's in Central Europe and Norway which worked well although it had a fairly low capacity (1 to 4 telegraph channels). The system was tested both at 40 MHz and at 100 MHz to explore the frequency dependent properties of meteor scatter propagation. The advent of satellite communication diverted interest away from meteor scatter propagation for obvious reasons of stable propagation and large bandwidth. Interest in meteor scatter communication has been revitalized as a result of rapid advances in microcomputer technology and digital communication techniques. Some suggested uses for modern meteor scatter communication systems include automatic data collection from unmanned sites, thin-line digital radiolinks, where privacy and exclusive ownership of the communication terminals are essential. Meteor scatter could also be a candidate mode for operation of digital HF communication systems with extended frequency range of operation into the VHF band. The aim of this paper is to present an overview of the meteor scatter propagation mechanism, and the ongoing research efforts which are directed towards the exploration of the potential of meteor scatter propagation as a communication channel.

Author

N87-18709# North Atlantic Treaty Organization, Brussels (Belgium). Allied Radio Frequency Agency.

VHF/UHF/MICROWAVE LOS TERRESTRIAL PROPAGATION AND SYSTEM DESIGN

T. K. FITZSIMONS *In* AGARD and Special Course on Interaction of Propagation and Digital Transmission Techniques 11 p (SEE N87-18703 11-32) Oct. 1986

(AGARD-R-744) Avail: NTIS HC A14/MF A01

The telecommunication frequency range under discussion is from 30 MHz up to tens of GHz. For military communications this means the use of systems such as Combat Net Radio, Single-Channel Radio Access, Tactical and Fixed Radio Relay, Air-Ground-Air Systems, Common User Information Systems and Tactical Satellite. For civil communications the systems are not dissimilar - mobile radio, fixed radio relay systems, Air Traffic Control, etc. Of course there is a considerable amount of broadcasting and there are military and civil radar systems in these frequency bands. The spectrum range from 30 MHz to about 5 GHz is for the military in particular, prime spectrum; wide bandwidths (hence digital transmission) can be achieved, most propagation mechanisms are relatively stable and most of this part of the spectrum can be used by tactical systems either operating on the move or moving frequently to new sites. In addition to considerations of wanted performance and necessary characteristics such as ECM, the military systems are designed to meet requirements for rapid deployment in an environment which

is difficult and unpredictable from the electromagnetic environment, topographic, and meteorological aspects.

Author

N87-18710# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

UHF/SHF SATCOM PROPAGATION AND SYSTEM DESIGN

ALLEN L. JOHNSON *In* AGARD and Special Course on Interaction of Propagation and Digital Transmission Techniques 18 p (SEE N87-18703 11-32) Oct. 1986

(AGARD-R-744) Avail: NTIS HC A14/MF A01

One year after the launch of the Russian Sputnik, the Americans orbited the world's first active communications satellite, SCORE. The communications planners hoped that the line-of-sight communications through satellites would overcome the various propagation problems plaguing long-distance High Frequency (HF) communications. The communications satellite did overcome many of the traditional HF problems but due to the law of conservation of difficulty, a new set of propagation problems emerged. This section deals with some of those problems. A satellite orbiting at approximately 19,200 nautical mile altitude rotates at the same rate as the Earth and, if in an equatorial plane, appears to remain fixed over one point on the Earth. The equatorial synchronous satellite is discussed. The Earth-to-satellite link experiences a variety of propagation effects such as free space loss, attenuation, polarization changes, refraction, and delay as a result of the physics of the link and the normal Earth's atmosphere. These are also discussed.

Author

N87-18711# North Atlantic Treaty Organization, Brussels (Belgium). Allied Radio Frequency Agency.

PROBLEMS OF SPECTRUM MANAGEMENT AND SYSTEM COMPATIBILITY

T. K. FITZSIMONS *In* AGARD and Special Course on Interaction of Propagation and Digital Transmission Techniques 10 p (SEE N87-18703 11-32) Oct. 1986

(AGARD-R-744) Avail: NTIS HC A14/MF A01

The problems of radio frequency spectrum management stem basically from requirements that are increasing more rapidly than our ability to exploit certain parts of the spectrum. The expanding demand is caused partly by the transition from analog to digital transmission methods but of course also to the increase in communications needs and uses. Much of the increase in demand is for allotments and assignments in frequency bands already heavily exploited. New frequency bands are periodically added to the table of allocations by the ITU (International Telecommunication Union) and the rate at which this has happened in the recent past is itself an indication of the almost explosive growth in the uses of the radio frequency spectrum.

Author

N87-18721# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Avionics Panel.

MULTIFUNCTION RADAR FOR AIRBORNE APPLICATIONS

Jul. 1986 209 p In ENGLISH and FRENCH Symposium held in Toulouse, France, 14-18 Oct. 1985

(AGARD-CP-381; ISBN-92-835-0395-3; AD-A173978) Avail: NTIS HC A10/MF A01

The present state-of-the-art of multifunction radar and new concepts for the design of future radar systems are presented. Specific subject areas addressed include all-weather operation, signal processing, high resolution imaging (synthetic aperture radar), beam steering, range and Doppler estimation, clutter and interference, equipment and component design, target detection and classification, multifunction integration, and radar system integration. For individual titles see N87-18722 through N87-18760.

N87-18722# Thomson-CSF, Paris (France).

ABOUT THE FUTURE OF AIRBORNE RADAR

MICHEL H. CARPENTIER *In* AGARD Multifunction Radar for Airborne Applications 6 p (SEE N87-18721 11-32) Jul. 1986

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

The present state-of-the-art of airborne multifunctional radar is reviewed and possible developments for future systems are discussed. The operational requirements of military aircraft radars are outlined with particular attention given to target acquisition and tracking, radar navigation and terrain following. The electromagnetic environments these systems will operate in are also characterized. The limitations of present radars are defined

32 COMMUNICATIONS AND RADAR

and suggestions are made regarding the directions of future research. Four possible areas of development are addressed: (1) improvement of the range resolution and complexity of the transmitted waveforms; (2) better utilization of the received signals; (3) improvement of angular domain; and (4) cooperation with the electromagnetic countermeasure system and other sensors onboard the aircraft. M.G.

N87-18723# Forschungsinstitut fuer Funk und Mathematik, Werthoven (Germany, F.R.).

SOLID STATE MULTIFUNCTION PHASED ARRAY RADAR

W. D. WIRTH *In* AGARD Multifunction Radar for Airborne Applications 8 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

With an experimental phased array radar system ELRA (electronic steerable radar) operational experience has been gathered. This system was planned for solid state operation, therefore it consists of active receiving and transmitting arrays. The provisional tube power amplifiers are replaced by transistor amplifiers. This change had some implications on the multifunction operation, especially on the selection of transmitted waveforms. The necessary considerations are relevant for future solid state phased array radars. The introduction of monolithic microwave antenna modules will improve the chances of active solid state phased arrays. Author

N87-18724# Radar Systems Group, Los Angeles, CA. Advanced Development Dept.

MULTIMISSIION AIRBORNE RADAR FOR THE 1990S

THOMAS H. ROBINSON *In* AGARD Multifunction Radar for Airborne Applications 2 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The continuing trend towards the development and production of aircraft capable of multiple missions indicates that future airborne radars must provide a broad spectrum of air-to-air and air-to-ground modes. This paper investigates the modal and functional requirements of a multimode radar projected for the mid-1990s period. The paper is divided into two sections. In the first, the multimission capabilities of current radars are presented to establish trends and capabilities. In the second, the requirements of the next generation system are established. Current multimode radars lay the basis for future systems. The experience gained on the APG-65 and APG-63/70 radars is presented and conclusions are drawn regarding their impact on future system requirements. Not only are modes and performance reviewed for these radars but also their system architecture. The discussion starts with the APG-65 radar which is the first true multimission radar with programmable signal and data processing. Following this, the evolution of the APG-63 radar, culminating with the most recent upgrading resulting in redesignation of APG-70, is presented. The incorporation of air-to-ground capabilities in the APG-70, resulting from the Dual Role Fighter program, is reviewed. Results from the Advanced Fighter Capabilities Demonstration program are presented showing how high resolution SAR was incorporated into a full weapon delivery solution. The specific radar requirements for the next decade radar system are developed. This development is done in two parts. First, mode requirements are synthesized for air superiority, navigation and strike/interdiction operation. This includes low altitude penetration requirements and a review of radar timeline constraints which arise. Second, the fundamental functional requirements needed to implement the mode requirements are explored. Architectural issues and their impact on reliability and sustainability are also considered. Author

N87-18725# Royal Signals and Radar Establishment, Malvern (England).

MULTIFUNCTION MILLIMETRE-WAVE RADAR FOR

ALL-WEATHER GROUND ATTACK AIRCRAFT Abstract Only

K. E. POTTER *In* AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Details of the millimeter wave radar performance are presented which show that with potentially available power sources an all weather capability can be realized. Performance is evaluated as a function of frequency and antenna size, and the use of polarimetry with wide bandwidth/coherent processing is shown to offer potential enhancement for target discrimination. The millimeter wave radar is shown to be potentially capable of satisfying the

following functions: take off/landing, terrain following, area correlation, tercom, and acquisition of targets. The above roles can be achieved in an all weather environment making the millimeter wave radar a valuable multifunction airborne radar. Author

N87-18726# Rome Air Development Center, Griffiss AFB, NY. **MULTI-MODE MULTISTATICS FOR PASSIVE/ACTIVE**

AIRBORNE SURVEILLANCE Abstract Only

ROBERT F. OGRODNIK *In* AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The increasing performance demands for air surveillance assets, as well as the necessity for continued surveillance operations in the presence of enemy jamming anti-radiation missile (ARM) attacks, have increased interest in passive surveillance, in particular multi-mode passive/active multistatic sensing. The use of noncooperative radiation as illuminators of opportunity combined with passive surveillance electromagnetic support measurement (ESM) sensors opens new horizons to multistatic surveillance from a passive airborne platform. Research and field tests have been conducted on ESM augmented bistatics as well as noncooperative multistatics which support the development of airborne multi-mode passive surveillance technology. This work has been conducted under such programs as the Bistatic Enhanced Altitude Detection (BEAD) and the noncooperative multistatic Passive Coherent Location (PCL). Both BEAD and PCL technology directly support the receiver, signal processing and target location/tracking operations necessary for passive surveillance. The demonstrated technologies for EM interference rejection and multistatic multi-target tracking and location under PCL provide a promising performance bench mark for passive surveillance in the presence of a complex electromagnetic environment. Passive receiver intercept performance under BEAD has provided a receiver design baseline for both look-down and look-up surveillance applications. The technologies under development in BEAD and PCL are presented along with the field test results and the sensor concepts. In particular, spin-off data such as bistatic look-down clutter, noise-floor limitation of noncooperative multistatics and sensitivity limitations set by passive surveillance using signal intercept techniques and illuminators of opportunity are provided. Author

N87-18727# Huntco 70 Ltd., Scarborough (Ontario).

MOTION COMPENSATION REQUIREMENTS FOR A HIGH RESOLUTION SPOTLIGHT SAR Abstract Only

J. S. A. HEPBURN, G. E. HASLAM (Defence Research Establishment, Ottawa, Ontario), D. F. LIANG, and W. S. WIDNALL (Massachusetts Inst. of Tech., Cambridge) *In* AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

The Canadian Department of National Defence is developing a high resolution airborne spotlight synthetic aperture radar (SAR). To attain the high contrast, high resolution and low geometric distortion objectives of the project, it is essential that very accurate motion compensation be applied to the radar returns to minimize the effects on SAR image quality of spurious antenna phase center motion. The motion compensation system being developed for the project includes a gimbaled master inertial navigation system (INS) located near the center of gravity of the host aircraft, a strapdown inertial measurement unit (IMU) comprising gyroscope and accelerometer triads mounted on the radar antenna, as well as Doppler velocity and barometric altitude sensors for damping the inertial systems. The role of the master INS is to enable high accuracy alignment of the strapdown IMU. The raw sensor data are integrated using a U-D factorized Kalman filter to obtain optimal estimates of the motion of the radar antenna phase center while the SAR window is open. The data are used to adjust both the radar pulse repetition frequency and the phase and displacement of the radar returns. An analysis of the motion compensation requirements was carried out, leading to the specification of the motion compensation sensor configuration and accuracy. The performance of the motion compensation system has been evaluated by detailed computer simulation. This evaluation accounted for all major system error sources, including errors associated with sensors, transfer alignment and computation, with the system operating in a moderately turbulent environment. Author

N87-18728# Defence Research Establishment Ottawa, (Ontario).

IMPLEMENTATION OF AN AIRBORNE SAR MOTION COMPENSATION SYSTEM Abstract Only

D. DIFILIPPO, D. F. LIANG, L. POSTEMA (Lear Siegler, Inc., Grand Rapids, Mich.), and B. LEACH (National Aeronautical Establishment, Ottawa, Ontario) *In* AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The Canadian Department of National Defence has entered into the Phase 2 development of an airborne synthetic aperture radar motion compensation (SARMC) system, following a Phase 1 feasibility study which led to the specification of the SARMC sensor configuration and accuracy. This paper describes the hardware and software configurations of an airborne SARMC system implemented on board a Convair 580 research aircraft. The hardware configuration includes a gimbaled LTN-51 inertial navigation system, a Decca Doppler radar, a baroaltimeter and a motion compensation inertial measurement subsystem (MCIMS). The MCIMS is a specially designed strapped-down inertial measurement unit mounted on the ring gear of the APS-506 radar antenna. Since motion compensation depends critically on knowledge of the MCIMS orientation with respect to the radar line-of-sight to the designated target, a laser alignment procedure was developed and performed to calibrate the azimuth encoder of the antenna ring gear. This procedure is discussed along with experimental results. Substantial effort was dedicated to streamlining the Kalman filter algorithms in the SARMC processing package to obtain a high degree of robustness and computational efficiency while optimally integrating the information from the motion compensation sensors. Preliminary flight trial data are presented and compared with simulation results to indicate the level of performance achievable with this optimized system. Author

N87-18729# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany). Inst. for Radio Frequency Technology.

MM WAVE SAR SENSOR DESIGN: CONCEPT FOR AN AIRBORNE LOW LEVEL RECONNAISSANCE SYSTEM Abstract Only

C. BOESSWETTER *In* AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The basic system design considerations for a high resolution SAR system operating at 35 GHz or 94 GHz are given. First it is shown that only the focussed SAR concept in the side looking configuration matches the requirements and constraints. After definition of illumination geometry and airborne modes the fundamental SAR parameters in range and azimuth direction are derived. A review of the performance parameters of some critical mm wave components (coherent pulsed transmitters, front ends, antennas) establish the basis for further analysis. The power and contrast budget in the processed SAR image shows the feasibility of a 35/94 GHz SAR sensor design. The discussion of the resulting system parameters points out that this unusual system design implies both benefits and new risk areas. One of the benefits besides the compactness of sensor hardware turns out to be the short synthetic aperture length simplifying the design of the digital SAR processor, preferably operating in real time. A possible architecture based on current state-of-the-art correlator hardware is shown. One of the potential risk areas in achieving high resolution SAR imagery in the mm wave frequency band is motion compensation. However, it is shown that the short range and short synthetic aperture lengths ease the problem so that correction of motion induced phase errors and thus focussed synthetic aperture processing should be possible. Author

N87-18730# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany). Inst. for Radio Frequency Technology.

ECCM EFFECTIVENESS OF A LOW SIDELobe ANTENNA FOR SAR GROUND MAPPING Abstract Only

C. BOESSWETTER *In* AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Airborne synthetic aperture radar (SAR) reconnaissance systems in the strip mapping mode are susceptible to jamming. The main electronic counter measure (ECM) threat is commonly

understood to be the ground based sidelobe jammer which includes a sensitive intercept receiver and a tracking capability to adapt the jamming power in angle, frequency and bandwidth to the SAR system. The most important of several necessary electronic counter-countermeasure (ECCM) techniques is commonly considered to be a low sidelobe SAR antenna which also improves MTI performance. To characterize the ECCM and cost effectiveness of such an expensive antenna some measures are needed. There are two separate phases: intercept and jamming. Accordingly, two gains are defined: intercept gain and jamming gain. Both are based on the evaluation of the signal-to- (jammer plus clutter plus noise) ratio in the processed SAR image for the configuration airborne sensor-ground based jammer. Both gains describe the benefits of a low side lobe antenna in terms of jam-free flight distance (intercept) and target contrast enhancement (jamming). It is shown that in the most interesting case of heavy jamming both intercept and jamming phases are described by the same set of equations if normalized to the pointing direction R sub 0 of the antenna. It follows that the intercept ratio on the ground equals the reciprocal of the target contrast in the processed SAR image. To discuss both the intercept and jamming gain performance of a given SAR antenna 3-dimensional relief plots and 2-dimensional contour plots are used. They allow the definition of both gains directly. For the parameters of a given SAR reconnaissance system the plots are calculated in an area of 120 nmi x 180 nmi (azimuth x range). By replacing the existing antenna with uniform weighting with an antenna with 25 dB lower sidelobe level the ECCM effectiveness in terms of intercept gain and jamming gain is shown. Since the equations are normalized to the pointing direction of the sensor antenna the results are given in relative terms. By including actual jammer parameters the ECCM effectiveness may also be given in absolute terms. Author

N87-18731# Thomson-CSF, Malakoff (France). Div. A.V.S.

SYNTHETIC APERTURE IMAGING AIRBORNE RADAR

MARC LUCAS *In* AGARD Multifunction Radar for Airborne Applications 4 p (SEE N87-18721 11-32) Jul. 1986 Previously announced as A86-32632

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

Airborne synthetic aperture radars are systems able to obtain high resolution ground images, by day or night, independent of weather conditions. Their applications are very broad, both military (reconnaissance), and civilian (mapping, remote sensing). Following a brief technical account (synthetic aperture, pulse compression), the paper describes the operational features of an airborne radar system providing high resolution images at long range. Then, a technical description is given. This system can provide in real time, to the ground, radar images by using a high rate data link. It consists of two main parts: (1) an airborne part including the antenna, the radar transmitter-receiver, and the data link unit, and (2) a ground station that realizes, in real time, data reception, synthetic aperture processing, and image exploitation. IAA

N87-18732# Forschungsinstitut fuer Hochfrequenzphysik, Werthhoven (Germany, F.R.).

MILLIMETER WAVE TRANSMISSION THROUGH MAN-MADE OBSCURATIONS IN A BATTLEFIELD ENVIRONMENT Abstract Only

H. ESSEN and E. P. BAARS *In* AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

It is quite well established that millimeter waves exhibit superior transmission features for natural obscurations, i.e., mostly adverse weather-effects, if compared to those in the IR-region. Therefore mm-wave systems are competitors for military surveillance and guidance systems. For these applications the knowledge of the amount of degradation of mm-systems due to obscuration in a battlefield environment has to be assessed in comparison to IR-sensors. The data dealt with in this paper have been gathered during various measurement campaigns. They cover smoke and dust trials with mm-wave instrumentation systems at 47 GHz and 94 GHz and experiments on screening smokes. All trials were performed in conjunction with IR-measurements. For the dust and smoke-trials a bistatic configuration was used with transmitters and receivers located at two opposite sites across an artillery impact area. Results are discussed by means of attenuation-curves for different transmit/receive-polarizations. A comparison of the results of the two employed mm-wave frequencies with the

32 COMMUNICATIONS AND RADAR

simultaneously measured IR-data is given for selected events and on a statistical basis over the whole measurement period. For the experiments on screening smokes a monostatic configuration was chosen with a pulsed 94 GHz instrumentation radar operating over a folded transmission path against a corner reflector and armoured target vehicles. By recording the echos from a number of consecutive range gates the attenuation caused by the smoke as well as the backscatter of the smoke cloud and the location of scattering centers within the cloud could be evaluated. Author

N87-18733# Adaptive Sensors, Inc., Santa Monica, CA. A CFAR DESIGN CONCEPT FOR OPERATION IN HETEROGENEOUS CLUTTER

HAROLD M. FINN /In AGARD Multifunction Radar for Airborne Applications 12 p (SEE N87-18721 11-32) Jul. 1986 Sponsored by the Army (AGARD-CP-381) Avail: NTIS HC A10/MF A01

When the heterogeneous clutter field spanning the spatial sampling sliding window can be modeled as two contiguous homogeneous clutter fields with the statistical parameters of each field unknown and independent from field to field and with the transition point between fields also not known, then the cell averaging CFAR (constant false alarm rate) performance significantly degrades yielding target masking effects and loss of false alarm regulation. For the same defined and encountered environment spanning the sliding windows, the performance degradation effects are shown to be largely eliminated when a newly developed class of CFAR test is employed designated as heterogeneous clutter estimating CFAR's (HCE-CFAR). The test initially involves the combined use of multiple hypothesis testing and maximum likelihood estimation procedures to estimate the statistical parameters of each of the two fields, and the transition point between them, and then makes use of the relevant estimated clutter field parameters to effect the final decision rule. HCE-CFAR designs are presented for both the cases when the contiguous fields have Rayleigh first order probability distributions, and log normal probability distribution. However, the focus of the development and the conducted performance evaluation is for the Rayleigh clutter cases. Author

N87-18734# Marconi Co. Ltd., Chelmsford (England). HIGH-RESOLUTION MTI WITH SAR Abstract Only

A. FREEMAN /In AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Moving Target Imaging (MTI) using Synthetic Aperture Radar (SAR) offers considerable potential as an all-weather surveillance tool, monitoring the movement of vehicles on the ground. The purpose of the work described in this paper is to investigate techniques of producing high-resolution images of such moving objects using the radar signals received by an existing airborne SAR system. The first step in the MTI method adopted is the production of a rather crude image of such moving targets as exist in the data. This can be achieved by application of a simple prefilter (for clutter-cancellation) prior to the conventional azimuth (Doppler) processing. The image can then be used for initial detection of the 'targets'. In such images, well-behaved moving targets are distorted by their motions in a particular manner and the parameters of the target motions can be estimated from their shape and other properties. These parameters are measured and then used to construct a 2-dimensional filter matched to the response for each target, for use in the azimuth (Doppler) processing. This technique can be shown to produce high-resolution images of the moving targets with resolution being comparable to that of the conventional airborne SAR images of the ground. Author

N87-18735# Adaptive Sensors, Inc., Santa Monica, CA. A SEQUENTIAL ADAPTATION TECHNIQUE AND ITS APPLICATION TO THE MARK 12 IFF SYSTEM

JOHN S. BAILEY, JOHN D. MALLETT, DUANE J. SHEPPARD

(Army Electronics Research and Development Command, Fort Monmouth, N. J.), F. NEAL WARNER, and ROBERT ADAMS (Technology Service Corp., Santa Monica, Calif.) /In AGARD Multifunction Radar for Airborne Applications 11 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Sequential adaptation uses only two sets of receivers, correlators, and A/D converters which are time multiplexed to effect spatial adaptation in a system with (N) adaptive degrees of freedom. This technique can substantially reduce the hardware cost over what is realizable in a parallel architecture. A three channel L-band version of the sequential adapter was built and tested for use with the MARK XII IFF (identify friend or foe) system. In this system the sequentially determined adaptive weights were obtained digitally but implemented at RF. As a result, many of the post RF hardware induced sources of error that normally limit cancellation, such as receiver mismatch, are removed by the feedback property. The result is a system that can yield high levels of cancellation and be readily retrofitted to currently fielded equipment. Author

N87-18736# General Electric Co., Utica, NY. Aerospace Electronic Systems Dept. HIGH RESOLUTION SIGNAL PROCESSOR FOR LIMITED APERTURE MULTIMODE RADAR

ROBERT L. NEVIN and M. R. OSULLIVAN (O'Sullivan Consulting, Inc., Rancho Palos Verdes, Calif.) /In AGARD Multifunction Radar for Airborne Applications 10 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The maximum attainable point target detection capability of a search radar in a receiver noise limited situation is fundamentally limited by the radar's power-aperture product. However, the degree to which practical systems approach this maximum performance may be limited by processor power (i.e., processor throughput, resolution, etc.). Furthermore, in clutter limited situations, such as air-to-air look-down search modes, greater processor resolution, in both range and Doppler, can reduce the effective size of the clutter cell competing with the target, and thereby improve subclutter visibility. Recent and ongoing developments have contributed to the application of high-resolution, high-throughput signal processing to multimode, multifunction airborne radars. Both air-to-air and air-to-ground modes benefit in performance from increased processing power and flexibility. The solution to the high resolution processor is based on the experimental Modular Survivable Radar developed by General Electric in the late 1970s, and extended to airborne multimode radar projects. This modular, reconfigurable pipeline consists of high-efficiency stages, each with a narrow range of assigned functions, cascaded to form the full signal processor. Experience in system integration and testing has proven the adaptability of this architecture, which can be particularly useful to achieve the detection range requirements in a small fighter aircraft where physical space and cooling capability limit the power and aperture available to the radar. The architecture of a Programmable Signal Processor (PSP) currently in development for future application is described. This architecture allows Processing Elements (PE's) and memory elements to be configured into parallel pipelines. The PE's are designed to perform linear and nonlinear operations at the same high throughput rate. These features make it highly suitable for integration into the radar signal processor. With respect to this integration, the degree of flexibility required at different points in the pipeline is considered. Author

N87-18737# Forschungsinstitut fuer Funk und Mathematik, Werthoven (Germany, F.R.G.). ANGULAR SUPER-RESOLUTION WITH ARRAY ANTENNAS: APPLICATION TO SEEKER-HEADS Abstract Only

U. NICKEL /In AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Monopulse seeker-heads can give large errors due to closely spaced targets or even completely wrong directions in the case of cross-eye deception. The effective countermeasure against these errors is resolution enhancement. Super-resolution methods offer

the possibility to resolve targets closer than the antenna beamwidth. Such methods are favorable for seeker-head applications, because the target separation as well as the signal-to-noise ratio increases as the missile approaches the target. All effective super-resolution methods require an antenna array with access to the single element outputs. Thus mechanical scanning is replaced by electronic scanning. Depending on the type of missile, sometimes antenna pattern restrictions have to be tolerated. Among all super-resolution methods the parametric target model fitting (PTMF) method seems to be most appropriate for this application. This method tries to fit a completely parameterized target model directly to the measured data. It can be rather easily computed, and it is the only method which can resolve completely correlated targets, which arise in the case of multipath and cross-eye deception. For seeker-heads with few antenna elements an implementation with digital signal processor chips is most suited. Computer simulations and experiments with measured data using the DESAS test equipment show that two targets separated at 0.3 beamwidth can be resolved in azimuth and elevation and that the switch from conventional monopulse to two-target estimation (super-resolution), which is crucial for the approaching missile, can be done by a reliable automatic test procedure. Author

N87-18738# Thomson-CSF, Montrouge (France). Division Equipements Avioniques.

DYNAMICS AND SIGNAL PROCESSING ALGORITHMS FOR HIGH FREQUENCY OF RECURRENCE RADAR MODES (DYNAMIQUES ET ALGORITHMES DE TRAITEMENT DU SIGNAL DANS LES MODES RADAR A HAUTE FREQUENCE DE RECURRENCE)

PHILIPPE LACOMME In AGARD Multifunction Radar for Airborne Applications 6 p (SEE N87-18721 11-32) Jul. 1986 In FRENCH

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

The dynamics problem in the processing of signals is particularly difficult in the case of high frequency of recurrence (HFR) radar modes. Reception dynamics and necessary signal processing are defined and a typical case is evaluated. The effects of quantification are then analyzed at the various stages of signal processing (coding, rejection filtering, Fourier transformation). It is shown that the quantification noise depends, to a large extent, on the processing algorithms utilized. The presence of a ground echo rejection filter can directly increase the truncation problems owing to the elements situated after the filter. Likewise, the various algorithms used to compute the Fourier transform (fast Fourier transform or Winograd Fourier transform) function very differently vis-a-vis the truncations carried out with the operators. Therefore, in the selection of processing algorithms, it is necessary to consider, not only their performances with regard to the number of elementary operations, but also their sensitivity to quantification noise. M.G.

N87-18739# Rome Air Development Center, Griffiss AFB, NY. DIGITAL AND OPTICAL SYSTOLIC ARCHITECTURES FOR AIRBORNE ADAPTIVE RADARS

STANLEY LIS, VINCENT C. VANNICOLA, JOHN A. GRANIERO, BARRY P. MEDOFF (Electromagnetic Systems Labs., Inc., Sunnyvale, Calif.), and WILLIAM A. PENN (General Electric Co., Syracuse, N.Y.) In AGARD Multifunction Radar for Airborne Applications 13 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Systolic architectures for digital and analog, electronic and optical signal processing are presented along with specific applications to adaptive nulling. It is shown how the various architectures provide for the implementation of adaptive algorithms and how technologies affect performance. Their effects on adaptive degrees of freedom, convergence time, null depth, signal to noise ratio are presented along with size, weight, and required power. Adaptive algorithms covered are of two basic types: feedback/iterative and direct methods. Examples of each include the least mean square (LMS) for the iterative type and the QU factorization based on the Givens method for the direct method. Simulation results have verified the performance of the least squares and the systolic array for QU factorization by Givens method. Improved performance was obtained using the modified minimum variance distortionless response algorithm based on the maximum likelihood criteria. An optical implementation of the least squares algorithm over a continuously adaptive multi-path was experimentally evaluated. Thus far, 24 dB of cancellation was

achieved over a 7 micro-second multi-path window for 10 mega-Hertz instantaneous bandwidth. Adaptivity in the spatial, temporal and Doppler domains are illustrated and their embodiment into the various architectures are presented. For example, an analog optical processor which generates weights in the spatial and temporal (multi-path) domains for broadband systems is shown. Also shown is a digital systolic architecture which is applied to a direct decomposition method for generation of adaptive weights in the spatial and Doppler domains. A description of brassboard models representing both architectures is included. Author

N87-18740# Marconi Avionics Ltd., Basildon (England). Signal Processing Design Dept.

THE APPLICATION OF MULTI-DIMENSIONAL ACCESS MEMORIES TO RADAR SIGNAL PROCESSING SYSTEMS Abstract Only

DAVID HAYES and BILL STRAWHORNE In AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

A multi-dimensional access memory (MDAM) allows a word to be accessed from store either in the manner it was entered or as part of a bit slice of equally spaced or contiguous words. Conceptually, data may be regarded as being stored in an n dimensional hypercube of side length equal to the word length that usefully maps onto a wide range of signal processing operations, (e.g., FFTs, matrix inversion, multiple moments, distance metrics, sorts, searches and correlation decodes), when associated processing units that can carry out both bit parallel and bit serial arithmetic are used. The mapping of the natural multi-dimensionality of a signal processing task onto the MDAM structure is shown to be particularly useful when bit serial, word parallel processors are employed. In these circumstances the facilities of the MDAM make possible a range of useful operations that could only be implemented with great inefficiency using conventional memories. Furthermore, the MDAM considerably simplifies address generation for the I/O of real and complex words (e.g., the corner turn of incoming samples) while allowing useful permutations, such as barrel shifts, to be applied on each memory access for a insignificant cost in extra circuitry. Highly efficient and deeply pipelined, implementations of MDAM/processor structures are discussed that are particularly well suited to VLSI methodologies, in that very wide bandwidth interconnection networks of high complexity can be achieved at relatively low gate and pin counts. Thus, it is possible to form highly parallel multi-MDAM/processor structures that support very high levels of concurrency, identified as necessary for future radar signal processing systems. Moreover these structures translate over classes of operations that are not normally associated with each other. Consequently, these forms can be made extremely general and modular to produce powerful and compact processing kernels for programmable systems that embody high level signal processing constructs in their VLSI fabric and lead to high performance at the minimum silicon cost. Author

N87-18741# Forschungsinstitut fuer Hochfrequenzphysik, Werthhoven (Germany, F.R.).

ON A SINGLE STEP TECHNIQUE FOR ADAPTIVE ARRAY PROCESSING

JOSEF WORMS In AGARD Multifunction Radar for Airborne Applications 6 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

An improved adaptation algorithm designed for real time signal processing in antenna arrays is presented. The method is used for determining the filter weights in a sidelobe cancellation system. The Wiener filter equation is solved by using the well known Gauss-Seidel method and a sample matrix estimate. This algorithm (SSM - Single Step Method) combines rapid convergence and numerical stability. Compared with the direct SMI-technique and the Widrow LMS-algorithm, the properties of the proposed algorithm lead us to the conclusion that it is especially well suited for airborne antenna array applications. Author

32 COMMUNICATIONS AND RADAR

N87-18742# Thomson-CSF, Montrouge (France). Division Equipements Avioniques.

FORM FACTOR OPTIMIZATION FOR HFR EMISSION (OPTIMISATION DUE FACTEUR DE FORME EN EMISSION HFR)

PH. LEBIENVENU In AGARD Multifunction Radar for Airborne Applications 9 p (SEE N87-18721 11-32) Jul. 1986 In FRENCH

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

In high frequency of recurrence (HFR) emission having a weak form factor, eclipses and sampling result in some significant losses of the signal. The object of this paper is to present evaluation methods for these losses, starting with detection probability curves as a function of distance, and to utilize these methods to determine, under certain constraints of emitted power and computation loads, optimum form factors. M.G.

N87-18743# Alabama Univ., Huntsville. Dept. of Electrical and Computer Engineering.

A GENERAL SOLUTION FOR THE SYNTHESIS OF BINARY SEQUENCES WITH DESIRED CORRELATION SEQUENCE

ROBERT J. POLGE In AGARD Multifunction Radar for Airborne Applications 9 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Binary sequences are of considerable interest in many applications. In particular, the performance of a radar depends on the ambiguity function. For the case of binary phase modulation, the zero-Doppler performance of a pulse radar is a function of the discrete autocorrelation of the corresponding binary sequence. Alternately, a binary sequence can be expressed as a sequence of runs where the length of a run is equal to the number of contiguous bits of same sign. Given a run pattern the discrete autocorrelation can be computed easily and more rapidly than with the standard technique. The inverse problem, which is the synthesis of a run pattern given the desired discrete autocorrelation sequence, is much more difficult. This paper develops a set of sequential relations which relate the desired autocorrelation sequence to properties of the run pattern. For example, the autocorrelation at lag 1 defines the number of runs for a sequence of specified length. The autocorrelation at lag 2 now determines the number of runs of length 1. More generally the autocorrelation at lag $(k+1)$ establishes a relation between consecutive runs with sum exactly equal to k . Judicious use of these relations greatly facilitates the computer synthesis of binary sequences. While the method is quite general, emphasis is on tracking applications where it is desired to minimize the sidelobes as far as possible. Author

N87-18744# Illinois Univ., Chicago. Communication Lab.

BASIC MONOSTATIC POLARIMETRIC BROADBAND TARGET SCATTERING ANALYSIS REQUIRED FOR HIGH RESOLUTION POLARIMETRIC RADAR TARGET DOWNRANGE/CROSSRANGE IMAGING OF AIRBORNE SCATTERERS

RING-YUEN FOO, SUJEET K. CHAUDHURI (Waterloo Univ., Ontario), and WOLFGANG-M. BOERNER In AGARD Multifunction Radar for Airborne Applications 10 p (SEE N87-18721 11-32) Jul. 1986

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

It has been well known that high frequency radar interrogation may disclose fine geometrical as well as in-depth material decomposition of radar targets, whereas low frequency interception may only recover such coarse information as target size and target volume. At low frequencies, a target behaves as if it were a point source; within the resonance frequency regime it may disclose its natural frequency structure; and at high frequencies (PO/GO) its geometrical fine structures. Any target descriptor which is intended to describe the geometry becomes somewhat loose in its validity at low and resonant frequencies. For a target descriptor to describe fine geometrical structure, it has to be defined on a high frequency basis. In the phenomenological wideband polarimetric approach of the polarimetric radar target description first introduced by Kennaugh and further extended by Huynen, the proper specification of frequency range of validity has not been pointed out. In both treatments little care was given to this fact, which resulted in a haphazard early rejection of these important high resolution polarimetric radar target imaging theories because the resulting algorithms were incorrectly applied to the total spectral region. In view of these unsubstantiated claims of the complete uselessness

of high resolution polarimetric radar imagery, the main objective is to show, based on rigorous electromagnetic vector scattering theory, that the Kennaugh, and particularly the Huynen polarimetric target descriptors, at high frequencies, can be closely related to specular geometry (in particular, specular curvature). For the purpose of verifying our approach the perfectly conducting ellipsoid is considered versus similar spherical target shapes. Numerical verification with measured scattering data for these shapes is shown, and application of the Kennaugh and Huynen target characteristic descriptors in downrange target discrimination, imaging and identification is suggested or demonstrated. Author

N87-18745# Waterloo Univ. (Ontario). Dept. of Electrical Engineering.

MULTI-(BI)-STATIC HIGH FREQUENCY (PO/GO) RADAR TARGET IMAGING OF AIRBORNE SCATTERERS

SUJEET K. CHAUDHURI and WOLFGANG-M. BOERNER (Illinois Univ., Chicago) In AGARD Multifunction Radar for Airborne Applications 12 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Electromagnetic scattering at distances remote from a complex-shaped object, at high frequencies (Physical Optics/Geometric Optics), is dominated by certain specular components which are highly bistatic aspect and multifrequency dependent. The locations of these specular points on the complex object are known as the scattering centers. Generation of these scattering centers is dependent on the local geometry and local material in-depth decomposition of the object with respect to the aspect directions of the transmitter and receiver locations (monostatic as well as bistatic cases). The knowledge of the locations and the local geometries plus underlying material decomposition of these scattering centers can be useful in developing air target discrimination/identification algorithms. Based upon this existing available basic multistatic scattering formulation, which is highly polarization-dependent, a basic vector inverse scattering model can be developed to recover these scattering centers from poly-(bi)-static polarimetric (bistatic scattering matrix) signatures which then may be used to formulate target classification, imaging and identification algorithms. The approach adopted in this investigation is based on the solution to the general poly-(bi)-static high frequency isolated scattering center recovery problem. Once this direct model solution is established and verified with the analytically model-generated and measured model test data, it is used as a building block toward more complicated inverse problems for the following realistic situations: (1) scattering center recovery with aspect/frequency restricted measurements for more economic/realistic implementation (limited bi/mono-static aspect angles, narrow bandwidth, CW multi-(bi)-static angle data, etc.) for the development of classification/imaging/identification algorithms; and (2) shape/surface material decomposition pattern recognition algorithms based on the knowledge of the recovered distribution of 3-dimensional distributed scattering centers on a complex shape target. Author

N87-18746# Thomson-CSF, Malakoff (France).

TARGET ANALYSIS THROUGH FINE DISTANCE DISCRIMINATION Abstract Only [DISPOSITIF DANALYSE DE CIBLES PAR DISCRIMINATION FINE EN DISTANCE]

R. AMBOS In AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 In FRENCH

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

Fine target analysis as a function of distance requires an emission with an instantaneous wide band spectra, i.e., for a resolution of 50 cm, 300 MHz are necessary. To develop an analysis technique based on pulse compression with linear frequency modulation, it is necessary to develop very strong BT (bandwidth-time) dispersive lines, to encode and process the compressed pulses very quickly. The principle proposed handles these difficulties in the following manner: to develop the strong BT necessary for the emission by utilizing existing dispersive lines resulting from specific analog processing. M.G.

N87-18748# Siemens A.G., Munich (Germany, F.R.).

THE MIXTURE OF DIFFERENT SEMICONDUCTOR TECHNOLOGIES IN RADAR MODULES AND ITS IMPACT ON COOLING PROBLEMS AND RELIABILITY

ERIK LANGER *In AGARD Multifunction Radar for Airborne Applications* 8 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The T/R-modules of active phased array radars (PAR) contain electronic circuits made from very different materials and technologies. The power dissipation of the dense packed modules produces much heat in the array which has only moderate cooling conditions. Therefore, the electronic devices must operate at ambient temperatures up to 90 C. Despite careful optimization of the heat paths, junction temperatures can rise up to 160 C. Hence failure mechanisms with high activation energies (e.g., 1.85 eV) are relevant, even though they can normally be neglected for reliability estimations. By optimizing the individual devices one can expect that with soft degradation the mean repair interval (MRI) of the array will be about 1 to 3 years accumulated service times. The degradation of electrical performance at high temperatures limits only the transmission power and the receiver noise figure. By application of an Arrhenius graph and modification of the bath tube curve, one can derive reliability figures from stress tests with small numbers of samples in an early state of development. The reliability and packaging problems can be solved, so that T/R-modules can meet the requirements of active PAR. Author

N87-18749# Rome Air Development Center, Griffiss AFB, NY. **MMIC T/R MODULES FOR THE NEXT GENERATION AIRBORNE SURVEILLANCE PLATFORMS**

EDWARD J. JONES, MICHAEL O. LITTLE, THOMAS A. MCEWEN, R. HUNTER CHILTON, and JOSEPH P. POLNIASZEK *In AGARD Multifunction Radar for Airborne Applications* 6 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Technology for a lightweight low cost transmit/receive (T/R) module for the next generation airborne surveillance phased array radar is described. The T/R module in an active phased array radar is a primary system cost driver; therefore, a low cost, module had to be developed in order to make future phased arrays affordable. Monolithic microwave integrated circuit (MMIC) technology is the technology being developed to fill the above requirement. MMIC technology is an approach wherein all the active and passive elements of the circuit and their required interconnections are formed on a single semiconductor material, e.g., gallium arsenide. MMIC technology appears to be ideal because of the inherent low cost involved with production of integrated circuits. The low production cost is due to the lack of manual handling and assembly, improved reliability, improved reproducibility, small size and weight, circuit design flexibility, and broadband performance. Author

N87-18750# Rome Air Development Center, Hanscom AFB, MA. **Electromagnetic Sciences Div.**

LOW-COST, MONOLITHIC BEAMFORMING COMPONENTS FOR RADAR Abstract Only

PAUL H. CARR, SCOTT W. MITCHELL, and RICHARD T. WEBSTER *In AGARD Multifunction Radar for Airborne Applications* 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Planar, monolithic technology offers the possibility of lowering the cost of beamforming components, which contribute significantly to the high price of phased array radars. The most immediate opportunity for planar technology could be to replace the costly ferrite phase shifters in current use. PIN diode phase shifters have the advantage of faster switching times (sub-microsecond) than ferrites and the disadvantage of slightly higher insertion loss, which is due to the fact that microstrip is inherently more lossy than waveguide. Low cost PIN phasers can be fabricated by monolithic technology or automated, robotic hybrid thick-film techniques. Monolithic phase shifters on GaAs have typical losses of 6 dB and power handling capabilities under a watt. This eliminates them from consideration as replacement for ferrite phasers in the corporate fed arrays considered above. New research results on reducing this insertion loss are presented. The insertion loss is not critical if the phase shifter is followed by an efficient power amplifier. The French have reported on MISFET amplifiers on InP with 33% power added efficiency and a power output at 9 GHz

of 4W/mm gate width, which is more than twice that of the best GaAs MESFET. Monolithic technology is especially attractive at mm-wave frequencies, due to the smaller component size and the minimization of parasitics. Results on 44 GHz phase shifters are presented. Electronically variable time delay rather than phase shift is required for low-sidelobe phased arrays having wide instantaneous bandwidth. Monolithic SAW tapped delay lines on GaAs are described for use at center frequencies under 1 GHz. Above 1 GHz, magnetostatic wave devices are capable of continuous variable time delay over a 40 nsec range. Author

N87-18751# Societe d'Etude du Radant, Les Ulis (France).

ELECTRONIC SCANNING ANTENNA FOR MILITARY AIRCRAFT OF THE 1990S Abstract Only (ANTENNE A BALAYAGE ELECTRONIQUE AEROPORTEE POUR AVION D'ARME DES ANNEES 90)

C. CHEKROUN *In AGARD Multifunction Radar for Airborne Applications* 1 p (SEE N87-18721 11-32) Jul. 1986 In FRENCH (AGARD-CP-381) Avail: NTIS HC A10/MF A01

A 7-bit electronic scanning antenna has been developed. The possibilities of the wide angular coverage (70 deg cone), the radioelectric performance (transmission less than 15 dB), and the frequency band of this antenna makes it an ideal candidate for the air-to-air multifunction radar of the 90's. A prototype antenna is described and some X band results are given. M.G.

N87-18752# AEG-Telefunken, Ulm (Germany, F.R.). Radio and Radar Systems Group.

EHF MULTIFUNCTION PHASED ARRAY ANTENNA Abstract Only

KLAUS SOLBACH *In AGARD Multifunction Radar for Airborne Applications* 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The design of a low cost demonstration EHF multifunction-phased array antenna is described. Both, the radiating elements and the phase-shifter circuits are realized on microstrip substrate material in order to allow photolithographic batch fabrication. Self-encapsulated beam-lead PIN-diodes are employed as the electronic switch elements to avoid expensive hermetic encapsulation of the semiconductors or complete circuits. A space-feed using a horn-radiator to illuminate the array from the front-side is found to be the simplest and most inexpensive feed. The phased array antenna thus operates as a reflect-array, the antenna elements employed in a dual role for the collection of energy from the feed-horn and for the re-radiation of the phase-shifted waves (in transmit-mode). The antenna is divided into modules containing the radiator/phase-shifter plate plus drive- and BITE-circuitry at the back. Both drive- and BITE-components use gate-array integrated circuits especially designed for the purpose. Several bus-systems are used to supply bias and logical data flows to the modules. The beam-steering unit utilizes several signal processors and high-speed discrete adder circuits to combine the pointing, frequency and beam-shape information from the radar system computer with the stored phase-shift codes for the array elements. Since space, weight and power consumption are prime considerations only the most advanced technology is used in the design of both the microwave and the digital/drive circuitry. Author

N87-18753# Technische Hogeschool, Delft (Netherlands). Dept. of Electrical Engineering.

BASIC CHARACTERISTICS OF FM-CW RADAR SYSTEMS

L. P. LIGTHART, L. R. NIEUWKERK, and J. S. VANSINTTRUYEN *In AGARD Multifunction Radar for Airborne Applications* 11 p (SEE N87-18721 11-32) Jul. 1986

(AGARD-CP-381) Avail: NTIS HC A10/MF A01

Due to rapid technological progress in real-time signal processing, FM-CW radar systems are expected to become a more serious competitor to pulse radar systems. This paper deals with basic radar principles such as modulating waveforms and ambiguity functions characteristics. Advantages and disadvantages of FM-CW radar systems are compared to pulse radar systems. The inherent signal processing used in FM-CW radar systems allows a flexible choice of system parameters. In this context aspects like sensitivity, range and velocity resolution are discussed. It is elucidated that the use of digital processors for signal processing (frequency determination, filtering, etc.) offers the possibility to exchange

32 COMMUNICATIONS AND RADAR

dedicated hardware solutions with software implementations. Attention is paid to equipment like the antennas, diplexer, transmitter and receiver, and to isolation problems between transmitter and receiver. Results of an experimental FM-CW research radar are shown. In addition, the future prospects of FM-CW radar, with the aerial and solid-state R.F. head-end integrated, are indicated. M.G.

N87-18754# Thomson-CSF, Malakoff (France). Division A. V. S.

RADAR DISPLAY, CONVERSION OF SCANNING: ERRORS AND CORRECTION TECHNIQUES [VISUALISATION RADAR. CONVERSION DE BALAYAGE: DEFAUTS ET TECHNIQUES D'AMELIORATION]

JEAN-CLAUDE BARON In AGARD Multifunction Radar for Airborne Applications 10 p (SEE N87-18721 11-32) Jul. 1986 In FRENCH (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Video radar information resulting from processing circuits in polar coordinates. The presentation of this information on a screen requires a preliminary storage in a memory referred to as a radar map memory or image memory. In numerous cases, the organization of image memory in cartesian coordinates is interesting because it allows: (1) certain radar processing to be easily carried out; (2) carrier movement compensation; and (3) direct access for the presentation of the image in the television mode. The conversion of scanning, which allows the recording of video radar (presented in polar coordinates) in the memory in cartesian coordinates, can generate errors, the most prominent of which are the loss of radar information for near distances and images with black zones for very great distances. The techniques which permit the removal or correction of these errors are based on: a harmonization between radar parameters and those of the image memory; processing techniques at the level of memory points or at the level of image pixels; and techniques of filling-in through interpolation. M.G.

N87-18755# Thomson-CSF, Malakoff (France). Division A. V. S.

POSTINTEGRATION OF RADAR IMAGES Abstract Only [POSTINTEGRATION D'IMAGES RADAR]

DANIEL GARNIER In AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 In FRENCH (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The integration of radar maps, obtained with airborne synthetic antenna radar, enhances the quality of the maps by augmenting the contrast of actual echoes with respect to background noise. The enhancement works especially well on the noise called granulation or speckle, which is characteristic of coherent radar. The integration of radar maps representing a single scene obtained in the course of successive scans, therefore at different angles and distances, requires precise compensation for vehicle movement. This compensation is analyzed for the case of echo storage in an XY memory architecture and a rho-theta architecture. Two types of filters are examined: (1) the RC type, and (2) the sliding average filter. The experimental results are presented and the pros and cons for each procedure are discussed. M.G.

N87-18756# AEG-Telefunken, Ulm (Germany, F.R.).
DUAL FREQUENCY MM-WAVE RADAR FOR ANTITANK HELICOPTER Abstract Only

F. X. JEHL and H. MEINEL In AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Helicopters are gaining increasing significance for air close support, airborne landing, tank unit interdiction and both helicopter and tank engagement missions. To support these mission phases, sensors are required for obstacle warning, navigation, and moving and fixed target indication for weapon designation. The majority of the present systems use optical and infrared sensors; some of them apply laser systems. These sensor systems are subject to considerable limitations with respect to their capability of penetrating bad weather zones, fog, and battlefield environment (dust, smoke, man-made fog etc.). The design concept of a dual-frequency radar operating in millimeter wave range which avoids these drawbacks and complements existing sensors is presented. It consists of a 80 GHz radar subsystem for obstacle

warning including the detection of wires up to a range of approximately 500 m; due to the selection of a frequency in the absorption line of oxygen resulting in a high atmospheric attenuation (16 dB/km), the susceptibility to interception and thus also to interference electronic countermeasures can be maintained at a very low level. A 50 GHz radar subsystem (attenuation as low as 0.3 dB/km) with its range of approximately 5 km against targets of interest is used for navigation, fixed and moving target indication as well as weapon designation. Due to the combination of the two subsystems (50/80 GHz), high-value components (antenna, scanner, receiver assemblies, control and indicator units) can be used jointly for both subsystems, so that the special features of each subsystem become available at reasonable expenses.

Author

N87-18757# Alabama Univ., Huntsville. Dept. of Electrical and Computer Engineering.

SIMULATION OF MULTISTATIC AND BACKSCATTERING CROSS SECTIONS FOR AIRBORNE RADAR

ALBERT W. BIGGS In AGARD Multifunction Radar for Airborne Applications 11 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

In order to determine susceptibilities of airborne radar to electronic countermeasures and electronic counter-countermeasures simulations of multistatic and backscattering cross sections were developed as digital modules in the form of algorithms. Cross section algorithms are described for prolate (cigar shape) and oblate (disk shape) spheroids. Backscattering cross section algorithms are also described for different categories of terrain. Backscattering cross section computer programs were written for terrain categorized as vegetation, sea ice, glacial ice, geological (rocks, sand, hills, etc.), oceans, man-made structures, and water bodies. PROGRAM SIGTERRA is a file for backscattering cross section modules of terrain (TERRA) such as vegetation (AGCROP), oceans (OCEAN), Arctic sea ice (SEAICE), glacial snow (GLASNO), geological structures (GEOL), man-made structures (MAMMAD), or water bodies (WATER). AGCROP describes agricultural crops, trees or forests, prairies or grassland, and shrubs or bush cover. OCEAN has the SLAR or SAR looking downwind, upwind, and crosswind at the ocean surface. SEAICE looks at winter ice and old or polar ice. GLASNO is divided into a glacial ice and snow or snowfields. MAMMAD includes buildings, houses, roads, railroad tracks, airfields and hangars, telephone and power lines, barges, trucks, trains, and automobiles. WATER has lakes, rivers, canals, and swamps. PROGRAM SIGAIR is a similar file for airborne targets such as prolate and oblate spheroids. Author

N87-18758# Department of Communications, Ottawa (Ontario).
THE USE OF SIMULATED SYNTHETIC-APERTURE RADAR: SIGNALS OF SHIPS IN THE DEVELOPMENT OF AN AUTOMATIC SHIP CLASSIFICATION SYSTEM Abstract Only

MALCOLM R. VANE and J. K. E. TUNSLY (London Research and Development, Ontario) In AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

One of the major problems encountered in developing and testing any target classification scheme is the collection of an adequate data base for training and testing the classifier. This is particularly a problem if one must obtain radar information from a large number of viewing angles and over a large number of targets, some of which may be unfriendly. A method for obtaining this information by simulation is described. Synthetic aperture radar signals such as would be obtained from either a moving or a stationary ship, are simulated and it is shown how such a facility can be used in the development of an automatic ship classification system. The images of stationary ships are used to train and test the classification system and the images of moving vessels are used to show how the classifier performance degrades if the motion is left uncorrected. A readily available data base such as Jane's Book of Ships is used to compile 3-D outlines of the vessels of interest. These outlines, accurate down to the 1-m level, are used to decompose the ship's superstructure into a set of radar scatterers. The returns from the scatterers are then summed, taking into account the viewing angle of the radar. Using this technique, the radar scattering models for a complete library of ships can be formed, and the library used to develop and test various automatic classification schemes. Examples of simulated SAR images of ships

32 COMMUNICATIONS AND RADAR

are given and the real image of a particular ship is compared to its simulated one. The limitations of the technique are discussed, and the use of the data in testing an actual classification scheme is briefly outlined. Author

N87-18759# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). **REQUIREMENTS AND APPLICATIONS FOR RADAR SIMULATIONS: A STANDPOINT OF AN AIRFRAME COMPANY** WERNER KOHL and WOLFGANG HETZNER *In* AGARD Multifunction Radar for Airborne Applications 13 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

An overview of requirements and applications for radar simulations performed by an airframe company is presented. The discussion covers offline computer models either as stand alone or implemented within air or sea combat simulations. The use for online models reach from interface simulations to rather complex models for manned aircraft simulations. The paper presents realized examples of radar models for air or sea combat simulations, an experimental engineering tool which simulates a core avionic system, a 1 versus 1 advanced flight simulation with a pilot in the loop and a radar signal simulation implemented in a terrain-following closed loop simulation at an avionic ng. Author

N87-18760# Thomson-CSF, Montrouge (France). **CRITERIA FOR THE EVALUATION OF RANGE PERFORMANCE IN AIR/AIR INTERCEPTION Abstract Only [CRITERES POUR L'EVALUATION DES PERFORMANCES DE PORTEE EN INTERCEPTION AIR/AIR]** P. RAMSTEIN *In* AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 *In* FRENCH (AGARD-CP-381) Avail: NTIS HC A10/MF A01

Radar range performances are given either as a scanning detection probability of 50%, or a cumulative detection probability of from 85 to 90%, depending on the approach speed of the target and the duration of the scan cycle. These values offer only incomplete data for the evaluation of intercept performance. More complete data can be obtained by considering, for a given target, the acquisition probability, or better, probability of definite acquisition, that is, not following losses at great or moderate distance. A method of fast computation for these probabilities is described which avoids the use of statistical simulation. This method, based on the use of Markov chains, takes into account the logistics of acquisition and target loss, as well as the probability of detection in one pass. Examples are given which show how to optimize the scanning speed and permit a comparison of modes with and without transmission frequency agility. Finally, a discussion addressing the selection of evaluation criteria best adapted to a given operational situation is presented. M.G.

N87-21200# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. **COMPRESSOR BLADE CLEARANCE MEASUREMENT USING CAPACITANCE AND PHASE LOCK TECHNIQUES** ROSARIO N. DEMERS *In* AGARD Advanced Instrumentation for Aero Engine Components 10 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

The clearance measurement system has several unique features which minimize problems plaguing earlier systems. These include tuning stability and sensitivity drift. Both these problems are intensified by the environmental factors present in compressors i.e., wide temperature fluctuations, vibrations, and conductive contamination of probe tips. The circuitry in this new system provides phase lock feedback to control tuning and shut calibration to measure sensitivity. The use of high frequency excitation lowers the probe tip impedance, thus minimizing the effects of contamination. A prototype has been built and tested. The ability to calibrate has been demonstrated. An eight channel system is now being constructed for use in the Compressor Research Facility at Wright-Patterson AFB. The efficiency of a turbine engine is to a large extent dependent upon the mechanical tolerances maintained between its moving parts. On critical tolerance is the blade span. Although this tolerance may not appear severe, the impact on compressor efficiency is dramatic. The penalty in percent efficiency has been shown to be three times the percent clearance

to blade span ratio. In addition, each percent loss in compressor efficiency represents one half percent loss in specific fuel consumption. Factors which affect blade tip clearance are identified. Author

N87-21886# Rome Univ. (Italy). Dept. of Electrical Engineering. **SPACE-BASED MULTIFUNCTION RADAR SYSTEMS: FUTURE TOOL FOR CIVILIAN AND MILITARY SURVEILLANCE** G. GALATI and G. LOSQUADRO (Selenia S.p.A., Rome, Italy) *In* AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 9 p (SEE N87-21881 15-04) Dec. 1986 (AGARD-CP-410) Avail: NTIS HC A15/MF A01

Space-based surveillance systems, including primary radar (SBR) and secondary surveillance radar (SSR) are of interest for both air traffic control and the air defence. The relevant state of the art, surveillance system architectures with special reference to the European scenario and future work are discussed. Multifunction space-based surveillance for European applications, synthetic aperture radar for remote sensing and system options and tradeoffs are discussed. Author

N87-21889# Thomson-CSF, Meudon-la-Forêt (France). SDC Div. **MONOPULSE SECONDARY RADAR: PRACTICAL REALIZATION AND ACHIEVEMENT. MODE S: THE RADAR OF TOMORROW** FRANCOIS DELILLE *In* AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 15 p (SEE N87-21881 15-04) Dec. 1986 (AGARD-CP-410) Avail: NTIS HC A15/MF A01

There can be no doubt that Mode S will be part of tomorrow's Air Traffic Control (ATC) radar. Its assets in terms of air traffic surveillance and data link are noted. Fundamental characteristics are its compatibility with existing secondary surveillance radar's (SSR), selective interrogation and monopulse reception. The monopulse SSR is a landmark in the transition towards Mode S; it contributes several major improvements, without requiring onboard transponders to be changed. Choices made in the implementation of the system are discussed, in particular as regards the antenna, transmitter, reception and processing techniques. Through these options, full Mode S compatibility is maintained. Practical results have turned out to be conclusive, and so the system was taken into production and already many stations are operational round the world. The Mode S extension which has to be added to the monopulse radar is also described, and it is being operated at Orly as part of an experimental development program. Author

N87-21890# Thomson-CSF, Meudon-la-Forêt (France). SDC Div. **A PRACTICAL EXAMPLE OF MOVING TARGET DETECTION (MTD) PROCESSING FOR AN AIR TRAFFIC CONTROL RADAR WITH WEATHER CHANNEL**

CHRISTINE BRUNO *In* AGARD Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users 9 p (SEE N87-21881 15-04) Dec. 1986 (AGARD-CP-410) Avail: NTIS HC A15/MF A01

Air Traffic Control (ATC) radar processing of the Moving Target Detector (MTD) type is described. It comprises an independent processing channel called weather channel, which supplies meteorological data. The MTD processing technique is aimed at improving the detection of useful targets in the midst of clutter. The algorithms employed are detailed, as well as the performance to be expected, in particular the improvement in the radar picture presented to the operator. The processing system is made up of programmable processors, of which the architecture and other main features are described, as is the radar station remote monitoring and maintenance system. Finally, results obtained in experiments are given. Author

32 COMMUNICATIONS AND RADAR

N87-23859# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Avionics Panel.

MICROWAVE ANTENNAS FOR AVIONICS

Apr. 1987 161 p Lectures held in Rome, Italy, 7-8 May 1987; in Guenzburg, West Germany, 11-12 May 1987; and in Ankara, Turkey, 14-15 May 1987
(AGARD-LS-151; ISBN-92-835-1547-1; AD-A185152) Avail: NTIS HC A08/MF A01

Even though considerable advances have been made in digital technology and signal processing, antennas continue to play a key role and their performance is often a dominating factor in defining the overall effectiveness of a system. New system requirements, and the need to provide electronic scanning capabilities have presented major challenges to the technology that require substantial improvements over what is currently available. Over the last decade there have been notable advances in antenna and radome design, particularly in sidelobe reduction, electronic scanning, conformal arrays, printed circuit arrays, adaptive control and millimeter wave antennas. Many of these issues are addressed. Future trends and new directions for technological innovation are subjects for round table discussions. For individual titles, see N87-23860 through N87-23867.

N87-23860# Rome Air Development Center, Hanscom AFB, MA. Electromagnetics Directorate.

BASIC PARAMETERS OF ANTENNAS FOR AIRCRAFT, SATELLITES AND MISSILES

ROBERT J. MAILLOUX In AGARD Microwave Antennas for Avionics 17 p (SEE N87-23859 17-32) Apr. 1987
(AGARD-LS-151) Avail: NTIS HC A08/MF A01

System requirements for airborne, satellite and missile antennas continue to place increasingly severe demands upon antenna technology. In general these requirements push toward the increased capability to control and modify antenna patterns, and away from the use of small antennas with broad radiation patterns. Increased control can imply several levels of added sophistication. At the lowest level it implies mechanical or electronic scanning of an antenna directive pattern, at the next level there are needs to produce precise low sidelobe radiation patterns, and at the highest level of complexity there is the need to actively suppress jammer interference through the use of adaptive control of a full array or an antenna with sidelobe cancellers. In addition to increased control, there is also a trend toward higher frequencies, even to EHF frequencies where arrays of several thousand elements are necessary for some applications. These needs and applications of antenna technology are examined. Author

N87-23861# Westinghouse Electric Corp., Baltimore, MD. Advisory Engineer-Antenna Development.

AIRCRAFT RADAR ANTENNAS

HELMUT E. SCHRANK In AGARD Microwave Antennas for Avionics 7 p (SEE N87-23859 17-32) Apr. 1987
(AGARD-LS-151) Avail: NTIS HC A08/MF A01

Many changes have taken place in airborne radar antennas since their beginnings over forty years ago. A brief historical review of the advances in technology is presented, from mechanically scanned reflectors to modern multiple function phased arrays. However, emphasis is not on history but on the state-of-the-art technology and trends for future airborne radar systems. The status of rotating surveillance antennas is illustrated by the AN/APY-1 Airborne Warning and Control System (AWACS) slotted waveguide array, which achieved a significant breakthrough in sidelobe suppression. Gimballed flat plate arrays in nose radomes are typified by the AN/APG-66 (F-16) antenna. Multifunction phased arrays are presented by the Electronically Agile Radar (EAR) antenna, which has achieved significant advances in performance versatility and reliability. Trends toward active aperture, adaptive, and digital beamforming arrays are briefly discussed. Antennas for future aircraft radar systems must provide multiple functions in less aperture space, and must perform more reliably. Author

N87-23862# AEG-Telefunken, Ulm (Germany, F.R.). Radar Subdivision.

AIRCRAFT ANTENNAS/CONFORMAL ANTENNAS MISSILE ANTENNAS

KLAUS SOLBACH In AGARD Microwave Antennas for Avionics 16 p (SEE N87-23859 17-32) Apr. 1987
(AGARD-LS-151) Avail: NTIS HC A08/MF A01

Three major areas of airborne microwave antennas are examined. The basic system environment for missile telemetry/telecommand and fuze functions is sketched and the basic antenna design together with practical examples are discussed. The principle requirements of modern nose radar flat plate antennas are shown to result from missile/aircraft system requirements. Basic principles of slotted waveguide antenna arrays are sketched and practical antenna designs are discussed. The present early warning system designs are sketched to point out requirements and performance of practical radar warning and jamming antennas (broadband spiral antennas and horn radiators). With respect to newer developments in the ECM scenario, some demonstrated and proposed antenna systems (lens fed arrays, phased array, active array) are discussed. Author

N87-23863# TICRA A/s, Copenhagen (Denmark).

SPACECRAFT MULTI-BEAM AND CONTOURED-BEAM ANTENNAS

P. BALLING In AGARD Microwave Antennas for Avionics 23 p (SEE N87-23859 17-32) Apr. 1987 Sponsored in part by INTELSAT

(AGARD-LS-151) Avail: NTIS HC A08/MF A01

High gain spacecraft antennas with multiple beams and contoured beams are key components in satellite communications and direct broadcast systems. This is reflected on the latest generation of communications satellites, where the antenna subsystem is the largest subsystem with its weight of more than 300 kg. The antennas achieved a large communications capacity through multiple frequency reuses and may be reconfigured to serve different coverage areas. The current multi-beam and contoured-beam antenna technology is reviewed. Different implementation, reflector or lens with feed array or direct radiating array, are considered. The emphasis is placed upon systems with offset paraboloidal reflectors. The limitations of the offset reflector with respect to beam scanning and cross polarization are reviewed. Computer aided design procedures and design examples are presented. Author

N87-23864# Army Communications-Electronics Command, Fort Monmouth, NJ.

MILLIMETER WAVE ANTENNAS FOR AVIONICS

FELIX K. SCHWERING In AGARD Microwave Antennas for Avionics 8 p (SEE N87-23859 17-32) Apr. 1987
(AGARD-LS-151) Avail: NTIS HC A08/MF A01

An overview of the area of mm-wave antennas is presented with emphasis on possible avionics applications. For the purpose of the review, mm-wave radiating structures are grouped into two classes: antennas of conventional configuration and antennas based on new design concepts. The first class is composed of well known antennas such as reflector, lens, horn and slotted waveguide antennas. The second class includes radiating structures such as printed circuit mm-wave antennas, antennas derived from open mm-waveguides, and integrated antennas. Some of these antennas have microwave counterparts, others are new with no microwave heritage. Millimeter wave antennas are usually of very reasonable size and weight, and some of these antennas are suitable for rapid mechanical scanning. They should be sufficiently versatile to satisfy most avionics requirements. Atmospheric propagation conditions vary strongly throughout the mm-wave band and have to be taken into account in the design of mm-wave systems and their antennas. A brief summary of these effects is included. Author

N87-23865# Standard Telephones and Cables Ltd., Paignton (England).

ADAPTIVE ANTENNAS

P. BARTON In AGARD Microwave Antennas for Avionics 21 p (SEE N87-23859 17-32) Apr. 1987
(AGARD-LS-151) Avail: NTIS HC A08/MF A01

The basic principles of adaptive antennas are outlined in terms of the Wiener-Hopf expression for maximising signal to noise ratio

32 COMMUNICATIONS AND RADAR

in an arbitrary noise environment; the analogy with generalized matched filter theory provides a useful aid to understanding. For many applications, there is insufficient information to achieve the above solution and thus non-optimum constrained null steering algorithms are also described, together with a summary of methods for preventing wanted signals being nulled by the adaptive system. The three generic approaches to adaptive weight control are discussed: correlation steepest descent, weight perturbation and direct solutions based on sample matrix inversion. The tradeoffs between hardware complexity and performance in terms of null depth and convergence rate are outlined. The sidelobe cancellor technique is described. Performance variation with jammer power and angular distribution is summarized and the key performance limitations identified. The configuration and performance characteristics of both multiple beam and phase scan array antennas are covered, with a brief discussion of performance factors. Author

N87-23866# Communications Research Centre, Ottawa (Ontario).

MIC TECHNOLOGY FOR PHASED ARRAYS

R. DOUVILLE In AGARD Microwave Antennas for Avionics 19 p (SEE N87-23859 17-32) Apr. 1987

(AGARD-LS-151) Avail: NTIS HC A08/MF A01

The technology and performance of typical transmit receive (T/R) modules which include the basic elements of a phase shifter, a low noise amplifier, and a high power amplifier is emphasized. An overview is given of microwave integrated circuits (MICs) technology with respect to its use in phased array systems for military applications. Historically, the term MIC has been used to refer to planar microwave circuits using one or more different forms of printed transmission lines, all characterized by their ability to be phototetched on a suitable dielectric substrate. Active and passive discrete components such as transistors, chip capacitors and resistors are then attached. This technology is more precisely referred to as hybrid MIC (HMIC). The field of MIC design is currently undergoing a major revolution due to the rapid emergence of monolithic MIC (MMIC) design. In this latter, all components, including the active devices, are fabricated using deposition and etching processes, thereby eliminating the need for attachment of discrete components. These technologies are discussed with respect to their potential in phased array antennas. E.R.

N87-26955# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany). Inst. fuer Hochfrequenztechnik.

THE CURRENT AND FIELD DISTRIBUTION OF A HIGH POWER SATELLITE ANTENNA AFFECTED BY NONLINEAR PLASMA SHEATH PHENOMENA

K.-H. BETHKE and P. EDENHOFER (Bochum Univ., West Germany) In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 10 p (SEE N87-26937 21-18) May 1987 Sponsored in part by Bundesministerium fuer Forschung und Technologie, West Germany (AGARD-CP-406) Avail: NTIS HC A13/MF A01

For electromagnetic and acoustic radiation from antennas in a plasma environment, the fundamental electro- and hydrodynamic equations are presented involving nonlinear source terms up to the third order. A perturbation procedure is applied to derive a numerical solution from a set of coupled integral equations for the linearized (first order) magnetic field and electron density describing the dipole radiation into a homogeneous compressible plasma. The solution is given in terms of an equivalent surface current density based on a Green's function representation. An inhomogeneous plasma sheath is shown to build up around the dipole, where the antenna-to-plasma coupling turns out to be strongest in the near field of a high power transmitting antenna. Author

N87-29518# Hazeltine Corp., Greenlawn, NY. Adaptive Systems Lab.

INCREASING THE USEFULNESS OF AWACS DOWNLINK TRANSMISSIONS BY SEMANTIC COMPRESSION

BONNIE SCHNITTA-ISRAEL and ROY S. FREEDMAN In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 4 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

Preliminary investigation of the data compression by semantic techniques via an automated resource allocation system based on AWACS operator expertise indicates improvement would occur to down link data transmission for G 2 missions. In essence this improvement is obtained by improving the timeliness of information transmission through knowledge directed allocation. In order to specify a complete system, a list of tasks which should be considered are listed. Author

N87-29522# National Aeronautical Establishment, Ottawa (Ontario).

SPEECH IS MORE THAN JUST AN AUDIBLE VERSION OF TEXT

MELVYN J. HUNT In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 12 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

Man machine communication by text using keyboards and screens is much more firmly established than voice I/O. Partly because of this, voice tends to be regarded as an audible version of text. This view is misleading: it leads to an underestimation of both the difficulties and the potential of voice I/O. Speech encodes information on factors such as speaker identity and attitude and sentence structure in ways that have no counterpart in text. The style of language appropriate for speech is quite different from that appropriate for text. Speech output and input systems tend to ignore those aspects of the speech signal that are not directly represented in text, and they frequently use a style and syntax suited to text rather than speech. In the case of speech output, the technology needed to exploit the additional aspects of the speech signal is already appearing, and recordings illustrating the possibilities are available. In the case of speech input, the technology is not yet developed, but the ability to manipulate features such as voice quality in speech output systems may be a powerful tool in learning how to exploit such features in speech input systems. Author

N87-29523# Centre d'Etudes et de Recherches de Medecine Aerospatiale, Paris (France).

VOICE COMMAND AND THE CHANGE OF MENTAL REPRESENTATION DURING TASK PERFORMANCE [COMMANDE VOCALE ET CHANGEMENT DE REPRESENTATION MENTALE DANS LA TACHE]

R. AMALBERTI, D. BATEJAT, and J.-P. MENU In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 10 p (SEE N87-29503 24-06) Feb. 1987 In FRENCH (AGARD-CP-414) Avail: NTIS HC A14/MF A01

A two task experiment was performed to assess the distribution of mental resources and the competition between mental and speaking resources during task performance. The experiment was designed so that a primary surveillance/detection task was performed along with a secondary task involving the input of flight related information by either keyboard or voice command. Detection time was measured for the primary task and accuracy was determined for both the primary and secondary tasks. Quantitative results show that the use of voice command favors the performance of the primary surveillance task, but, for the secondary task, the voice input was less accurate than the manual keyboard input. Qualitative results with regard to pilot visual comportment and vocal errors are also discussed. M.G.

32 COMMUNICATIONS AND RADAR

N87-29524# Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario).

LAYERED PROTOCOLS IN VOICE INTERACTION WITH COMPUTERS

M. M. TAYLOR /In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 12 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

The Layered Protocol model for human computer interfaces is described, with special reference to the problems of voice input and output. In a layered protocol, each level passes virtual messages back and forth between human and computer. These virtual messages are realized in the form of interchanges at the level below. The protocol at a level is analogous to the syntax of a sentence, in that it is the method by which the content of a message can be given an agreed interpretation. Each protocol can be designed or evaluated independently of all the others in an interface. The stability of a protocol is determined by its response delays and by the channel capacity of the lower level protocols that support its messages. Sometimes an unstable protocol can be stabilized and speeded by reducing the message rate of the supporting protocols. Users have been observed to do this intuitively. Voice input provides special problems because of the relatively high error probability inherent in the recognizer: errors in other modalities are likely to be due to operator fault. This tends to lead to unwarranted distrust of voice input, and to demands for types of feedback that are probably inappropriate to the level of protocol to which the recognizer is suited. Voice output can be used by the computer to initiate protocols, or to provide a response channel for protocols under conditions where the user's eyes are otherwise occupied. Consideration of protocol demands helps to clarify the requirements for precision in recognition, and for the characteristics of computer responses to voice input; it helps also in judging appropriate conditions for the use of voice output.

Author

N87-29525# University of Southern California, Los Angeles. Dept. of Safety and Systems Management.

THE ROLE OF ASYMMETRIC TRANSFER IN THE EVALUATION OF VOICE GENERATION AND RECOGNITION SYSTEMS

D. L. DAMOS /In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 8 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

The results of five experiments examining the effect of voice generation and recognition systems on dual task performance are presented. The extent to which asymmetric transfer biased the data in three of these experiments is determined by using statistical techniques and by comparing the data to the results of between subjects experiments. Generally, subjects performed task combinations better when stimuli for one of the tasks was presented auditorily using a voice generation system rather than visually on a display screen. In contrast, the use of a voice recognition system did not result in better dual task performance than the use of more conventional input devices.

Author

N87-29526# Institute for Perception RVO-TNO, Soesterberg (Netherlands).

VOICE INTERACTIVE SYSTEMS IN SEVERE NOISE CONDITIONS

J. H. M. STEENEKEN and G. LANGHOUT /In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 6 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

In a comparison of word recognition performance between human listeners and automatic speech recognition systems (ASR), the human listeners performs much better, especially in severe noise conditions. An application engineer can try to optimize the performance of an ASR system by selecting the optimal noise cancelling microphone and vocabulary for voice input. Some results from a study on the effect of signal handling and vocabulary configuration on the performance of voice input and voice output systems are discussed.

Author

N87-29529# Aerospace Medical Research Labs., Wright-Patterson AFB, OH.

EFFECT OF AUDIO BANDWIDTH AND BIT ERROR RATE ON PCM, ADPCM AND LPC SPEECH CODING ALGORITHM INTELLIGIBILITY

RICHARD L. MCKINLEY and THOMAS J. MOORE /In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 7 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

The effects of audio bandwidth and bit error rate on speech intelligibility of voice coders in noise are described and quantified. Three different speech coding techniques were investigated, pulse code modulation (PCM), adaptive differential pulse code modulation (ADPCM), and linear predictive coding (LPC). Speech intelligibility was measured in realistic acoustic noise environs by a panel of 10 subjects performing the Modified Rhyme Test. Summary data is presented along with planned future research in optimization of audio bandwidth vs bit error rate tradeoff for best speech intelligibility.

Author

N88-11909# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Electromagnetic Wave Propagation Panel.

THEORETICAL ASPECTS OF TARGET CLASSIFICATION

Jun. 1987 221 p Lecture series held in Rome, Italy, 29-30 Jun., in Neubiberg, Fed. Republic of Germany, 2-3 Jul., and in Norend, Norway, 6-7 Jul. 1987

(AGARD-LS-152: ISBN-92-835-1553-6; AD-A185125) Avail: NTIS HC A10/MF A01

Various analytical methods and, their numerical implementation, for generating and classifying target signatures under transient and steady state illumination, with emphasis on classification schemes that facilitate extraction of unknown target features in the inverse problem of identification are discussed. Included also are numerical modeling, experimental results obtained under controlled and realistic conditions, and descriptions of range facilities. For individual titles, see N88-11910 through N88-11921.

N88-11910# Polytechnic Inst. of New York, Farmingdale. Dept. of Electrical Engineering and Computer Science.

TARGET STRENGTH: AN OVERVIEW OF SOME RECENT THEORETICAL DEVELOPMENTS

LEOPOLD B. FELSEN /In AGARD Theoretical Aspects of Target Classification 15 p (SEE N88-11909 03-32) Jun. 1987

(AGARD-LS-152) Avail: NTIS HC A10/MF A01

A brief review is given of some recent developments and trends in the theory of target scattering and classification. Emphasis is on phenomena at high and moderate frequencies. It is in these parametric regions where wave transport phenomena play an essential role.

Author

N88-11911# Ohio State Univ., Columbus. ElectroScience Lab.

UNIFORM GEOMETRICAL THEORY OF DIFFRACTION

P. H. PATHAK /In AGARD Theoretical Aspects of Target Classification 20 p (SEE N88-11909 03-32) Jun. 1987

(AGARD-LS-152) Avail: NTIS HC A10/MF A01

Keller's geometrical theory of diffraction (GTD) represents a major breakthrough in solving a wide variety of electromagnetic (EM) radiation and scattering problems at high frequencies. In particular, the GTD is an extension of geometrical optics to include a class of diffracted rays via a generalization of Fermat's principle. These diffracted rays are initiated, for example, from geometrical and electrical discontinuities in a scatter, or from points of grazing incidence on smooth convex parts of the scattering surface. However, being a pure ray optical theory, the original GTD falls within the transition regions adjacent to geometric optical shadow boundaries where the diffracted field generally assumes its largest value. This limitation of the GTD is overcome via the uniform version of the GTD which requires the diffracted field to make the total high frequency field continuous across the optical shadow boundaries. The UTD solutions for the diffraction by edges and smooth convex surfaces are reviewed in detail after introducing the basic concepts of GTD.

Author

N88-11912# Naval Postgraduate School, Monterey, CA.
SINGULARITY EXPANSION METHOD: TARGET RESONANCES
 MICHAEL A. MORGAN / In AGARD Theoretical Aspects of Target
 Classification 5 p (SEE N88-11909 03-32) Jun. 1987
 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

A unified treatment for the natural mode representations for induced currents and scattered fields is described using elementary concepts of causality and superposition. The transient back-scattered field is shown to have the form of a constant coefficient exponential series only in the late-time, after the last directly driven response is received from the scatterer. Prior to this, the early-time response is found to be due to both the direct physical optics fields as well as to a sum of modulated natural modes. Practical implications of this result, regarding aspect-invariant target classification using natural resonances, are discussed. Author

N88-11913# Tel-Aviv Univ. (Israel). Dept of Electrical Engineering.

THE HYBRID WAVEFRONT RESONANCE METHOD
 EHUD HEYMAN / In AGARD Theoretical Aspects of Target
 Classification 24 p (SEE N88-11909 03-32) Jun. 1987
 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

When observed over long periods, scattered returns from targets illuminated by broad band signals reveal distinctive features in the early and late time regimes. The features can be explained in terms of the different wave phenomena, progressive and oscillatory, that are dominant during these respective intervals. A recently developed hybrid theory has formulated the connection between them and has provided new interpretations that did not emerge in earlier treatments. These interpretations can clarify issues which have arisen within the singularity expansion method (SEM), in particular, the adequacy of the expansion at early times. Here, the hybrid wavefront resonance theory is reviewed, first within the vigorous context of scattering by a circular cylinder, and then via a ray analysis of scattering by a general (composite) object. Author

N88-11914# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany). Inst. fuer Hochfrequenztechnik.

PHYSICAL OPTICS METHOD: PREDICTION OF RADAR SIGNATURES
 V. STEIN / In AGARD Theoretical Aspects of Target Classification
 17 p (SEE N88-11909 03-32) Jun. 1987
 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

There has been increasing interest in the use of the physical optics method in the computation of radar signatures of complicated objects which are large compared to the wavelength. A series of ideal conducting structures for which the physical optics method has been successfully applied to compute the back-scattered field is presented. The basic idea of physical optics following the Huygens-Helmholtz principle is evaluated. The surface integrals for the electromagnetic scattered field are presented and discussed. Some details of the physical optics method, when applied to complicated structures, are considered in the form of a short survey. This includes the hidden surface problem, the ability to predict depolarization effects for certain situations, the evaluation of the phase integral, the extension of physical optics to treat double reflections, the accuracy of the geometrical model and an estimation of the computer time. In the conclusion, some steps for the further extension and improvement of the physical optics method are summarized. Author

N88-11915# Kassel Univ. (Germany, F.R.). Dept. of Electrical Engineering.

THEORETICAL ASPECTS OF TARGET CLASSIFICATION: PHYSICAL OPTICS AND RADON TRANSFORM METHODS
 K. J. LANGENBERG / In AGARD Theoretical Aspects of Target
 Classification 15 p (SEE N88-11909 03-32) Jun. 1987
 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

Target classification is set up as a multidimensional inverse scattering problem for electromagnetic waves. The target is considered to be of compact support residing in a media with constant wave speed. The scattered field produced by a prescribed incident field is represented by its equivalent sources in terms of Huygens' principle: for the sake of simplicity, the inversion of this representation of the physical optics or weak scatterer

approximation linearizes the inverse problem resulting immediately in an inversion formula for the characteristic or singular function of the scatterer if the scattered field is measured as a function of frequency - or as broadband transients - on a closed surface sufficiently remote from the target in an either bistatic or monostatic experimental arrangement. Author

N88-11916# Arizona Univ. Tucson. Electromagnetics Lab.

PARAMETRIZATION IN SCATTERING MODELS
 D. G. DUDLEY / In AGARD Theoretical Aspects of Target
 Classification 17 p (SEE N88-11909 03-32) Jun. 1987
 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

Parametric modeling in transient wave scattering is discussed. Global modeling based on the body resonances of the scattering object are discussed along with two examples. The nature of the incompleteness of global models is discussed. The concept of the local model, based on ray optic methods, is introduced. Included is an example of local modeling. It is shown that the local model is an order of magnitude more parsimonious and more robust in the presence of noise, compared to the global model. It is concluded that the local model has a better probability of success in practical target classification because of its performance in a noisy environment. Author

N88-11917# Naval Postgraduate School, Monterey, CA.

INPUT SIGNAL SHAPING: K-PULSE
 MICHAEL A. MORGAN / In AGARD Theoretical Aspects of Target
 Classification 16 p (SEE N88-11909 03-32) Jun. 1987
 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

Classification of electromagnetic scatterers by selective mode annihilation is discussed. After providing a brief description of historical background, the conceptual basis of this methodology is developed, followed by a theoretical explanation of the techniques that are employed. Some particular resonance annihilation schemes that have been implemented and tested are illustrated. Results from the tests using synthetic signals, integral equation computations and experimental transient scattering measurements are featured. Author

N88-11918# Naval Postgraduate School, Monterey, CA.

NUMERICAL MODELING: FINITE METHODS
 MICHAEL A. MORGAN / In AGARD Theoretical Aspects of Target
 Classification 17 p (SEE N88-11909 03-32) Jun. 1987
 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

Recent developments in computational methods for unbounded electromagnetic problems involving antennas and scattering are considered. Emphasis is given to the numerical implementation of differential equation based formulations using either finite differences or finite elements. Elementary examples are used as conceptual vehicles for introducing finite element and unimoment techniques. The finite element boundary integral method and the field feedback formulation are discussed. Current capabilities are demonstrated by considering some of the important research results utilizing the finite methods. Author

N88-11919# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany). Inst. fuer Hochfrequenztechnik.

NUMERICAL MODELING: INTEGRAL EQUATION METHOD
 V. STEIN / In AGARD Theoretical Aspects of Target Classification
 20 p (SEE N88-11909 03-32) Jun. 1987
 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

A review is given of the different expressions for the representation of the electromagnetic fields by integrals over the surface current. The integral equations, which mostly are used for the solution of practical problems, are discussed and the method of moments is outlined, where the use of pulses as basis functions is emphasized. Estimations of the core storage and the computer time are given. Two geometrical models for the scattering structure are discussed in more detail: the surface patch model and the wire-grid model. A list of application examples of the integral equation method with references is given. Two further examples are outlined in detail: computation of the radiation pattern of an antenna mounted on a helicopter and determination of the extreme near field of a cube. Author

32 COMMUNICATIONS AND RADAR

N88-11920# Naval Postgraduate School, Monterey, CA.

EXPERIMENTS: TEST RANGE FACILITIES, PART 1

MICHAEL A. MORGAN *In* AGARD Theoretical Aspects of Target Classification 16 p (SEE N88-11909 03-32) Jun. 1987 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

A brief review is given of some of the transient electromagnetic scattering ranges at U.S. universities and research facilities. The Transient Electromagnetic Scattering Laboratory located at the Naval Postgraduate School is discussed. Particular attention is given to the role of this facility in studies of natural resonance target classification studies. Detailed consideration is given to measurement concepts of transient scattering, with examples given to illustrate the procedures and requisite signal processing that is involved. Author

N88-11921# Arizona Univ., Tucson. Electromagnetics Lab.

EXPERIMENTS: TEST RANGE FACILITIES, PART 2

D. G. DUDLEY *In* AGARD Theoretical Aspects of Target Classification 10 p (SEE N88-11909 03-32) Jun. 1987 (AGARD-LS-152) Avail: NTIS HC A10/MF A01

A description is given of the electromagnetic transient range facility at the Lawrence Livermore Laboratory. The range design and the instrumentation for both time domain and broadband frequency domain measurements are discussed. Two examples of experiments are given: scattering from a conducting plate and transmission through an aperture in a screen. Author

N88-19653# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Electromagnetic Wave Propagation Panel.

TERRESTRIAL PROPAGATION CHARACTERISTICS IN MODERN SYSTEMS OF COMMUNICATIONS, SURVEILLANCE, GUIDANCE AND CONTROL

H. J. ALBRECHT, ed. Nov. 1987 269 p *In* ENGLISH and FRENCH Meeting held in Ottawa, Ontario, 20-24 Oct. 1986 (AGARD-CP-407; ISBN-92-835-0434-8; AD-A194686) Avail: NTIS HC A12/MF A01

New research results in surface propagation characteristics for modern systems applications in relevant frequency ranges are discussed. Ground characteristics and their effects, diffraction and shadowing effects, refraction and reflection at medium boundaries, general system applications, special system applications, and special experimental results are discussed. For individual titles, see N88-19654 through N88-19675.

N88-19654# Norwegian Telecommunications Administration Research Establishment, Kjeller. Research Dept.

AN INVESTIGATION OF TERRAIN RELATED VARIABLES FOR PREDICTING THE MULTIPATH FADE DEPTH DISTRIBUTION ON TERRESTRIAL MICROWAVE LINES

TERJE TJELTA, RODERIC L. OLSEN, and LOUIS MARTIN (Centre National d'Etudes des Telecommunications, Lannion, France) *In* AGARD: Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 9 p (SEE N88-19653 12-32) Nov. 1987 (AGARD-CP-407) Avail: NTIS HC A12/MF A01

Terrain related variables are shown to be important in an asymptotic prediction equation for the worst month multipath fade depth distribution. From a fading data base for 47 links in northwestern Europe, equations are developed employing up to six variables and an additional variable geoclimatic factor. The best standard error of prediction is 2.8 dB, considerably better than that available from other prediction methods for the same region. A large number of variables are investigated, most of them closely related to the terrain. The results suggest that terrain reflections play an important role in multipath propagation. Author

N88-19655# Communications Research Centre, Ottawa (Ontario). Dept. of Communications.

A REVIEW OF THE ROLE OF SURFACE REFLECTION IN MULTIPATH PROPAGATION OVER TERRESTRIAL MICROWAVE LINKS

RODERIC L. OLSEN, LOUIS MARTIN, and TERJE TJELTA (Norwegian Telecommunications Administration Research Establishment, Kjeller.) *In* AGARD: Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 23 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

It has long been recognized that surface reflection on overwater microwave radio relay paths plays an important role in causing frequency selective multipath fading. There is mounting experimental and theoretical evidence that ground reflection and scattering has an important role in producing much of the selective multipath propagation effects on overland links. Here, both old and new evidence is reviewed that provides some new insights into the complex mixture of mechanisms involved. Some resulting implications for the design of digital radio links are also discussed. Author

N88-19656# Institut fuer Rundfunktechnik, Munich (Germany, F.R.).

DEVELOPMENT OF A GROUND-CONDUCTIVITY MAP FOR THE AREA OF THE FEDERAL REPUBLIC OF GERMANY FROM MEASURED FIELD-STRENGTH CONTOURS

BERND RAUFMANN *In* AGARD: Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 5 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

A comparison of ground conductivity values found for 14 transmitter sites with two frequencies showed a linear relation between the effective ground conductivity and the frequency. On this basis all conductivity values were normalized to a frequency of 1 MHz. The average ground conductivity values for each transmitter were associated with four different geographical zones. As there were only slight differences among the average values in three neighboring zones, the conductivity data of this area were unified as a whole. So the final result of the evaluations was a ground conductivity map with only two areas of different ground conductivity. Detailed explanations of the methods applied in the developing process of the conductivity map are presented, and the limits of these methods as well as the statistical distribution of the results obtained are discussed. Author

N88-19657# Nebraska Univ., Lincoln. Dept. of Electrical Engineering.

SCATTERING AND DEPOLARIZATION BY RANDOM ROUGH TERRAIN AND VEGETATION COVERED TERRAIN-UNIFIED FULL WAVE APPROACH

EZEKIEL BAHAR *In* AGARD: Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 15 p (SEE N88-19653 12-32) Nov. 1987

(Contract DAAG29-82-K-0123)

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

The principal elements of the full wave approach to problems of scattering and depolarization by rough terrain and vegetation covered terrain are presented. Scattering by random rough surfaces is considered in detail and the full wave solutions are compared with earlier solutions based on geometric optics, physical optics and perturbation theories. It is shown that since the full wave approach accounts for both specular point scattering as well as Bragg scattering in a self-consistent manner, it resolves the discrepancies between the physical optics and the perturbation solutions, and bridges the wide gap between them. Thus, on applying the full wave approach to scattering by composite random rough surfaces, it is not necessary to adapt a two-scale model of the rough surface. The analytical procedures that account for the effects of vegetation on radio wave propagation over a terrestrial path are also presented. They are based on the full wave solutions to scattering by finitely conducting irregularly shaped objects with rough surfaces. Author

N88-19658# Polytechnic Inst. of Brooklyn, Farmingdale, NY. Dept. of Electrical Engineering and Computer Science.

PROPAGATION IN LONGITUDINALLY VARYING DUCTS, WITH EMPHASIS ON GUIDING TO ANTIGUIDING TRANSITIONS

LEOPOLD B. FELSEN *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 7 p (SEE N88-19653 12-32) Nov. 1987

(Contract DAAG29-85-K-0180; F49620-85-C-0078)

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

Recent developments in the theory of propagation in longitudinally varying ducts are reviewed, with emphasis on gradual guiding to anti-guiding transitions that convert an initially well-trapped mode field smoothly (adiabatically) into a leaky mode. The connection between the trapped and leaky mode regimes is provided by a parabolic equation or, in certain cases, by an intrinsic mode spectral integral. Numerical implementation for different examples confirms the phenomenology predicted by the analysis and reveals the beaming of initially trapped modal energy into the exterior after the duct disappears. Some consideration is also given to incorporating these concepts into a synthesis of the field excited by a radiating source inside the duct. *Author*

N88-19659# Communications Research Centre, Ottawa (Ontario). Dept. of Communications.

VHF/UHF PROPAGATION BY DIFFRACTION: CALCULATION BY NUMERICAL INTEGRATION

J. H. WHITTEKER *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 7 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

The method proposed here applies approximate diffraction theory to a terrain model that retains most of the complexity of the real terrain, and finds a solution to the diffraction problem for each particular transmission path profile. The method is to find the radio wave field as a function of height above each terrain point by integrating over the field above the preceding terrain point, using Huygen's principle. The integration is done not only for direct waves, but also for earth-reflected waves. *Author*

N88-19660# Forschungsinstitut fuer Hochfrequenzphysik, Werthhoven (Germany, F.R.G.).

MONO- AND BISTATIC RADAR COVERAGE DIAGRAMS INCLUDING DIFFRACTIVE WAVE PROPAGATION

HEINER KUSCHEL *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 10 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

Here, a digital terrain database, the Digital Landmass System (DLS), having high horizontal and vertical resolution, is used to obtain optical coverage patterns, as well as physical coverage plots. Physical coverage calculations are based on the consideration of wave propagation phenomena such as diffraction and refraction, using a multiple knife edge propagation model in combination with the above mentioned terrain database. Both the terrain model and the terrain database were verified by measurements. *Author*

N88-19661# Polytechnic Inst. of New York, Brooklyn. Center for Advanced Technology in Telecommunications.

A DIFFRACTION BASED THEORETICAL MODEL FOR PREDICTION OF UHF PATH LOSS IN CITIES

HENRY L. BERTONI and JORAM WALFISCH *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 10 p (SEE N88-19653 12-32) Nov. 1987 Sponsored in part by GTE Labs., Inc. and the New York State Science and Technology Foundation (AGARD-CP-407) Avail: NTIS HC A12/MF A01

A theory for predicting ultrahigh frequency path loss for cellular mobile radio systems in urban areas outside of the high-rise urban core is presented. In such areas the buildings are of nearly uniform height and form nearly parallel rows. Each row has the appearance of a cylinder lying on the ground, so that propagation is a process of diffraction past many cylinders. Using this approach, researchers developed a model for predicting average path loss that is in good agreement with measurements. *Author*

N88-19662# Centre d'Electronique de l'Armement, Bruz (France). ITES Div.

A PROGRAM FOR THE CALCULATION OF RADIO-WAVE TRANSMISSION LOSS OVER THE SPHERICAL EARTH AND OVER OBSTACLES

MICHEL RANGER, JEAN-LOUIS REGNIER, MARC ANDREU, and YVES LEPAPE *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 12 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

A new computer program was created to evaluate the radioelectric wave propagation loss around the earth in the frequency range of 30 to 40 MHz up to 10 to 12 GHz. The name of the program is CARDIF. Details of the program are given. *Author*

N88-19663# New Jersey Inst. of Tech., Newark. Dept. of Electrical Engineering.

CORRECTING RAY FIELD FAILURES CAUSED BY FOCUSING IN AN INHOMOGENEOUS DUCT: A CRITICAL LOOK AT THE GAUSSIAN BEAM METHOD

E. NIVER, M. S. VOGAS, C. J. RUIZ, and L. B. FELSEN (Polytechnic Inst. of Brooklyn, Farmingdale, N. Y.) *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 11 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

The Gaussian beam method (GBM) was investigated for multiple reflected ray fields in a model surface duct (or equivalently, a symmetrically excited full duct with a V-type refractive index profile). The purpose was to ascertain whether a beam stack that adequately represents the field at observation points along a particular ray segment corresponding to a certain number of reflections continues to be adequate along ray segments with a different number of reflections. Optimization was achieved by numerical experiment. The optimized parameters give good agreement, but should not be regarded as absolute. *Author*

N88-19664# Naval Ocean Systems Center, San Diego, CA. Ocean and Atmospheric Sciences Div.

REVIEW OF RECENT DEVELOPMENTS IN EVAPORATION DUCTING ASSESSMENT

JUERGEN H. RICHTER *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 9 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

Evaporation ducting is an important propagation enhancement mechanism over the oceans. Recent efforts have shown that the models presently used appear adequate for statistical assessments. An important correction algorithm was developed to remove erroneously high duct heights. A new air-sea temperature probe is under development which is expected to improve in situ evaporation ducting assessment. *Author*

N88-19665# Portsmouth Polytechnic (England). Dept. of Electrical and Electronic Engineering.

IDENTIFICATION OF MICROWAVE LINE-OF-SIGHT MULTIPATH COMPONENTS

A. HEWITT, L. MARTIN, W. H. LAU, J. AUSTIN, K. H. CRAIG (Science Research Council, Chilton, England), and E. VILAR *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 13 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

Fading due to multipath propagation is frequency selective. Given a wideband measurement of the channel transfer function, it is of interest to estimate the delays and amplitudes of the multipath rays. Fourier techniques suffer from limited resolution and sidelobes. Alternative parametric methods are available and one, the Prony algorithm, was used in this research. The algorithm was tested against a database of laboratory generated fades involving known delays and amplitudes. The capabilities and limitations of the method are outlined. Results obtained using real in the field measurements are illustrated and discussed, as are the areas to which this approach is applicable. *Author*

32 COMMUNICATIONS AND RADAR

N88-19666# Centre National d'Etudes des Telecommunications, Lannion (France).

REFRACTIVE INDEX, METEOROLOGY AND FADING IN LINE-OF-SIGHT TRANSMISSION PATHS (COINDICE DE REFRACTION, METEOROLOGIE ET AFFAIBLISSEMENTS SUR LES TRAJETS EN VISIBILITE)

LOUIS MARTIN, RODERIC L. OLSEN, and TERJE TJELTA (Norwegian Telecommunications Administration Research Establishment, Kjeller) In AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 12 p (SEE N88-19653 12-32) Nov. 1987 In FRENCH

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

In the development of reliable prediction methods for fixed frequency fading that would be applicable throughout a radio transmission network, it became necessary to account for the radio-metric conditions characteristic of each region within a given radio network. A purely meteorological method for the calculation of the geoclimatic factor is proposed and utilized in a prediction formula for fixed frequency fading applicable to a very unfavorable month. The method is based on a simultaneous study of the climate and propagation conditions of two link pairs situated in two different climate regions. Author

N88-19667# Air Force Geophysics Lab., Hanscom AFB, MA. **RADIO AND RADAR HOLES AND MULTIPATH ZONES: THE GLOBAL AND LOCAL INFLUENCES ON ATMOSPHERIC REFRACTIVE STRUCTURE AND RESULTING ADVERSE RADIO AND RADAR PERFORMANCE Abstract Only** OWEN R. COTE, JAMES F. MORRISSEY, and YUTAKA IZUMI In AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 1 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

Results from recent USAF field testing of digital radio line-of-sight (LOS) and troposcatter (TROPO) radio path performance, in which concurrent line vertical resolution refractivity profiles were also made, show that multipath effects on LOS and TROPO complement each other both performance-wise and weather-wise. Maximum multipath delay is a clear propagation path related event in LOS and a heavy rain/thunderstorm related event in TROPO. Because radio holes and multipath zones occur concurrently, being produced by the same refractive ducting layer, LOS paths can be designed to minimize the occurrence of frequency selective fading at the possible expense of some increase in non-frequency selective fading under strong ducting conditions. Path length is less important in affecting path performance than are duct layer strength and geometry. The rule that maximum multipath delay goes as the third power of path length is not confirmed by these measurements. Measured maximum multipath delay on an LOS is better represented by a half-power dependence on path length. Author

N88-19668# McMaster Univ., Hamilton (Ontario). Communications Research Lab.

THE CORRELATION BETWEEN METHODOLOGICAL AND LOW-LEVEL ANGLE-OF-ARRIVAL MEASUREMENTS

J. LITVA, P. BAUMAN, and N. R. FINES (Communications Research Centre, Ottawa, Ontario) In AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 16 p (SEE N88-19653 12-32) Nov. 1987 Sponsored by Department of National Defence, Ottawa

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

Anomalous propagation can cause serious low-angle tracking errors. Here, an investigation into the correlation between data from collocated radio and meteorological experiments is described. The data was recorded on the Ottawa River and consist of both radio and meteorological measurements. The measurements were carried out using a low level beacon and a large synthetic aperture antenna called a vertical profiler. The primary radio parameters consist of the angles-of-arrival of the direct and multipath signals from the beacon. The primary meteorological parameters are relative humidity, temperature, and barometric pressure. Author

N88-19669# Standard Elektrik Lorenz A.G., Pforzheim (Germany, F.R.).

MM-WAVE PROPAGATION AND APPLICATION IN MILITARY COMMUNICATION SYSTEMS

D. ROTHER and E. MUELLER In AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 21 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

Millimeter (mm) wave characteristics and propagation effects such as atmospheric attenuation, shadowing, reflection, and the influence of fading on radio links are studied. System concepts for short range communications such as internal command post communication are presented and discussed. Author

N88-19670# Forschungsinstitut der Deutschen Bundespost, Darmstadt (Germany, F.R.).

SPACE-DIVERSITY EFFECTS ON LINE-OF-SIGHT PROPAGATION PATHS

H.-G. GILOI, K. METZGER, and R. VALENTIN In AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 8 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

The effects of space-diversity reception on the performance of analog and digital radio-relay systems is discussed. The existing results valid for analog systems are reviewed. Some single-frequency measurements of the dependence of the improvement factor in the vertical antenna separation are discussed. It was found that the prediction formula proposed by Hosoya gives a good approximation to the measured dependence. The effect of frequency selectivity of the fading was taken into account for a performance estimation of digital radio links. Author

N88-19671# Department of Trade and Industry, London (England). Radio Regulatory Div.

SOME MEASUREMENTS OF HEIGHT GAIN AT V.H.F.

JOHN FAIRBROTHER, KEVIN A. HUGHES, and DOUGLAS M. HOLDEN (GEC-Marconi Electronics Ltd., Chelmsford, England) In AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 15 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

Some of the published work on antenna height gain is reviewed and limitations of the currently available information are highlighted. Comparison is then made with the results of height gain experiments undertaken in southeastern England at frequencies of approximately 95 MHz and 200 MHz. The variation of height gain is investigated, as is a relationship between height gain and the location variability of received field strength within a given environmental area. It was suggested that within the range investigated (experiments done at 95 MHz used vertical polarization and path lengths varying from about 25 km to 105 km) height gain may be represented as n dB for each doubling of antenna height. The value of n varies with the local environment at the receiving site. Author

N88-19672# Plessey Electronic Systems Research Ltd., Romsey (England).

ENVELOPE AND PHASE STATISTICS FOR NON-GAUSSIAN NOISE AND RESULTING ERROR PROBABILITIES FOR DIGITAL COMMUNICATIONS SYSTEMS

J. H. ROBERTS In AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 15 p (SEE N88-19653 12-32) Nov. 1987

(AGARD-CP-407) Avail: NTIS HC A12/MF A01

It is becoming increasingly clear that the electromagnetic environment should be given serious attention from the point of view of its statistical characteristics when systems of communication, command, or control are planned. Here, statistical properties of the envelope and phase are derived in a general manner. A new formula, for example, is given for the probability that a noise envelope sample exceeds a sample of an envelope of signal plus noise. This is the basic statistic needed for assessing incoherently detected situations such as On-off or FSK. In order to apply the results to specific noise types, three types of non-Gaussian noise are studied: Cauchy noise, quartic noise and

a mixture of Gaussian plus impulsive noise. It is very clear that a non-Gaussian noise with a distribution having a long tail can be very damaging to digital data. Author

N88-19673# British Telecom Research Labs., Ipswich (England). Technology Applications Dept.

THE 6 GHZ PROPAGATION MEASUREMENTS OVER A 51 KM PATH IN THE UK

J. E. DOBLE *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 8 p (SEE N88-19653 12-32) Nov. 1987 (AGARD-CP-407) Avail: NTIS HC A12/MF A01

For several years British Telecom has operated an experimental 6 GHz digital link over a 51 km path in the worst multipath environment in the UK. Results from this link are discussed with particular emphasis being given to a previously unreported form of cross-polar-isolation (XPI) behavior in which the XPI degrades with both frequency selective and flat components of fading. Such events occur only once or twice a year in the location of the experiment but emphasize the need for the development of interface cancellers if co-frequency cross-polar frequency plans are to become viable. Author

N88-19674# Commerce Dept., Boulder, CO.

AN EHF TELECOMMUNICATION SYSTEM ENGINEERING MODEL

KENNETH C. ALLEN *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 15 p (SEE N88-19653 12-32) Nov. 1987 (AGARD-CP-407) Avail: NTIS HC A12/MF A01

An extremely high frequency telecommunication system engineering model (ETSEM) was developed as an aid in the design of line-of-sight (LOS) communication systems from 10 to 100 GHz. ETSEM provides tabulation of path geometry parameters and analyzes ray path and Fresnel zone clearances to help the engineer design the path. ETSEM also predicts the performance (availability) of both digital and analog systems based on state-of-the-art EHF propagation models and equipment specifications. Attenuation by rain, clear air absorption and multipath are modeled. These are expected essentially to determine the statistics of link availability as limited by propagation impairments. Performance may be predicted by any interval of months of the year. A climatological data base for North America and Europe provides parameters for the propagation models. ETSEM has been implemented on a desk top computer. Weaknesses and limitations of the model are discussed. Author

N88-19675# Rennes Univ. (France). Dept. Antennes.

A PROPAGATION CAMPAIGN IN A MARINE ENVIRONMENT UTILIZING A DIGITAL SYSTEM AT 36 GHZ [UNE CAMPAGNE DE PROPAGATION EN MILIEU MARITIME, UTILISANT UN SYSTEME NUMERIQUE A 36 GHZ]

YVONICK HURTAUD and ALAIN JUNCHAT (Centre d'Electronique de l'Armement, Bruz, France) *In* AGARD. Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control 14 p (SEE N88-19653 12-32) Nov. 1987 *In* FRENCH (AGARD-CP-407) Avail: NTIS HC A12/MF A01

A propagation study in a maritime environment that took place at the end of 1984 on the French Atlantic coast is discussed. An 8.448 Mbit/s system working at 36 GHz was used. This experiment studied the attenuation at 36 GHz caused by rain behavior as well as the behavior of the digital link. In order to know the sea state, a buoy with a swell sensor was anchored close to the line-of-sight (LOS). It provided the height of waves. The distribution of the rain drop size measured by the spectroprecipitometer showed good agreement with the distributions of Marshall Palmer and Joss, et al. Specific attenuation was calculated using these distributions and Mie theory. For selected periods, the whole attenuation of the link is forecast and compared to the experimental values. The digital transmission analysis reveals that the link quality strongly depends on the sea state. When the sea is quiet, the reflection of a part of the incident energy on the water disturbs the link with the tide. Author

N88-27406# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AIR-TO-AIR RADAR FLIGHT TESTING

RANDALL E. SCOTT (Test Group, 6520th, Edwards AFB, Calif.) Jun. 1988 117 p (AGARD-AG-300-VOL-7; ISBN-92-835-0460-7; AD-A19,412) Avail: NTIS HC A06/MF A01

This volume in the AGARD Flight Test Techniques Series describes flight test techniques, flight test instrumentation, ground simulation, data reduction and analysis methods used to determine the performance characteristics of a modern air-to-air (a/a) radar system. Following a general coverage of specification requirements, test plans, support requirements, development and operational testing, and management information systems, the report goes into more detailed flight test techniques covering a/a radar capabilities of: detection, manual acquisition, automatic acquisition, tracking a single target, and detection and tracking of multiple targets. There follows a section on additional flight test considerations such as electromagnetic compatibility, electronic countermeasures, displays and controls, degraded and backup modes, radome effects, environmental considerations, and use of testbeds. Other sections cover ground simulation, flight test instrumentation, and data reduction and analysis. The final sections deal with reporting and a discussion of considerations for the future and how they may affect radar flight testing. Author

N89-11931# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Electromagnetic Wave Propagation Panel.

MEDIA EFFECTS ON ELECTRONIC SYSTEMS IN THE HIGH LATITUDE REGION

Sep. 1988 225 p Lecture series held in Ottawa, Ontario, 29-30 Sep. 1988, in Geilo, Norway, 24-25 Oct. 1988, and in London, United Kingdom, 27-28 Oct. 1988 (AGARD-LS-162; ISBN-92-835-0478-X; AD-A202423) Avail: NTIS HC A10/MF A01

The lecture series directs its attention to propagation problems and solutions for many systems. The topics include satellite communications over polar and auroral latitudes, over-the-horizon radar, low frequency propagation under high latitude conditions, remote sensing of targets and high latitude regions by active and passive EM systems and HF communications at auroral and polar latitudes. Unique lower atmospheric effects and multipath problems of importance at high altitudes are discussed. For individual titles, see N89-11932 through N89-11941.

N89-11932# Army Communications-Electronics Command, Fort Monmouth, NJ. Center for C3 Systems.

MEDIA EFFECTS ON ELECTRONIC SYSTEMS IN THE HIGH LATITUDE REGION

HAIM SOICHER *In* AGARD. Media Effects on Electronic Systems in the High Latitude Region 3 p (SEE N89-11931 03-32) Sep. 1988 (AGARD-LS-162) Avail: NTIS HC A10/MF A01

Modern technology and state-of-the-art research will permit communications, navigation, and surveillance systems to adapt to the complex and rapidly changing medium. However, such adaptability depends to a large extent on: improvement of prediction of auroral, ionospheric and magnetic disturbances; understanding of the mechanisms responsible for the formation of ionospheric inhomogeneities and the propagation related effects; obtaining the long-term data base; and maintaining real time information flow on the natural electromagnetic and particle radiation background. Author

N89-11934# Northwest Research Associates, Inc., Bellevue, WA.

TRANSIONOSPHERIC PROBING AND PROPAGATION

E. J. FREMOUW *In* AGARD. Media Effects on Electronic Systems in the High Latitude Region 23 p (SEE N89-11931 03-32) Sep. 1988 (AGARD-LS-162) Avail: NTIS HC A10/MF A01

The propagation of radio waves through the ionosphere is necessary for the operation of many C(3) systems. The aspects of magnetoionic theory that relate to transionospheric probing are discussed, dispensing rather quickly with the bulk-ionosphere effects and concentrating on the effects of spatially irregular total electron content and scintillation. Regarding the latter, the signal

32 COMMUNICATIONS AND RADAR

statistics of scintillation and the channel parameters that describe those statistics are discussed. The geophysical parameters needed to characterize the plasma-density irregularities that produce scintillation are considered. The focus in this regard is the application to user-oriented computer models. In addition to the foregoing, the experimental techniques used to employ scintillation as a diagnostic tool and the radio sources available for transionospheric probing are discussed. Author

N89-11935# Hamburg Univ. (Germany, F.R.). Meteorological Inst.

GROUND/LOWER ATMOSPHERIC CONSIDERATION

H. JESKE /In AGARD, Media Effects on Electronic Systems in the High Latitude Region 22 p (SEE N89-11931 03-32) Sep. 1988

(AGARD-LS-162) Avail: NTIS HC A10/MF A01

The ground-wave propagation of electromagnetic waves in the frequency range below 30 MHz is especially influenced by the ground characteristics (electrical constants, roughness, obstacles) along the path. For frequencies above 30 MHz the main propagation mechanisms are determined by the vertical stratification of the refractive index in the lowest part of the non-ionized atmosphere. The effects are hardly frequency-dependent. The characteristics of the involved media (ground atmosphere) and their influences on electromagnetic wave propagation are discussed with special emphasis to anomalies due to the complex environment of polar regions. Author

N89-11936# Communications Research Centre, Ottawa (Ontario). Radio Propagation Lab.

HF COMMUNICATIONS AND REMOTE SENSING IN THE HIGH LATITUDE REGION

JOHN S. BELROSE /In AGARD, Media Effects on Electronic Systems in the High Latitude Region 42 p (SEE N89-11931 03-32) Sep. 1988

(AGARD-LS-162) Avail: NTIS HC A10/MF A01

Media effects on high frequency communications are discussed. High latitude disturbance zones and magnetic coordinates; the propagation media in the high latitude region; ground effects; radio noise and interference; results of high frequency communications, direction finding, surveillance and remote sensing at high latitudes; transionospheric high frequency propagation; and over-the-horizon radar are discussed. Author

N89-11937# Centre National de la Recherche Scientifique, Verrieres-Le Buisson (France).

H. F. RADAR PROBING (INCLUDING MODIFICATION)

P. BAUER /In AGARD, Media Effects on Electronic Systems in the High Latitude Region 15 p (SEE N89-11931 03-32) Sep. 1988

(AGARD-LS-162) Avail: NTIS HC A10/MF A01

At high magnetic latitudes (auroral and polar regions), the ionospheric plasma is governed by the geometry of the magnetic field, the experience of particle precipitations (from 100 MeV solar protons to keV electrons), large and small scale convection electric fields, and strong atmosphere/ionosphere coupling processes. As a result, the various forms of free energy sources feed the growth of plasma instabilities which through nonlinear mechanisms lead to a turbulent cascade of ionospheric inhomogeneities from the regional scale of the ion larmor radii. The scales of the irregularities encompass the wavelength ranges of HF systems, thus providing natural targets for HF radars. While highly horizontally stratified in the D and E layers, the targets are essentially aligned along the magnetic field in the F region. HF radar techniques making use of these properties include: partial reflection systems (D and lower E region), E region auroral radars, F region auroral and polar radars. These techniques characterize: the irregularities and the underlying instabilities, the high latitude plasma convection, and the middle atmosphere motions (gravity waves and tides). A better understanding of the basic plasma processes is also provided by HF ionosphere modification experiments performed from the D up to the F region through the excitation of resonant frequencies and through the local change macroscopic properties such as the electron temperature or the electron density. Author

N89-11939# Northwest Research Associates, Inc., Bellevue, WA.

SATELLITE IN-SITU PROBING

E. J. FREMOUW /In AGARD, Media Effects on Electronic Systems in the High Latitude Region 10 p (SEE N89-11931 03-32) Sep. 1988

(AGARD-LS-162) Avail: NTIS HC A10/MF A01

Of those various media that affect radio propagation, the one that can be probed in situ by means of satellites is the ionosphere. The portion of the ionosphere that can be so probed repeatedly over long periods of time is the F layer. Phenomena that affect and/or can be sensed in the F layer are discussed. Specifically, techniques for, and some recent results on, the two major phenomena identified as affecting the high-latitude ionosphere, particle precipitation and its resulting ionization and ExB drift and the plasma-density irregularities that result therefrom, especially those that produce radiowave scintillation are reviewed. Regarding particle precipitation, attention is confined to electrons in the range of a few tens of eV to a few tens of keV, excluding other species and energies that produce ionization lower than the E layer. Upwelling electrons and the question of balance between currents flowing into and out of the ionosphere, insofar as they can be sensed on board a satellite in the F layer are considered. Thus, we shall consider measurement of the magnetic field, especially the local perturbation field. We'll also indicate the utility of optical remote sensing, in the form of imaging from a platform in the F layer, for providing a plan view related to point measurements on the platform. Primarily we'll consider in-situ measurements of the F-layer thermal plasma, mainly its electron and total ion density, temperature, and drift, giving little attention to the identification of ion species. Accordingly, we'll briefly review the measurement principles of the Langmuir probe, the retarding-potential analyzer, and the ion drift meter. Our consideration of the in-situ electric field will be limited primarily to the d.c. convection field, but it will include structure therein. By way of example, we'll describe in some detail the complement of instruments on board the DNA HiLat and Polar BEAR satellites and results therefrom. Author

N89-11940# Centre National de la Recherche Scientifique, Verrieres-Le Buisson (France).

INCOHERENT/COHERENT SCATTER

P. BAUER /In AGARD, Media Effects on Electronic Systems in the High Latitude Region 17 p (SEE N89-11931 03-32) Sep. 1988

(AGARD-LS-162) Avail: NTIS HC A10/MF A01

Coherent and incoherent VHF and UHF radars provide a means for studying, in three dimensions, some of the basic physical properties of the atmosphere (from the troposphere up to the thermosphere) and of the ionosphere. The term coherent refers here to pulse phase coherent integration of the scattered radar signals. This technique is applicable whenever the scattering process is stationary over the interpulse period. It is the case for the scattering of electromagnetic waves arising from turbulent atmospheric fluctuations and from ionospheric irregularities. On another hand, incoherent integration has to be used when the scattering occurs from plasma thermal fluctuations in the ionosphere. Mesosphere - Stratosphere - Troposphere (MST) coherent radars give access to atmospheric dynamics (wind and turbulence). Aspect sensitive coherent radars allow one to map the ionospheric electric field and to characterize E region plasma instabilities, whenever such instabilities are sufficiently developed. Incoherent scatter radars provide three dimensional measurements of the electron and ion temperatures, of the electron concentration and of the ion drift vector over the whole ionosphere. Author

N89-11941# Royal Norwegian Council for Scientific and Industrial Research, Kjeller. Environmental Surveillance Technology Programme.

PROPAGATION MEDIUM ADAPTIVE TECHNIQUES FOR ADVERSE COMMUNICATIONS AND FOR REMOTE SENSING

DAG T. GJESSING /In AGARD, Media Effects on Electronic Systems in the High Latitude Region 19 p (SEE N89-11931 03-32) Sep. 1988

(AGARD-LS-162) Avail: NTIS HC A10/MF A01

In general terms, an object probed by electromagnetic waves can be characterized by the distribution of scatters along and transverse to the propagation direction, the chemical surface structure of the object, the surface temperature and the motion

pattern. A unified set of first order expressions derived from basic physical principles characterizing the scattering object is presented. From these it is shown how the propagation medium affects the results of the various remote sensing techniques. In exactly the same way the factors which characterize the propagation medium in relation to communications are derived. It is shown that in regard to the influence of the propagation medium, the problems related to communications are very much unified with those of remote sensing. Author

N89-17709# Polytechnic Univ., Farmingdale, NY. Dept. of Electrical Engineering.

GEOMETRICAL THEORY OF DIFFRACTION FOR HIGH-FREQUENCY COHERENCE FUNCTIONS IN WEAKLY RANDOM MEDIUM WITH INHOMOGENEOUS BACKGROUND PROFILE

R. MAZAR and L. B. FELSEN /In AGARD, Scattering and Propagation in Random Media 16 p (SEE N89-17706 10-31) Mar. 1988

(Contract F49620-85-C-0028)

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

The localization of high-frequency wave propagation around ray trajectories, and the reflection and (or) diffraction of these local plane wave fields by boundaries, inhomogeneities, and (or) scattering centers was combined via the Geometrical Theory of Diffraction (GTD) into one of the most effective means of analyzing high-frequency wave phenomena in complex deterministic environments. These constructs are incorporated into a stochastic propagation and diffraction theory for statistical moments of the high-frequency field in a weakly fluctuating medium with inhomogeneous background profile. Canonical problems with deterministic GTD furnish the propagators and the local reflection, refraction, and diffraction coefficients that relate incoming and outgoing wavefields. The major analytical building blocks include propagators described in local coordinates centered on the GTD ray trajectories in the deterministic inhomogeneous background environment; multiscale expansions in these coordinates, to chart and solve for the propagation properties of statistical measures of the parabolically formulated ray fields; Kirchhoff or physical optics (PO) approximations, generated by GTD incident fields, to establish initial conditions for fields reflected from extended smooth surfaces; and point scatterer solutions to establish GTD initial conditions for small scatterers and edges. Author

N89-17710# Colorado School of Mines, Golden. Center for Wave Phenomena.

MULTIPLE SCATTERING FROM ROUGH SURFACES

JOHN A. DESANTO /In AGARD, Scattering and Propagation in Random Media 10 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

A review of multiple scattering theories is presented with specific application to scattering from rough surfaces. This includes the limitations, advantages, and range of validity of both traditional methods such as the Kirchhoff and perturbation methods as well as a discussion of modern methods. The latter include the connected diagram method (integral equations), the smoothing method, the stochastic Fourier transform approach, and the spectral method. The former two methods have an analog in the theory of wave propagation in random media. The latter method is analogous to a method developed for scattering from periodic surfaces. The modern mathematical approach to these problems is stressed. In this approach the exact stochastic integral equations are used to develop equations on averages of the field quantities. The two most prominent equations are the Dyson equation on the first moment of the field, and the Bethe-Salpeter equation on the second moment. For homogeneous surface statistics, the former yields the coherent specular scattering, and the latter yields the incoherent scattering. Formally, both can be expressed exactly in the sense that all orders of multiple scattering are included, but, in order to be solved, must be approximated. The Dyson equation was solved in lowest order approximation and illustrates the necessity of using multiple scattering techniques to describe coherent scattering. The situation with the Bethe-Salpeter equation, however, is not nearly so well understood, and the difficulty of finding approximation techniques for this equation are discussed. Author

N89-17712# Royal Signals and Radar Establishment, Malvern (England).

MARKOV RANDOM FIELDS: A STRATEGY FOR CLUTTER MODELLING

STEPHEN P. LUTTRELL /In AGARD, Scattering and Propagation in Random Media 8 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

The need for models of image texture (or clutter) are briefly reviewed. The use of detailed physical models is prohibited by the difficulty of characterizing the scatterer distribution and the scattering process which cause the texture, and so phenomenological modeling is used. It is proposed that certain statistics of the image be measured, and that synthetic images which are consistent with these measurements be generated by a Monte Carlo method - this allows the need for further statistics to be tested. The relationship of this scheme to the well-known maximum entropy method for constructing least committal probability distributions is pointed out. Furthermore it is shown how a Markov random field model is generated by this process. Finally, some methods are suggested for selecting useful statistics, which are demonstrated by analyzing a synthetic aperture radar image of a wood and a sonar image of the sea bed. Author

N89-17713# Texas Univ., Arlington. Wave Scattering Research Center.

A SCATTERING MODEL FOR FORESTED AREA

M. A. KARAM and A. K. FUNG /In AGARD, Scattering and Propagation in Random Media 9 p (SEE N89-17706 10-31) Mar. 1988

(Contract NAG9-115)

(AGARD-CP-419) Avail: NTIS HC A23/MF A01 CSCL 13B

A forested area is modeled as a volume of randomly oriented and distributed disc-shaped, or needle-shaped leaves shading a distribution of branches modeled as randomly oriented finite-length, dielectric cylinders above an irregular soil surface. Since the radii of branches have a wide range of sizes, the model only requires the length of a branch to be large compared with its radius which may be any size relative to the incident wavelength. In addition, the model also assumes the thickness of a disc-shaped leaf or the radius of a needle-shaped leaf is much smaller than the electromagnetic wavelength. The scattering phase matrices for disc, needle, and cylinder are developed in terms of the scattering amplitudes of the corresponding fields which are computed by the forward scattering theorem. These quantities along with the Kirchhoff scattering model for a randomly rough surface are used in the standard radiative transfer formulation to compute the backscattering coefficient. Numerical illustrations for the backscattering coefficient are given as a function of the shading factor, incidence angle, leaf orientation distribution, branch orientation distribution, and the number density of leaves. Also illustrated are the properties of the extinction coefficient as a function of leaf and branch orientation distributions. Comparisons are made with measured backscattering coefficients from forested areas reported in the literature. Author

N89-17715# Pennsylvania State Univ., University Park. Dept. of Electrical Engineering.

THE ENHANCEMENT EFFECT OF THE BACKSCATTERED INTENSITY IN A RANDOM MEDIUM

C. C. YANG and K. C. YEH (Illinois Univ., Urbana.) /In AGARD, Scattering and Propagation in Random Media 11 p (SEE N89-17706 10-31) Mar. 1988

(Contract NSF ATM-83-12175, NSF ECS-83-11345)

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

A wave gradually loses its coherence while propagating in a random medium. This is because the wave experiences decorrelation along a propagation path that has uncorrelated irregularities. If, however, different parts of the propagation path have correlated irregularities, the decorrelation of the wave will not proceed as rapidly as otherwise. This effect is most prominently manifested in the case of backscattering where the return wave propagates through the same irregularities as the outgoing wave. The average backscattered intensity can be shown to be higher than that expected from a wave propagating over a path equal to the round trip distance but through uncorrelated irregularities. This phenomenon is known as the enhancement effect. This enhancement effect is clearly revealed when the receiver is moved ever closer to the transmitter. As the separation between the

32 COMMUNICATIONS AND RADAR

receiver and the transmitter is reduced, the average scattered intensity will increase and reaches a peak when the receiver is co-located with the transmitter. If the wave statistics are in the saturation regime, this maximum increase amounts to a doubling of the average intensity. The enhancement effect is examined under various conditions. There can be backscattering from random irregularities themselves or from a deterministic scatter. The difference between weak and strong scattering is distinguished. The effects produced by various power spectral functions from the random medium are also considered. Author

N89-17717# Royal Signals and Radar Establishment, Malvern (England).

HIERARCHICAL SCATTERING MODELS

E. JAKEMAN *In* AGARD, Scattering and Propagation in Random Media 11 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The most familiar descriptor of multi-scale structure in continuous scattering media is the power law spectrum which characterizes hierarchical or fractal behavior. The mathematical and phenomenological implications of adopting such models in scattering calculations will be discussed with particular reference to the statistical properties of amplitude scintillation generated by a phase changing screen or diffuser. A brief summary of results obtained when the phase itself is a Gaussian random fractal will be followed by a more detailed review of the case when the phase gradient is fractal. This last model is not only more realistic for fluid systems subject to diffusive or other smoothing effects, but is also amenable to mathematical and numerical analysis. The geometrical optics contribution to the scattered intensity pattern is particularly easy to calculate and a number of results for the statistics of ray density fluctuations will be presented. Author

N89-17719# Illinois Univ., Urbana-Champaign.

SPACE-TIME STATISTICS OF WAVES PROPAGATING THROUGH A DEEP PHASE SCREEN

S. J. FRANKE and C. H. LIU *In* AGARD, Scattering and Propagation in Random Media 16 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

Wave propagation through a deep phase screen is studied in which the properties vary randomly both with time and space. Two approaches will be discussed. One is analytical, the other involves numerical simulation. In the analytical approach, asymptotic expressions for the space-time correlation functions of the wave field are derived for the case of Gaussian random irregularities. For the simulation approach, general prescribed space-time random variations of irregularities are generated and used to represent a time varying phase screen. This technique can be used to model a screen with a power law type of irregularity spectrum. Numerical propagation code is then used to compute the wave fields at the reception plane from which statistics will be calculated. The relations between the statistics of the wave fields and the space-time variations of the medium will be discussed. Applications of the results will be discussed. Author

N89-17720# National Oceanic and Atmospheric Administration, Boulder, CO. Wave Propagation Lab.

LINE-OF-SIGHT MILLIMETER WAVE PROPAGATION CHARACTERISTICS

S. F. CLIFFORD, R. J. HILL, R. B. FRITZ, R. A. BOHLANDER, and R. W. MCMILLAN (Georgia Inst. of Tech., Atlanta.) *In* AGARD, Scattering and Propagation in Random Media 7 p (SEE N89-17706 10-31) Mar. 1988

(Contract MIPR-122-85)

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

From 1983 to 1985 a team of scientists from NOAA's Wave Propagation Laboratory and Georgia Institute of Technology conducted an extensive set of millimeter wave propagation measurements. In five, thirty-day sessions, chosen for the widest variety of weather conditions, millimeter wave frequencies from 116 to 230 GHz were propagated over a 1.4 km horizontal path in Flatville, Illinois. Simultaneous, extensive measurements of the meteorology allowed a detailed comparison of the propagation characteristics with the current state of the atmosphere. The observations of millimeter wave propagation characteristics during clear air and severe weather are reported. Amplitude and phase spectra for propagation in clear air are compared with theory

derived using the weak refractive turbulence approximation. Excellent agreement is found. Further, probability density functions appear to be, respectively, lognormal (amplitude) and Gaussian (phase difference), as expected from application of the central limit theorem. Interesting meteorological observations and their millimeter wave signatures will also be presented. Author

N89-17723# Forschungsinstitut der Deutschen Bundespost, Darmstadt (Germany, F.R.).

A PRECIPITATION SCATTER EXPERIMENT AT 30 GHZ

HEINZ SCHMIEDEL and ALFRED OCHS *In* AGARD, Scattering and Propagation in Random Media 8 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

An experiment was initiated to study scattering of microwaves at 30 GHz from precipitation, which is of importance in interference analysis and system coordination. The measurements are made in a bistatic configuration with transmit and receive sites separated by some 25 km. The propagation paths are run in a vertical plane containing the two terminal sites. Four transmitters are operated at different fixed elevations, one receiver is connected to a fixed antenna, a second one to a steerable antenna. Thus a total of eight main-beam intersections are formed, from which precipitation scatter can be received under different scatter angles and at different heights up to 10 km. Both, horizontally and vertically polarized signals are measured. In addition, a line-of-sight link and a rain-scatter link are operated at 30 and 11 GHz for the purpose of comparison. To study precipitation scattering in a situation close to those of actual communication links, a further 100 km path is run at 30 GHz. The main objectives of the experiment are: studies of direct relevance to system design and coordination (long term statistics of transmission loss in various interference configurations, significance of backscatter in relation to forward scatter, influence of the melting layer, scattering from ice crystals up to a height of 10 km, and power density spectra and fading rate of the scattered signal); and studies of physical processes relevant to the precipitation scatter. The experimental set-up is described and first results of the measurements will be given. Author

N89-17724# National Telecommunications and Information Administration, Boulder, CO.

OBSERVED PHASE DELAY THROUGH RAIN AT 96 GHZ

KENNETH C. ALLEN *In* AGARD, Scattering and Propagation in Random Media 11 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Observations of phase delay through rain at 96 GHz are presented. The results are pertinent for target identification when relative amplitude and phase information are used from circularly polarized radar returns. At the transmitter site, a 9.6 GHz source was vertically polarized and a 9.1 GHz source was righthand circularly polarized. A single local oscillator phased locked both sources. At the receiver site, 1050 m away, the local oscillator was phase locked to the received 9.6 GHz signal. Both left- and right-hand circular polarizations at 96.1 were received using separate antennas. The phase of each polarization at 96.1 GHz was measured relative to the 9.6 GHz reference. This allowed the examination of the behavior of the differential phase delay of the circular polarizations. Author

N89-17725# Technische Hogeschool, Delft (Netherlands). Faculty of Electrical Engineering.

FM-CW RADAR REMOTE SENSING OF HYDROMETEORS

L. P. LIGTHART and J. S. VANSINTTRUYEN *In* AGARD, Scattering and Propagation in Random Media 15 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

In order to investigate phenomena influencing co-polar attenuation and cross-polar discrimination along earth-space satellite paths and terrestrial radio links at frequencies above 10 GHz, the number density, geometry, and orientation of hydrometeors (rain, snow, hail, melting particles) along the path have to be characterized. The modeling of the melting process, the dielectric properties of melting particles, and fall velocity behavior of hydrometeors for Doppler velocity computation with vertically pointing radars are described. Attention is paid to backward scattering of ellipsoidal hydrometeors for radar polarimetry computations at arbitrary elevation angles, and to

32 COMMUNICATIONS AND RADAR

forward scattering of spherical hydrometeors for attenuation computations at high frequencies. The multi-parameter FM-CW radar system is able to measure the polarization properties and Doppler velocity spectra of hydrometeors with high resolution in range and reflectivity level. Preliminary results obtained with this radar system are shown, indicating the capabilities of combined Doppler- and polarimetry measurements for classification of hydrometeors along a satellite path. Author

N89-17726# Thomson-CSF, Velizy (France). Centre d'Applications Radars.

MODELING OF ELECTROMAGNETIC WAVE AND SEA SURFACE INTERACTION [MODELISATION DE L'INTERACTION ENTRE UNE ONDE ELECTROMAGNETIQUE ET LA SURFACE DE LA MER]

MICHEL FOURNIER In AGARD, Scattering and Propagation in Random Media 14 p (SEE N89-17706 10-31) Mar. 1988 In FRENCH

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

The EM systems parameters and signal characteristics used in connection with ocean surface effects are reviewed. Hydrodynamic and statistical properties of the sea surface, including various spectral representations are covered. Finally, available models of EM wave and ocean surface interactions are also reviewed. These models consist of perturbation theory for EM waves which are large with respect to ocean waves, physical optics techniques for small EM wavelengths and a combination of both when EM and ocean wavelengths are of the same order. Author

N89-17727# Memorial Univ. of Newfoundland, Saint Johns. Faculty of Engineering and Applied Science.

ROUGH SURFACE PROPAGATION AND SCATTER WITH APPLICATIONS TO GROUND WAVE REMOTE SENSING IN AN OCEAN ENVIRONMENT

JOHN WALSH and SATISH K. SRIVASTAVA In AGARD, Scattering and Propagation in Random Media 15 p (SEE N89-17706 10-31) Mar. 1988 Sponsored by Canadian Dept. of National Defence and Natural Sciences and Engineering Research Council of Canada

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

Some properties of the vector integral equation representing a general formulation for propagation and scattering from rough surfaces are discussed. It is shown that under certain conditions the equation may be reduced to a Volterra equation of the second kind in the normal component of the surface field for an initially unexcited surface, and hence some confidence may be had in a Neumann series or successive approximation. Using the formulation, the backscattered field solutions at ground wave frequencies and resulting radar cross section solutions derived previously for a model of the ocean surface are presented and discussed. The source assumed is a vertical pulsed dipole. The choice of receiving antenna is left arbitrary. The second-order cross section contains terms in addition to those provided by existing theories. The additional terms may become very significant in certain Doppler frequency regions and hence required for ocean clutter estimation in the detection of certain types of surface targets. Some of the predictions were verified experimentally. Author

N89-17728# Thessaloniki Univ. (Greece). Dept. of Electrical Engineering.

WAVE-TILT SOUNDING OF TROPOSPHERIC DUCTS ABOVE THE SEA

D. P. CHRISOULIDIS and E. E. KRIEZIS In AGARD, Scattering and Propagation in Random Media 12 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

The possibility to detect tropospheric ducts above the sea through airborne wave-tilt measurements is investigated. Sea roughness and tropospheric refractivity anomalies associated with the presence of ducts are incorporated in an iterative procedure resulting in wave-tilt versus frequency diagrams at some altitude above sea level. In general, the diagram corresponding to ducting conditions appears sifted by delta f with respect to the diagram of the standard troposphere. This frequency shift is rather insensitive to variations of sea state, duct thickness, and optimum coupling height. It is though strongly dependent on duct intensity, delta M. The diagram of delta f vs. delta M is not far from linear in the

VHF band and thus offering itself for delta M through delta f measurements. Author

N89-17729# Royal Signals and Radar Establishment, Malvern (England).

I-BAND MULTIPATH PROPAGATION OVER THE SEA SURFACE

C. J. BAKER and K. D. WARD In AGARD, Scattering and Propagation in Random Media 5 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

A series of measurements are summarized which were aimed at studying the phenomenon of multipath resulting from line of sight, two way, microwave propagation over the sea surface. It was observed that the expected lobing structure, due to the interference of the direct and reflected signals is destroyed when the sea surface becomes sufficiently rough, suggesting the coherent part of the forward scattered sea reflection to be zero. Further, it was observed that although the pulse by pulse fluctuations show deep fading characteristics they may be modeled by the Rice-squared distribution. However, it was found that care must be taken in choosing the duration of the measurement when evaluating the statistical properties of the data. Author

N89-17730# Rennes Univ. (France). Dept. Antennes.

MEASUREMENT AND MODELING OF 36 GHZ SEA REFLECTION PHENOMENA [ETUDE EXPERIMENTALE ET MODELISATION DU PHENOMENE DE REFLEXION SUR LA MER A 36 GHZ]

YVONICK HURTAUD, CLAUDE TERRET, JEAN-PIERRE DANIEL, and ALAIN JUNCHAT (Centre d'Electronique de l'Armement, Bruz, France) In AGARD, Scattering and Propagation in Random Media 14 p (SEE N89-17706 10-31) Mar. 1988 In FRENCH (AGARD-CP-419) Avail: NTIS HC A23/MF A01

During the 1984 autumn, a measurement campaign of the propagation of electromagnetic waves at 36 GHz was conducted on the French Atlantic coast, near Lorient. The length of the link between the transmitting site, located on the isle of Groix and the receiving site at Gavres, was 9.7 km. Owing to the small height of the antennas, a part of the emitted energy was reflected by the sea surface. At the reception point, the fields coherent interference produced by the direct and reflected radiations, gave a signal varying periodically with the influence of the tides. In order to study the specular reflection phenomena over the sea, specific measurements were made with the help of an elevator. It allowed the height of the receiving antenna to change on a distance of about 5 meters, maintaining that way, at the same time, steady environmental conditions. Thanks to this device, the forward specular reflection coefficient, at a frequency of 36 GHz could then be determined. The measurements which were made, proved the good agreement between then and the theory, especially in the case of strong roughness. Following these results, a model of propagation based on specular reflection was developed to be compared with the measurements. In some particular meteorological situations, a distortion of the interference figures can be observed, due to variations of the atmospheric structure. Author

N89-17731# Naval Research Lab., Washington, DC. Ionospheric Effects Branch.

RANDOM PROPAGATION THROUGH THE LONGWAVE CHANNEL

F. J. KELLY, F. J. RHOADS, and M. D. ANDREWS (Interferometrics, Inc., Vienna, VA.) In AGARD, Scattering and Propagation in Random Media 27 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The longwave propagation channel in the earth-ionosphere waveguide has many characteristics of a random medium. The lower surface of the waveguide is sometimes rough or smooth depending on the propagation path considered. The ionospheric boundary is significantly perturbed by sudden events during both daytime and nighttime. The polar-arctic regions of the world evidence these effects in a striking manner and require different statistical treatment. Recent observation of longwave fields in the arctic will be described and their degree of agreement with statistical predictions displayed. Author

32 COMMUNICATIONS AND RADAR

N89-17732# National Telecommunications and Information Administration, Boulder, CO. Inst. for Telecommunication Sciences.

MODELING OF WIDEBAND HF CHANNELS

MARTIN NESEBERGS. In AGARD, Scattering and Propagation in Random Media 16 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Laboratory simulation of wideband high frequency (HF) system performance is currently not possible because such simulators do not exist. Moreover, there are no validated HF channel models for bandwidths of the order of one megahertz, on which to base the simulator design. Additive distortions, namely noise and interference, in the HF band are briefly reviewed. An introduction and an appraisal of past narrowband HF models are presented: their background, validation tests, and the NTIA/ITS development of the Watterson's simulator. That laboratory tool, judged best by many, works in real time and offers accurate representations of HF channel bandwidth up to 10 or 12 kHz. In the present study an extension to wideband models is attempted. Unfortunately, it suffers from an apparently serious shortage of measured data for the time-varying channel transfer function. A possible wideband model is hypothesized, conjectures are made, many questions are raised, but hardly any are answered. One is left faced with a requirement for an experimental program that is to ascertain the wideband characteristics of multipath fading for digital radio transmission in the HF band and over propagation paths of interest. Author

N89-17733# National Telecommunications and Information Administration, Boulder, CO. Inst. for Telecommunication Sciences.

PROPAGATION AND PERFORMANCE MEASUREMENTS OVER A DIGITAL TROPOSCATTER COMMUNICATIONS LINK

JOHN J. LEMMON. In AGARD, Scattering and Propagation in Random Media 13 p (SEE N89-17706 10-31) Mar. 1988 Sponsored by Department of the Army, Washington, DC (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Propagation and performance measurements that were obtained over a digital troposcatter communications link between Bockberg, West Germany, and West Berlin are discussed. The measurements were unusual in that three general types of data were collected simultaneously over the link: propagation data, digital performance data, and meteorological data. The propagation data include received signal level (RSL) and multipath measurements made with a channel probe, the performance data consist of bit-error data obtained from a 1.544 Mbps T1 bank, and the meteorological data (in the form of radiosonde messages) were used to generate profiles of the radio refractive index over the link. The basic principles and instrumentation of the channel probe and the test configurations used to obtain these data are discussed. Then the results of analyses of these data are presented and discussed. These results include the measured impulse response of the channel, delay spread, RSL, bit-error ratios, and refractive index profiles. Potential relationships among these results are investigated in order to assess the impact of various troposcatter channel conditions on digital radio performance. In particular, both the definition and methods of utilizing the all important parameter of delay spread. These considerations range from the simple parameter of 2 sigma values to a more complete evaluation of the dynamic properties of delay-spread derived from the channel probe data. Previous studies have addressed many facets of troposcatter propagation. An attempt was made to bring all of these facets together, to present a more complete description of the troposcatter channel, and to enhance future digital upgrades of existing troposcatter links. Author

N89-17734# National Telecommunications and Information Administration, Boulder, CO. Inst. for Telecommunication Sciences.

MEASUREMENT, MODELING AND SIMULATION OF LOS MICROWAVE CHANNELS

JAMES A. HOFFMEYER and LEWIS E. VOGLER. In AGARD, Scattering and Propagation in Random Media 16 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

A brief summary of prior work in the field of microwave line-of-sight (LOS) channel propagation measurements, channel models, and channel simulators is presented. The objective of

these efforts is the reliable prediction of microwave radio performance on any specified link. The ideal channel simulator is one that operates at RF, operates under computer control, is dynamic, stimulates both minimum and nonminimum phase distortions, and has a dual channel capability for the comparative evaluation of space and frequency diversity radios. Significant parameters of this ideal simulator should be based on a model that was validated through propagation measurements on different representative paths. Although much progress was made, a number of issues remain. The work in the area of channel simulation, propagation measurements, and modeling is described. Together with channel measurement programs currently underway, this work should be helpful in the resolution of many of the remaining issues. Author

N89-17735# Emmanuel Coll., Boston, MA.

STRUCTURES OF DENSITY AND VELOCITY FLUCTUATIONS IN THE AURORAL OVAL AND THEIR IMPACT ON COMMUNICATION AND RADAR SYSTEMS

SUNANDA BASU, SANTIMAY BASU, W. R. COLEY, and N. C. MAYNARD (Air Force Geophysics Lab., Hanscom AFB, MA.) In AGARD, Scattering and Propagation in Random Media 14 p (SEE N89-17706 10-31) Mar. 1988 (Contract F19628-86-K-0038)

(AGARD-CP-419) Avail: NTIS HC A23/MF A01
A class of ionospheric irregularities in the auroral oval associated with large structured plasma flows was recently isolated with radar and satellite in-situ measurements. These density irregularities have large power spectral densities (PSD) at short scale lengths. The density and velocity spectra in such regions are characterized and their impact on scintillation observations and radar performance are discussed. The structures plasma flows may occur in association with large or small field aligned currents. The velocity spectra have fairly shallow power spectral indices in regions of large field aligned currents and are steep in regions of small current flows. The density spectra, on the other hand, can be described by a power law index of approximately -2 in both the large and small field aligned current regions. The temporal structure of scintillations will thus be dictated not only by the scattering strength but also by the large flow velocities encountered in the auroral oval. The density structures with large PSD at short scale lengths are expected to introduce considerable ionospheric clutter in HF radar systems. The effect of E-region conductivity in modifying small-scale F-region structure and its implication for communication and radar systems is discussed. Author

N89-17736# Telettra S.p.A., Chieti (Italy).

IMPULSE RESPONSE MEASUREMENTS AND CHARACTERIZATION OF WIDEBAND VHF RADIO LINES

P. LOMUZIO, G. GUIDOTTI, N. BENVENUTO, and S. PUPOLIN (Padua Univ., Italy) In AGARD, Scattering and Propagation in Random Media 14 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Results of an experiment to determine the characteristics of VHF radio links are presented. The experiment was conducted in a plain surrounded by mountainous area with a system that allowed the measurement of the delay spread (difference between the maximum and minimum delay propagation paths) due to multipath propagation. Various sites were explored with measurements being made at different carrier frequencies within the VHF band. In this experiment, an interesting result was that delay spreads increase with the carrier frequency. Author

N89-17738# Cambridge Univ. (England). Ocean Acoustics Group.

CROSS-FREQUENCY CORRELATION OF INTENSITY FLUCTUATIONS IN THE PHASE-CHANGING MEDIA

SARAH J. MILLER. In AGARD, Scattering and Propagation in Random Media 4 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The cross-correlation of intensity fluctuations at two different wave frequencies is a useful tool in remote sensing of sources and random phase changing media. The cross-spectrum of these fluctuations is investigated here for the model of a deeply modulated phase changing screen. An analytic expression is obtained for this spectrum and the effect of increasing frequency differences is demonstrated. Finally, the statistics of the wave fields in the far field are examined by comparing the second and

fourth moments. It is shown that the relationships of these moments is consistent with the assumption that the statistics of a monochromatic field are normal in the far field, but inconsistent with wave fields of different frequencies having a joint normal distribution there. Author

N89-17739# Laboratoire Central de Telecommunications, Paris (France).

MODELING ELECTROMAGNETIC WAVE PROPAGATION THROUGH A STRONGLY-FLUCTUATING IONIZED MEDIUM BY THE PHASE SCREEN METHOD (MODELE DE PROPAGATION D'UNE ONDE ELECTROMAGNETIQUE DANS UN MILIEU IONISE A FORTES FLUCTUATIONS PAR LA METHODE DES ECRANS DE PHASE)

Y. BENIGUEL and B. GIBERT (Aerospatiale Etablissement des Mureaux, France) In AGARD, Scattering and Propagation in Random Media 11 p (SEE N89-17706 10-31) Mar. 1988 In FRENCH

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

An irregular medium, such as the high altitude ionosphere, is defined statistically using the mean value and variance of electron density and the spectral density of propagation index fluctuations. This data permits the characterization of the signal phase as a random variable in the medium propagation. The spatial distribution of the irregularities, connected with the action of the terrestrial magnetic field, produces a very anisotropic medium. The propagation calculation is difficult to carry out if one simply specifies a variation profile of the mean electron density. The method described and used in this paper consists of the discretization of the medium in successive phase screens of low density. The method of resolution is explained. The results presented support signal amplitude, phase and scintillation rate calculations. Author

N89-17743# Messina Univ. (Italy). Istituto di Struttura della Materia.

SELECTIVE EXTINCTION OF A DISPERSION OF SINGLE AND AGGREGATED LAYERED SPHERES

F. BORGHESE, P. DENTI, R. SAIJA, O. I. SINDONI (Chemical Research and Development Center, Aberdeen Proving Ground, MD.), and G. TOSCANO In AGARD, Scattering and Propagation in Random Media 4 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

The extinction coefficient for a low-density dispersion of small stratified spheres as well as for that of their binary aggregates was calculated. The results are discussed for 50 Å spheres with a core of MgO and a coating of Al, a case in which a dramatic shift of the resonance peaks as a function of the thickness of the coating occurs. This suggests that a suitable choice of the thickness could produce selective extinction in a wide range of frequency, although this effect could be strongly weakened if a considerable percentage of spheres aggregate. Author

N89-17744# Societe Mothesim, Le Plessis-Robinson (France). **ELECTROMAGNETIC REFLECTIVITY IN NON-HOMOGENEOUS CONTINUOUS RANDOM MEDIA WITH CYLINDRICAL SYMMETRY [REFLECTIVITE ELECTROMAGNETIQUE D'UN MILIEU ALEATOIRE INHOMOGENE CONTINU A SYMETRIE CYLINDRIQUE]**

G. MULLER and F. MOLINET In AGARD, Scattering and Propagation in Random Media 12 p (SEE N89-17706 10-31) Mar. 1988 In FRENCH

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

For the calculation of electromagnetic reflectivity in random media, it is common to separate the mean reflectivity of the medium from its fluctuations. However, studies have shown evidence of marked interaction between the two. A calculation scheme is presented which takes into consideration the interaction between the medium mean reflectivity and fluctuations. The medium discussed is an ionized plasma with fluid flow. Cylindrical coordinates are used for field calculations. Results for global and local phenomena and turbulence are discussed. Author

N89-17746# New Mexico State Univ., Las Cruces. Dept. of Physics.

NON-LINEAR EFFECTS ON THE ATMOSPHERIC TRANSMISSION OF HIGH-FLUX ELECTROMAGNETIC BEAMS

R. L. ARMSTRONG In AGARD, Scattering and Propagation in Random Media 3 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The propagation of an intense beam of electromagnetic radiation through the atmosphere is accompanied by a host of interactions between the beam and atmospheric constituents present along the propagation path. These interactions may have significant influence on the characteristics of the propagating beam. Aerosol-beam interactions are discussed which, in many cases of practical interest, are the dominant interactions between the atmosphere and the propagating beam. Theoretical experimental insights are reviewed in a survey of this complex problem. Author

N89-17747# Rome Air Development Center, Hanscom AFB, MA. Applied Electromagnetics Div.

A STATISTICAL ANALYSIS OF POLAR METEOR SCATTER PROPAGATION IN THE 45 TO 104 MHZ BAND

M. J. SOWA, J. M. QUINN, J. E. RASMUSSEN, P. A. KOSSEY, and J. C. OSTERGAARD (Danish Research Center for Applied Electronics, Hoersholm.) In AGARD, Scattering and Propagation in Random Media 9 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Data being acquired over a 1200 km path in northern Greenland, to characterize the polar meteor scatter channel, are described. The data include both propagation and projected communication statistics. The propagation statistics include arrival rates and duty cycle as a function of frequency and received signal level. The communication statistics include estimates of the performance of a number of candidate systems in terms of throughput and message delivery time, as a function of frequency, time-of-day, season, data rate, and modulation, for a specified bit-error-rate, message length, and packet size. Author

N89-17748# Hamburg Univ. (Germany, F.R.). Meteorologisches Inst.

MONT CARLO SIMULATION OF MULTIPLE SCATTERING EFFECTS OF MILLIMETER WAVES FROM RAIN FOR A BISTATIC RADAR

P.-H. VOSS and H. JESKE In AGARD, Scattering and Propagation in Random Media 9 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Within the scope of rain measurements with a bistatic dual-polarization radar, the influence of multiple scattering effects is discussed. The determination of multiple scattering intensities (up to sixth order) for frequencies of 33 and 91 GHz in dependence on rainfall rate, single scattering albedo, volume scattering coefficient, number of ground reflections, antenna beam widths, and dimensions of the rain volume was done by the aid of an efficient Monte Carlo algorithm. The results show that multiple scattering cannot be neglected interpreting the scattered electromagnetic field on the basis of the normal radar equation. The portion to total scattering can become more than 5 percent for shorter microwaves and stronger rain rates (say 50 mm/h). Author

N89-18565# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Electromagnetic Wave Propagation Panel.

EFFECTS OF ELECTROMAGNETIC NOISE AND INTERFERENCE ON PERFORMANCE OF MILITARY RADIO COMMUNICATION SYSTEMS

Dec. 1988 420 p Meeting held in Lisbon, Portugal, 26-30 Oct. 1987

(AGARD-CP-420; ISBN-92-835-0487-9) Avail: NTIS HC A18/MF A01

To achieve reliable communications, a thorough knowledge of the communications channel is required. It is important for system design to characterize the channel, which in general consists of intentionally radiated signals, noise of either natural origin or radiated from man-made sources or composite variations of these signals. The various noise and interference sources existing in the communications channel impose a fundamental limit on achievable radio system performance. Communications equipment

32 COMMUNICATIONS AND RADAR

must be designed to cope with the effects of electromagnetic noise and interference. The symposium examined how to determine the effects of these disturbances by measuring, modelling and particularly simulating the characteristics of unwanted signals. Communication system design and performance were also discussed. For individual titles, see N89-18566 through N89-18597.

N89-18566# GTE Government Systems Corp., Westborough, MA. Strategic Systems Div.

RADIO NOISE CHARACTERISTICS AND THEIR SYSTEM PERFORMANCE IMPLICATIONS

JOHN R. HERMAN In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 18 p (SEE N89-18565 11-32) Dec. 1988 (AGARD-CP-420) Avail: NTIS HC A18/MF A01

This survey reviews the impacts of correlated-pulse impulsive noise on communication coding and system performance. Examples of atmospheric and man-made noise are provided to set the background. The statistical characteristics of radio noise are defined and several noise mitigation techniques are discussed. Author

N89-18567# Rome Air Development Center, Hanscom AFB, MA. Propagation Branch.

BALLOON MEASUREMENT SOFT LOW FREQUENCY TE AND TM ATMOSPHERIC NOISE

JOHN P. TURTLE and PAUL A. KOSSEY (Air Force Geophysics Lab., Hanscom AFB, MA.) In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 11 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Measurements of Transverse Electric (TE) and Transverse Magnetic (TM) atmospheric noise, obtained during a five-hour flight of a free-floating balloon are discussed. The balloon carried three low frequency receivers and three (orthogonal) loop antennas to measure TE and TM atmospheric noise at 42.5 kHz, and the normal (TM) and converted (TE) signals from ground-based transmitters at 37.2 kHz, 48.5 kHz and 60 kHz. A description of the low frequency instrumentation is given, along with discussions of the TE and TM data acquired during the flight, most of which (four hours) occurred at a free-floating altitude of about 21 km. Emphasis is on the TE-to-TM signal and noise ratios observed during the flight. The use of such data to validate TE and TM atmospheric noise prediction codes is also discussed. Author

N89-18568# Pacifica-Sierra Research Corp., Los Angeles, CA. LIGHTNING GENERATION OF LOW-FREQUENCY TE ATMOSPHERIC NOISE

EDWARD C. FIELD, JR. and CHRIS R. WARBER In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 13 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

The role of horizontal lightning strokes in producing transverse-electric low-frequency atmospheric noise is discussed. The fields generated by such strokes are calculated as a function of frequency, stroke altitude, stroke orientation, and the state of the ionosphere. Results show that horizontal strokes are weak TE noise radiators unless their altitude exceeds a few kilometers. Above several kilometers, however, horizontal strokes can radiate Transverse Electric (TE) noise almost as efficiently as vertical strokes radiate transverse-magnetic noise. Because TE noise does not propagate as well as Transverse Magnetic (TM) noise, the TE/TM noise ratio tends to diminish with distance, particularly under disturbed ionospheric conditions. Most horizontal lightning channels do, in fact, occur above 3 km and are more frequent than vertical channels. Moreover, the horizontal structure of lightning is typically 2 or 3 times greater in extent than vertical structure, even for cloud-to-ground strokes. It therefore appears that horizontal lightning is high enough, occurs often enough, and has enough channel length to radiate substantial TE noise. TE atmospheric noise might therefore be stronger than previously believed. Recent balloon-borne measurements on the TE/TM noise ratio seem to confirm that conclusion. Author

N89-18569# Interferometrics, Inc., Vienna, VA.

VLF RADIO NOISE

MICHAEL D. ANDREWS, LORRAINE DEBLASIO, and FRANCIS J. KELLY (Naval Research Lab., Washington, DC.) In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 18 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

The Ionospheric Effects Branch of the Space Science Division at the Naval Research Laboratory is engaged in an ongoing program to measure the natural noise environment at VLF. A Navy P-3 aircraft has been used to measure the ambient noise at 35 kHz. There are three orthogonal loop antennas so that both TE and TM components of the noise can be measured. Mean noise levels and values for V sub d will be presented for 1620 observations on seven days in July and August 1986. Examples of the observed APDs are shown. This experiment observed values for V sub d significantly lower than the C.C.I.R. values which probably indicates that these observations were heavily influenced by local noise rather than atmospheric. Author

N89-18570# Stanford Univ., CA. Space, Telecommunications and Radioscience Lab.

A NEW GLOBAL SURVEY OF ELF/VLF RADIO NOISE

A. C. FRASER-SMITH, R. A. HELLIWELL, B. R. FORTNAM, P. R. MCGILL, and C. C. TEAGUE In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 15 p (SEE N89-18565 11-32) Dec. 1988

(Contract N00014-84-G-0202; N00014-81-K-0382;

F19628-84-K-0043; NSF DPP-83-16641)

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Stanford University is presently operating a global network of eight computer-controlled receiving systems, or radiometers, for the measurement of electromagnetic noise in the 10 to 32,000 Hz (ELF/VLF) frequency band. Each radiometer consists of two dual-channel receivers, each with two crossed loop antennas (East-West, North-South). One of these receivers has a response covering the frequency range 10 to 500 Hz and the other covering the range 200 to 32,000 Hz. A bank of narrow-band filters (5 pct) bandwidth is used to monitor the noise present at 16 selected frequencies throughout the overall range of operation. The output of these filters is continuously sampled and statistical averages computed and recorded on magnetic tape, along with samples of the raw data. Broadband samples of the ELF/VLF noise are also taken periodically (typically one minute every hour) to provide a check on system performance and to aid in the interpretation of the statistical data. The digital data are being used primarily for statistical studies of the global distribution of ELF/VLF noise. Plots of minimum, maximum, average, and rms noise amplitudes versus frequency can be comparatively easily prepared for a wide variety of time intervals for each radiometer location. Plots of the noise statistic V sub d amplitude probability distributions are also easily prepared. Author

N89-18571# SRI International Corp., Arlington, VA. Information Sciences and Technology Center.

MAN-MADE RADIO NOISE AND INTERFERENCE

G. H. HAGN In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 15 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Considered here is what the scientific community currently knows and does not know about man-made radio noise. Both empirical and analytical noise are discussed. The measurement of man-made noise also is discussed. The measurement of man-made noise levels (and related statistics) during military exercises is suggested. A man-made radio noise program is described which would help fill the voids in current knowledge. Author

N89-18572# Science Research Council, Chilton (England).
TRANS-HORIZON COCHANNEL INTERFERENCE PATH MEASUREMENTS IN EUROPE

MARTIN P. M. HALL In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 10 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Existing methods for predicting co-channel interference levels are very inadequate, and development of these methods has been severely limited by the lack of suitable data. There are particular problems within Europe because there is a wide range of climatic and geographical conditions. COST Project 210 was set up to provide suitable data and prediction methods. The prime objective is to develop and evaluate models to serve as a basis for frequency planning co-ordination procedures and interference calculations, in order to improve the organization of further radio communication systems within Europe. After giving an up-to-date statement on the COST 210 activities set out above, early results obtained from three representative areas of study are given: (1) statistics of high signal level, and case studies, essentially in clear-air conditions, on paths of 150 to 300 km from France to the U.K. (in collaboration with CNET (Paris), CNET (Lannion), Portsmouth Polytechnic, IBA and RSGB); (2) hydrometeor scatter studies using a 10 cm wavelength dual-polarization radar at RAL, where a radar-derived raincell database is being used to simulate interference paths and to examine relative effects of ice and rain, etc; and (3) hydrometeor scatter statistics and case studies on a 131 km overland path (in collaboration with DTI), and a 48 km overland path, both in conjunction with the radar mentioned above, and two overseas paths of 201 and 302 km (in collaboration with CNET). Author

N89-18573# Manchester Univ. (England). Inst. of Science and Technology.

EXPERIMENTAL OBSERVATIONS OF SPECTRAL OCCUPANCY AT HF

GEOFFREY F. GOTT, PATRICK J. LAYCOCK, ARUP R. RAY, and MARK MORRELL In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 8 p (SEE N89-18565 11-32) Dec. 1988 Sponsored by the Science and Engineering Research Council, United Kingdom and the Ministry of Defence, United Kingdom (AGARD-CP-420) Avail: NTIS HC A18/MF A01

An experiment to measure spectral occupancy at HF has been undertaken since the sunspot maximum of 1982, and examples of the results are presented. Also, a mathematical model is being fitted to the experimental data, and initial results of this aspect of the work are included. Author

N89-18574# Army Information Systems Command, Fort Huachuca, AZ. Engineering and Integrations Center.

NOISE MEASUREMENT SYSTEMS/TECHNIQUES

CALVIN B. CHRISTIANSON In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 9 p (SEE N89-18565 11-32) Dec. 1988 (AGARD-CP-420) Avail: NTIS HC A18/MF A01

The evolution of noise management systems, types of and capabilities of systems that have been used in the last decade, and a small portable system that was developed for noise measurements are briefly discussed. The use of this small system for noise measurements in the field and resulting data is presented. Author

N89-18575# Naval Ocean Systems Center, San Diego, CA.

SIGNAL NOISE/INTERFERER COMBINER UNIT PROGRAMMABLE (SINCUP)

EMILIO MARTINEZDEPISON In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 9 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

The Signal Noise Interferer Combiner Unit Programmable (SINCUP) has been developed to facilitate laboratory performance testing of Very Low Frequency (VLF)/Low Frequency (LF) receivers. To accomplish this, the unit allows the combining in controlled amounts of various real-world environmental and manmade interference with an information carrying signal. The externally modulated signal is combined with internally/externally generated

Gaussian noise and/or with an internally/externally generated interferer. In order to test modern digital processing techniques, such as Adaptive Null Steering, Eigenvector Sorting, and Widrow-Hoff adaptive filters, SINCUP is capable of generating and meeting much higher signal-to-noise plus interference ratios than earlier channel simulators. The present software has been written to accommodate a dynamic signal-to-noise ratio (SNR) range from -60 to +60 dB. Higher dynamic range units could be implemented. Author

N89-18576# National Telecommunications and Information Administration, Boulder, CO. Inst. for Telecommunication Sciences.

EFFECTS OF NOISE AND INTERFERENCE ON SYSTEM PERFORMANCE

ARTHUR D. SPAULDING In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 17 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

A summary is given of the two basic types of noise processes that confront us: narrowband processes composed of various collections of narrowband intentionally radiated signals, coherent pulse trains, various kinds of unintentionally radiated manmade noise, etc., all termed Class A; and broadband processes such as atmospheric noise from lightning and various forms of manmade noise such as automotive ignition noise, etc., termed Class B. After a short summary of these noise processes, stating only the models in current use, a review is given of the performance of normal (linear) systems in Class A and Class B noise, not in great detail, but sufficiently to give a good feel for the diverse performance degradations obtained. Examples of both digital and analog systems are used. After reviewing the substantial degradation the real-world interference environment can cause the existing systems, results are given of the performance of systems especially designed to take advantage of the actual interference, showing very substantial performance improvements. Examples of both techniques currently being pursued, parametric and nonparametric, are used. Author

N89-18577# Communications Research Centre, Ottawa (Ontario).

THE DESIGN AND PERFORMANCE OF AN ADAPTIVE PACKET-SWITCHED HF DATA TERMINAL

G. R. NOURRY and A. J. MACKIE (Intellitech Canada Ltd., Ottawa, Ontario) In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 10 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Adaptive techniques form a useful set of tools for combating the time and space variability of HF channels and the other factors adversely affecting HF communications. These techniques have been implemented together with packet-switching in a vehicle called the HF data terminal. The terminal is characterized by adaptivity at all levels of its design, including a real-time channel evaluation and channel selection mechanism, an adaptive link protocol for channel optimization, and a fully distributed and adaptive routing algorithm for the selection of routes in an HF network. The adaptivity is implemented via a suite of robust, low-overhead, adaptive protocols that work even in low-bandwidth and error-prone environments. With the exception of channel evaluation/selection, all forms of adaptivity are dynamic and not negotiated over HF links. The data terminal has been tested over both short and long HF links. The performance of this system is illustrated with results from these tests. It is shown that, in addition to fully automatic operation, the system provides a significant improvement in HF communications reliability and survivability. Throughput was demonstrated to be an order of magnitude greater in existing HF communications systems. Author

32 COMMUNICATIONS AND RADAR

N89-18578# Plessey Research Roke Manor Ltd., Romsey (England).

DESIGN CONSIDERATIONS FOR AN AUTOMATED HF DATA NETWORK WITH ADAPTIVE CHANNEL SELECTION

R. J. GOODWIN and A. P. C. REED *In* AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 11 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

A fully automatic HF data network has been designed which adapts to changing propagation and interference conditions. Frequency management at network level derives real time propagation data which is supplied to all network stations. At link level, propagation prediction, interference assessment and link sounding together provide adaptive channel selection for each call. Efficient and reliable message transmission is achieved using a novel FEC/ARQ protocol which also provides for adaptive changes in data rate or channel reselection during the call. Frequency management and network management functions can be executed by any subset of stations in the network and no special sounding equipment is required. Author

N89-18579# Manchester Univ. (England). Inst. of Science and Technology.

EXPERIMENTAL ROBUST HF MODEMS INCORPORATING ADAPTIVE EXCISION

GEOFFREY F. GOTT, PAUL DOANY, SIU W. WONG, and E. PHILIP DARBYSHERE *In* AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 10 p (SEE N89-18565 11-32) Dec. 1988

Sponsored by Ministry of Defence, United Kingdom (AGARD-CP-420) Avail: NTIS HC A18/MF A01

Two 75 bits/sec modems which are able to operate in the presence of severe interference from other HF users, frequency selective fading, and noise are described. One modem is a frequency hopper (with a total bandwidth of about 200 kHz) and the other occupies a single voice channel. Author

N89-18580# Hull Univ. (England). Dept. of Electronic Engineering.

ARTIFICIAL INTELLIGENCE IN HF COMMUNICATION SYSTEMS

A. P. JOWETT *In* AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 25 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

The current status of HF communications system design is reviewed. Attention is given to the constituent components of HF systems. The need for automatic system control and frequency management is presented. A new method of in-band real-time channel evaluation (RTCE) is described and a proposed co-channel interference model is included. A formalized HF systems design philosophy is presented in order to achieve optimum performance in noise and interference environments, and compatibility with other types of communication systems. Author

N89-18581# Hull Univ. (England). Dept. of Electronic Engineering.

PROCESSING TECHNIQUES FOR RADIO COMMUNICATIONS IN NON-GAUSSIAN NOISE ENVIRONMENTS

M. DARNELL *In* AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 15 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

The different forms of background noise/interference environment encountered by various types of radio communication systems are considered. Shortcomings of the analytical models available for these environments are then identified. The fundamental characteristics of radio paths which affect their ability to pass information are then examined, and certain general design principles established. Finally, several procedures and techniques with the potential to enhance radio system performance in non-Gaussian environments are described. Author

N89-18582# York Univ. (England). Dept. of Electronics.

IMPROVED CODING AND CONTROL OF HF SYSTEMS IN A NON-GAUSSIAN NOISE ENVIRONMENT

J. HAGUE *In* AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 17 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

A HF communication system which is capable of adapting various parameters, such as frequency and coding scheme, to provide the user with the most reliable HF path is described. Each transceiver/ATU is of amateur-grade, and is capable of delivering approximately 150 W over the range 2 to 30 MHz. The transceivers are fully computer-controllable, and this enables automatic channel selection to be achieved. When used with 10m whip antennas, a cheap and portable HF system results; however, for some channels, the 10m antenna will not present an ideal match to the system, and thus the automatic tuning facility of the ATU is used to achieve a match, which may take up to 3 seconds. Due to this constraint, broadband antennas for the probing channel become desirable, at the expense of making the system less portable. The coding/control software runs on two 8085 systems. Each 8085 system is equipped of 8 Kbytes of ROM and 8 Kbytes of RAM, and therefore reasonably complex algorithms may be accommodated. Additional memory cards may be added to the system at a later date as required. Presently, Golay (23,12) and other half-rate codes (the Golay (23,12) code is in fact implemented as a (24,12) code for ease of system timing), are supported by the system, but it is intended to utilise other coding schemes, such as the embedded-array code (Darnell, Honary & Zolghadr, 1986) at a later date by modifying the software. Author

N89-18583# Istituto per le Telecomunicazioni e l'Elettronica G. Vallauri, Livorno (Italy).

ELECTROMAGNETIC CODE FOR NAVAL APPLICATIONS

F. CRESCIMBENI, F. BESSI, and S. CHITI (IDS Ingegneria dei Sistemi S.p.A., Pisa, Italy) *In* AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 12 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

The use of an increasing number of electronic apparatus became vital to meet the high performance required for military navy applications. Thus the number of antennas to be mounted on shipboard greatly increased. As a consequence of the high antenna density, of the complexity of the shipboard environment and of the powers used for communication and radar systems, the EMC (Electro-Magnetic Compatibility) problem is playing a leading role in the design of the topside of a ship. The Italian Navy has acquired a numerical code for the antenna siting and design. This code, together with experimental data measured at the Italian Navy test range facility, allows for the evaluation of optimal sitings for antenna systems on shipboard, and the prediction of their performances in the actual environment. The structure of this code, named Programma Elettromagnetico per Applicazioni Navali, (Electromagnetic Code for Naval Applications) is discussed, together with its capabilities and applications. Also the results obtained in some examples are presented and compared with the measurements. Author

N89-18584# Naval Ocean Systems Center, San Diego, CA.

NARRATIVE COMPRESSION CODING FOR A CHANNEL WITH ERRORS

JAMES W. BOND *In* AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 15 p (SEE N89-18565 11-32) Dec. 1988

Previously announced as N88-25673

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Data compression codes offer the possibility of improving the throughput of existing communication systems in the near term. This study was undertaken to determine if data compression codes could be utilized to provide message compression in a channel with up to a .10 bit error rate. The data compression capabilities of codes were investigated by estimating the average number of bits-per-character required to transmit narrative files. The performance of the codes in a channel with errors (a noisy channel) was investigated in terms of the average numbers of characters decoded in error per bit error and of characters printed in error per bit error. Results were obtained by encoding four narrative

files, which were resident on an IBM PC and use a 58 character set. The study focused on Huffman codes and suffix/prefix comma-free codes. Other data compression codes, in particular, block codes and some simple variants of block codes, are briefly discussed to place the study results in context. Comma-free codes were found to have the most promising data compression because error propagation due to bit errors are limited to a few characters for these codes. A technique was found to identify a suffix/prefix comma-free code giving nearly the same data compression as a Huffman code with much less error propagation than the Huffman codes. Author

N89-18585# Forschungsgesellschaft fuer Angewandte Naturwissenschaften, Werthoven (Germany, F.R.).

NEW METHOD FOR SUPPRESSION OF GONIOMETER OF ERRORS BY RADIO NOISE FROM OVERHEAD POWER LINES J. BENDER, G. DEUBACH, and G. KOSEL. In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 9 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Overhead power lines below 70 kV often generate impulsive radio noise by sparking which may heavily interfere on the performance of military VHF communication systems. The first part of this presentation deals with that kind of radio noise, its characteristics and possible sources and shows some measurements. Measurements also show that radio noise from sparking overhead power lines may influence automatic goniometer direction finding: one gets a wrong bearing, that of the noise source. Therefore, a new method for eliminating this noise influence was investigated. It determines the lower envelope of the direction finder (DF) signal and is only applicable in the digital area of signal processing. The method is described and its effectiveness is presented. Author

N89-18586# Victoria Univ. (British Columbia). Dept. of Electrical and Computer Engineering.

JAMMING AND ELECTRONIC COUNTERMEASURES

VINAY K. BHARGAVA, and CHANG WANG. In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 11 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

There is no single jamming strategy that is worst for all spread spectrum systems and there is no single spread spectrum system that is best against all jamming waveforms. Examined here are the following potential jammers: (1) broadband and partial-band jammers; (2) continuous wave and multitone jammers; (3) pulse jammers; and (4) repeat-back jammers. In order to operate in the presence of jamming, military communication systems must incorporate one or more of the primary countermeasure techniques in their designs, such as spread spectrum, error control coding, and steerable-null antennas. The basic design approach for such anti-jam communication systems is introduced. Ground rules for system performance are specified by stating assumptions regarding jammers and anti-jam systems along with definitions of the fundamental system parameters. Two useful examples of such systems, namely coherent direct sequence spread, phase-shift-keying (DS/PSK), and non-coherent frequency-hopped frequency-shifted keying (FH/FSK) systems are presented. Because coding and interleaving are extremely important in anti-jam system design, the impact of these techniques is illustrated with examples. Author

N89-18587# Rhode and Schwartz G.m.b.H., Munich (Germany, F.R.).

ECM RESISTANCE IN THE HF BAND BY USE OF ADAPTIVE REACTION AND FREQUENCY HOPPING

G. GREINER, P. ISELT, and G. MUELLER. In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 9 p (SEE N89-18565 11-32) Dec. 1988 Sponsored in part by SHAPE Technical Center

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

In shortwave communications, change of frequency either by adaptive reaction or by frequency hopping as a means of protection against jamming must be adapted to the particular transmission characteristics of shortwaves. Adaptive reaction to a new frequency

is a technique used for maximizing the throughput and optimizing reliability, and is an Electronic Counter Counter Measure (ECCM) against conventional jamming systems. As a result of the analysis and reaction times of follower jammers, frequency hoppers with 10 to 20 hops/s can provide adequate protection against electronic counter measures (ECM) also in the 90's. In this case, effective error correction techniques are required because of the high proportion of disturbed hop channels. Hopping systems with hop rates of more than 100 or 1000 hops/s are discussed. An HF communication system with adaptive reaction and frequency hopping of up to 20 hops/s is presented. Results are presented of field trials with adaptive reaction and frequency hopping with a dwell time of 160 ms corresponding to 6 hops/s. A test system with reproducible channel characteristics of the HF channel is described. Author

N89-18588# Communications Research Centre, Ottawa (Ontario).

PREDICTING THE EFFECTS OF NOISE AND INTERFERENCE ON FAST FREQUENCY-HOPPED M-ARY NCFSK SYSTEMS

E. BARRY FELSTEAD, JOHN S. BIRD, and U. ANDREJ TENNE-SENS. In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 11 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Calculation of the performance, in terms of received bit error probabilities, of fast frequency-hopped M-ary non-coherent frequency-shift-keyed (NCFSK) systems is discussed. A general method of calculating accurately the performance of such systems for arbitrary M, degraded by system noise and both partial-band-noise and multi-tone jamming is introduced. Some typical results are presented and it is shown for a fixed hop rate how the use of time diversity, through repetition of each symbol on several hops, can dramatically improve performance; M may be simultaneously increased to keep the data rate high. This technique in conjunction with only simple error-correction coding can make the system quite robust. System degradation due to multipath can fortuitously be overcome by the same anti-jam techniques. Author

N89-18589# Instituto Superior Tecnico, Lisbon (Portugal).

INHERENT-JITTER EFFECTS IN THE NEW RAPID ACQUISITION METHOD FOR FREQUENCY-HOPPED PUSH-TO-TALK SPREAD SPECTRUM SYSTEMS: A JITTER-FIGHTING SCHEME

JORGE M. N. PEREIRA and AUGUSTO A. ALBUQUERQUE. In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 20 p (SEE N89-18565 11-32) Dec. 1988

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

A critical problem in Push-to-Talk Frequency-Hopped Spread-Spectrum systems is its vulnerability to eavesdropping during the necessary preamble, or to possible reproduction by a would-be interferer. A new acquisition method has been envisioned, and is presented, to reduce this weakness, permitting the receiver to work in lower signal-to-noise ratio and to acquire faster than in any known system. The essence of the new method is the use of sliding-window integration non-coherent detectors and a decision rate much higher than the hopping one, and coincident with the window-relocation rate. The inherent-jitter effects in the new method are described, and results presented for an optimal (omniscient) system, after jitter-bypassing. A jitter-fighting scheme is then proposed and its performance and adequacy analyzed. Author

N89-18590# LuTech, Inc., Dallas, TX.

DEVELOPMENT OF A NEW HIGH ALTITUDE ELECTROMAGNETIC PULSE (HEMP) ENVIRONMENT AND RESULTING OVERHEAD LINE RESPONSES

F. M. TESCHE and P. R. BARNES (Oak Ridge National Lab., TN.) In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 20 p (SEE N89-18565 11-32) Dec. 1988

(Contract DE-AC05-84OR-21400)

(AGARD-CP-420) Avail: NTIS HC A18/MF A01

Being able to accurately determine the response of an electrical system which is excited by a high altitude nuclear electromagnetic pulse (EMP) requires a knowledge of the time history of the incident EMP field strength, as well as its angle of incidence and polarization. A commonly used, unclassified, description of this

32 COMMUNICATIONS AND RADAR

environment is provided by the Bell Laboratory waveform. Recent studies have shown, however, that this EMP waveform tends to over-estimate the response of an above-ground transmission line by more than an order of magnitude. As a result, other unclassified high altitude EMP environments have been developed. Discussed here is the development of two alternate unclassified EMP environment descriptions: one arising from a simple radiating dipole moment model, and the other resulting from curve-fitting the calculated fields from a computer code named CHAP. For both of these EMP models, the electric field at two earth observation points are compared. These fields are then coupled to an above-ground line and the resulting open-circuit voltage responses are compared. Using the CHAP EMP environment, a limited parametric study of the peak positive and negative open-circuit line voltage is then performed and surface plots of these peak voltages are presented. Author

N89-18591# Federal Armed Forces Defense Science, Munster (Germany, F.R.). Agency for NBC Protection.

EMP-INDUCED TRANSIENTS AND THEIR IMPACT ON SYSTEM PERFORMANCE

RICHARD J. STURM In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 7 p (SEE N89-18565 11-32) Dec. 1988 (AGARD-CP-420) Avail: NTIS HC A18/MF A01

The interaction of electromagnetic waves with complex systems is still a puzzling phenomenon. Presented here is an attempt to show how information about the sequence of interaction steps can be extracted from the whole set of data which are recorded during an electromagnetic pulse (EMP) test of a complex system. The basic idea is to separate the interaction process in two or more steps, the external interaction, coupling through e.g., an aperture, and the internal interaction. The internal interaction results in the all important results in the all important pin currents/voltages which endanger the proper function of the system. In case of EMP the induced currents can reach peak values of more than 100 A even on short cables in compact systems (helicopters, tanks, etc.). The type of upset and damage which have been observed after illumination with EMP-like fields are reported. The basic concept of the determination of the EMP-vulnerability is discussed and explained by examples. Author

N89-18592# BDM Services Co., Albuquerque, NM.

SHIELDS FOR PROTECTING CABLES FROM THE EFFECTS OF ELECTROMAGNETIC NOISE AND INTERFERENCE

L. O. HOEFF, J. S. HOFSTRA, R. J. KARASKIEWICZ, and B. W. TORRES In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 10 p (SEE N89-18565 11-32) Dec. 1988 (AGARD-CP-420) Avail: NTIS HC A18/MF A01

The intrinsic electromagnetic property of a cable or connector shield is its surface transfer impedance. This is the ratio of the longitudinal open circuit voltage measured on one side of the shield (normally the inside) to the axial current on the other side (normally the outside). In cases where a high electric field is present at the surface of the shield, the transfer admittance or charge transfer elastance is also important. Measurements of typical cables, connectors, backshells and cable terminations are presented and explained in terms of simple models. Author

N89-18593# Army Electronics Command, Fort Monmouth, NJ. Center for Command, Control and Communications Systems.

AUTOMATING SPECTRUM MANAGEMENT OF TACTICAL COMMUNICATIONS TO MINIMIZE MUTUAL INTERFERENCE AND MAXIMIZE FREQUENCY REUSE ON THE BATTLEFIELD

SAMUEL M. SEGNER In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 14 p (SEE N89-18565 11-32) Dec. 1988 (AGARD-CP-420) Avail: NTIS HC A18/MF A01

Automating spectrum management of tactical multichannel line of sight (LOS) and tropospheric (TROPO) communications systems began in the early 80's with the establishment of the Automated Battlefield Spectrum Management and Engineering (ABSME) studies and analysis program and its test bed for software evolution, the Army Automated Tactical Frequency Engineering System (ATFES) pilot program in U.S. Army Forces, Europe (USAREUR). The ATFES is a minicomputer based, four echelon pilot system

deployed in Europe as a vehicle to research potential battlefield spectrum management capabilities through operational evaluation of software and operating procedures during major USAREUR exercises. The pilot system provides a go to war asset for use until the software is transitioned to the communications system control centers/elements for evolving switched systems; it is mounted in existing tactical demand access and VHF combat net radio (CNR) management is described in this paper. Interoperable distributed data base processing is the key to spectrum management responsive to highly maneuverable forces. Author

N89-18594# Industrie per lo Spazio e le Comunicazioni S.p.A., Rome (Italy).

COSITING OF RADIO TERMINALS

GIUSEPPE CUCINOTTA and RAFFAELE AZZARONE (Marina Militare, Livorno, Italy) In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 11 p (SEE N89-18565 11-32) Dec. 1988 (AGARD-CP-420) Avail: NTIS HC A18/MF A01

The causes of the radiocommunication channel degradation are identified when receivers and transmitters or transceivers are collocated in mobile platforms or in sites where space is at a premium. System and equipment parameters are evaluated to minimize the degradation of the receivers performance in cosited radio installations, together with additional technical and operational resources necessary to support this target. Furthermore the parameters necessary for computer simulations of cositing effects and associated frequency management are identified. Author

N89-18595# City Univ., London (England). Chemical Energy Research Centre.

INTERMODULATION INTERFERENCES IN RADIO SYSTEMS

P. S. W. HO, L. H. BEVAN, A. C. C. TSEUNG, and W. S. WILKINSON In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 8 p (SEE N89-18565 11-32) Dec. 1988 Sponsored in part by the Science and Engineering Research Council, United Kingdom and the Home Office, United Kingdom (AGARD-CP-420) Avail: NTIS HC A18/MF A01

The phenomenon of intermodulation is introduced first. The origins of intermodulation interference in a radio communication systems are considered. Mechanisms responsible for this interference, for example, ferromagnetic nonlinearity and electron tunnelling are considered, and a model based on a metal-semiconductor rectifying junction is suggested. An experimental setup for measuring intermodulation levels of specially treated test samples and the operating procedures are then described. A general principle to overcome the structural intermodulation problem is outlined. Experimental results for some chemical and metallic coatings, and their merits are presented next. Lastly, the usefulness of monitoring the background intermodulation level of a test site is given. In conclusion, the joint effect is the first order in determining the degree of seriousness of the intermodulation problem and the use of high conductivity coating provides the most feasible solution. Author

N89-18596# Army Electronics Command, Fort Monmouth, NJ. Center for Command, Control and Communications Systems.

AUTOMATING THE DECONFLICTION OF JAMMING AND SPECTRUM MANAGEMENT

SAMUEL M. SEGNER In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 12 p (SEE N89-18565 11-32) Dec. 1988 (AGARD-CP-420) Avail: NTIS HC A18/MF A01

Powerful airborne and ground based jammers are being fielded by all services and nations as part of the intelligence/electronic warfare (I/EW) combat capability. For their survivability, these I/EW systems operate far from the FLOT; this creates rather large denial areas to friendly forces when they jam. Manual coordination between I/EW managers and spectrum managers is not practical to take on targets of opportunities or track the intended enemy victims when these victims counter by frequency maneuvers. Two possible architectures, one centralized, the other decentralized, are explored as is the applicability of the electromagnetic compatibility (EMC) software developed for the U.S. Army Automatic Tactical Frequency Engineering System (ATFES) pilot

33 ELECTRONICS AND ELECTRICAL ENGINEERING

program. The proposed approach is to apply the principles of the Joint Commanders EW Staff (JCEWS). The initial simplified software to demonstrate the computer aided coordination at VHF is explained
Author

N89-18597# Royal Aircraft Establishment, Farnborough (England).

DETERMINING THE AZIMUTHAL DISTRIBUTION OF NOISE AND INTERFERENCE ACROSS THE HF SPECTRUM AT THE RAE RECEIVING STATION, COBBETT HILL, SURREY, ENGLAND

H. L. SPONG. In AGARD, Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems 14 p (SEE N89-18565 11-32) Dec. 1988 (AGARD-CP-420) Avail: NTIS HC A18/MF A01

An increasing interest in techniques for nulling out unwanted signals and interference in the HF band makes it more important to establish not only the magnitude of the signals but the direction from which they are emanating and whether they are of a spasmodic or continuous nature. The Royal Aircraft Establishment (RAE) has been anxious for some time to build up a data base of such information from which statistical trends may be derived and applied to research into more effective HF communications systems for the Royal Air Force. Given here is a simple outline of a measurement system built around a Multi-Vee antenna, a Rohde and Schwarz ESH3 measurement receiver and a Hewlett Packard HP9836 computer all installed at the RAE Receiving Station, Cobbett Hill. The various formats available on the HP9836 computer for displaying the data, for example, Signal versus Time and Signal versus Direction, etc., are given. Data acquired from this system has so far been based upon two measurement methods. The first takes up to five frequencies of interest across the HF band and measures these at the same time or times on consecutive days in an effort to determine the constancy or otherwise of the direction and magnitude of the interfering signals. The second approach has been to evaluate the measurement system as a means of gathering data on channel occupancy.
Author

33

ELECTRONICS AND ELECTRICAL ENGINEERING

Includes test equipment and maintainability; components, e.g., tunnel diodes and transistors; microminiaturization; and integrated circuitry.

N87-22094# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Avionics Panel. **THE POTENTIAL IMPACT OF DEVELOPMENTS IN ELECTRONIC TECHNOLOGY ON THE FUTURE CONDUCT OF AIR WARFARE, VOLUME 3**

Dec. 1986. 119 p. Proceedings of the AGARD Avionics Panel Workshop, The Hague, Netherlands, 21-25 Oct. 1985 (AGARD-AR-232-VOL.3. ISBN-92-835-1541-2; AD-A178424) Avail: NTIS HC A06/MF A01

Advances in microelectronics have resulted in circuit densities many orders of magnitude greater than in current usage, making possible higher speed circuitry and greater storage capacity. RF techniques are also leading to monolithic microwave integrated circuits and microstrip antennas with corresponding reductions in size and weight. In addition, rapid advances are taking place in computer architecture and software that will provide improved information processing and control. This, coupled with progress in artificial intelligence and man-machine interface, offers promise of greatly improved battle management in the cockpit. The scale of changes is such that the nature of air warfare should be significantly affected over the next twenty years. This study examined the potential of electronic technology and potential benefits such as improvements in information processing, reduction in size and weight, increased reliability and maintainability, determined the applicability of such improvements to avionics and command and control systems and such functions as navigation and guidance, communications, surveillance, cockpit engineering and electronic warfare, and examined the impact on air warfare in the time period 2000 to 2010.
Author

N87-23867# Massachusetts Univ., Amherst. Dept. of Electrical and Computer Engineering.

PRINTED CIRCUIT ANTENNA TECHNOLOGY

DANIEL H. SCHAUBERT. In AGARD Microwave Antennas for Avionics 15 p (SEE N87-23859 17-32) Apr. 1987 (AGARD-LS-151) Avail: NTIS HC A08/MF A01

Printed circuit antennas are being used on a variety of spacecraft, aircraft, and projectiles where their low profile and conformability minimize interference with the structural and aerodynamic properties of the vehicle. The basic microstrip antenna has been studied extensively, but some important aspects of its performance are not yet characterized by the analyses that are available to the designer. Furthermore, new applications in millimeter wave monolithic phased arrays are forcing the designer to use substrates that are electrically thick and that may have a high permittivity. Several characteristics of microstrip antennas are described and some that are being studied with the aim of improving antenna performance are identified. A brief description of analysis techniques available to the designer and researcher are presented. Finally, several aspects of monolithic and integrated phased arrays are considered. General properties of these arrays are discussed, and then several architectures and their associated printed circuit radiators are presented.
Author

N87-26554# ERA Ltd., Leatherhead (England). Applied Physics Dept.

RADIATION CHARGING AND BREAKDOWN OF INSULATORS

D. K. DAVIES. In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 7 p (SEE N87-26937 21-18) May 1987 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

An experimental investigation of the charge produced by photo-emission from insulators in vacuo is described. It is shown that the emission from materials commonly used in spacecraft construction, such as polyimide, as well described by solid state theory, but that externally applied fields modify both the emission dynamics as well as the eventual saturation charge density. The energetics of the electron breakdown of such charged surfaces is analyzed.
Author

N87-26959# Atomic Energy Research Establishment, Harwell (England).

SURFACE MODIFICATION TO MINIMISE THE ELECTROSTATIC CHARGING OF KAPTON IN THE SPACE ENVIRONMENT

D. VERDIN and M. J. DUCK. In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 12 p (SEE N87-26937 21-18) May 1987. Sponsored in part by the Royal Aircraft Establishment, Farnborough, England (AGARD-CP-406) Avail: NTIS HC A13/MF A01

The electrostatic charging of Kapton under electron irradiation is reduced by coating it with a dispersion of indium oxide in a soluble polyimide. The proportion of oxide in the coating and its thickness are chosen to give an optimum balance between the surface resistivity and the thermo-optical properties of the film.
Author

N88-10809# Electronique Serge Dassault, Saint Cloud (France).

DEDALE: AN EXPERT SYSTEM FOR ANALOG CIRCUIT MAINTENANCE

MICHEL MUENIER and PHILIPPE DEVES. In AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 12 p (SEE N88-10806 02-08) Aug. 1987 (AGARD-LS-155) Avail: NTIS HC A07/MF A01

DEDALE is an expert system designed to cover the diagnostic phase of an analog circuit. DEDALE allows the fast and intelligent identification of circuit faults. Its ability is not limited to a few circuits; it is able to troubleshoot fairly quickly any new circuit with minimum initial knowledge.
Author

N88-23792# Naval Weapons Center, China Lake, CA. Microelectronics Branch.

MICROELECTRONICS THE NEXT FIFTEEN YEARS

DEAN WALLACE *In* AGARD, *The Design, Development and Testing of Complex Avionics Systems* 5 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

Some future trends in microelectronics are predicted. The focus is on CMOS integrated circuit technology. CMOS is presently the leading integrated circuit technology, and all trends show that it will continue to dominate the integrated circuit market in the future. Twin tub and silicon on insulator (SOI), identified as the two leading CMOS technologies in the future, are examined. These two technologies have the capability of giving maximum CMOS device performance. With device geometries shrinking, the problems associated with scaling are introduced, and some possible solutions are examined. A brief description is given of some fundamental limits in integrated circuit technology. Author

N89-17695# Aeritalia S.p.A., Turin (Italy). Combat Aircraft Group.

A STUDY TO OPTIMIZE THE CFRP-AL MECHANICAL JOINT IN ORDER TO REDUCE ELECTRICAL RESISTANCE

F. CIPRI and M. PELOSI *In* AGARD, *Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures* 11 p (SEE N89-17685 10-31) Mar. 1988

(AGARD-CP-427) Avail: NTIS HC A14/MF A01

The aim is to show what could be the kind of joints that would reduce the electrical resistance when a carbon fiber reinforced structure has to be jointed with an aluminum part. Assembly of specimens has been considered in fixed and removable configurations. The materials used to prepare the specimens to be jointed were carbon fiber reinforced plastic F263-T300 Fabric 3K70PW and Aluminum alloy 2024-T3. Author

N89-18468# Oce Nederland B.V., Venlo

BUILT-IN SELF TEST

B. JANSEN and A. J. VANDEGOOR (Technische Hogeschool, Delft, Netherlands) *In* AGARD, *Software Engineering and Its Application to Avionics* 16 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Because of the increasing complexity of digital circuits, it is becoming more and more difficult to determine whether a circuit is correct or faulty. Faults in a circuit can hardly be detected just by looking at the outside what the reaction of the circuit is to a certain input sequence. Fault tolerant computing can be a solution. Built-In Self Test (BIST) techniques can also be used to verify whether the circuit is correct, not only during normal operation, but also during the early development periods. The result of using BIST techniques is a considerable reduction of time between design and the final product, and a reduction of maintenance time and cost. BIST is a test method of which the circuit can separate itself from the surrounding logic, and perform a test. After the self test, the circuit reports to the surrounding logic whether it is correct. The advantage of BIST is that it is a universal and systematic test method with a solid mathematical foundation. Based on the stuck-at fault model, it is possible to compute the fault coverage, which is the number of faults detected by the BIST method. The theory of BIST is described. A circuit is divided into combinational and sequential parts, which are tested separately. The sequential parts are tested with a so-called scan-path test. Alternative test methods to test the combinational parts are described. The method to compute the number of patterns needed to detect all faults with a certain probability as function of complexity of the circuit is given. The theory of CRC signature analyzers, and the probability of masking are also described and illustrated with some examples, which can directly be used in practice. Author

FLUID MECHANICS AND HEAT TRANSFER

Includes boundary layers; hydrodynamics; fluidics; mass transfer; and ablation cooling.

N86-29068# Royal Military Coll. of Science, Shrivenham (England). School of Management and Mathematics.

PRESSURE WAVE: GUN BARREL INTERACTIONS

A. B. CROWLEY and W. P. C. KING *In* AGARD *Interior Ballistics of Guns* 11 p (SEE N86-29063 20-31) Jan. 1986

(AGARD-CP-392) Avail: NTIS HC A10/MF A01

The interaction of pressure waves generated during the internal ballistics cycle with the vibrations of a tank barrel, and the possible effects on accuracy, are described. The investigation is based on codes simulating the complete internal ballistics cycle, including the venting of gases after shot exit, and the longitudinal and flexural vibration modes of the barrel, both of which were developed at the Royal Military College of Science. The computational effects of pressure waves on both accuracy and structural integrity are discussed for a number of different charge and barrel configurations. Author

N86-29071# Ecole Royale Militaire, Brussels (Belgium). Dept. of Applied Chemistry.

INTERIOR BALLISTICS OF SMALL ARMS: PARTICULAR PROBLEMS. PART 1: HEAT TRANSFER AND COOK-OFF PHENOMENON IN A SMALL CALIBER WEAPON

R. MEYSMANS *In* AGARD *Interior Ballistics of Guns* 10 p

(SEE N86-29063 20-31) Jan. 1986

(AGARD-CP-392) Avail: NTIS HC A10/MF A01

The first results obtained since beginning in 1983 are summarized. Induction periods and critical temperature, measured during salvo-firing in a small caliber weapon are compared with the values theoretically predicted by means of a mathematical model, describing as correct as possible what happens in the combustion chamber. The determination of some physico-chemical parameters, to be used in the mathematical model, is discussed. Author

N86-29072# Ecole Royale Militaire, Brussels (Belgium). Dept. of Armament and Ballistics.

INTERNAL BALLISTICS OF SMALL ARMS: PARTICULAR PROBLEMS. PART 2: THERMODYNAMIC MODEL, POWDER PARAMETERS, INITIATION

E. CELENS *In* AGARD *Interior Ballistics of Guns* 23 p (SEE N86-29063 20-31) Jan. 1986

(AGARD-CP-392) Avail: NTIS HC A10/MF A01

The applicability of the thermodynamic model was studied in small caliber weapons. The use of appropriate computer algorithms for optimal exploitation of closed vessel trials was examined. To better understand the initiation phase, the working of primary high explosive compounds was studied by visualizing the ignition phenomenon in a transparent chamber. The results obtained in these studies are summarized. B.G.

N86-29074# Fraunhofer-Inst. fuer Kurzzeitdynamik, Weil am Rhein (Germany, F.R.). Abteilung fuer Ballistik.

MEASUREMENT OF IMPORTANT BALLISTIC FLOW PROPERTIES BY SPECTROSCOPIC TECHNIQUES

G. KLINGENBERG *In* AGARD *Interior Ballistics of Guns* 18 p (SEE N86-29063 20-31) Jan. 1986

(AGARD-CP-392) Avail: NTIS HC A10/MF A01

Considerable progress was made in recent years in probing the gun interior ballistics cycle and the subsequent muzzle flow dynamics. With the amount of experimental research done, more detailed information was obtained to describe the many complexities of the flow phenomena which are associated with the discharge of a weapon. A survey of some of the experimental research is reviewed, pointing out the capabilities as well as the limitations and constraints encountered in ballistic environments. The experimental diagnostics described includes spectroscopic techniques for measuring the temperature and gas velocity in reacting two-phase flows produced by the combustion of both solid and liquid propellants. These techniques are the emission

and/or absorption methods, reversal and Abel inversion methods, and laser Doppler spectrometry. In particular, an intrusive emission gauge technique is described which permitted the thermometric probing of optically thick propellant gases in highly pressurized combustion chambers. Sample results of these measurements will be presented. In addition, efforts directed towards the adequate simulation of reacting ballistic flows by means of a gas gun simulator are described. Author

N86-29075# Concentration, Heat and Momentum Ltd., London (England).

MODELLING THE BEHAVIOUR OF ADDITIVES IN GUN BARRELS

N. RHODES and J. C. LUDWIG. In AGARD Interior Ballistics of Guns 11 p (SEE N86-29063 20-31) Jan. 1986 (AGARD-CP-392) Avail: NTIS HC A10/MF A01

A mathematical model which predicts the flow and heat transfer in a gun barrel is described. The model is transient, two-dimensional and equations are solved for velocities and enthalpies of a gas phase, which arises from the combustion of propellant and cartridge case, for particle additives which are released from the case, volume fractions of the gas and particles. Closure of the equations is obtained using a two-equation turbulence model. Preliminary calculations are described in which the proportions of particle additives in the cartridge case was altered. The model gives a good prediction of the ballistic performance and the gas to wall heat transfer. However, the expected magnitude of reduction in heat transfer when particles are present is not predicted. The predictions of gas flow invalidate some of the assumptions made regarding case and propellant behavior during combustion and further work is required to investigate these effects and other possible interactions, both chemical and physical, between gas and particles. Author

N86-29173# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. **SHOCK-WAVE BOUNDARY LAYER INTERACTIONS**

J. DELERY (Office National d'Etudes et de Recherches Aeronautiques, Paris, France), J. G. MARVIN (National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.), and E. RESHOTKO (Case Western Reserve Univ., Cleveland, Ohio) Feb. 1986 223 p (AGARD-AG-280, ISBN 92-835-1519-6; AD-A171302) Avail: NTIS HC A10/MF A01

Presented is a comprehensive, up-to-date review of the shock-wave boundary-layer interaction problem. A detailed physical description of the phenomena for transonic and supersonic speed regimes is given based on experimental observations, correlations, and theoretical concepts. Approaches for solving the problem are then reviewed in depth. Specifically, these include: global methods developed to predict sudden changes in boundary-layer properties; integral or finite-difference methods developed to predict the continuous evolution of a boundary-layer encountering a pressure field induced by a shock wave; coupling methods to predict entire flow fields; analytical methods such as multi-deck techniques; and finite-difference methods for solving the time-dependent Reynolds-averaged Navier-Stokes equations used to predict the development of entire flow fields. Examples are presented to illustrate the status of the various methods and some discussion is devoted to delineating their advantages and shortcomings. Reference citations for the wide variety of subject material are provided for readers interested in further study. Author

N87-20121# MATRA Service Aerodynamique, Velizy-Villacoublay (France).

SIMULATION OF A JET DEFLECTION SYSTEM WITH THE AID OF THE EULER EQUATIONS (SIMULATION D'UN SYSTEME DE DEVIATION DE JET A L'AIDE DES EQUATIONS D'EULER)

M. BREDIF, J. J. CHATTOT, C. KOECK, and P. WERLE. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 11 p (SEE N87-20199 13-02) Nov. 1986 In FRENCH

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

The solution method for the Euler equations is applied to the calculation of nozzle flow in missiles fitted with jet control surfaces. The approach utilized, an explicit finite volume method with convergence acceleration through the multigrid technique, is briefly described. The numerical results obtained are analyzed in detail

and the interaction between the control surface and the nozzle wall is examined. Comparisons with experimental results are carried out. It is shown that the numerical simulation of the flow through the nozzle system with the jet control surface permits the accurate prediction of the thrust vector deviation due to control surface deflection, whereas the axial thrust loss is estimated low. Author

N87-20213# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.). Theoretical Aerodynamic Group.

NUMERICAL SIMULATION OF INTERNAL AND EXTERNAL INVISCID AND VISCOUS 3-D FLOW FIELDS

STEFAN LEICHER. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 27 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A numerical method for solving the 3-D Euler equations in geometrical complex domains was developed. The approach divides the computational space into multiple blocks whose structure follows the natural lines of the configuration. A systematic, multi-block grid generation scheme is used to produce the grid. The flow solutions are obtained by solving the Euler equations by a finite volume discretization and a Runge-Kutta time stepping scheme. The main advantage of this method is the applicability to complex geometries, for example complete aircraft configurations including wing, fuselage, canard and tail. The coupling with a 3-D boundary layer method allows to account for viscous effects. Another application for the method was the simulation of flows in the presence of a propeller. Author

N87-20222# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

USING THE BOUNDARY-LAYER EQUATIONS IN THREE-DIMENSIONAL VISCOUS FLOW SIMULATION

WILLIAM R. VANDALSEM and JOSEPH L. STEGER. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 12 p (SEE N87-20199 13-02) Nov. 1986 Previously announced as N86-28061

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A simple and computationally efficient algorithm for solving the unsteady three dimensional boundary layer equations in a time accurate or relaxation mode is presented. The algorithm is used to compute the separated flow over a 6:1 elliptical at angle of attack and the transonic flow over a finite wing with shock induced separation. These results are compared to available experimental data. A method of using the boundary layer algorithm to accelerate a Navier-Stokes computation is also presented. Example computations indicate that a boundary layer algorithm can be used to improve both the accuracy and efficiency of a Navier-Stokes algorithm. Author

N87-20223# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

COMPUTATION OF THREE-DIMENSIONAL FLOWS BY VISCOUS-INVISCID INTERACTION USING THE MZM METHOD

M. LAZAREFF and J. C. LEBALLEUR. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 15 p (SEE N87-20199 13-02) Nov. 1986 In FRENCH; ENGLISH summary (AGARD-CP-412) Avail: NTIS HC A19/MF A01

The MZM numerical method (Multi-Zonal-Marching) previously suggested for solving the hyperbolic set of equations of the viscous layers, and the three dimensional turbulent mean velocity profiles modelling suggested for computing separated flows over infinite swept wings, have lead to the development of a very general three dimensional boundary layer method, fit for use on complex geometries, with any prescribed structured mesh, in view of a viscous-inviscid interaction analysis. The method was used successfully for computing transonic wings without separation, with solution of the coupling and rigorous integration of the boundary layer equations starting from the stagnation point. New results are here presented, without coupling, for configurations of ellipsoids of revolution, or flattened ellipsoids, at 30 deg or 60 deg of incidence, and for a geometry of the slender lifting-body type: at 30 deg of incidence and 10 deg of yaw angle, with a quasi-total accessibility of the computation domain. These boundary-layer-alone calculations display a flow structure which exhibits a strong analog with accumulations lines, the numerical solution giving access to both sides of these lines. Author

34 FLUID MECHANICS AND HEAT TRANSFER

N87-21182# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

EVALUATION OF L2F-MEASUREMENTS IN UNSTEADY TURBINE FLOW

W. FOERSTER, R. SCHODL, and H. KRUSE. In AGARD Advanced Instrumentation for Aero Engine Components 12 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

The L2F-velocimeter is a suitable device with which to perform experimental studies on instationary effects in turbomachines. The execution and the evaluation of L2F-measurements within and near the rotor blade channel of a single-stage, cold air test turbine are discussed. The measurements provide information on instantaneous distribution of the 2-D flow vector as well as the components of random fluctuating velocity. The turbine rotor flow is periodically unsteady because of the upstream inlet guide vanes. In order to ensure the almost complete reconstruction of all possible rotor-to-stator orientations, the discrete measurements are evaluated by combining a local and chronological interpolation procedure. A discussion of experimental uncertainties in this application of the L2F-technique is included. Author

N87-21185# Instituto Superior Tecnico, Lisbon (Portugal). Dept. of Mechanical Engineering.

THE FLOW AROUND A SQUARED OBSTACLE

D. F. G. DURAO, M. V. HEITOR, and J. C. F. PEREIRA. In AGARD Advanced Instrumentation for Aero Engine Components 13 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

Laser-Doppler measurements of the velocity distribution around and in the wake of a two-dimensional squared obstacle for $Re = 1400$ are reported. The results were measured with a counter interfaced with a microprocessor. The counter was built based on a specific design to quantify and diminish errors resulting from bias sources. In addition the periodic character of the flow in the wake was characterized by measurements of turbulence spectra with Fast Fourier Transformation instrumentation. The values of the predominant frequencies were correlated with the flow Reynolds number. Author

N87-21193# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

DIGITAL IMAGE PROCESSING APPLIED TO FLUID DYNAMIC PROBLEMS

J. M. BUCHLIN. In AGARD Advanced Instrumentation for Aero Engine Components 10 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

Applications of visualization techniques associated with Digital Image Processing in fluid dynamics are discussed. Two typical fluid flow problems of interest for propulsion are selected to illustrate the purpose. The mixing properties of the jet are discussed. Laser tomography and light scattering from micro-droplets of oil lead to the quantification of the three dimensional concentration field. The local heat transfer distribution on a heated surface from oblique and co-liner impinging jets is discussed. Thermographic imaging system is used. Digitized infrared pictures are processed to provide local and average values of the heat transfer coefficients. Author

N87-21928# Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

FUNDAMENTAL STUDIES ON SHOCK-WAVE/BOUNDARY-LAYER INTERACTIONS IN A 3-D CHANNEL

R. BENAY, T. POT, and J. DELERY. In AGARD Transonic and Supersonic Phenomena in Turbomachines 20 p (SEE N87-21927 15-07) Mar. 1987 In FRENCH; ENGLISH summary Original language document was announced in IAA as A87-21068 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

Detailed experimental data on shock-wave/boundary-layer interaction in 3-D flows is still relatively scarce. This fact brought ONERA to undertake experiments in view of producing as complete a literature as possible on a three-dimensional transonic channel flow with shock. The test set-up is a channel with a 100 x 120 mm inlet section. The lower wall of the channel is humped while the other three faces are flat. In operation, a continuous supersonic flow is started and shock recompressions formed on the

descending part of the hump. The flow in the interaction region was carefully analyzed by using, in particular, a three-color LDV system. The tests brought out a strongly three-dimensional flow structured very differently from the one observed in 2-D channel flows. It was revealed that in the presence of the strong adverse pressure gradient of the shock, a 3-D boundary layer tends to thicken less than a 2-D boundary layer, since the flow can reorganize in a much more complex fashion in the three directions of space. The precise data obtained were analyzed to arrive at a better understanding of the phenomena from a physical point of view, and also constitute a data base for validating the calculation models being developed. Author

N87-21933# Cambridge Univ. (England). Dept. of Engineering. EXPERIMENTAL OBSERVATIONS ON AN UNSTEADY, NORMAL SHOCK/BOUNDARY LAYER INTERACTION

In AGARD Transonic and Supersonic Phenomena in Turbomachines 14 p (SEE N87-21927 15-07) Mar. 1987 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

An experiment is described in which a normal shock interacts with the natural turbulent wall boundary layer in a parallel sided duct at Mach 1.3 and 1.5. The shock wave is vibrated in symmetric fashion by a rotating cam mounted in the tunnel diffuser. The design of this experiment, particularly, the efforts to obtain a pure forcing signal, is discussed. Shock motion analysis at reduced frequencies of order 0.2 to 2 and amplitude parameters of 2 to 20 percent (based on equivalent chord) is presented. Unsteady surface pressure measurements under the interaction were made and demonstrate that there is negligible phase change between the shock motion and the surface pressures. It appears reasonable to utilize quasi-steady assumptions in the calculation of the surface pressures at the low frequency conditions tested. Author

N87-21939# Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

NUMERICAL VISCOUS-INVISCID INTERACTION METHOD FOR INTERNAL SEPARATED FLOWS AND SHOCK WAVE-BOUNDARY LAYER INTERACTION

J. C. LEBALLEUR and D. BLAISE. In AGARD Transonic and Supersonic Phenomena in Turbomachines 20 p (SEE N87-21927 15-07) Mar. 1987 In FRENCH; ENGLISH summary (AGARD-CP-401) Avail: NTIS HC A16/MF A01

A calculation method for internal transonic separated flows, and for shock wave-boundary layer interactions, is presented. It is based on developments in indirect numerical solvers with viscous-inviscid splitting, well conditioned at high Reynolds numbers. The viscous flows are calculated with the defect formulation theory, here simplified with thin layers approximations compatible with an integral method. The direct and semi-inverse strong coupling methods, and the direct and inverse defect integral methods with turbulence models involving 0, 1, or 2 integral transport equations, which were previously suggested for airfoils flows, were generalized to internal flows for which the inviscid field requires the use of an Euler solver. Results are obtained for turbulent flows in transonic shocked channels with backpressure, involving multiple shock wave-boundary layer interactions, and incipient or extensive separations. The method is also applied to supersonic shock wave-boundary layer interactions, for compression ramps or shock wave-reflexions. First results obtained for computing viscous flows in cascades are presented. Author

N87-21946# Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

MODELING HIGH REYNOLDS NUMBER INTERNAL FLOWS BY NUMERICAL SOLUTION OF THE NAVIER-STOKES EQUATIONS (CALCUL D'ECOULEMENTS INTERNES A GRAND NOMBRE DE REYNOLDS PAR RESOLUTION NUMERIQUE DES EQUATIONS DE NAVIER-STOKES)

L. CAMBIER, B. ESCANDE, and J.-P. VEUILLLOT. In AGARD Transonic and Supersonic Phenomena in Turbomachines 20 p (SEE N87-21927 15-07) Mar. 1987 In FRENCH Original language document was announced in IAA as A87-21030 (AGARD-CP-401) Avail: NTIS HC A16/MF A01

A finite difference approach is taken for solving the time-averaged Navier-Stokes equations for high-Re turbulent flows. Subgrid-scale features are incorporated into the calculations to account for phenomena in viscous thin layers, and a turbulence model which includes two transport equations is defined to describe

34 FLUID MECHANICS AND HEAT TRANSFER

turbulence along the mixing length. The spatial discretization is performed using the Green's function integrated along the flow contours. Results are provided from sample calculations for a $Re = 80,000$ flow through a row of compressor blades. Additionally, comparisons are made of different turbulence models for a shock wave-boundary layer interaction. IAA

N87-21948# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

DETERMINATION OF THE SUPERSONIC CASCADE ENTRANCE ZONE [DETERMINATION DE LA REGION DE CAPATION D'UN GRILLE D'AUBES SUPERSONIQUE]

GEORGES MEAUZE In AGARD Transonic and Supersonic Phenomena in Turbomachines 12 p (SEE N87-21927 15-07) Mar. 1987 In FRENCH; ENGLISH summary (AGARD-CP-401) Avail: NTIS HC A16/MF A01

Incidence phenomenon, well known for supersonic straight cascades, is analyzed and extended in the general case of a cascade of a stream-surface with variable radius and thickness. The special configuration of a radial cascade is studied in detail. From this analysis, it is possible to point out some rules for the optimization of the entrance part of supersonic cascades.

Author

N87-22137# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. **ROUND TABLE DISCUSSION ON MODELLING OF TIME-VARIANT FLOWS USING VORTEX DYNAMICS**

Feb. 1987 104 p In ENGLISH and FRENCH Discussion held in Aix-en-Provence, France, 10 Apr. 1986 (AGARD-AR-239; ISBN-92-835-0405-4; AD-A179039) Avail: NTIS HC A06/MF A01

In recent years there has been a marked growth in the applications of vortex dynamics to time-varying flows, usually involving separated regions with vortical structures. The flow models are based on distributions of vortex elements which may vary in complexity. This Report is a compilation of invited papers on the topic presented at the AGARD Fluid Dynamics Panel Round Table Discussion held in Aix-en-Provence, France, in April 1986. The papers cover current and projected developments in France, Germany, Greece, Italy, Netherlands, UK and USA. The Report provides a good overall view of the state of the art of the topic, covering both the achievements and the deficiencies requiring future research. The outstanding problems center on how the effects of viscosity can be realistically modelled, particularly in three dimensional flow, and what might be done to deal with the effects of compressibility. For individual titles, see N87-22138 through N87-22144.

N87-22138# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

COMPUTATION OF UNSTEADY FLOWS USING THE POINT VORTEX METHOD [CALCUL D'ECOULEMENTS INSTATIONNAIRES PAR LA METHODE DES TOURBILLONS PONCTUELS]

Y. MORCHOISNE In AGARD Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics 15 p (SEE N87-22137 15-34) Feb. 1987 In FRENCH (AGARD-AR-239) Avail: NTIS HC A06/MF A01

The computation of unsteady flow of an inviscid, incompressible fluid around wing, rotor, or fuselage configurations may be carried out with the various singularity methods. The object of this report is to briefly describe the doublet-point vortex methods and discuss some applications which have been recently investigated including a double delta wing, a rotor in forward flight, a helicopter fuselage, and a helicopter in forward flight. M.G.

N87-22139# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. for Theoretical Fluid Mechanics.

VORTEX DYNAMICS: A REPORT ON WORK IN GERMANY

H. OERTEL In AGARD Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics 10 p (SEE N87-22137 15-34) Feb. 1987 (AGARD-AR-239) Avail: NTIS HC A06/MF A01

This article reviews the numerical work relevant to the vortex dynamics method carried out in Germany supplemented by results from the Franco-German Research Institute Saint Louis, I.S.L. The

introduction includes the development of two- and three-dimensional simulation methods and is followed by a discussion of the results in shear layers, trailing far wakes, aerodynamical profile flow simulation with spoiler and the simulation of three-dimensional structures in wakes. Author

N87-22140# Defense Industriels Directorate, Athens (Greece). **SIMULATION OF IMPINGING SHEAR LAYERS USING VORTEX DYNAMICS**

ARGYRIS G. PANARAS In AGARD Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics 26 p (SEE N87-22137 15-34) Feb. 1987 (AGARD-AR-239) Avail: NTIS HC A06/MF A01

Organized vortices have been observed within the oscillating shear layers that impinge on a surface. It is believed that the feedback force necessary for the generation of these vortices is produced by their interaction with the reattachment surface. In the present work, models for studying the interaction of lines or of finite-area vortices with edges that simulate cavity-type of flows or edge-tones are examined. According to the analysis, the interaction of vortices with an edge induces periodic pressure fluctuations similar to those measured in oscillating flows. Also, when the geometry of an edge is such that no oscillation has been observed, the amplitude of the induced pressure pulses is insignificant. Thus, the hypothesis about the role of the vortex/edge interaction is supported. Author

N87-22141# Politecnico di Torino (Italy). Dept. of Aerospace Engineering.

VORTEX DYNAMICS-SURVEY OF THE ACTIVITY IN ITALY

M. GERMANO In AGARD Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics 6 p (SEE N87-22137 15-34) Feb. 1987 (AGARD-AR-239) Avail: NTIS HC A06/MF A01

The activity in modelling time variant flows using vortex dynamics is at present very limited in Italy. Moreover the contributions are principally in fundamental areas or in areas outside the aeronautical field. Author

N87-22142# National Aerospace Lab., Amsterdam (Netherlands).

MODELLING OF TIME-VARIANT FLOWS USING VORTEX DYNAMICS-ACTIVITIES IN THE NETHERLANDS

H. W. M. HOEIJMAKERS In AGARD Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics 9 p (SEE N87-22137 15-34) Feb. 1987 (AGARD-AR-239) Avail: NTIS HC A06/MF A01

Activities in the Netherlands in the area of simulating low-speed flows using vortex elements are summarized. Aspects of some of the methods developed are highlighted and plans for future work are indicated. Author

N87-22143# Cambridge Univ. (England). Dept. of Engineering. **FLOW MODELS USING VORTEX DYNAMICS: WORK IN THE UNITED KINGDOM**

D. J. MAULL In AGARD Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics 18 p (SEE N87-22137 15-34) Feb. 1987 (AGARD-AR-239) Avail: NTIS HC A06/MF A01

A review is given of work in the United Kingdom on vortex dynamics. This method of modelling separated flows is applied to unsteady flow around aerofoils, bluff bodies, boundary layers and pollution studies. Many applications are given and some of the difficulties in using the method described. Author

N87-22144# California Inst. of Tech., Pasadena. **RECENT ACTIVITY IN VORTEX METHODS IN THE UNITED STATES**

A. LEONARD In AGARD Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics 10 p (SEE N87-22137 15-34) Feb. 1987 (AGARD-AR-239) Avail: NTIS HC A06/MF A01

Vortex methods for flow simulation continue to have a wide-ranging appeal as a means of developing a better understanding of a complex flow and, in many cases, obtaining useful quantitative data. Part of the appeal is in the relative simplicity of the computer code that is required to do the job and, usually, in the relatively low computational cost. For example, experience

34 FLUID MECHANICS AND HEAT TRANSFER

has shown that some fairly complex three-dimensional flows may be simulated with a hundred or so vortex elements (sections of a vortex tube). Another aspect of the appeal is the visualization of the flow in terms of vortex dynamics, an aspect that aids in the physical understanding of the flow. In this paper, recent activity in the United States concerning flow simulation with vortex methods is reviewed. We consider three main areas of effort: separated flows in two-dimensions (Section 2), simulations using the method of contour dynamics (Section 3) and three-dimensional flows (Section 4). Finally, in Section 5, we cite directions for future efforts that look particularly promising. Author

N87-22145# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. **COMPUTATION OF THREE-DIMENSIONAL BOUNDARY LAYERS INCLUDING SEPARATION** Feb. 1987. 218 p. AGARD Special Course held in Rhode-St-Genese, Belgium, 14-18 Apr. 1986; sponsored by the von Karman Inst. and AGARD (AGARD-R-741; ISBN-92-835-0407-0; AD-A179085) Avail: NTIS HC A10/MF A01

The Special Course on Computation of Three-Dimensional Boundary Layers Including Separation was sponsored by the AGARD Fluid Dynamics Panel and the von Karman Institute and presented at the von Karman Institute, Rhode-Saint-Genese, Belgium, on 14 to 18 April 1986. The Course presented a comprehensive review of experimental aspects of three-dimensional boundary layers with emphasis on the use of fundamental experiments to improve models for turbulence and transition. A review of various calculation methods was given, including the calculation of transition and calculations which aid in aerodynamic design. Numerical differential methods were discussed and viscous-inviscid interactive schemes and procedures were reviewed. Calculations of corner and tip region flows was covered in detail. For individual titles, see N87-22146 through N87-22153.

N87-22146# Office National d'Etudes et de Recherches Aeronautiques, Toulouse (France). Dept. d'Aerothermodynamique. **THREE-DIMENSIONAL BOUNDARY LAYERS: INTRODUCTION TO CALCULATION METHODS** JEAN COUSTEIX In AGARD Computation of Three-Dimensional Boundary Layers Including Separation 49 p (SEE N87-22145 15-34) Feb. 1987 (AGARD-R-741) Avail: NTIS HC A10/MF A01

This paper gives an outline of problems encountered when faced with the calculation of three-dimensional boundary layers. The various topics which are discussed are: geometry of axis systems, boundary layer equations, global equations, nature of the system of equations, integral methods, singularities in boundary layer calculations, numerical techniques, turbulence modelling. Author

N87-22147# Imperial Coll. of Science and Technology, London (England). Dept. of Aeronautics. **PHYSICS AND MODELLING OF THREE-DIMENSIONAL BOUNDARY LAYERS**

P. BRADSHAW In AGARD Computation of Three-Dimensional Boundary Layers Including Separation 19 p (SEE N87-22145 15-34) Feb. 1987 (AGARD-R-741) Avail: NTIS HC A10/MF A01

This section of the course is an introduction to the physics of three-dimensional (3D) turbulent flows and a discussion of modelling - the use of experimental data in developing calculation methods. Only conventional Reynolds-averaged calculation methods will be discussed: for simplicity, only differential methods, in which variables are predicted at each point in the boundary layer, will be treated, but similar principles should apply to integral methods. Author

N87-22148# National Aerospace Lab., Amsterdam (Netherlands).

THREE-DIMENSIONAL SHEAR LAYER EXPERIMENTS AND THEIR USE AS TEST CASES FOR CALCULATION METHODS

B. VANDENBERG In AGARD Computation of Three-Dimensional Boundary Layers Including Separation 13 p (SEE N87-22145 15-34) Feb. 1987 (AGARD-R-741) Avail: NTIS HC A10/MF A01

Three-dimensional shear layer experiments are discussed with a view to those developing calculation methods. The emphasis is on the selection of useful experiments for comparisons with calculations and the proper way to perform the comparisons. A review of more recent three-dimensional shear layer experiments is included. Author

N87-22149# Office National d'Etudes et de Recherches Aeronautiques, Toulouse (France).

THREE-DIMENSIONAL LAYERS: LAMINAR-TURBULENT TRANSITION

DANIEL ARNAL In AGARD Computation of Three-Dimensional Boundary Layers Including Separation 34 p (SEE N87-22145 15-34) Feb. 1987 (AGARD-R-741) Avail: NTIS HC A10/MF A01

The first part of this paper is devoted to a brief survey of transition problems in two-dimensional flows. The main elements of laminar instability theory are presented and used for elaborating some practical transition criteria. In three-dimensional situations, the problem is much more complex, because transition may occur through streamwise instability, cross-flow instability or leading edge contamination. It is assumed that the streamwise instability can be studied by using two-dimensional results. On the contrary, the cross-flow instability and the leading edge contamination constitute typical features of three-dimensional flows, as it is illustrated by experimental results. The extension of linear stability theory to these last problems is discussed, and transition criteria are developed. Moreover an intermittency method allows the transition region to be calculated. These techniques are applied to swept wings and bodies at incidence. Author

N87-22150# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

EVALUATION OF RESULTS OF BOUNDARY-LAYER CALCULATIONS WITH REGARD TO DESIGN AERODYNAMICS

E. H. HIRSCHEL In AGARD Computation of Three-Dimensional Boundary Layers Including Separation 29 p (SEE N87-22145 15-34) Feb. 1987 (AGARD-R-741) Avail: NTIS HC A10/MF A01

The tools for the preprocessing of geometrical and inviscid flow data for boundary-layer computations, and for the postprocessing of the computed data are discussed. After a presentation of some important basic properties of three-dimensional boundary layers, the definition of coordinates, the computation of the metric properties, and transformation laws are given. Then the relations for the boundary-layer parameters, which are used in engineering work, like the wall-shear stress, friction forces, skin-friction lines, displacement properties etc., are presented. They are complemented with applications from design aerodynamics. The question what can be seen from boundary-layer results with regard to separation is then addressed. Basic topographical considerations are made, and basic topological rules are demonstrated. Finally practical separation indicators which can be applied to boundary-layer results are listed. Applications from design aerodynamics close the paper. Author

N87-22151# Douglas Aircraft Co., Inc., Long Beach, CA.

AN APPROACH TO PRACTICAL AERODYNAMIC CALCULATIONS

TUNCER CEBECI In AGARD Computation of Three-Dimensional Boundary Layers Including Separation 40 p (SEE N87-22145 15-34) Feb. 1987 (AGARD-R-741) Avail: NTIS HC A10/MF A01

The emphasis of these lectures is on the numerical solution of three-dimensional boundary-layer equations using forms of Keller's Box scheme and interaction with solutions of inviscid-flow equations. Calculations are described for the flow over a circular cylinder started impulsively from rest and a prolate spheroid at angle of attack, and were obtained with prescribed free-stream velocity distribution; the results emphasize the need for the

34 FLUID MECHANICS AND HEAT TRANSFER

Characteristic Box finite-difference scheme, which automatically satisfies the numerical stability criterion, in regions of flow where the w-velocity component is negative. Corresponding calculations, this time with a novel interactive method, are reported for the flow over the leading edge of a thin ellipse, over an oscillating airfoil and around wings; the results confirm that the interactive procedure provides accurate solutions, without numerical problems, in regions of flow separation. Author

N87-22152# Office National d'Etudes et de Recherches Aérospatiales, Paris (France).

PROGRESS IN VISCOUS-INVISCID SOLVERS (VIS)

J. C. LEBALLEUR In AGARD Computation of Three-Dimensional Boundary Layers Including Separation 3 p (SEE N87-22145 15-34) Feb. 1987

(AGARD-R-741) Avail: NTIS HC A10/MF A01

The aim of these lectures was an introduction to the further extensions of boundary layer theory, which rely on the development of full viscous-inviscid interaction solvers, in three-dimensional flows. At the present time, however, the state of the art still does not accommodate the full 3D-problem. It is more or less restricted, on one hand, to advances in uncoupled 3D-boundary layer problems, direct or inverse, and, on the other hand, to developments in full viscous-inviscid solvers for the 2D or quasi-3D infinite swept wing flows, the latter developments involving the coupling and the calculation of quasi-3D closed separations. The present lectures were mainly devoted to the developments obtained by the author and his colleagues in these two areas. These developments were outlined after describing shortly the different strategies which can be used to split the Navier-Stokes problem into a viscous-inviscid interaction problem, in two or three dimensions. Author

N87-22153# Scientific Research Assoc. ates, Inc., Glastonbury, CT.

COMPUTATION OF TIP AND CORNER REGION FLOWS

T. R. GOVINDAM and H. McDONALD In AGARD Computation of Three-Dimensional Boundary Layers Including Separation 20 p (SEE N87-22145 15-34) Feb. 1987

(AGARD-R-741) Avail: NTIS HC A10/MF A01

The flow field in corner and tip regions of wings and propellers is complex, three-dimensional, and viscous with large secondary/transverse velocities. The large secondary velocities, usually associated with streamwise vorticity development in the flow, preclude the use of conventional boundary-layer solution techniques to compute such flow fields. On the other hand, solution techniques for the full Navier-Stokes equations that adequately resolve the length scales of tip and corner region flow fields would require formidable computer resources for use routinely. Sets of approximate three-dimensional viscous flow equations which are applicable to tip and corner region flow fields and which can be solved economically are sought. Clearly, economy of solution must result from approximations to the governing equations for such procedures to be attractive. A spatial marching computation procedure that solves approximate three-dimensional viscous flow equations economically is presented here and application of the procedure to compute tip and corner region flow fields discussed. Author

N87-27958# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel.

TECHNICAL EVALUATION REPORT ON THE FLUID DYNAMICS PANEL SYMPOSIUM ON APPLICATIONS OF COMPUTATIONAL FLUID DYNAMICS IN AERONAUTICS

W. J. MCCROSKEY (National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.) Mar. 1987 24 p Symposium held in Aix-en-Provence, France, 7-10 Apr. 1986

(AD-A172209; AGARD-AR-240; ISBN-92-835-0416-X) Avail: NTIS HC A02/MF A01

The Fluid Dynamics Panel of AGARD arranged a Symposium in Applications of Computational Fluid Dynamics in Aeronautics on 7 to 10 April 1986 in Aix-en-Provence, France. The purpose of the Symposium was to provide an assessment of the status of CFD in aerodynamic design and analysis, with an emphasis on emerging applications of advanced computational techniques to complex configurations. Sessions were devoted specifically to grid generation, methods for inviscid flows, calculations of

viscous-inviscid interactions, and methods for solving the Navier-Stokes equations. The 31 papers presented at the meeting are published in AGARD Conference Proceedings CP-412 and are listed in the Appendix to this report. A brief synopsis of each paper and some general conclusions and recommendations are given. Author

N88-11968# Smith (A. M. O.), San Marino, CA. Fluid Dynamics Panel.

TECHNICAL EVALUATION REPORT ON THE FLUID DYNAMICS PANEL SYMPOSIUM ON AERODYNAMIC AND RELATED HYDRODYNAMIC STUDIES USING WATER FACILITIES

A. M. O. SMITH, J. W. SLOOFF, and A. ROSHKO (California Inst. of Tech., Pasadena.) Aug. 1987 10 p

(AGARD-AR-225; ISBN-92-835-1556-0; AD-A187957) Avail: NTIS HC A02/MF A01

The results of aerodynamic investigations performed in water facilities were examined and reviewed. These facilities included water tunnels, towing channels, and stationary tanks. It was observed that the use of water as a medium for both aerodynamic and hydrodynamic testing is gradually gaining wider acceptance. This meeting allowed specialists to gather and discuss their results, compare techniques, and find solutions to problems. Author

N88-11970# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel.

SPECIAL COURSE ON MODERN THEORETICAL AND EXPERIMENTAL APPROACHES TO TURBULENT FLOW STRUCTURE AND ITS MODELLING

Aug. 1987 263 p Course held in Rhode-St.-Genese, Belgium, 16-20 Mar. 1987; sponsored by the von Karman Inst. and AGARD

(AGARD-R-755; ISBN-92-835-0430-5; AD-A198872) Avail: NTIS HC A12/MF A01

The large eddy concept in turbulent modeling and techniques for direct simulation are discussed. A review of turbulence modelling is presented along with physical and numerical aspects and applications. A closure model for turbulent flows is presented and routes to chaos by quasi-periodicity are discussed. Theoretical aspects of transition to turbulence by space/time intermittency are covered. The application to interpretation of experimental results of fractal dimensions and connection of spatial temporal chaos are reviewed. Simulation of hydrodynamic flow by using cellular automata is discussed. For individual titles, see N88-11971 through N88-11978.

N88-11971# Stanford Univ., CA. Dept. of Mechanical Engineering.

FUNDAMENTALS OF TURBULENCE FOR TURBULENCE MODELING AND SIMULATION

W. C. REYNOLDS In Advisory Group for Aerospace Research and Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling 66 p (SEE N88-11970 03-34) Aug. 1987

(AGARD-R-755) Avail: NTIS HC A12/MF A01

A brief review is given of fluid flow fundamentals pertinent to turbulence. Extensive use is made of the Cartesian tensor summation convention, where repeated indices imply that the terms containing them must be summed over all possible coordinate indices. Author

N88-11972# Electricite de France, Chatou. Lab. National d'Hydraulique.

TURBULENCE MODELLING THROUGH ONE POINT CLOSURES-APPLICATIONS-ENLIGHTENING BY LARGE EDDY SIMULATION

D. LAURENCE In Advisory Group for Aerospace Research and Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling 34 p (SEE N88-11970 03-34) Aug. 1987

(AGARD-R-755) Avail: NTIS HC A12/MF A01

Reynolds stress and Low Re models for the modelling of inhomogeneous flows are considered. They are shown to provide satisfactory predictions for engineering flows. Near wall and buoyancy effects are also included. Results of large eddy simulations are used as guidance to the standard one point closures, especially for data that cannot be obtained by experiment. Author

34 FLUID MECHANICS AND HEAT TRANSFER

N88-11973# Office National d'Etudes et de Recherches Aérospatiales, Toulouse (France). Dept. of Aerothermodynamics. **HOMOGENEOUS TURBULENCE TWO-POINT CLOSURES AND APPLICATIONS TO ONE-POINT CLOSURES**

B. AUPOIX *In Advisory Group for Aerospace Research and Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling 47 p (SEE N88-11970 03-34) Aug. 1987*

(AGARD-R-755) Avail: NTIS HC A12/MF A01

Homogeneous, i.e., translation invariant, turbulence is discussed. Homogeneous turbulence is an ideal situation in which the mean field is unaffected by the turbulent motion, so that the turbulent motion can be studied solely with a prescribed mean field. Such a flow can nearly be achieved in very simple experimental set-ups. Author

N88-11974# Commissariat à l'Energie Atomique, Gif-sur-Yvette (France). Service de Physique du Solide et de Résonance Magnétique. **DYNAMICS AND ROUTES TO CHAOS FROM QUASIPERIODICITY**

M. DUBOIS *In Advisory Group for Aerospace Research and Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling 17 p (SEE N88-11970 03-34) Aug. 1987*

(AGARD-R-755) Avail: NTIS HC A12/MF A01

One of the routes leading to deterministic chaos is the route through the quasiperiodicity; the simplest one involves the presence of two oscillators, whose dynamics may become chaotic by the increase of the amount of the non-linearities between them. Though this dynamic is generally related to nonlinear dynamic systems, it may be found in hydrodynamical flows as soon as the increase of a control parameter initiates the appearance of periodic behaviors. So, in the following, the physical examples will be taken from Rayleigh-Benard experiments, which provide good illustrations of quasiperiodic behaviors in dissipative systems. Author

N88-11975# Commissariat à l'Energie Atomique, Gif-sur-Yvette (France). Service de Physique du Solide et de Résonance Magnétique. **A DETERMINISTIC APPROACH TO TURBULENCE: CHAOS IN RAYLEIGH-BENARD CONVECTION**

P. BERGE *In Advisory Group for Aerospace Research and Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling 30 p (SEE N88-11970 03-34) Aug. 1987*

(AGARD-R-755) Avail: NTIS HC A12/MF A01

Various aspects of chaos in Rayleigh-Benard convection are discussed. Basic concepts concerning dissipative dynamical systems, a definition of chaos, a brief introduction to bifurcations, reconstruction of phase space and quasiperiodicity are among the topics covered. R.J.F.

N88-11976# Commissariat à l'Energie Atomique, Gif-sur-Yvette (France). Service de Physique du Solide et de Résonance Magnétique. **TRANSITION TO TURBULENCE VIA SPATIO-TEMPORAL INTERMITTENCY**

PAUL MANNEVILLE *In Advisory Group for Aerospace Research and Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling 18 p (SEE N88-11970 03-34) Aug. 1987*

(AGARD-R-755) Avail: NTIS HC A12/MF A01

A scenario of transition to turbulence specific to large aspect ratio systems is presented. Starting with simulations on a model chosen for its relevance to the field of convective instabilities, researchers characterized the spatio-temporal intermittent phase. They examined the transition process having recourse to simpler systems: coupled map lattices. This process appeared to involve the propagation of an information, laminar/turbulent which seemed stochastic though it was generated by a deterministic dynamics. Author GRA

N88-11977# Istituto Nazionale di Ottica, Florence (Italy).

DETERMINATION OF FRACTAL DIMENSION, CONNECTION OF SPACE AND TEMPORAL CHAOS AND APPLICATION TO EXPERIMENTAL RESULTS

S. CILIBERTO *In Advisory Group for Aerospace Research and Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling 15 p (SEE N88-11970 03-34) Aug. 1987*

(AGARD-R-755) Avail: NTIS HC A12/MF A01

Experiments on time dependent behavior of a horizontal fluid layer, heated from below, that is Rayleigh-Benard convection, are discussed. It is shown that time dependent regimes are characterized by the presence of either traveling waves or localized oscillations. These spatio-temporal regimes turn out to be similar to those observed in numerical simulations of Kuramoto-Shivashinsky and Kuramoto-Velarde partial differential equations. Experimental evidence that the properties of the chaotic regimes depend on space coordinates is given. Experiments on surface wave instabilities where the competition between two spatial patterns produces time dependent behavior and chaos are discussed. The results of this experiment are in good agreement with a low dimensional model obtained from Navier-Stokes equations. Author

N88-11978# Brussels Univ. (Belgium). Faculté des Sciences. **LATTICE GAS HYDRODYNAMICS**

JEAN PIERRE BOON and ALAIN NOLLÉZ *In Advisory Group for Aerospace Research and Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling 27 p (SEE N88-11970 03-34) Aug. 1987*

(AGARD-R-755) Avail: NTIS HC A12/MF A01

The motivation for using a lattice gas to simulate hydrodynamics stems from the idea that the details of the microscopic properties should be unimportant to the macroscopic behavior of the fluid. So, whether the fictitious microworld one uses is a caricature of a real fluid does not matter as long as it produces correct hydrodynamics. In order to answer the question of whether the lattice gas hydrodynamics meets the goal of producing correct hydrodynamics, the constitutive elements are built up to construct a lattice gas and a model system is put to work. Computational aspects of hydrodynamic simulations are reviewed. Author

N88-11979# Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine (France). Fluid Dynamics Panel. **TECHNIQUES OF FLOW VISUALIZATION**

W. MERZKIRCH and K. GERSTEN (Ruhr Univ., Bochum, West Germany) Dec. 1987 100 p (AGARD-AG-302; ISBN-92-835-0438-0; AD-A194291) Avail: NTIS HC A05/MF A01

The methods of flow visualization are reviewed with particular emphasis on their application in wind tunnels, water tunnels, and experiments related to propulsion research. The discussion of methods starts with those that visualize the flow pattern on a solid surface. Then methods visualizing the whole field, either by introducing a foreign substance (smoke, dye) or by making use of refractive index changes in the flowing fluid (optical methods) are examined. Emphasis is placed on the discussion of the physical background of a method rather than on technical details. B.G.

N88-23125# Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine (France). Fluid Dynamics Panel. **AERODYNAMIC AND RELATED HYDRODYNAMIC STUDIES USING WATER FACILITIES**

Jun. 1987 462 p In ENGLISH and FRENCH Symposium held in Monterey, Calif., 20-23 Oct. 1986 Original contains color illustrations

(AGARD-CP-413; ISBN-92-835-0419-4; AD-A199357) Avail:

NTIS HC A20/MF A01

Related problems, experiences and advancements in aeronautical and maritime fluid dynamics through the use of water facilities are reviewed. In recent years there has been an increasing use of water facilities for aerodynamic investigations. These include water tunnels, towing channels, and stationary tanks. Examples include basic research problems as well as flow fields around fighter aircraft, inlet flows, recirculation flow patterns associated with VTOL, ramjet simulation, etc., and, in general, 3-D flows with vortices or separated regimes as prominent features. The Symposium was organized to provide an appropriate forum for

34 FLUID MECHANICS AND HEAT TRANSFER

the exchange of information within the aeronautical and maritime fluid dynamics community. For individual titles, see N88-23126 through N88-23157.

N88-23127* National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

VORTEX BREAKDOWN AND CONTROL EXPERIMENTS IN THE AMES-DRYDEN WATER TUNNEL

F. K. OWEN (Comptech, Inc., Palo Alto, Calif.) and D. J. PEAKE. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 10 p (SEE N88-23125 16-34) Jun. 1987. Previously announced as N87-13409.

(AGARD-CP-413) Avail: NTIS HC A20/MF A01 CSCL 20D

Flow-field measurements have been made to determine the effects of core blowing on vortex breakdown and control. The results of these proof-of-concept experiments clearly demonstrate the usefulness of water tunnels as test platforms for advanced flow-field simulation and measurement. Author

N88-23130* Eidetics International, Inc., Torrance, CA. **FLOW VISUALIZATION STUDY OF VORTEX MANIPULATION ON FIGHTER CONFIGURATIONS AT HIGH ANGLES OF ATTACK**

GERALD N. MALCOLM and ANDREW M. SKOW. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 19 p (SEE N88-23125 16-34) Jun. 1987. (Contract F33615-85-C-3619)

(AGARD-CP-413) Avail: NTIS HC A20/MF A01

Experiments were performed in a flow visualization water tunnel on a generic fighter model to explore vortex manipulation as an effective means of aircraft control by altering the natural state of the forebody and LEX vortices in the medium-to-high-angle of attack range with either small surface modifiers or blowing jets. Specifically, the forebody vortex system was examined with the clean forebody, with forebody strakes, and with forebody surface blowing. LEX vortices were examined with a clean LEX, with small geometric modifications near the apex, and with surface blowing, both in upstream and downstream directions at various locations on the LEX surface. The interactive effects of forebody and LEX/wing vortices and their response to the various methods of control were also examined. It was concluded that the forebody vortices can be effectively controlled by either blowing or using strakes, but the effectiveness is very dependent on proper radial placement of the blowing port or strake. Author

N88-23131* Naval Postgraduate School, Monterey, CA. Dept. of Mechanical Engineering.

OSCILLATING FLOW OVER BLUFF BODIES IN A U-SHAPED WATER TUNNEL

TURGUT SARPKAYA. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 15 p (SEE N88-23125 16-34) Jun. 1987.

(Contract NSF CEE-82-10246)

(AGARD-CP-413) Avail: NTIS HC A20/MF A01

Studies dealing with sinusoidally oscillating separated and unseparated flows over various types of bluff bodies are described. First, the characteristics of a large U-shaped vertical water tunnel are described and then the numerical and experimental results obtained with circular cylinders are presented. It is shown that for 2-D, attached, and laminar-flow conditions the data are, as expected, in good agreement with the previous analysis. The oscillatory viscous flow becomes unstable to axially periodic Taylor-Görtler vortices above a critical Keulegan-Carpenter number K ($K = U_{\text{sub}} mT/D$) for a given Beta ($\text{Beta} = D \sup 2 / \nu \rho \omega T$). For larger values of K the effects of separation and vortex shedding become increasingly important, eventually leading to a very interesting half Karman vortex street in the transverse direction in the range B less than K less than 13. The discrete vortex model of the separated oscillating flow is shown to provide a reasonably satisfactory explanation of the transverse vortex street. Finally, an attempt is made, through the use of an ideal vortex model, to explain the observed flow modes and the cycle-to-cycle variations in forces and pressures in terms of their sensitivity to small stochastic variations in the position of the vortices. Author

N88-23134* Technische Hochschule, Aachen (Germany, F.R.). **SHORT DURATION FLOW ESTABLISHMENT ON A PROFILE IN A WATER-LUDWIG-TUNNEL**

W. KERRES and H. GROENIG. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 12 p (SEE N88-23125 16-34) Jun. 1987.

(AGARD-CP-413) Avail: NTIS HC A20/MF A01

This paper deals with the time-dependent establishment of the flow field on an airfoil in unsteady flow. The impulsive part of the flow is achieved in a Water-Ludwig-Tunnel. By using a coded particle tracing method for flow visualization, the detailed flow establishment on a NACA 0012 airfoil at 30-deg angle of attack is shown from the beginning where potential flow exists with zero circulation to a quasi-steady formation of the vortex street.

Author

N88-23135* McDonnell-Douglas Research Labs., Saint Louis, MO.

EXPERIMENTAL INVESTIGATION OF HOVER FLOWFIELDS IN WATER AT THE MCDONNELL DOUGLAS RESEARCH LABORATORIES

K. R. SARIPALLI, J. C. KROUTIL, and J. R. VANHORN. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 10 p (SEE N88-23125 16-34) Jun. 1987.

(AGARD-CP-413) Avail: NTIS HC A20/MF A01

A new experimental facility, the Hover Research Facility (HRF), is designed to study the flowfields generated by hovering vertical takeoff and landing (VTOL) aircraft and helicopters. Water is used as the working medium because of its inherent advantages in flow visualization and laser Doppler velocimeter (LDV) measurements. The applications of the Hover Research Facility include: (1) experimental investigation of twin-jet impingement flow with application to VTOL aircraft; (2) visualization of the flowfield around a fully contoured, model supersonic fighter/attack short takeoff and vertical landing (STOVL) aircraft; and (3) performance testing of a No Tail Rotor (NOTAR) helicopter in hover mode by use of a scale model. Flow visualization and quantitative LDV data on these experiments are presented. Author

N88-23136* Instituto Superior Tecnico, Lisbon (Portugal). Dept. of Mechanical Engineering.

AN INVESTIGATION OF DUCTED PROPELLERS IN AXISYMMETRIC SHEAR FLOW

J. A. C. FALCAODECAMPOS. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 15 p (SEE N88-23125 16-34) Jun. 1987. Sponsored in part by Instituto Superior Tecnico.

(AGARD-CP-413) Avail: NTIS HC A20/MF A01

To improve the basic understanding of the complex interaction flow phenomena between ducted propeller systems and a ship's hull, the effects of radial nonuniformity of the inflow to the ducted propeller were investigated, both numerically and experimentally. The mathematical model is based on the Euler equations for an inviscid, incompressible axisymmetric flow and on the representation of the propeller by an actuator disk. In a vorticity-stream function formulation, the problem is governed by two coupled integral equations, which express vorticity transport in the flow and the boundary conditions on the duct and hub surfaces. The numerical solution method employs a discretization of the vorticity field into vortex sheets, which are traced iteratively in a fixed grid. The problem was also experimentally investigated in the Large Cavitation Tunnel of the Maritime Research Institute of the Netherlands. A five-bladed propeller model, placed inside a duct, was tested behind wire screens, generating a wake velocity profile with axial symmetry. Laser-Doppler measurements of mean axial and radial velocities were carried out at various axial locations upstream and downstream of the ducted propeller. Detailed comparisons between the results of calculations and the experiments are presented and discussed. Author

34 FLUID MECHANICS AND HEAT TRANSFER

N88-23137# Leicester Univ. (England). Dept. of Engineering.
MEASUREMENTS OF AERODYNAMIC FORCES ON UNSTEADILY MOVING BLUFF PARACHUTE CANOPIES
D. J. COCKRELL, R. J. HARWOOD, and C. Q. SHEN. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 7 p (SEE N88-23125 16-34) Jun. 1987 (AGARD-CP-413) Avail: NTIS HC A20/MF A01

Equations which describe the unsteady motion of bluff bodies through fluids contain certain components, termed added mass coefficients, which can only be determined by experiment. From the solutions to such equations the ways in which the shapes of parachute canopies influence the frequency of their oscillatory motion in pitch and their corresponding damping rates are required. Although a full-scale parachute canopy descends through air, oscillating in pitch as it does, experiments necessary to determine these added mass coefficients have been performed under water, using for this purpose a large ship tank from the towing carriage of which the model parachute canopies were suspended. These experiments showed that the added mass coefficients for bluff parachute canopies differed appreciably from their corresponding potential flow values. The latter were obtained from the analysis of inviscid, fluid flow around regular shapes which were representative of those parachute canopies. The significance for the prediction of the parachute's dynamic behavior in pitch is outlined. Author

N88-23138# IMI Summerfield, Kidderminster (England).
WATER FLOW VISUALISATION OF A RAMROCKET COMBUSTION CHAMBER

P. J. BOSZKO and G. S. OWEN. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 11 p (SEE N88-23125 16-34) Jun. 1987 Sponsored in part by Ministry of Defence (AGARD-CP-413) Avail: NTIS HC A20/MF A01

Flow within the combustion chamber of a ramrocket has been investigated using water flow visualization with air bubbles as tracers. Configurations with four axisymmetric intakes entering the combustion chamber at either 45 or 90 deg have been considered. A region of stable recirculatory flow has been identified at the head end of the combustion chamber and estimates have been obtained of the amount flowing through the recirculation region. Based on this information fuel jets have been designed which it is believed will aid ignition, secure flame stability, and improve combustion efficiency. The interaction between fuel jets and the recirculatory air flow has been tentatively investigated on flow visualization tests using jets of colored water. Author

N88-23139# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).
THE ONERA WATER TUNNELS TEST POSSIBILITIES FOR FLOW VISUALIZATION IN AERONAUTICAL AND NAVAL DOMAINS

H. WERLE. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 16 p (SEE N88-23125 16-34) Jun. 1987 In FRENCH; ENGLISH summary (AGARD-CP-413) Avail: NTIS HC A20/MF A01

The ONERA water test tunnels, which for a long time were the pioneers in flow visualization, cover a broad scope of test methods and means, encompassing a wide field of applications. This paper presents an up-to-date description of the experimental techniques used for plane, axisymmetric and three-dimensional flow, and gives a survey of the most notable results achieved in domains as varied as fundamental research and aerodynamics and related hydrodynamic studies. Author

N88-23140# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. for Experimental Fluid Mechanics.
THE USE OF A WATER TOWING TANK FOR AERODYNAMIC TESTING AND METHODS FOR QUANTITATIVE EVALUATION OF PHOTOGRAPHS

H. BIPPES. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 11 p (SEE N88-23125 16-34) Jun. 1987 (AGARD-CP-413) Avail: NTIS HC A20/MF A01

The use of the water towing tank of the DFVLR for fluid dynamic testing is briefly described. The capability of measuring techniques is discussed. Among the various techniques the quantitative

evaluation of photographs of visualized flow proved to be most effective for use in a water towing tank. Two methods enabling the survey of 3-D flow fields are dealt with in detail. The first method based on photogrammetric techniques has already been applied to the investigation of 3-D disturbances in an unstable laminar boundary layer and to the study of a free vortex flow. The second one is based on holographic techniques. Its feasibility for supplying quantitative data is discussed. Author

N88-23141# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.
FLOW MEASUREMENTS IN A WATER TUNNEL USING A HOLOCINEMATOGRAPHIC VELOCIMETER

LEONARD M. WEINSTEIN and GEORGE B. BEELER. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 7 p (SEE N88-23125 16-34) Jun. 1987 (AGARD-CP-413) Avail: NTIS HC A20/MF A01 CSCL 20D

Dual-view holographic movies were used to examine complex flows with full three-space and time resolution. This approach, which tracks the movement of small tracer particles in water, is termed holocinematographic velocimetry (HCV). A small prototype of a new water tunnel was used to demonstrate proof-of-concept for the HCV. After utilizing a conventional flow visualization apparatus with a laser light sheet to illuminate tracer particles to evaluate flow quality of the prototype tunnel, a simplified version of the HCV was employed to demonstrate the capabilities of the approach. Results indicate that a full-scale version of the water tunnel and a high performance version of the HCV should be able to check theoretical and numerical modeling of complex flows and examine the mechanisms operative in turbulent and vortex flow control concepts, providing an entirely unique instrument capable, for the first time, of simultaneous three-space and time measurements in turbulent flow. Author

N88-23142# Centre d'Etudes et de Recherches, Toulouse (France). Dept. d'Etudes en Mecanique et Energetique des Systemes.
EXPERIMENTAL STUDY OF VORTEX SHEETS IN PLANE FLOW [ETUDE EXPERIMENTALE DE NAPPES TOURBILLONNAIRES EN ECOULEMENT PLAN]

CHRISTIAN BERGER, MAGALI BOURGEOIS, GERARD LAVERGNE, CHRISTINE LEMPEREUR, and JEAN-MICHEL MATHE. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 7 p (SEE N88-23125 16-34) Jun. 1987 In FRENCH (AGARD-CP-413) Avail: NTIS HC A20/MF A01

With the aim of conducting an experimental study of shear instability in laminar flow, a vertical water tank was designed which would generate a confluence of two bi-dimensional flows of different velocities. The study consisted of characterizing the instabilities developing downstream from the base starting with the determination of velocity profiles with laser anemometry and various flow visualization and image processing techniques. The Reynolds number calculated across the width of the base and the mean of the two velocities is less than 600. Modeling this type of flow with the aid of vortex sheets emitted at the base extremities permits the construction of emission lines comparable to those observed. Author

N88-23143# Princeton Univ. NJ. Dept. of Mechanical and Aerospace Engineering.
THREE-DIMENSIONAL FLOW VISUALIZATION USING LASER-SHEET SCANNING

D. M. NOSENCHUCK and M. K. LYNCH. In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 13 p (SEE N88-23125 16-34) Jun. 1987 (Contract N00014-85-K-0352; NSF MSM-83-52175) (AGARD-CP-413) Avail: NTIS HC A20/MF A01

It has been demonstrated that the conventional technique of fixed-laser-sheet flow visualization can be extended to include 3-D visualization by means of a scanning laser sheet. This system was implemented using a rotating mirror in conjunction with appropriate fixed optics. A space-filling 3-D data base was digitally obtained from the imaging and recording units, and was processed to yield a variety of 3-D views of the flow field in addition to obtaining quantitative results regarding mixing levels and velocities. Laser-sheet scanning was first applied in a study of boundary-layer turbulence in which active control was implemented. The flow

visualization readily indicated the near-wall instabilities present in turbulent spots and synthetic turbulent boundary layers. When control was attempted using an array of surface heating elements, the visualization technique graphically illustrated the attenuation of the near-wall sublayer streaks and resultant quiescent outer flow. Author

N88-23144# Institut de Mecanique des Fluides de Lille (France).

APPLICATION OF HIGH SPEED HOLOGRAPHY TO AERODYNAMIC AND HYDRODYNAMIC THREE-DIMENSIONAL VELOCIMETRY

M. STANISLAS, O. RODRIGUEZ, M. DADI, and F. BELUCHE In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 10 p (SEE N88-23125 16-34) Jun. 1987 Sponsored in part by French Ministry for Defense (AGARD-CP-413) Avail: NTIS HC A20/MF A01

The application of holography to the measurement of fluid velocity in 3-D domains is proposed. After a short description of the method, an example of application to the water flow around a circular cylinder at low Reynolds number is presented. Then, the main limitations of the method are discussed and solutions proposed to overcome them. Author

N88-23146# Universite de Valenciennes et du Hainaut-Cambresis (France). Lab. de Mecanique des Fluides.

WATER TUNNEL MEASUREMENTS BY AN ELECTROCHEMICAL METHOD (MESURES EN TUNNEL HYDRODYNAMIQUE PAR METHODE ELECTROCHIMIQUE)

C. TOURNIER and P. FLORENT In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 14 p (SEE N88-23125 16-34) Jun. 1987 In FRENCH (AGARD-CP-413) Avail: NTIS HC A20/MF A01

A polarographic method to measure parietal friction is described. With the proper liquid, the technique permits the measurement of 3-D and unsteady flows without perturbations. To employ the method, a large capacity water tank (Re - 1.5 x 10 to the 6th) made entirely of electrically neutral and chemically inert materials was designed. Sample measurements made using the polarographic method are presented. They were selected to illustrate the advantages of this method in typical cases of 3-D or unsteady flows. The possibility of measuring mass transfer using this method is also discussed. Author

N88-23147# California Univ., San Diego, La Jolla.

FLOW VELOCITY MEASUREMENTS BY IMAGE PROCESSING OF OPTICALLY MODULATED TRACES

M. GHARIB, B. DYNE, O. THOMAS, and C. YAP In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 7 p (SEE N88-23125 16-34) Jun. 1987 (AGARD-CP-413) Avail: NTIS HC A20/MF A01

A computerized flow visualization technique capable of quantifying the flow field automatically is described. The technique uses a time modulated illumination scheme to retrieve vectorial information from the pathlines of particles suspended in the flow. This technique has eliminated a major source of error in velocity reading which is common in conventional particle tracing techniques. Application of the present technique to the recirculating flow field of a 2-D cavity is described. Velocity profiles obtained from the pathlines of the particles through the present techniques show excellent agreement with the velocity profiles obtained using laser Doppler velocimetry. Author

N88-23148# Florida State Univ., Tallahassee.

A NON-INVASIVE EXPERIMENTAL TECHNIQUE FOR THE MEASUREMENT OF UNSTEADY VELOCITY AND VORTICITY FIELDS

L. LOURENCO, A. KROTHAPALLI, J. M. BUCHLIN, and M. L. RIETHMULLER (Von Karman Inst. for Fluid Dynamics, Rhode-Saint Genese, Belgium) In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 9 p (SEE N88-23125 16-34) Jun. 1987 (AGARD-CP-413) Avail: NTIS HC A20/MF A01

A new velocity measurement technique is described which provides the simultaneous visualization of a 2-D streamline pattern and the quantification of the velocity field. The main advantage of this technique is that the velocity field can be measured with sufficient accuracy and spatial resolution so that the vorticity field

can be readily obtained. This technique is ideally suited for the study of unsteady vertical flows, which occur in high angle of attack aerodynamics. The technique, some of the important parameters affecting its use, and some recent examples are described. Author

N88-23149# Notre Dame Univ., IN. Dept of Aerospace and Mechanical Engineering.

USE OF WATER TOWING TANKS FOR AERODYNAMICS AND HYDRODYNAMICS

MOHAMED GADELHAK In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 11 p (SEE N88-23125 16-34) Jun. 1987

(Contract NAS1-18292; NAS1-18213; N00014-81-C-0453, F49620-82-C-0020; NSF ISI-85-60825)

(AGARD-CP-413) Avail: NTIS HC A20/MF A01 CSDL 20D

Wind tunnels and flumes have become standard laboratory tools for modeling a variety of aerodynamic and hydrodynamic flow problems. Less available, although by no means less useful, are facilities in which a model can be towed (or propelled) through air or water. This article emphasizes the use of the water towing tank as an experimental tool for aerodynamic and hydrodynamic studies. Its advantages and disadvantages over other flow rigs are discussed, and its usefulness is illustrated through many examples of research results obtained over the past few years in a typical towing tank facility. Author

N88-23151# British Aerospace Public Ltd. Co., Bristol (England). Aerodynamics Research Dept.

A COMPARATIVE STUDY OF VORTEX FLOWS IN WIND AND WATER TUNNELS

A. G. DAVIES In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 16 p (SEE N88-23125 16-34) Jun. 1987

(AGARD-CP-413) Avail: NTIS HC A20/MF A01

Characteristics of the flowfield around a generalized missile configuration using two flow visualization techniques in a water tunnel are compared to corresponding wind tunnel data at subsonic and supersonic speeds. It is shown that the flowfields derived from the water tunnel can be representative of those found at subsonic speeds although isolated body vortex locations agree more with those measured at supersonic speeds than that separation angles on the body can be important. The addition of a cruciform set of fins is shown to modify the body vortex structure dramatically, the degree of modification varying with axial location of the fins. A speed effect is seen to exist in the water tunnel that can change some vortex flowfield characteristics from those of a subsonic flow to those observed at supersonic speeds. Finally, cross flow velocities and circulations are compared between water and wind tunnels. Author

N88-23152# Saab-Scania, Linkoping (Sweden).

INVESTIGATION ON THE MOVEMENT OF VORTEX BURST POSITION WITH DYNAMICALLY CHANGING ANGLE OF ATTACK FOR A SCHEMATIC DELTA-WING IN A WATERTUNNEL WITH CORRELATION TO SIMILAR STUDIES IN WINDTUNNEL

KARL W. WOLFFELT In AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 8 p (SEE N88-23125 16-34) Jun. 1987

(AGARD-CP-413) Avail: NTIS HC A20/MF A01

The requirements for modern military aircraft to maintain good handling qualities at very high angles of attack is one of many reasons why an increased knowledge is necessary regarding the aerodynamic behavior of vortex flows at nonstationary conditions. Linearized theory as it has been utilized in flight mechanics simulation using damping derivatives derived from forced oscillation technique, for example, may no longer be valid at such conditions. With this background some investigations have been made by SAAB-SCANIA with the aim to study the hysteresis effects for nonstationary vortex flows. A schematic delta-wing model which could also be equipped with a similar canard wing has been tested in a water tunnel. The model was supported in the tunnel by a simple mechanism by which it could be forced to move in one of four different modes, pitching or plunging with either ramp or harmonic motion. The flow over the model was visualized with air bubbles and sequences were recorded on videotape. The sequences were analyzed and the movements of the leading edge

34 FLUID MECHANICS AND HEAT TRANSFER

vortex burst have been studied with the main interest focused on the hysteresis effects. Author

N88-23153# Technische Hogeschool, Eindhoven (Netherlands). **SOME VISUALIZATION STUDIES ON TURBULENT BOUNDARY LAYERS USING MULTIWIRED HYDROGEN BUBBLE GENERATION**

R. BLOKLAND and K. KRISHNA PRASAD /in AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 12 p (SEE N88-23125 16-34) Jun. 1987 (AGARD-CP-413) Avail: NTIS HC A20/MF A01

Provided are new results obtained using two visualization methods which assist in describing essentially three dimensional phenomena: (1) With two wire pattern correlation the flow field can be described in a large set of sections through a certain structure; (2) Multiple color illumination allows recognition of movements in a direction normal to the plane of the photograph from changes in color. Some countings were made concerning the behavior of low speed streaks as a function of y and the relation between streaks and some other structures. A new detection criterion for streaks is proposed. The distribution for the spanwise velocity of a streak was determined. It is shown that the detection criteria of Blackwelder and Kaplan essentially samples spanwise passages of streaks. A few results of multiple color visualization are shown to establish unambiguously the vertical transport associated with streaks. Author

N88-23154*# Lehigh Univ., Bethlehem, PA. Dept. of Mechanical Engineering and Mechanics.

STRUCTURE OF UNSTEADY FLOWS AT LEADING- AND TRAILING-EDGES: FLOW VISUALIZATION AND ITS INTERPRETATION

D. ROCKWELL, R. ATTA, L. KRAMER, R. LAWSON, D. LUSSEYRAN, C. MAGNESS, D. SOHN, and T. STAUBLI /in AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 13 p (SEE N88-23125 16-34) Jun. 1987 Sponsored in part by NASA, NSF, Navy, AF, and Volkswagen Foundation (AGARD-CP 413) Avail: NTIS HC A20/MF A01 CSC 20D

Unsteady two- and three-dimensional flow structure at leading and trailing edges of bodies can be characterized effectively using recently developed techniques for acquisition and interpretation of flow visualization. The techniques addressed here include: flow image/surface pressure correlations; 3-D reconstruction of flow structure from flow images; and interactive interpretation of flow images with theoretical simulations. These techniques can be employed in conjunction with: visual correlation and ensemble-averaging, both within a given image and between images; recognition of patterns from images; and estimates of velocity eigenfunctions from images. Author

N88-23155# Hamburg Model Basin (Germany, F.R.). **MEASUREMENTS OF THE TIME DEPENDENT VELOCITY FIELD SURROUNDING A MODEL PROPELLER IN UNIFORM WATER FLOW**

JOERG BLAUROCK and GERD LAMMERS /in AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 13 p (SEE N88-23125 16-34) Jun. 1987 (AGARD-CP-413) Avail: NTIS HC A20/MF A01

As part of a research program, the flow field around an operating ship propeller was investigated in a water tunnel, using laser Doppler velocimetry. The 3-D velocity field was measured in three planes at the suction side and four planes on the pressure side of the propeller at the design thrust coefficient of $K_{sub} T = 0.185$. In one of the planes in the propeller's slipstream, the measurements were repeated at thrust coefficients of $K_{sub} T = 0.12$ and 0.25 . The velocity profiles measured in the propeller's slipstream are compared with the induced velocities derived from design calculations, and occurring deviations are discussed. Furthermore, the instantaneous flow field permits study of the tip vortices at different distances behind the propeller. The measurements yield a quantitative description of the vortices, and the influence of propeller load at the blade tips on geometry and intensity of the tip vortices can be seen. Author

N88-23156# Admiralty Research Establishment, Gosport (England).

EXPERIMENTS TO INVESTIGATE THE VORTICES SHED FROM A SUBMARINE-LIKE BODY OF REVOLUTION

A. R. J. M. LLOYD and I. M. C. CAMPBELL (Southampton Univ., England) /in AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 22 p (SEE N88-23125 16-34) Jun. 1987 Presented at the 59th Meeting of the AGARD Fluid Dynamics Panel Symposium, Monterey, Calif., 20-23 Oct. 1986 (AGARD-CP-413) Avail: NTIS HC A20/MF A01

Described are experiments to determine the characteristics of the vortices shed from a submarine-like body of revolution at an angle of attack in a turn. The experiments used a new type of vorticity probe developed by Freestone at the City University in the UK. The probe allows the streamwise vorticity to be estimated from simple pressure measurements and rapid assessments of vortex position and strength can be made. The paper examines the expected performance of the probe using a simulation of an ideal viscous cored vortex and reports experience gained in the design and preliminary testing of the probe. Results of experiments to measure the vortex shed by a hydroplane at an angle of attack and a body of revolution in a turn are reported. Author

N88-23157# Admiralty Research Establishment, Gosport (England). Submarine Hydrodynamics and Experiment Services Div.

A REVIEW OF THE NATO SPECIAL GROUP OF EXPERTS ON NAVAL HYDROMECHANICS AND RELATED PROBLEMS

JOHN CHARLESWORTH and L. JOHN LEGGAT (Defence Research Establishment Atlantic, Dartmouth, Nova Scotia) /in AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 12 p (SEE N88-23125 16-34) Jun. 1987 (AGARD-CP-413) Avail: NTIS HC A20/MF A01

The Special Group of Experts on Naval Hydromechanics and Related Problems (SGE-HYDRO) was formed following an exploratory meeting on 3 to 4 November 1982. Its formation was spurred to a large degree by the need within NATO for a forum to promote multinational cooperation in the general area of Naval hydromechanics testing and research for problems not adequately covered by other NATO international exchange groups and the International Towing Tank Conference. The Group's mandate allows it to address current aspects of interest to Naval hydromechanics including test and research facilities, test techniques and instrumentation, prediction methods, model to full scale correlations, full scale trials, model tests, math modeling and simulation, and implications of instrumentation development in other fields. Author

N88-27480# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AERODYNAMICS OF HYPERSONIC LIFTING VEHICLES: FLUID DYNAMICS PANEL AGARD SYMPOSIUM

S. M. BOGDONOFF, H. HORNUNG, ed., and R. E. WHITEHEAD, ed. (Office of Naval Research, Arlington, Va.) Apr. 1988 20 p Symposium held in Bristol, United Kingdom, 6-9 Apr. 1987 (AGARD-AR-246, ISBN-92-835-0453-4; AD-A195892) Avail: NTIS HC A03/MF A01

This report reviews and evaluates the Fluid Dynamics Panel AGARD Symposium entitled, Aerodynamics of Hypersonic Lifting Vehicles, held 6 to 9 June 1987 in Bristol, UK. The purpose of the Symposium was to assess the technology status in the field of hypersonics after a comparative lull in the past decade. The author addresses each of the papers separately and makes general comments on the 5 major topic sessions. The limitations of test facilities for experimental studies at high Mach numbers were clearly evident. New developments in computational fluid dynamics provide possibilities that did not exist in the past. The reviewer stressed the areas that need special emphasis in the future. The papers presented at the Symposium are published in AGARD Conference Proceedings CP-429 and are listed in an Appendix to this report. Author

34 FLUID MECHANICS AND HEAT TRANSFER

N88-28872# British Aerospace Public Ltd. Co., Weybridge (England). Military Aircraft Div.

DEVELOPMENT AND ANALYSIS OF TURBULENT NON-EQUILIBRIUM BOUNDARY LAYERS

A. G. T. CROSS *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 250-270 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

The simulation of flow phenomena involving a boundary layer was already identified as potentially very sensitive to the upstream state of the incoming layer. The state of the layer in the sense of being laminar, transitional, or turbulent is of prime importance. As turbulent flow is usual at full scale it is a main objective of model tests. For turbulent flow an important consideration is departure from equilibrium as, in these cases the similarity solutions so frequently used in calculations no longer apply. Including non-equilibrium effects in the velocity profile is particularly revealing, and is essential for determining the important scale parameters and establishing separation criteria. The turbulent boundary layer is considered specifically in terms of the law of the wall and wake velocity profile which can be used to examine the influence of second order effects including that of departure from equilibrium.

Author

N88-28873# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. fuer Experimentelle Stromungsmechanik.

SHOCK BOUNDARY LAYER INTERACTION

E. STANEWSKY *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 271-305 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

An essential prerequisite for the viscous simulation of the flow about transonic flight vehicles is the correct simulation of shock boundary layer interaction. The latter requires that the parameters of the incoming boundary layer dominating the interaction are known. An attempt is made to identify such parameters for the characteristic features of shock boundary layer interaction.

Author

N88-28875# Calspan Field Services, Inc., Arnold AFS, TN.

VORTEX FLOWS

EDWARD M. KRAFT *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 338-355 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

For today's high performance aircraft, separation and vortical flow is a fact of life. The design challenge is to control vortex separation and make it work to improve the aircraft performance. Vortical flows are generally complex and correspondingly difficult to model analytically. Consequently subscale simulation remains the primary developmental tool for vehicle optimization, particularly in a high speed maneuver. Therefore, it is essential to understand the physical aspects of vortical flows that effect subscale simulation. A brief summary of some of the key questions and current assessment is provided. The primary types of vortical flows of interests in terms of proper subscale simulation at transonic speeds are forebody vortices, wing leading edge vortex flows, vortex breakdown, and vortex/shock interactions. The fundamental aspects of these types of flow are explored and areas where further research is required, are suggested.

Author

N88-28876# Middle East Technical Univ., Ankara (Turkey). Dept. of Aeronautical Engineering.

ENVIRONMENTAL EFFECTS ON TRANSITION AND BOUNDARY LAYER CHARACTERISTICS

C. CIRAY *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 356-408 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

The environmental effect on transition and some boundary layer characteristics is summarized. Environmental effects seem to be a section of fluid dynamics that was neglected or that was not studied systematically and in an organized manner. Yet with the need or increased accuracies required from recent wind tunnel measurements and the need for reduced discrepancies of the experimental data obtained from different wind tunnels, the wind tunnel environmental effects have to be accurately assessed. Looking at the breadth and delicacy both from an experimental

and theoretical point of view, the subject of environmental effect on transition and boundary layer characteristics appears challenging and rewarding for fluid dynamicists.

Author

N88-28877# Calspan Field Services, Inc., Arnold AFS, TN.

BOUNDARY LAYER MANIPULATION

EDWARD M. KRAFT *In* AGARD, Boundary Layer Simulation and Control in Wind Tunnels p 409-446 (SEE N88-28857 23-01) Apr. 1988

(AGARD-AR-224) Avail: NTIS HC A20/MF A01

It is clear that, left to its own development, the boundary layer on a model used in a subscale simulation may have little resemblance, in general, to the boundary layer on the full-scale vehicle. Consequently, it is inevitable that some sort of manipulation of the viscous dominated regions on the model will have to be performed in order that the wind tunnel results can be extrapolated to flight. The elements necessary for a successful viscous simulation are: an understanding of what parameters need to be controlled in the subscale experiment to provide a surprise-free extrapolation to flight; means for manipulating and controlling the required viscous parameters. Methods for determining that the viscous parameters were properly controlled in the wind tunnel; and an understanding of how the wind tunnel data need to be extrapolated to flight from whatever conditions were established in the wind tunnel. It must also be kept in mind that different boundary layer manipulation techniques will be applied for different test requirements. In addition, different requirements may exist for various components of a vehicle. An overview of the elements required for boundary layer manipulation will be presented and some suggested areas for future research will be discussed.

Author

N89-11400# Technische Univ., Regensburg (Germany, F.R.).

COMPUTATIONAL FLUID DYNAMICS AND SUPERCOMPUTERS, CHAPTER 6

W. GENTZSCH *In* AGARD, Computational Fluid Dynamics: Algorithms and Super Computers p 141-182 (SEE N89-11395 02-60) Mar. 1988

(AGARD-AG-311) Avail: NTIS HC A09/MF A01

It is important to optimally adapt codes and algorithms to the vector or parallel computer in use. In addition to faster and larger supercomputers, users must be much better trained than for (scalar) general purpose computers. Details on restructuring typical numerical algorithms to achieve superior performance on vector computers. The focus, of course, is on Computational Fluid Dynamics. During the last two decades CFD gained an important position together with experiments in wind tunnels and analytical methods. The main objective of CFD is to simulate dynamic flow fields through the numerical solution of the governing equations, e.g., the Navier-Stokes equations, using high-speed computers. The simulation of 2-D inviscid and viscous flows on vector computers does not represent any difficulties with respect to memory requirements or computation time. In 3-D, however, one has to compute some 20 to 30 variables per mesh point in a 3-D field per time-step or iteration such as the velocity components, density, pressure, enthalpy, temperature, concentrations, dissipative fluxes, local time steps, geometry coefficients, dummy arrays, etc. Computations in the case of 3-D are therefore restricted to fairly coarse meshes as well as to solutions which are often not fully converged solutions. The large amount of CPU time involved and the fact that the data cannot be contained in central memory are the main reasons for the long elapsed times for CFD applications. In these cases, the mapping of the problem onto the architecture of the machine and in particular onto special organizations of the memory must be fully considered to take full advantage of the vector computer.

Author

N89-18610# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel.

VALIDATION OF COMPUTATIONAL FLUID DYNAMICS.

VOLUME 1: SYMPOSIUM PAPERS AND ROUND TABLE DISCUSSION

Dec. 1988. 588 p. *In* ENGLISH and FRENCH Symposium held in Lisbon, Portugal, 2-5 May 1988

(AGARD-CP-437-VOL.1; ISBN-92-835-0489-5;

ISBN-92-835-0491-7) Avail: NTIS HC A25/MF A01

The specific intent of the examining activities, both computational and experimental, was directed toward validating or

34 FLUID MECHANICS AND HEAT TRANSFER

calibrating CFD codes over a broad spectrum of fluid dynamics study areas. The objectives of the Symposium were to identify the level of agreement of numerical solution algorithms and physical models with experimental and/or analytical data, to identify regions of validity for given flow solvers, and to identify flow regions where significant gaps exist and further work is warranted. For individual titles, see N89-18611 through N89-18647.

N89-18611# General Dynamics Corp., Fort Worth, TX.

CFD VALIDATION PHILOSOPHY

RICHARD G. BRADLEY. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 6 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Computational Fluid Dynamics (CFD) is becoming an increasingly powerful tool in design and analysis of fluid dynamic and aerospace systems. Application of CFD to practical design problems requires a high level of confidence, which in turn requires focused experimentation to verify the accuracy of CFD codes. The need for CFD validation is presented from the viewpoint of the user, and a general philosophy for validation of CFD codes is introduced, highlighting the requirements for disciplined experimentation and careful evaluation of the bounds of error in CFD solutions. Author

N89-18612# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

ACCURACY REQUIREMENTS AND BENCHMARK EXPERIMENTS FOR CFD VALIDATION

JOSEPH G. MARVIN. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 15 p (SEE N89-18610 11-34) Dec. 1988 Previously announced as N88-21423 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01 CSCI 20D

The role of experiment in the development of Computational Fluid Dynamics (CFD) for aerodynamic flow prediction is discussed. The CFD verification is a concept that depends on closely coordinated planning between computational and experimental disciplines. Because code applications are becoming more complex and their potential for design more feasible, it no longer suffices to use experimental data from surface or integral measurements alone to provide the required verification. Flow physics and modeling, flow field, and boundary condition measurements are emerging as critical data. Four types of experiments are introduced and examples are given that meet the challenge of validation: flow physics experiments; flow modeling experiments; calibration experiments, and verification experiments. Measurement and accuracy requirements for each of these differ and are discussed. A comprehensive program of validation is described, some examples given, and it is concluded that the future prospects are encouraging. Author

N89-18613# National Aerospace Lab., Amsterdam (Netherlands).

NUMERICAL ACCURACY ASSESSMENT

J. W. BOERSTOEL. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 18 p (SEE N89-18610 11-34) Dec. 1988 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

A framework is provided for numerical accuracy assessment. The purpose of numerical flow simulations is formulated. This formulation concerns the classes of aeronautical configurations (boundaries), the desired flow physics (flow equations and their properties), the classes of flow conditions on flow boundaries (boundary conditions), and the initial flow conditions. Next, accuracy and economical performance requirements are defined; the final numerical flow simulation results of interest should have a guaranteed accuracy, and be produced for an acceptable FLOP-price. Within this context, the validation of numerical processes with respect to the well known topics of consistency, stability, and convergence when the mesh is refined must be done by numerical experimentation because theory gives only partial answers. This requires careful design of test cases for numerical experimentation. Finally, the results of a few recent evaluation exercises of numerical experiments with a large number of codes on a few test cases are summarized. Author

N89-18617# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

COMPARATIVE STUDY OF CALCULATION PROCEDURES FOR VISCOUS FLOWS AROUND AIRFOILS IN THE TRANSONIC REGIME

H. W. STÖCK, W. HAASE, and H. ECHTLE. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 9 p (SEE N89-18610 11-34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Comparative studies for the evaluation of flows around airfoils are presented. This problem is solved in two different ways. Flows are computed by: (1) a finite volume Navier-Stokes method; and (2) an iterative calculation procedure using a finite volume method to solve the full potential equation for the inviscid flow and an inverse integral boundary layer method for the viscous part. Using the Navier-Stokes method, two different algebraic turbulence models are investigated. First, the Baldwin-Lomax model is applied followed by the Cebeci-Smith model, in combination with a recently developed approach to evaluate the turbulent length scales in Navier-Stokes method. Concerning the problem of the computation of shock wave boundary layer interaction zones, a numerical study is performed using the finite volume Navier-Stokes method. The influence of mesh refinement, in the surface normal and tangential direction, with respect to the prediction quality is studied. Two different airfoils, the RAE 2822 and the DoAL3, are investigated and compared to experimental findings. Author

N89-18618# Catania Univ. (Italy). Inst. di Macchine.

NUMERICAL SOLUTION OF COMPRESSIBLE NAVIER-STOKES FLOWS

F. BASSI, F. GRASSO, and M. SAVINI (Consiglio Nazionale delle Ricerche, Peschiera Borromeo, Italy). In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 14 p (SEE N89-18610 11-34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

A mesh embedding technique for increasing the accuracy of Navier-Stokes computations of compressible flows is presented and fully described. The method proposed is quite robust and the results obtained by applying it to transonic airfoil computations are in fairly good agreement with the experiments and with computations made by other authors using much finer meshes. Thus this technique allows the computation of such flows for practical use even on small computers. Author

N89-18619# National Aerospace Lab., Amsterdam (Netherlands).

THE INTERNATIONAL VORTEX FLOW EXPERIMENT

A. ELSENAAR, L. HJELMBERG, K. BUETEFISCH, and W. J. BANNINK (Technische Hogeschool, Delft, Netherlands). In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 20 p (SEE N89-18610 11-34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Experimental results of the International Vortex Flow Experiment are presented. In this joint program, the vortex flow development on a 65 deg delta wing was studied for Mach numbers between 0.4 and 4. The experimental results include pressure and force measurements, surface flow visualizations and flow field surveys. The influence of leading edge shape (sharp or rounded), a decrease in leading edge sweep (to 55 deg), the addition of a canard wing and yaw effects were measured and analyzed in some detail as far as vortex development, shock wave formation and vortex break-down are concerned. Particular attention was given to experimental details that affect the comparison with theory. Some specific test cases for computer code validation are recommended. Author

34 FLUID MECHANICS AND HEAT TRANSFER

N89-18620# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

STATUS OF CFD VALIDATION ON THE VORTEX FLOW EXPERIMENT

B. WAGNER, S. M. HITZEL, M. A. SCHMATZ, W. SCHWARZ, A. HILGENSTOCK, and S. SCHERR (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen, Germany, F.R.) In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 10 p (SEE N89-18610 11-34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

The vortex flow phenomena developing at highly swept wings by leading edge separation are of great interest for fighter and missile aerodynamics. While panel methods are already known for more than a decade to satisfactorily model the roll-up of the corresponding vortex sheets at subsonic speed, Euler methods became available in the early 80's for predicting these effects also in the transonic and supersonic speed ranges. Subsequent trials to validate such transonic vortex flow computations revealed the experimental data basis to be very poor for high speeds and, in consequence, the International Vortex Flow Experiment on Euler Code Validation was set up. More recently, also three dimensional Navier-Stokes codes could be applied in order to clarify the role of viscous effects and to investigate in detail the neglect of those in the Euler solutions. A survey is presented on the Euler code validation based on the Symposium on the IVFE in 1986 and additional insight is given into some related Euler and Navier-Stokes work done in West Germany more recently. Author

N89-18621# Notre Dame Univ., IN. Dept. of Aerospace and Mechanical Engineering.

FLOW FIELD SURVEYS OF LEADING EDGE VORTEX FLOWS

T. T. NG, R. C. NELSON, and F. M. PAYNE (Boeing Commercial Airplane Co., Seattle, WA.) In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 13 p (SEE N89-18610 11-34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

The phenomenon of vortex breakdown over slender delta wings is examined experimentally. Measurements of leading edge vortex structures were obtained using both flow visualization and detailed wake surveys using either a seven hole pressure probe or a laser Doppler anemometer. The structure of the leading edge vortex on a family of delta wings is presented. The delta wing models were sharp-edge flat plates having leading edge sweep angles of 70, 75, 80 and 85 degs. These models were tested at angles of attack of 10, 20, 30 and 40 degs in a Reynolds number range of $8.5 \times 10,000$ to $6.4 \times 10,000$. Data is presented on vortex trajectories, wake surveys, and swirl angles before and after vortex breakdown. In addition, the effect of Reynolds number on the vortex surveys is discussed. The data presented represents a portion of a large experimental data base that should be of value to the development and validation of computational models of leading edge vortices. Author

N89-18624*# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

ACCURATE SOLUTIONS, PARAMETER STUDIES AND COMPARISONS FOR THE EULER AND POTENTIAL FLOW EQUATIONS

W. KYLE ANDERSON and JOHN T. BATINA In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 16 p (SEE N89-18610 11-34) Dec. 1988

Previously announced as N88-28892 (AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01 CSCIL 20D

Parameter studies are conducted using the Euler and potential flow equation models for steady and unsteady flows in both two and three dimensions. The Euler code is an implicit, upwind, finite volume code which uses the Van Leer method of flux vector splitting which has been recently extended for use on dynamic meshes and maintain all the properties of the original splitting. The potential flow code is an implicit, finite difference method for solving the transonic small disturbance equations and incorporates both entropy and vorticity corrections into the solution procedures thereby extending its applicability into regimes where shock strength normally precludes its use. Parameter studies resulting in benchmark type calculations include the effects of spatial and temporal refinement, spatial order of accuracy, far field boundary

conditions for steady flow, frequency of oscillation, and the use of subiterations at each time step to reduce linearization and factorization errors. Comparisons between Euler and potential flow results are made, as well as with experimental data where available. Author

N89-18625# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

VERIFICATION OF AN IMPLICIT RELAXATION METHOD FOR STEADY AND UNSTEADY VISCOUS AND INVISCID FLOW PROBLEMS

M. A. SCHMATZ, A. BRENNEIS, and A. EBERLE In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 33 p (SEE N89-18610 11-34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

A 3-D Navier-Stokes code (NSFLEX) and an unsteady Euler code (INFLEX3) is described. The fundamental feature of both methods is a Godunov type averaging procedure based on an eigenvalue analysis of the inviscid equations for the calculation of the inviscid fluxes. Up to 3rd order accuracy in space is employed for the flux calculation. The unfactored implicit equations are solved in time dependent form by a Newton method. Relaxation is performed with a point Gauss-Seidel technique. Both codes are highly vectorized. Because the codes are finite volume schemes, they are flexible in handling complex geometries. The NSFLEX is applied to steady viscous 2-D airfoil and 3-D delta wing flows at transonic Mach numbers including vortices. The method compares very well with the experiment. The INFLEX method is applied to the unsteady Euler equations in order to predict time accurate, unsteady, subsonic and transonic flows about 3-D configurations oscillating in the flow. Numerical results are given for a rectangular supercritical wing and the so-called LANN-wing. Comparisons show good agreement with experiments for a wide range of Mach numbers. Viscous effects, especially at the rear of the wing, explain some deviations. Author

N89-18626# Avions Marcel Dassault, Saint-Cloud (France). Div. of Etudes Avancees.

RELIABILITY AND VALIDITY OF CFD CODES: FLIGHT AND WIND TUNNEL COMPARISON (FIABILITE ET VALIDITE DES CODES DE C.F.D. COMPARAISON AU VOL ET A LA SOUFFLERIE)

G. HECKMANN In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 11 p (SEE N89-18610 11-34) Dec. 1988 In FRENCH

(AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

Considerations for the evaluation of CFD (computational fluid dynamics) software are discussed with particular emphasis given to the comparison of code predictions with flight and wind tunnel test data. Overall robustness of the computational procedure, code portability, documentation, maintenance, and error detection/correction are discussed along with other factors that effect general reliability and quality. The use of wind-tunnel pressure data, velocity fields and flow visualization results for code validation is addressed along with the use of flight-test local measurements and drag response data. Author

N89-18627# Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

SEPARATION AROUND ELLIPSOID-TYPE OBSTACLES: MODELING AND VALIDATION EXPERIENCES (DECOLLEMENT SUR OBSTACLES DE TYPE ELLIPSOIDE EXPERIENCES DE VALIDATION ET MODELISATION)

D. BARBERIS and B. CHANETZ In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 17 p (SEE N89-18610 11-34) Dec. 1988 In FRENCH; ENGLISH summary

(AGARD-CP-437-VOL-1) Avail: NTIS HC A25/MF A01

In the aim of understanding 3-D separation phenomenon and obtaining detailed experimental data for the development and calibration of numerical models, wall measurements (pressures, surface flow visualizations by viscous coating), flow field measurements with pressure probes and 2 directional laser Doppler velocimeter were carried out on blunt bodies of simple form. Vortex flows and boundary layers near the plane of symmetry were investigated. Experimental data were used for the validation of a

34 FLUID MECHANICS AND HEAT TRANSFER

numerical method for the separation line. Differences observed between theoretical and experimental results on turbulent quantities indicate some insufficiencies of the turbulence model used.

Author

N89-18633# British Aerospace Public Ltd. Co., Bristol (England) Dynamics Div.

DEVELOPMENT AND APPLICATION OF A WEAPONS MULTIBLOCK SUITE

P. A. SHEPHERD and G. R. TOD. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 17 p (SEE N89-18610 11-34) Dec 1988. Sponsored in part by Ministry of Defence, United Kingdom (AGARD-CP-437-VOL-1). Avail: NTIS HC A25/MF A01

A Multiblock Euler capability for use on weapons in the project environment is described, with comparisons between predicted and experimental data being given for a number of weapons related problems. The present Jameson flow code is shown to produce good agreement with experiment in most cases, covering a wide range of Mach number and incidence. The limitations of the code for more general weapon applications, where viscous effects dominate, is also clear. Extensions of the existing flow solver to higher Mach number and the modeling of viscous phenomena, will form the subject of further development.

Author

N89-18634# General Dynamics Corp., San Diego, CA. Convair Div.

ARCJET VALIDATION OF SURFACE CATALYTICITY USING A VISCOUS SHOCK-LAYER APPROACH

ALLEN D. ZWAN, RICHARD S. CROOKS, and WALTER J. WHATLEY. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 13 p (SEE N89-18610 11-34) Dec 1988 (AGARD-CP-437-VOL-1). Avail: NTIS HC A25/MF A01

A 2-D planar, viscous shock layer code was developed to analyze surface catalytic effects on small, leading edge test specimens in an arcjet environment. An arcjet test was performed to generate validation data for the newly developed code. The test program consisted of testing leading edge test specimens with radii of 0.10, 0.25 and 0.35 inches. Test specimens of each radius were coated with silicon carbide, silicon monoxide, or nickel. The code predicted the surface recombination rates for silicon carbide and nickel coatings. These rates agree with other values found in similar literature.

Author

N89-18635*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH

CFD VALIDATION EXPERIMENTS FOR INTERNAL FLOWS

LOUIS A. POVINELLI. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 13 p (SEE N89-18610 11-34) Dec 1988. Previously announced as N88-16679 (AGARD-CP-437-VOL-1). Avail: NTIS HC A25/MF A01 CSCL 20D

Computational Fluid Dynamics (CFD) validation experiments at NASA Lewis are described. The material presented summarizes the research in 3 areas: Inlets, ducts and nozzles, Turbomachinery, and Chemically reacting flows. The specific validation activities are concerned with shock boundary layer interactions, vortex generator effects, large low speed centrifugal compressor measurements, transonic fan shock structure, rotor/stator kinetic energy distributions, stator wake shedding characteristics, boundary layer transition, multiphase flow and reacting shear layers. These experiments are intended to provide CFD validation data for the internal flow fields within aerospace propulsion system components.

Author

N89-18636# Technische Hochschule, Aachen (Germany, F.R.). Inst. for Jet Propulsion and Turbomachinery.

SOLUTION ON UNSTRUCTURED GRIDS FOR THE EULER- AND NAVIER-STOKES-EQUATIONS

W. KOSCHEL, M. LOETZERICH (Dornier-Werke G.m.b.H., Friedrichshafen, Germany, F.R.), and A. VORNBERGER. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 16 p (SEE N89-18610 11-34) Dec 1988. Sponsored in part by Deutsche Forschungsgemeinschaft, Fed. Republic of Germany (AGARD-CP-437-VOL-1). Avail: NTIS HC A25/MF A01

An explicit Finite Element scheme based on a two step Taylor-Galerkin algorithm was developed for solving the Euler and Navier-Stokes equations. The spatial discretization is based on an unstructured Finite Element mesh. The adaptive grid refinement technique which is incorporated in the code, allows a local refinement of the grid by mesh enrichment. For validation, the method is applied to the simulation of the flow around a cylinder and a sphere, a regular shock reflection at a wall, the interaction of an oblique shock wave with a laminar boundary layer and the flow through a scramjet inlet and a turbine cascade. The computed results generally show a satisfying agreement with analytical solutions and experimental data.

Author

N89-18637# Ecole Polytechnique Federale de Lausanne (Switzerland). Hydraulic Mechanics and Fluid Mechanics Inst.

VALIDATION OF AN EULER CODE FOR HYDRAULIC TURBINES

F. THIBAUD, A. DROTZ, and G. SOTTAS. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 14 p (SEE N89-18610 11-34) Dec 1988. Sponsored in part by Commission d'Encouragement des Recherches Scientifiques, Switzerland, Ateliers de Constructions Mecaniques de Vevey S.A., Switzerland and Suizer-Escher-Syss Ltd., Switzerland (AGARD-CP-437-VOL-1). Avail: NTIS HC A25/MF A01

Validation of a 3-D internal incompressible stationary Euler flow solver was performed. A finite volume discretization scheme with an explicit time integration is used. The influence of the numerical scheme parameters on the solution and on the convergence is extensively studied. The geometry on which the numerical and experimental comparisons are presented is the runner of an hydraulic Francis turbine. The difference between calculated and experimental integral values is less than 0.2 percent.

Author

N89-18638# Pennsylvania State Univ., University Park, Aerospace Engineering Dept.

COMPUTATIONAL TECHNIQUES AND VALIDATION OF 3D VISCOUS/TURBULENCE CODES FOR INTERNAL FLOWS

B. LAKSHMINARAYANA, K. R. KIRTLEY, and M. WARFIELD. In AGARD, Validation of Computational Fluid Dynamics. Volume 1: Symposium Papers and Round Table Discussion 17 p (SEE N89-18610 11-34) Dec 1988. Sponsored in part by Naval Ship Research and Development Center, Bethesda, MD (AGARD-CP-437-VOL-1). Avail: NTIS HC A25/MF A01

The computational techniques and codes developed for the prediction of 3-D turbulent flows in internal configurations and rotor passages are described. Detailed calibration and validation of the flow fields in 90 deg curved ducts, cascades, end wall flows and turbomachinery rotors are presented. Interpretation and comments on accuracy, level of agreement with various turbulence models and limitations of the codes are described. The single pass space marching code is found to be efficient for curved duct and 2-D cascade flows. Multipass space marching, time marching and zonal methods are found to be accurate for complex situations. The efficiency and accuracy of a zonal technique, with saving in computational time, is demonstrated.

Author

N89-18639# Institut de Mecanique des Fluides de Marseille (France)

WIND TUNNEL VALIDATION OF AERODYNAMIC FIELD CALCULATION CODES FOR ROTORS AND PROPELLERS IN VARIOUS FLIGHT CONDITIONS / VALIDATION A L'AIDE D'ESSAIS EN SOUFFLERIE DE CODES DE CALCUL DU CHAMP AERODYNAMIQUE DE ROTORS ET D'HELICES DANS DES CONDITIONS DE VOL VARIEES

C. MARESCA, D. FAVIER, M. NSI MBA, and C. BARBI. In AGARD, Validation of Computational Fluid Dynamics, Volume 1: Symposium Papers and Round Table Discussion, 16 p (SEE N89-18610 11:34) Dec. 1988. In FRENCH

(AGARD-CP-437-VOL-1) Avail. NTIS HC A25/MF A01

The aerodynamic characteristics of helicopter rotors and propellers operating in various flight modes were studied using both numerical codes and wind tunnel tests. The use of the wind tunnel results to validate and improve three computational codes is discussed. The codes specifically cover helicopter rotors in stationary (hovering) flight, propellers in translational flight, and helicopter rotors in forward flight. Author

N89-18640# Norges Tekniske Høegskole, Trondheim, Div. of Hydro- and Gas Dynamics

VALIDATION OF A 3D EULER/NAVIER-STOKES FINITE VOLUME SOLVER FOR A RADIAL COMPRESSOR

LARS-ERIK ERIKSSON and JAN TORE BILLDAL. In AGARD, Validation of Computational Fluid Dynamics, Volume 1: Symposium Papers and Round Table Discussion, 9 p (SEE N89-18610 11:34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail. NTIS HC A25/MF A01

The application of a time marching Euler-Navier-Stokes solution procedure to 3-D compressible turbomachinery flow is described. The method is based on the cell-centered finite volume technique and explicit Runge-Kutta time stepping. A centered and compact difference scheme is used to obtain the velocity and temperature gradients needed in the viscous flux terms and a standard algebraic turbulence model is included in the method. Computational results for the well known Eckardt impeller show that the viscous model comes significantly closer to the experimental data than the Euler model. The results of a thin layer version of the viscous solver are in very close agreement with those of the full Navier-Stokes solver. Author

N89-18643# Air Force Systems Command, Wright-Patterson AFB, OH. Aeronautical Systems Div.

EFFORTS TOWARD THE VALIDATION OF A COMPUTATIONAL FLUID DYNAMICS CODE FOR ANALYSIS OF INTERNAL AERODYNAMICS

R. G. SCHMIES, D. G. ARBITER, and R. D. DYER. In AGARD, Validation of Computational Fluid Dynamics, Volume 1: Symposium Papers and Round Table Discussion, 13 p (SEE N89-18610 11:34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail. NTIS HC A25/MF A01

A two-dimensional axisymmetric, Reynolds-averaged Navier-Stokes code (PARC2D) was selected to aid in the analysis of internal aerodynamics problems. Before implementing the code in actual systems applications, the code's results were compared with experimental data to determine the extent of its usefulness. The configurations chosen for code validation were (1) a two-dimensional hypersonic inlet, (2) an axisymmetric convergent-divergent nozzle, and (3) an axisymmetric subsonic diffuser. The ability of the method to readily perform engineering predictions on internal aerodynamics problems is discussed. Sample grids for each configuration as well as comparisons of computational and experimental results are presented. The PARC2D code was able to predict the hypersonic inlet flow field trends and shock structure, but had difficulty in predicting forebody losses. PARC2D provided good agreement with experimental data for both the nozzle as well as the subsonic diffuser. Author

N89-18646# Palermo Univ. (Italy). Dpt. di Ingegneria Nucleare. **TIME-DEPENDENT NUMERICAL SIMULATION OF THE STARTING FLOW OF AN INCOMPRESSIBLE FLUID PAST A DOWNSTREAM-FACING STEP**

M. CIOFALO and M. W. COLLINS (City Univ., London, England). In AGARD, Validation of Computational Fluid Dynamics, Volume 1: Symposium Papers and Round Table Discussion, 16 p (SEE N89-18610 11:34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail. NTIS HC A25/MF A01

An impulsively generated transient flow of an incompressible fluid past a complex shaped body is investigated numerically using the 2-D Navier-Stokes equations. The geometry is a flat plate with a backward facing step and a blunt trailing edge. Reynolds numbers, based on a free stream velocity and step height, range from 50 to 500. Results are compared with flow visualization data in water. The influence of boundary and initial conditions, differencing scheme, time stepping, pressure-velocity coupling algorithms and other computational parameters is discussed. A literature review is included of experimental and predictive studies on laminar and transitional flow past backstep. Author

N89-18647# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

A COMPARATIVE STUDY AND VALIDATION OF UPWIND AND CENTRAL-DIFFERENCE NAVIER-STOKES CODES FOR HIGH-SPEED FLOWS

DAVID H. RUDY, AJAY KUMAR, JAMES L. THOMAS, PETER A. GNOFFO, and SUKUMAR R. CHAKRAVARTHY (Rockwell International Science Center, Thousand Oaks, CA). In AGARD, Validation of Computational Fluid Dynamics, Volume 1: Symposium Papers and Round Table Discussion, 15 p (SEE N89-18610 11:34) Dec. 1988

(AGARD-CP-437-VOL-1) Avail. NTIS HC A25/MF A01 CSCL 20D

A comparative study was made using 4 different computer codes for solving the compressible Navier-Stokes equations. Three different test problems were used, each of which has features typical of high speed internal flow problems of practical importance in the design and analysis of propulsion systems for advanced hypersonic vehicles. These problems are the supersonic flow between two walls, one of which contains a 10 deg compression ramp, the flow through a hypersonic inlet, and the flow in a 3-D corner formed by the intersection of two symmetric wedges. Three of the computer codes use similar recently developed implicit upwind differencing technology, while the fourth uses a well established explicit method. The computed results were compared with experimental data where available. Author

N89-18648# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. **VALIDATION OF COMPUTATIONAL FLUID DYNAMICS, VOLUME 2: POSTER PAPERS**

Dec. 1988. 239 p. Symposium held in Lisbon, Portugal, 2-6 May 1988

(AGARD-CP-437-VOL-2) ISBN-92-835-0490-9

(ISBN-92-835-0491-7) Avail. NTIS HC A11/MF A01

AGARD's Fluid Dynamics Panel has sponsored a Symposium with the specific intent of examining activities, both computational and experimental, directed toward validating or calibrating computational fluid dynamics (CFD) codes over a broad spectrum of fluid-dynamics study areas. The objectives of the Symposium were to identify the level of agreement of numerical solution algorithms and physical models with experimental and/or analytical data, to identify regions of validity for given flow solvers, and to identify flow regions where significant gaps exist and further work is warranted. For individual titles see N89-18649 through N89-18663.

N89-18651# Instituto Superior Tecnico, Lisboa (Portugal). Dept. of Mechanical Engineering

FINITE DIFFERENCE METHODS IN RECIRCULATING FLOWS

J. C. F. PEREIRA and F. DURST (Erlangen-Nuremberg Univ., Germany, F.R.G.). In AGARD, Validation of Computational Fluid Dynamics, Volume 2: Poster Papers, 12 p (SEE N89-18649 11:34) Dec. 1988

(AGARD-CP-437-VOL-2) Avail. NTIS HC A11/MF A01

Numerical solutions of the two-dimensional Navier-Stokes equations using finite difference approaches in which different

34 FLUID MECHANICS AND HEAT TRANSFER

numerical schemes for the discretization of the convective terms are used are discussed. The errors arising in the solution of the recirculating flows are mainly attributed to the convective discretization schemes and, hence knowledge of different numerical schemes is essential to accurately predict complex recirculating flows. To assess the performance of prediction schemes, it is necessary to carry out predictions in carefully selected laminar flows. For this reason the flows examined are all in the laminar regime and emphasis is given to numerical solutions with laser-Doppler measurements. Author

N89-18656# Erlangen-Nuremberg Univ. (Germany, F.R.).
SOLUTION ERROR ESTIMATION IN THE NUMERICAL PREDICTIONS OF TURBULENT RECIRCULATING FLOWS
R. KESSLER, M. PERIC, and G. SCHUEERER. In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 12 p (SEE N89-18648 11-34) Dec. 1988 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

An efficient method for numerical solution error estimation and its application to numerical predictions of turbulent recirculating flows are presented. A finite volume method with colocated variable arrangement is employed to solve the flow and k-epsilon turbulence model equations. The two-dimensional, turbulent flow over an obstacle in a plane channel is selected to demonstrate the necessity of the error estimation. Recent laser Doppler measurements are available for this geometry. The error estimation method, which is applied to each solution variable, serves two purposes. Firstly, it aids in the construction of an optimum numerical grid. Secondly, the information of the location and magnitude of the numerical errors is essential to draw reliable conclusions from comparisons of numerical results and experimental data. The procedure outlined here is based on Richardson extrapolation and enables an accurate assessment of the performance of the employed turbulence model and, hence, of the complete numerical solution method. Author

N89-18659# Florence Univ. (Italy). Dpt. di Energetica.
ACCURACY AND EFFICIENCY OF A TIME MARCHING APPROACH FOR COMBUSTOR MODELING
A. A. BORETTI and F. G. MARTELLI. In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 17 p (SEE N89-18648 11-34) Dec. 1988 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

Research on numerical modeling of turbulent reactive gas flows is being conducted at the University of Florence Department of Energy Engineering (DEF) to provide improved analytical models of combustion devices. The objective is to develop adequate mathematical models of physical processes and a solution algorithm with suitable numerical properties. Both the flow model and the numerical method adopted are described in detail. Author

N89-18661# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.).
INVESTIGATION OF THE ACCURACY OF FINITE VOLUME METHODS FOR 2- AND 3-DIMENSIONAL FLOWS
C. ROSSOW, N. KROLL, R. RADESPIEL, and S. SCHERR. In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 11 p (SEE N89-18648 11-34) Dec. 1988 (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

The accuracy of finite volume methods for the discretization of the unsteady Euler equations in the cartesian coordinate frame is investigated. For finite volume methods, general requirements are derived for a spatial discretization which yields first order accuracy on arbitrary meshes. An error analysis shows that in two dimensions methods based on a cell vertex scheme meet these requirements whereas methods based on a cell centered scheme do not. Numerical results on different two-dimensional meshes confirm the theoretical statement that only cell vertex schemes perform accurately on grids with slope discontinuities. Using structured coordinate grids for complex three-dimensional flow problems, even cell vertex schemes require additional effort to ensure first order accuracy on arbitrary meshes. The applicability of the cell vertex scheme is demonstrated by the calculation of the flow field in a nozzle and the flow around a powered nacelle. Author

N89-18662# Technische Univ., Brunswick (Germany, F.R.). Inst. fuer Stromungsmechanik.

DOCUMENTATION OF SEPARATED FLOWS FOR COMPUTATIONAL FLUID DYNAMICS VALIDATION

DIETRICH HUMMEL. In AGARD, Validation of Computational Fluid Dynamics. Volume 2: Poster Papers 24 p (SEE N89-18648 11-34) Dec. 1988

(Contract DFG-SCHL 5/82; HU254/2; HU254/8; BMVU-1/HF41/90010/31454, BMVG-T/RF41/D0011/31411) (AGARD-CP-437-VOL-2) Avail: NTIS HC A11/MF A01

In recent years a large number of separated flows have been studied at Institute fur Stromungsmechanik of TU Braunschweig and a lot of experimental data are available. Some flows are well understood in many details and properly documented, so that they can be used as test cases for computational fluid dynamics validation. The topics of separated flows to be treated here are low speed flows around delta wings, double-delta wings and canard configurations as well as hypersonic flows in axial corners of intersecting wedges. The experimental results are summarized. The main results are presented and a detailed documentation is provided on where and in which form these results are available. Author

35

INSTRUMENTATION AND PHOTOGRAPHY

Includes remote sensors; measuring instruments and gages; detectors; cameras and photographic supplies; and holography.

N87-20180# Norges Tekniske Hoeskole, Trondheim. Dept. of Physics.

TV-HOLOGRAPHY: A PROMISING INSPECTION TOOL FOR ANALYSIS OF COMPOSITE MATERIALS

OLE J. LOKBERG, JAN T. MALMO, and ARVID STRAND (Conspectum A/S, Trondheim, Norway). In AGARD The Repair of Aircraft Structures Involving Composite Materials. 7 p (SEE N87-20174 13-01) Oct. 1986 (AGARD-CP-402) Avail: NTIS HC A11/MF A01

Holographic measuring techniques combined with the speed and convenience of video recording and display, provide a real-time system which can be used to reveal extremely small movements. By various excitation-like heating, pressure and vibrations, we detect object defects and structural weaknesses. The system's construction and its modes of operation are discussed. Finally some examples are given of the applications of the system. Author

N87-20359# MATRA Espace, Toulouse (France). Dept. of Satellite Engineering.

QUALIFICATION OF THE FAINT OBJECT CAMERA

PATRICE AMADIEU. In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures. 13 p (SEE N87-20355 13-18) Jul. 1986 (AGARD-CP-397) Avail: NTIS HC A12/MF A01

The Faint Object Camera (FOC) is presently integrated as one of the five Scientific Instruments in the NASA Space Telescope (ST) which after an extensive integration and tests campaign should be launched in 1986. The Space Telescope is an observatory of 13 metres long, 4.3 metres diameter and 11,000 kilogrammes which will be placed by the Space Shuttle in a 500 kms circular orbit. The Faint Object Camera installed at the ST focal plane is a complex instrument with a total weight of 320 kgs and overall dimensions 1 x 1 x 2.2 metres. A Structural/Thermal Model (STM) and flight model of the FOC have been built. The FOC/STM was subjected to an extensive test program with for the mechanical part, sine and random vibrations, acoustic noise and modal test. On the FOC/PTM, acoustic noise only was applied for workmanship verification. With the FOC integrated now in the Space Telescope and considering the specimen overall dimensions, limited mechanical testing will be applied at ST level which will consist of modal survey and acoustic noise. Then at the end of the test program, the overall assembly will be shipped to Kennedy Space Center and launched. Author

35 INSTRUMENTATION AND PHOTOGRAPHY

N87-21187# Land Turbine Sensors, Inc., Tullytown, PA.
SOME CONSIDERATIONS RELATING TO AERO ENGINE PYROMETRY

P. J. KIRBY *In* AGARD Advanced Instrumentation for Aero Engine Components 14 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

With turbine blade optical pyrometry rapidly becoming accepted by the aerospace community as a viable flight control technique, some of the traditional and emerging demands are described, with examples of how they are being addressed. Many of these demands are now being met by skillful application of materials technology, electronic engineering, signal processing and fluid flow techniques, but it is probable that flight conditions will impose a more pragmatic approach than customarily adopted towards test bed installations. Author

N87-21188# Technische Hochschule, Aachen (Germany, F.R.).
TURBINE ROTOR BLADE MEASUREMENTS USING INFRARED PYROMETRY

W. KOSCHEL, D. SALDEN, and T. HOCH *In* AGARD Advanced Instrumentation for Aero Engine Components 16 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

An infrared pyrometer system was developed for the noncontacting measurement of metal temperatures on turbine rotor blades. The system with a high bandwidth ratio, a small target size and a high signal-to-noise ratio meets the requirements for the accuracy of temperature measurements to be performed on small gas turbines running at high speeds. The system set-up is described and special features of the probe head design, the lay-out of the detector/amplifier unit and the signal processing are discussed in detail. Results of the automated calibration of an infrared pyrometer system concerning the influence of variations in the target-to-lens distance, in the lens stop diameter and in the observation angle on the detector signal output are reported. Finally some results of temperature measurements obtained for the cooled rotor blades of a small research turbine are presented. Author

N87-21194# Instituto Superior Tecnico, Lisbon (Portugal). Dept. of Mechanical Engineering.
PROCESSING TECHNIQUES FOR CORRELATION OF LDA AND THERMOCOUPLE SIGNALS

M. N. R. NINA and G. P. A. PITA *In* AGARD Advanced Instrumentation for Aero Engine Components 8 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

A technique was developed to enable the evaluation of the correlation between velocity and temperature, with laser Doppler anemometer (LDA) as the source of velocity signals and fine wire thermocouple as that of flow temperature. The discontinuous nature of LDA signals requires a special technique for correlation, in particular when few seeding particles are present in the flow. The thermocouple signal was analog compensated in frequency and the effect of the value of time constant on the velocity temperature correlation was studied. Author

N87-21202# Warwick Univ. Coventry (England). Dept. of Engineering.
THE APPLICATION OF HOLOGRAPHY AS A TRANSONIC FLOW DIAGNOSTIC TO ROTATING COMPONENTS IN TURBOMACHINERY

P. J. BRYANSTON-CROSS *In* AGARD Advanced Instrumentation for Aero Engine Components 22 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

A review is presented of the application of holography as a whole field flow visualization diagnostic in turbomachinery. Starting with two dimensional cascade testing, which required wavelength tolerated optical tables, it has now been found possible to obtain results with bolt-on optical components. In order to achieve this, compromises have been made in optical quality and attention has been given to the nature of the data required. Holographic systems are shown which have been applied to visualize the flow in a linear cascade, an annular cascade, a three dimensional compressor shock in a rotating flow and a diffuser blockage observed in a rotating turbocharger. Author

N87-29478# Marconi Avionics Ltd., Rochester (England). Guidance Systems Div.

A LOW COST GYROSCOPE FOR GUIDANCE AND STABILISATION UNITS

D. G. HARRIS *In* AGARD, Advances in Guidance and Control Systems and Technology 9 p (SEE N87-29474 24-04) Jul. 1987 (AGARD-CP-411) Avail: NTIS HC A07/MF A01

The potential requirements for a rugged moderate accuracy low cost gyro are very large, especially in smartening simple weapons. Suitable candidate weapons are identified and a composite specification derived for gyroscopes that would satisfy the guidance and stabilization requirements. A development program is then described which is aimed at producing a suitable gyro by the combination of a well established principle for angular rate measurement and the latest materials and electronic techniques. A considerable effort was expended on basic experimental work before prototype batches of gyros were made. Results from the test of the later can survive cannon firing without performance degradation. This was demonstrated by informal tests with potential customers. The discipline of regular estimates of unit production cost was firmly maintained to avoid a major pitfall of sub-inertial quality gyro design. However, there are many past projects which bear witness to the fact that this is an unforgiving art and the necessity for continuous attention to detail must be maintained if the START design is to be successfully taken through to mass production. Author

N87-29479# Naval Air Development Center, Warminster, PA.
JOINT DEVELOPMENT OF THE MULTI-FUNCTION INTEGRATED INERTIAL SENSOR ASSEMBLY (MIISA)

JACK JANKOVITZ, DAVID KRASNJANSKI, and ANDREW S. GLISTA, JR. (Naval Air Systems Command, Washington, D. C.) *In* AGARD, Advances in Guidance and Control Systems and Technology 9 p (SEE N87-29474 24-04) Jul. 1987 (AGARD-CP-411) Avail: NTIS HC A07/MF A01

The U.S. Navy, Air Force, and Army are in the process of formalizing the joint service development and flight evaluation of the Multi-Function Integrated Inertial Sensor Assembly (MIISA). The MIISA concept will provide a reliable, standardized, fault-tolerant, system which will serve as a common source of inertial data. MIISA will provide data for flight control, navigation, weapon delivery, automatic terrain following terrain avoidance, sensor/tracker stabilization, flight instruments, and displays. A primary goal of this joint service activity is to resolve all technical issues and make this capability available for the next generation fighter and attack aircraft and for advanced helicopters. The Navy program to design, build, and evaluate an IISA Advanced Development Model was begun. To insure that the IISA is suitable for installation and flight test in an Air Force F-15, extensive laboratory testing will be undertaken at the NAVAIRDEVCON Strapdown Navigation Laboratory. These tests involve the examination of IISA system performance for navigation and flight control. These tests are discussed. Author

N88-23145# Case Western Reserve Univ. Cleveland, OH. Dept. of Mechanical and Aerospace Engineering and Chemical Engineering.

MATCHED INDEX LASER ANEMOMETRY SYSTEMS FOR FLOW STUDIES IN COMPLEX GEOMETRIES

A. DYBBS, R. V. EDWARDS, and E. RESHOTKO *In* AGARD, Aerodynamic and Related Hydrodynamic Studies Using Water Facilities 18 p (SEE N88-23125 16-34) Jun. 1987 Sponsored in part by Case Center for Complex Flow Measurements, C3FM (Contract N00014-84-K-0294; NSF CME-79-13389) (AGARD-CP-413) Avail: NTIS HC A20/MF A01

Optical access to the flow is necessary if laser anemometry is to be used to map a given flow field. Often this access is difficult or impossible to obtain because of the shape of the object about which (or within which) the flow exists. Examples are flows in porous media, fluidized beds, heat exchangers, or near sinusoidal surfaces. Making the object of transparent material such as of glass or plexiglas is not sufficient to provide a reliable, useable optical environment for laser measurements. It is often necessary to use a fluid whose index of refraction matches that of the object. Author

35 INSTRUMENTATION AND PHOTOGRAPHY

N88-27525# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).
FLIGHT TESTING UNDER EXTREME ENVIRONMENTAL CONDITIONS

CLENDON L. HENDRICKSON (Air Force Flight Test Center, Edwards AFB, Calif.) Jun 1988 73 p
(AGARD-AG-300-VOL-8; ISBN-92-835-0459-3; AD-A197579)
Avail: NTIS HC A04/MF A01

The major objective of Flight Testing under extreme environmental conditions is to determine to what extent a weapon system, including its essential support equipment and attendant crews can accomplish the design mission in the required climatic extremes, using Technical Order procedures. Such testing has historically often revealed design deficiencies that impact the operational capabilities of the air vehicle involved. This volume in the AGARD Flight Test Techniques Series discusses the philosophy, purpose and methods for conducting ground and flight tests of weapon systems in extreme environment conditions. The areas considered include testing in a controlled artificial environment, as well as cold arctic, hot desert, tropic, and adverse-weather conditions. Also included are the technical and safety aspects of planning, instrumentation, and data acquisition requirements, types of tests conducted and reporting requirements. Author

N88-28287# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

THE ANATOMY OF THE GYROSCOPE

FRANK W. COUSINS and JOHN L. HOLLINGTON, ed. (Smiths Industries Aerospace and Defence Systems Ltd., Cheltenham, England) Feb. 1988 200 p
(AGARD-AG-313; ISBN-92-835-0441-0; AD-A197162) Avail: NTIS HC A09/MF A01

This report on the gyroscope and its applications collates the technical information to be found in the patent literature, augmented by that in text books and technical journals. The report is in three parts. Part 1 is a patent survey arranged in a detailed classification. Part 2 comprises a bibliography of the references in Part 1, and Part 3, published as a separate volume, gives historical notes and comments on the material of Parts 1 and 2. Author

N89-17608# Liton Technische Werke, Freiburg (Germany, F.R.).

PACKAGED FIBER OPTIC GYROSCOPE

H.-J. BUESCHELBERGER and W. SCHROEDER. In AGARD, Guidance and Control of Precision Guided Weapons 7 p (SEE N89-17605 10-15) Nov 1988
(AGARD-CP-435) Avail: NTIS HC A05/MF A01

An overview of the Fiber Optic Gyroscope (FOG) - Attitude and Heading Reference Systems (AHRS) program and the outlook for the application of FOG for smart munitions are given. The main program is for the development of a FOG with a drift stability of 0.1 °/h, which is the class for strapdown AHRS. Flight tests with the LTR-81, Liton Technische Werke's standard AHRS, are scheduled for the end of 1988. Author

36

LASERS AND MASERS

Includes parametric amplifiers

N87-13286# Plessey Co. Ltd., Romsey (England).
A STUDY OF METHODS OF PHASE NOISE REDUCTION OF SEMICONDUCTOR LASERS FOR SENSOR APPLICATIONS

J. P. DAKIN and P. B. WITHERS. In AGARD Guided Optical Structures in the Military Environment 7 p (SEE N87-13273 04-74) May 1986
(AGARD-CP-383) Avail: NTIS HC A14/MF A01

Many optical sensors based on fiber interferometry have been proposed. The majority of these use interferometers of the Mach-Zehnder or Michelson type, in which the optical path lengths of the two arms are often unequal. Under these conditions, a highly coherent light source is necessary to avoid signal/noise degradation due to fluctuations in the phase or frequency of the

source. Single mode gas lasers are sufficiently coherent, but their large size, critical alignment requirements, and cost, limit their appeal as light sources for optical sensors. Semiconductor lasers, however, are compact, rugged and potentially low-priced devices, but the magnitude of the phase noise is such that, to obtain microradian sensitivity in interferometric sensors, only path differences less than one millimetre between the signal and reference arms can be tolerated. This imbalance may be increased if the magnitude of the laser phase noise can be reduced using either passive optical feedback or active control of the laser drive current. Both approaches are described. Described first are proposed experiments to examine the feasibility of using an array of suitably spaced mirrors to provide passive optical feedback. Secondly, experiments to measure phase noise reduction produced by active control of the laser drive current are reported together with their results. Author

N87-21177# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.). Inst. fuer Antriebstechnik.

LASER-2 FOCUS VELOCIMETRY

R. SCHODL. In AGARD Advanced Instrumentation for Aero Engine Components 31 p (SEE N87-21170 14-31) Nov 1986
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

A review is given of various publications about L2F-velocimetry. Main emphasis is placed upon the important new advances of this technique. The manner of statistical data analysis of turbulent flows including the simplified version which enables a time-saving measuring procedure is described in some detail. The influence of beam diameter - beam separation ratio on the measuring accuracy and on the measuring time is treated. The capability of the L2F-system at close-to-wall measurements could be further improved. Results of measurements in a very small flow channel and in a small turbocharger compressor rotor are presented. The 3-D version of the L2F-system was successfully operated recently. The principle, the optical set-up and the signal processing are described and some first results are presented. A comparison between Laser Doppler (LD) - and Laser 2 Focus (L2F) velocimeters gives answers about such signal properties as amplitude and rate the smallest detectable particles and about the measuring time needed, based on the probe volume dimensions. Author

N87-21178# Cranfield Inst. of Tech., Bedford (England) School of Mechanical Engineering.

SEEDING GAS FLOWS FOR LASER ANEMOMETRY

A. MELLING. In AGARD Advanced Instrumentation for Aero Engine Components 11 p (SEE N87-21170 14-31) Nov 1986
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

The seeding of gas flows for laser anemometry is reviewed. The specification and determination of the size of seeding particles to ensure both an adequate response to velocity changes of the flowing medium and a sufficient light scattering capability are examined critically. A compromise between these conflicting criteria is generally given as an upper limit on acceptable particle size, expressed as the diameter of an equivalent spherical particle. Problems arise in defining and quantifying this equivalent diameter, generating particles of suitable size from a given material, measuring the particle size distribution at the generator exit, and determining the size distribution actually seen by the laser anemometer. Recommendations are made for particle generators, sizing methods, and interpreting the significance of quoted particle distributions for laser anemometry purposes. Author

N87-21180# Cranfield Inst. of Tech., Bedford (England) School of Mechanical Engineering.

APPLICATION OF DOPPLER AND TRANSIT LASER ANEMOMETRY IN SMALL TURBOMACHINES

R. L. ELDER, C. P. FOHSTER, and M. E. C. In AGARD Advanced Instrumentation for Aero Engine Components 15 p (SEE N87-21170 14-31) Nov 1986
(AGARD-CP-399) Avail: NTIS HC A24/MF A01

The selection laser anemometry systems and their application to the particularly hostile environment found in small high speed rotating turbomachines are discussed. There are several different laser anemometry systems which are used in turbomachinery studies and when selecting a system to carry out specific duties it is necessary to have some prior knowledge of the flows to be measured, the spatial resolution required and any limitations on

optical access. The optical access will often determine the spatial resolution possible and the quality of the scattered signal will generally determine the type of signal processor which can be used. The criteria used for the selection of systems at Cranfield are discussed. The arrangements in use include both the Doppler and transit systems each of which are found to have unique and very distinct advantages. Author

N87-21181# Pratt and Whitney Aircraft, East Hartford, CT.
LASER VELOCIMETRY STUDY OF STATOR/ROTOR INTERACTIONS IN A MULTI-STAGE GAS TURBINE COMPRESSOR

M. CARLSON WILLIAMS /in AGARD Advanced Instrumentation for Aero Engine Components 10 p (SEE N87-21170 14-31) Nov. 1986
 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

The measurement of airflow through multi-stage compressor rigs has generally been limited to the use of flow perturbing pressure and temperature probes. Although limited studies of the dynamics of these flows have been obtained with hot wire and hot film probes, the advent of the laser Doppler velocimeter (LDV) with its non-perturbing nature is expected to develop into the preferred instrumental method. To assess the feasibility of utilizing an LDV in these flows an exploratory program was recently undertaken at Pratt and Whitney. A multi-stage compressor rig, the Energy Efficient Engine high pressure compressor consisting of 6th through 15th compressor stages, was outfitted with windows between the 6th stator-7th rotor, 9th stator-10th rotor, and 13th stator-14th rotor. The windows, extending circumferentially one stator gap wide, permitted the hub to tip traversing midway between the stator trailing edge and the rotor leading edge both in and out of the stator wakes. A confocal two color, two component back scatter LDV system developed for use in gas turbine environs was employed to obtain detailed mappings to velocity magnitude and air angle as a function of rotor position at several spanwise and gapwise positions downstream of the 6th and 9th compressor stators. Although a complete mapping was not obtained, sufficient data was acquired behind the 13th stator to identify the flow's character there as well. The equipment employed in this study and the difficulties encountered are described. Author

N87-21201# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).
THE STUDY OF COMBUSTION BY MEANS OF DIODE LASER SPECTROSCOPY

B. ROSIER, P. GICQUEL, and D. HENRY /in AGARD Advanced Instrumentation for Aero Engine Components 11 p (SEE N87-21170 14-31) Nov. 1986 Original language document was announced as A86-46182
 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

The experimental apparatus and results with a diode laser spectrometer used to obtain absorption signatures of premixed methane-air burning in a furnace are reported. A tunable laser was used to scan the reaction zone with an acuity of 1900 lines/cm. Absorption data collected from the furnace were compared with reference spectra of known gases. Pulse frequencies of 50 Hz to 1 kHz were explored. The data obtained were useful for characterizing the temperatures and composition of the burning gases, identifying the presence of cold layers, and quantifying the mass concentrations of various gases along the flame front. Author

N87-29475# Eltro G.m.b.H., Heidelberg (Germany, F.R.).
EYE SAFE RAMAN LASER RANGE FINDER FOR GROUND AND AIRBORNE APPLICATION

J. RUGER /in AGARD, Advances in Guidance and Control Systems and Technology 9 p (SEE N87-29474 24-04) Jul. 1987
 (AGARD-CP-411) Avail: NTIS HC A07/MF A01

The need for an eye safe laser for military fire control systems, especially in the function as a range finder is described. The performance achieved with a Raman shifted Neodymium-YAG laser with a resulting wavelength of 1.54 microns is given in detail and compared to that of a 1.064 and 10.6 micron laser range finder under various atmospheric conditions. The use of the Raman range finder in prototype equipment contracted by the German MOD is described showing the advantages of eye safety and superior ranging performance as compared to the Neodymium-YAG laser range finder. Author

N88-13228# Institut Franco-Allemand de Recherches, Saint-Louis (France) Dept. d'Aerodynamique.

AN ULTRA-HIGH-SPEED CINEMATOGRAPHIC METHOD FOR THE STUDY OF WAKES IN HYPERSONIC BALLISTIC RANGES [UNE METHODE CINEMATOGRAPHIQUE ULTRA-RAPIDE POUR L'ETUDE DES SILLAGES EN TUNNEL DE TIR HYPERSONIQUE]

AXEL KOENEKE, BERNARD CHARLES JAEGGY, and GERMAIN KOERRER /in AGARD, Aerodynamics of Hypersonic Lifting Vehicles 13 p (SEE N88-13219 05-02) Nov. 1987
 In FRENCH

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

Optical methods are among the only possibilities to study hypersonic wakes in ballistic ranges. Because of the flow velocities involved the methods employed must permit exposure time well below one microsecond. The ISL has used ultrahigh speed visualization techniques for the study of the transition of hypersonic wakes for quite some time, but the means available up to now did not permit investigation of the time-history of the instabilities in the wake. The use of a laser equipped with an acousto-optical modulator is proposed as a source of ultrashort, highly energetic pulses with high repetition rate to be used to record a certain number of images of the same experiment in order to study the time history of these instabilities. Advantages of the laser as a light source are not only the high energies available together with pulse duration down to 20 nanoseconds, but mostly the free choice of repetition rate independently of exposure time, and the possibility to synchronize the pulses with external events. The laser is a point source and as such can be used in a variety of different optical setups. The coherent nature of the laser light even permits holographic techniques. The reception system capable of recording the images at a sufficient rate is the basic problem in the development and use of the proposed setup. Author

N89-12849# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

LASER APPLICATIONS IN FLOW DIAGNOSTICS

J. D. TROLINGER and J. J. GINOUX, ed. (Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese, Belgium) Oct. 1988 189 p
 (AGARD-AG-296; ISBN-92-835-0480-1, AD-A203450) Avail: NTIS HC A09/MF A01

This is an explanation and update of AGARDograph No. 186, Laser Instrumentation for Flow Field Diagnostics, which was published in 1974. A brief introduction to coherent optics and lasers is given to provide a review and common language to the reader. The material is presented at a level to be understood by engineers who are working in the aerospace field and who are interested in the experimental application of lasers in research and development. An emphasis is placed on applications in aerodynamics, and examples were selected from a number of laboratories in the NATO countries visited while the material was being prepared. The applications include holography, laser velocimetry, spectroscopy, and the use of lasers simply as efficient light sources in conventional measurement methods. Author

N89-17606# Raytheon Co., Sudbury, MA. Equipment Div.
CO2 LASER RADAR SYSTEMS FOR TARGET ACQUISITION AND GUIDANCE

A. V. JELALIAN, G. R. OSCHKE, D. R. BATES, and A. J. LEGERE /in AGARD, Guidance and Control of Precision Guided Weapons 14 p (SEE N89-17605 10-15) Nov. 1988
 (AGARD-CP-435) Avail: NTIS HC A05/MF A01

Laser radar systems combine the narrow beam width associated with optical systems with target measurement capabilities of microwave radar systems. The combined attributes of these distinctly different technologies lead to a single sensor capable of measuring range, velocity, acceleration and angular location while still providing imaging capability. The best optical source for systems having this capability is the CO2 laser operating in the infrared band at 10.6 microns. Atmospheric propagation, coherent and incoherent detection receivers, and field test data collected over the past two decades are assessed. Author

36 LASERS AND MASERS

N89-17714# Royal Signals and Radar Establishment, Malvern (England).

COHERENT SCATTERING FROM RANDOM MEDIA

C. J. OLIVER *In* AGARD, Scattering and Propagation in Random Media 12 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The representation and simulation of clutter textures in coherent scattering is discussed in terms of a correlated noise model. Initially, expressions for the detected intensity when coherent radiation is scattered from a surface with fluctuating cross-section are derived demonstrating how the effects of surface statistics and correlation properties interact with the imaging function. Secondly, a model for the cross-section fluctuations based on negative-binomial or gamma-distributed statistics is proposed. When coherent radiation is scattered by a surface with these properties the resulting intensity distribution can be shown to be K distributed. Having derived theoretical predictions for the correlated noise model with a variety of spectral forms a texture simulation technique is proposed based on linear filtering which duplicates the two-point correlation properties of the observed intensity. Finally, a comparison of original image data, simulated textures, and the theoretical model is made for a number of examples of differing textures of both natural and manmade clutter. Author

37

MECHANICAL ENGINEERING

Includes auxiliary systems (nonpower); machine elements and processes; and mechanical equipment.

N86-29236# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

AIRCRAFT AND BEARING TRIBOLOGICAL SYSTEMS

Feb. 1986 232 p Meeting held in San Antonio, Tex., 22-26 Apr. 1985.

(AGARD-CP-394, ISBN-92-835-1509-9; AD-A168241) Avail: NTIS HC A11/MF A01

Advances in aircraft gear and bearing tribology are discussed. Future trends and problems, gear and bearing materials, and lubricants are discussed. For individual titles see N86-29237 through N86-29254.

N86-29237# Westland Helicopters Ltd., Yeovil (England).

THE VALUE OF LABORATORY SIMULATION TESTING FOR PREDICTING GEARBOX PERFORMANCE

P. B. MACPHERSON *In* AGARD Aircraft and Bearing Tribological Systems 11 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

The evolution of a successful gearbox design involves much development testing which is both time consuming and expensive. For this reason full advantage should be taken of laboratory simulation tests for which, to be successful, predictions must, obviously, be reliable. Some of the more salient aspects of simulation testing are set out along with a few examples drawn from the author's experience. Heat treatment design rules, future test methods, and testing machines are discussed. Author

N86-29238# Schaefer (Georg) and Co., Schweinfurt (Germany, F.R.).

EFFECTS OF UNFAVORABLE ENVIRONMENTAL CONDITIONS ON THE SERVICE LIFE OF JET ENGINE AND HELICOPTER BEARINGS

H. K. LOPOESCH *In* AGARD Aircraft and Bearing Tribological Systems 9 p (SEE N86-29237 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

Aircraft bearings normally operate at high speeds and have to meet demanding reliability requirements. If conventional guidelines for their design are used, the resultant stresses are low. The stresses are particularly low if compared to those customarily applied in testing rolling fatigue. Potential fatigue life, the influence of plastic deformation in the raceways, the influence of surface damage and loading, service life under favorable lubricating

conditions, achievable fatigue life at loads above the endurance limit, and the influence of contamination are discussed. Author

N86-29239# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.).

AERO-ENGINE GEARS: MANUFACTURING CRACKS AND THEIR EFFECT ON OPERATION

J. SPECHT *In* AGARD Aircraft and Bearing Tribological Systems 10 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

The effect of cracks in gear splines is discussed. After black-oxidising of case-hardened gears, stress corrosion cracking may occur. This was determined from damage analysis of cracked gears of flight engines and from sample testing. Besides design measures to reduce operational stresses, corrective action may be in the form of modified manufacturing procedures and improved crack inspection. Author

N86-29240# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Stuttgart (Germany, F.R.). Inst. for Technical Physics.

TRIBOLOGY IN AIRCRAFT SYSTEMS: BASIC PRINCIPLES AND APPLICATIONS

E. JANTZEN and V. BUCK *In* AGARD Aircraft and Bearing Tribological Systems 13 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

The historical origin of the name tribology is outlined. The trends for the next two decades are reviewed: reduction of fuel consumption, improvement of the ratio of specific output to weight, reduction of maintenance, and further improvement of safety. Then the consequences from these trends are outlined with respect to research in tribology. The current status of research is sketched and some unsolved problems are discussed: interaction of material/lubricant in areas with mixed friction (reaction layers); interaction of material/lubricant in the hydrodynamic region; friction and wear of synthetic bearings with and without lubrication, friction, wear and service time if solid lubricants are used; and topographical features of surfaces. Many government sponsored research to gain the wide spread of basic knowledge necessary for new and better solutions. Author

N86-29241# Schaefer (Georg) and Co., Schweinfurt (Germany, F.R.).

DESIGN AND CALCULATION OF HIGH SPEED ENGINE BEARINGS

H. J. KOEBER *In* AGARD Aircraft and Bearing Tribological Systems 12 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

New aspects in design and calculation of high speed ball and roller bearings are discussed in as much as they affect bearing performance in the speed range of $D \times N = 3.0 \times 10^6$ min⁻¹ and beyond. For roller bearings the guide flange to roller end configuration as well as roller excursion within the cage pocket are linked to the phenomena of skewing and skidding. The need for under-race-lubrication in small diameter engine bearings is derived from this and a special solution (integral scoop) is shown along with related performance data. The influence of incorporating state of the art rolling elements made of silicon nitride on the design and calculation of high speed ball and roller bearings is shown taking into account hardness, density, Young's modulus and the Poisson ratio. Increase speeds coupled with additional design features being incorporated (such as lubrication holes, grooves, slots) require that inner rings of improved fracture toughness be developed with existing materials of known properties thus supplementing the material development activities already under way. Author

N86-29243# KHD Luftfahrttechnik G.m.b.H., Oberursel (Germany, F.R.).

MULTIFUNCTIONAL REQUIREMENTS FOR A GEARBOX SECONDARY POWER SYSTEM IN A MODERN FIGHTER AIRCRAFT AND ITS COMPONENTS AND INTERFACE REQUIREMENTS

M. PUCHER *In* AGARD Aircraft and Bearing Tribological Systems 14 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

The basic task of the gearbox in a Secondary Power System (SPS) of an aircraft is to provide and distribute mechanical energy

from the Auxiliary Power Unit (APU) or from the Main Engine (ME) to the accessories, e.g., generators, hydraulic pumps and fuel pumps. The complexity as well as the functional facilities increase by incorporating further functional requirements such as main engine start, cross drive operation between redundant systems with the associated control devices, including oil supply to the accessories into the gearbox oil system. The Tornado-SPS is one of the most modern systems flying today. The system shows a high reliability although the aircraft has been in service for only a few years. The experience gained with major components like gearbox housing, gearing, freewheel clutches, dry friction clutches and components of the oil system is reported. Some aspects from this experience are given for the design of gearboxes for future secondary power systems. Author

N86-29246# Westland Helicopters Ltd., Yeovil (England). Materials Lab.

THE ROLE OF RESIDUAL STRESS IN THE PERFORMANCE OF GEARS AND BEARINGS

A. V. OLIVER. In AGARD Aircraft and Bearing Tribological Systems 16 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

Residual stresses are an inevitable consequence of the manufacture and service conditions to which mechanical components are subjected. A wide range of evidence is presented to show the decisive effect of residual stress, both pre-existing and service induced, on the performance of gears and rolling element bearings. The results of measurement of residual stresses arising from a range of manufacturing procedures are presented, particular emphasis being placed on carburized steels. The effect of such stresses on fatigue performance is demonstrated. Possible causes of residual stress change during service are reviewed and the results of new experimental and theoretical work on the role of residual contact stress in a number of relevant tribological failure modes are presented. Author

N86-29247# Technische Hogeschool, Eindhoven (Netherlands). Dept. of Mechanical Engineering

THE LUBRICATION OF DYNAMICALLY LOADED CONCENTRATED HARD LINE CONTACTS: TEMPERATURE AND PRESSURE MEASUREMENTS

M. J. W. SCHOUTEN, H. J. VAN LEEUWEN, and H. A. MEIJER. In AGARD Aircraft and Bearing Tribological Systems 12 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

Some results of temperature and pressure measurements in two types of dynamically loaded concentrated contacts are reported, viz., a cam-flat follower contact and a cylindrical roller-outer race contact. The measurement technique utilizes miniature vapour deposited thin layer transducers and a counter current circuit and an amplifier. These first results are very encouraging. The transducers worked well, even under very adverse conditions of pure sliding and dynamic loads. Author

N86-29248# Atlantic Industrial Research Inst., Halifax (Nova Scotia)

WEAR OF HIGH SPEED ROLLER BEARINGS

T. SAVASKAN, E. E. LAUFER (Nova Scotia Technical Coll., Halifax), and D. E. VEINOT (Defence Research Establishment Atlantic, Dartmouth, Nova Scotia). In AGARD Aircraft and Bearing Tribological Systems 12 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

A laboratory bearing test rig was constructed to study wear in three high-speed roller bearings simultaneously under different conditions of loading and lubrication. A test run of 355 hours duration was performed during which wear of the bearings was monitored using DR ferrography. The test bearings from the rig were examined using metallography and microhardness measurements. Wear debris particles were collected from oil samples using ferrography. These were studied using bichromatic microscopy, scanning electron microscopy and energy dispersive X-ray analysis. The results of ferrography were correlated with the metallographic results. Author

N86-29254# Blok (Harmen), Rijswijk (Netherlands).

CRITICAL ANALYSIS OF ACHIEVEMENTS AND MISSING LINKS IN GEAR AND BEARING TRIBOLOGY IN RELATION TO POWER ENVELOPES

H. BLOK. In AGARD Aircraft and Bearing Tribological Systems 15 p (SEE N86-29236 20-37) Feb. 1986 (AGARD-CP-394) Avail: NTIS HC A11/MF A01

Power envelopes provide a convenient and informative basis of comparison for the development of gear transmissions towards higher power densities. Each such envelope consists of a sequence of segments representing power barriers due to a variety of critical phenomena. Most of these phenomena and barriers are tribologically affected. They may be exemplified by the occurrence of contact between the rubbing surfaces whenever a fully separating lubricant film can no longer be maintained and, further, by pitting and scuffing. For every gear transmission at least two power envelopes have to be considered in conjunction, i.e., for the most vulnerable pair of gears and rolling-element bearing, respectively. The trends of these two envelopes, as well as their mutual position, depend on the configuration of the major elements in the transmission concerned and on certain tribologic characteristics of the solid rubbing materials and the lubricant. The power envelopes, being tribologically affected, prove useful for developing tribology into tribotechnology, so as to enable its integration into the design of gear transmissions. Once certain missing links have been filled in, tribology may provide breakthroughs for developing the technology of both gears and bearings to the high-tech level required for creatively increasing the power densities permissible in gear transmissions. Here, the concentration is upon those segments of the two power envelopes that are called contact barriers. Author

N86-31064# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

DESIGN OF BOLTED JOINTS IN COMPOSITES

1985 27 p. Presented at the 60th Meeting of the Structures and Materials Panel of AGARD, San Antonio, Tex., 21-26 Apr 1985

(AGARD-R-727, ISBN 92-835-1531-5, AD-A171308) Avail: NTIS HC A03/MF A01

This publication contains three papers heard by the Structures and Materials Panel Sub-Committee on Mechanically Fastened Joints in Composites. The papers survey the various parameters governing the behaviour of bolted joints, and give some experimental data representative of behaviour under load. It is concluded that poor static strength, rather than good fatigue strength, is a characteristic of this type of joint. A Panel Specialists Meeting is to review the topic. Author

N87-17051# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France) Structures and Materials Panel

ADVANCED JOINING OF AEROSPACE METALLIC MATERIALS

Jul 1986 270 p. In ENGLISH and FRENCH. Meeting held in Oberammergau, West Germany, 11-13 Sep 1985

(AGARD-CP-398, ISBN 92-835-0397-X, AD-A173979) Avail: NTIS HC A12/MF A01

The papers contained in this report provide a review of the state-of-the-art of advanced joining techniques currently available to the manufacturers of aerospace equipment and identify newly emerging techniques and joining problems. Computational weld mechanics, diffusion bonding and superplastic forming, electron-beam welding, tungsten inert gas welding, inspection methods, and repair techniques are addressed. For individual titles see N87-17052 through N87-17071.

N87-17052# Carleton Univ., Ottawa (Ontario). Dept. of Mechanical and Aeronautical Engineering

COMPUTATIONAL WELD MECHANICS

JOHN GOLDACK, BALVANTRAI PATEL (Engineering Mechanics Research, Inc., Troy, Mich.), MALCOLM BIBBY, and JAMES MOORE. In AGARD Advanced Joining of Aerospace Metallic Materials 32 p (SEE N87-17051 09-37) Jul 1986 (AGARD-CP-398) Avail: NTIS HC A12/MF A01

An overview of the aims and methods of computational weld mechanics is presented. In particular, relevant literature and recent developments in the authors' laboratory are described. The

37 MECHANICAL ENGINEERING

presentation emphasizes an exposition of the computational principles and the application of computational weld mechanics to practice. In fact, the primary aim of the work is to transfer this technology from the research specialists who are developing it to the engineers who must apply it in the design and production of welded structures. The numerical methods, algorithms, software and computer hardware needed for computing the temperature, displacement, strain and stress fields associated with the welding process are described. While computer methods are widely applied in the engineering community, thermal strain-stress transients are rarely calculated in welding because of the complexity of the problem. Finite element analysis (FEA) together with the equations of continuum mechanics and irreversible thermodynamics forms the basis for a successful analysis of welding processes. The special problems encountered when FEA is used for weld analysis are discussed in detail. Particular attention is focussed on transient temperature field computations. Modelling heat sources, nonlinear thermal properties, the heats of fusion and transformation, and workpiece geometry and boundary conditions are discussed. Predicting relevant properties (strength, hardness, etc.) of weld joints from computed temperatures is included. In addition, thermo-elasto-plastic analysis for calculating residual strain, stresses and workpiece deformation is described. Measured thermal and distortion changes are compared to computed values as a means of verifying the accuracy of the computational methods. Finally, the computing environment (hardware and software) for computational weld mechanics is discussed at some length.

Author

N87-17053# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Paris (France). Lab. Assemblage Metallurgique.

STUDY OF THE ELECTRON BEAM WELDABILITY OF SUPERALLOYS THROUGH THE ANALYSIS OF MELT ZONE MORPHOLOGY

F. PIERQUIN and J. LESGOURGES. In AGARD Advanced Joining of Aerospace Metallic Materials 22 p (SEE N87-17051 09-37) Jul. 1986. In FRENCH; ENGLISH summary (AGARD-CP-398). Avail: NTIS HC A12/MF A01

Characterized by high specific energy, the electron beam allows a high welding velocity. The melted zones and heat affected zones are narrow and the thermal cycles involved are short, and therefore, the weld joints are submitted to high stresses. Thus, welding of high strength superalloys raises hot cracking problems, due to their low ductility. The configuration of the melted pond is logically recognized as an important factor in the generation of defects and on their type: vertical cracks, horizontal cracks, axial cracks, spike cracks, etc. To extend the applications of the process, a technique was developed to investigate the melted pond morphology and establish a correlation with the type of defects observed. The process, based on the pollution of the melted pond at a given time during welding, reveals, through micrographic examination, the solidification front configuration.

Author

N87-17054# Welding Inst., Cambridge (England). Solid Phase Welding Group.

THE APPLICATION OF DIFFUSION BONDING AND LASER WELDING IN THE FABRICATION OF AEROSPACE STRUCTURES

S. B. DUNKERTON and C. J. DAWES. In AGARD Advanced Joining of Aerospace Metallic Materials 12 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398). Avail: NTIS HC A12/MF A01

A review is given of work undertaken in both diffusion bonding and laser welding which is relevant to the aerospace industry. The wide use of superplastic forming/diffusion bonding of titanium alloys is mentioned with reference to particular applications. This is extended to include the newly developed superplastic aluminum alloys and data are presented on the diffusion bonding of conventional aluminum materials. The laser welding of aluminum, steel, nickel alloys and titanium alloys is covered with detail given on mechanical properties such as tensile and fatigue. The weld quality is shown to be tolerant to changes in process parameters by means of weldability lobes while dimensional tolerances such as beam/joint alignment and component fit-up can be critical. Finally, the development of laser beam spinning is mentioned with data on the increased tolerance to joint mismatch.

Author

N87-17055# Messerschmitt-Boelkow-Blohm G.m.b.H., Augsburg (Germany, F.R.). Materials and Technologies.

ECONOMICAL MANUFACTURING AND INSPECTION OF THE ELECTRON-BEAM-WELDED TORNADO WING BOX

JUERGEN BERGGREEN. In AGARD Advanced Joining of Aerospace Metallic Materials 11 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398). Avail: NTIS HC A12/MF A01

The Tornado wing box is an extensively electron-beam-welded titanium 6Al4V-alloy component. The design and the manufacturing steps are described with emphasis on joining and inspection techniques. As EB-welding requires expensive investments and operations the manufacturing costs have been cut by several means which are shown. The advantages of EB-welding on the material's side and the experience gained with this technique meanwhile allow the use of EB-welding for major titanium structures even with thick cross sections as a well-known and established and no longer uneconomic advanced joining method.

Author

N87-17056# Aeritalia S.p.A., Turin (Italy). Space System Div. THE WELDING OF ALUMINUM ALLOYS: A NEW TECHNOLOGY IN SPACE APPLICATION

P. MARCHESE and G. BANING. In AGARD Advanced Joining of Aerospace Metallic Materials 11 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398). Avail: NTIS HC A12/MF A01

The optimization of the structural weight of the Spacelab structure, the first European manned laboratory designed according to shuttle requirements, led to the choice of 2219-T851 aluminum alloy, T.I.G. welded with the process completely developed and qualified from Aeritalia as briefly described in this paper. To demonstrate the high quality and reliability of the welded primary structure, new inspection techniques, many different tests on the welded joint, and expensive fracture mechanics analysis were applied. The main assumptions and results are presented. The main efforts were concentrated on the reduction of number and size of welding defects, improving, on the one side, the welding technique and on the other side, inspecting single defects after fracture mechanics analysis based on sophisticated measurement of their dimensions, on the schematization of embedded flaw in tension and bending, and on careful measurement of material properties. Possible improvements of T.I.G. application for future space programs (space station) or its substitution with plasma welding processes are also mentioned.

Author

N87-17057# British Aerospace Aircraft Group, Bristol (England). Civil Aircraft Div.

DIFFUSION BONDING IN THE MANUFACTURE OF AIRCRAFT STRUCTURE

D. STEPHEN and S. J. SWADLING. In AGARD Advanced Joining of Aerospace Metallic Materials 17 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398). Avail: NTIS HC A12/MF A01

Over the last twenty years, considerable aerospace research and development effort has been directed to the development of the diffusion bonding (DB) process as a means of manufacture of low cost structures. To date the main thrust of these developments have been associated with titanium which has inherent metallurgical characteristics which make this material ideally suited for joining by this technique. For these titanium alloys which exhibit superplastic properties, the combined processes of superplastic forming (SPF) and DB considerably extend the range of low cost and structurally efficient titanium aerospace components which can be manufactured, even as replacements for conventionally fabricated aluminum alloy components. Recent developments in the SPF of high strength aluminums and metal matrix composites has stimulated work in the field of DB of aluminum. It is thought that in the longer term this field of DB could have the highest levels of application. This paper details the range of aerospace structural forms which can and are currently being manufactured using the diffusion bonding process. The process options, bond integrity, and nondestructive test (NDT) aspects are discussed.

Author

N87-17058# Royal Aircraft Establishment, Farnborough (England). Materials and Structures Dept.

DIFFUSION BONDING OF AL-ALLOYS IN THE SOLID STATE
P. G. PARTRIDGE, J. HARVEY, and D. V. DUNFORD. In AGARD Advanced Joining of Aerospace Metallic Materials 23 p (SEE N87-17051 09-37) Jul 1986
(AGARD-CP-398) Avail: NTIS HC A12/MF A01

Solid state diffusion bonds have been produced between clad Al-alloy sheets in alloys 7010, 2024, SUPRAL 220 and LITAL A. The sheet surface was first ion plated with a 1 micron layer of silver before bonding at 280 C or 450 C under 130 MPa or 7 MPa pressure. Lap shear strengths were in the range 140 MPa to 180 MPa and peel strengths were more than 40 N/mm. The effects of test piece design, surface finish, clad layer thickness and of oxide films on diffusion bond strength are described. The results suggest that a combination of thin silver coating and a clad layer should enable any Al-alloy to be diffusion bonded.

Author

N87-17059# Technische Univ., Munich (Germany, F.R.)
BONDING OF SUPERALLOYS BY DIFFUSION WELDING AND DIFFUSION BRAZING

P. ADAM and L. STEINHÄUSER. In AGARD Advanced Joining of Aerospace Metallic Materials 6 p (SEE N87-17051 09-37) Jul 1986
(AGARD-CP-398) Avail: NTIS HC A12/MF A01

Several developments of diffusion welded and diffusion bonded superalloy turbine engine parts, blades, vanes, and blisks, are summarized. The description of results comprises nondestructive testing of parts and mechanical testing of material samples. Results are mainly presented as conclusions on the expense of detailed test results which would require individual parts/material problem presentations.

Author

N87-17060# Societe Nationale Industrielle Aerospatiale, Suresnes (France). Dept. Production-Recherches.

APPLICATION OF DIFFUSION BONDING COMBINED WITH SUPERPLASTIC FORMING (SPF/DB) TO THE FABRICATION OF TAGV METAL SHEET STRUCTURES [APPLICATION DU SOUDAGE PAR DIFFUSION ASSOCIE AU FORMAGE SUPERPLASTIQUE (SPF/DB) A LA REALISATION DE STRUCTURES EN TOLES MINCES DE TAGV]

M. BOIRE and P. JOLYS. In AGARD Advanced Joining of Aerospace Metallic Materials 14 p (SEE N87-17051 09-37) Jul 1986. In FRENCH
(AGARD-CP-398) Avail: NTIS HC A12/MF A01

The potential applications of combined superplastic forming and diffusion bonding (SPF/DB) technology to the fabrication of TAGV titanium alloy structures are discussed. The conditions for the application of this technology are summarized as well as the impacts of certain material properties. Examples of structural fabrication processes are presented and an economical technique is suggested. Finally, the main problems which need to be resolved for a fully-developed industrial process are examined.

M.G.

N87-17066# National Research Council of Canada, Boucherville (Quebec)

A REAL TIME VISION SYSTEM FOR ROBOTIC ARC WELDING

M. DUFOUR, P. CIELO, and F. NADEAU. In AGARD Advanced Joining of Aerospace Metallic Materials 14 p (SEE N87-17051 09-37) Jul 1986
(AGARD-CP-398) Avail: NTIS HC A12/MF A01

Fast real-time vision systems for robotic arc welding have been developed and successfully implemented for seam tracking and adaptive welding functions (mass and heat balance). Typical seam tracking errors of 0.3 mm were achieved for single pass type joints (lap, butt, fillet). In one system the weld preparation profile is first enhanced by a projected laser target formed by a line and dots. A standard TV camera is used to observe the target image at an angle. The rapid preprocessor developed by NRCC and Leigh Instruments Inc as part of the visual aid system of the space shuttle arm is then used to analyse the video signal in real time. Another active vision system was developed in order to process more complex types of joints. It is based on laser flying spot scanning with a mechanically synchronized scanning system for projection and range finding. With a passive system the weld preparation temperature is mapped in front of the arc using a fiber optic bundle. The temperature profile of the joint is then

analysed by a microcomputer. Because no single sensor is universal, the combination of active and passive systems on the same robot arm allows the arc welding robot to perform complex tasks. Furthermore, the use of an off-line programming system greatly simplifies the programming task of an arc welding robotic workcell equipped with vision sensors.

Author

N87-17067# Hughes Helicopters, Culver City, CA. Materials, Processes and Standards Dept.

INERTIA WELDING OF NITRALLOY N AND 18 NICKEL MARAGING 250 GRADE STEELS FOR UTILIZATION IN THE MAIN ROTOR DRIVE SHAFT FOR THE AH-64 MILITARY HELICOPTER PROGRAM

A. G. HIRKO and L. L. SOFFA. In AGARD Advanced Joining of Aerospace Metallic Materials 9 p (SEE N87-17051 09-37) Jul 1986
(AGARD-CP-398) Avail: NTIS HC A12/MF A01

Preproduction feasibility studies were performed on laboratory type inertia welded specimens of Nitralloy N and 18 Nickel Maraging 250 Grade Steel prior to a full-scale engineering development program. The full-scale program consisted of producing scaled down drive shaft components to produce engineering test parts and to develop process control parameters for guide lines in the production program. Initial studies consisted of a metallurgical development program to arrive at a satisfactory post aging cycle for the composite or dual alloy drive shaft. In addition, metallurgical and static and dynamic tests were made from coupons excised from inertia-welded assemblies to establish structural behavior. Several sub-scale inertia-welded test specimens were tested in torsion loading to develop flight structural performance. Torsion tests showed the inertia weld exhibited strength characteristics equal or better than the parent metal for the Nitralloy N alloy component. The improved two-alloy, inertia-welded components show an approximate weight saving of 10 to 15 pounds over a drive shaft produced from Nitralloy N. This is due to a higher strength/weight ratio of 18 Nickel Maraging 250 Grade Steel as compared to Nitralloy N.

M.G.

N87-17068# Swiss Aluminum Ltd., Neuhausen am Rheinfall. Materials Technology Dept.

WELDING OF ALUMINUM CASTINGS

J. LEUPP, A. MAITLAND, and K. SCHELLENBERG. In AGARD Advanced Joining of Aerospace Metallic Materials 8 p (SEE N87-17051 09-37) Jul 1986
(AGARD-CP-398) Avail: NTIS HC A12/MF A01

Developments in the field of electronics have recently made available new methods and power sources which enable even the most difficult aluminum casting alloys to be welded economically. Each method has specific applications where it is optimally employed. The best results in fabrication welding are obtained with the TIG-PLASMA-KEYHOLE process. With this method the normal classification of casting alloys into those which weld easily and those which weld badly no longer applies. Excellent welds can be obtained for example with the high strength AlCu alloys. The flawless, fine grained weld bead provides mechanical properties equivalent to those of the parent metal - both under static and fatigue loading conditions. The best results in finish and repair welding have been obtained using TIG welding with variable polarity. If due care is taken, this method also enables excellent results to be achieved under all types of loading conditions. Examples where the described methods are successfully employed include not only aircraft constructions but also parts for railway vehicles and electrical switch-gear.

Author

N87-17069# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Paris (France). Lab. Assemblages Metallurgiques.

THE APPLICATION OF THE RBD PROCESS TO THE DEPOSITION OF ANTI-WEAR ALLOYS

J. LESGOURGUES. In AGARD Advanced Joining of Aerospace Metallic Materials 11 p (SEE N87-17051 09-37) Jul 1986
(AGARD-CP-398) Avail: NTIS HC A12/MF A01

Initially, the rechargement-brasage-diffusion (RBD) was developed by SNECMA to solve problems occurring during assembly and repair of cast superalloy turbine parts. Beyond the metallurgical possibilities it offers, this process has proved to be economical. Subsequent developments in this field have shown it was possible to apply alloys with specific characteristics, e.g.

37 MECHANICAL ENGINEERING

antiwear properties. This paper presents various applications of The RBD process, mainly in the field of wear protection. Author

N87-17071# Liburdi Engineering Ltd., Burlington (Ontario). **REPAIR TECHNIQUES FOR GAS TURBINE COMPONENTS** J. LIBURDI and P. LOWDEN. In AGARD Advanced Joining of Aerospace Metallic Materials 12 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398) Avail: NTIS HC A12/MF A01

Areas in which the state of the art in gas turbine repair technology needs to be advanced are discussed. A large part of the discussion deals with current inadequacies of weld repair techniques for high strength superalloys and with possible areas for improvement. In particular, the problems of poor weldability and the low strength of conventional weld repairs are examined, with emphasis on areas for further development including: welding with matching filler metals, pre-weld heat treatment and preparation, modification of welding techniques and post-weld hot isostatic pressing (HIPing) and heat treatment. Another area of discussion is the need for improved techniques for resurfacing and repair of airfoil damage. Two techniques appear to be promising for this application: diffusion brazing and vacuum plasma spraying. The importance of NDT limitations and mechanical analysis with regard to the development and implementation of novel repair techniques is emphasized. Disregard of these factors can lead to repairs which are substantially cosmetic in nature. Author

N87-21190# Cranfield Inst. of Tech., Bedford (England). Signal Processing and Applications Group.

ACQUISITION AND ANALYSIS OF DYNAMIC ROTATING MACHINERY DATA

R. WALLACE. In AGARD Advanced Instrumentation for Aero Engine Components 11 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

During the development and design of new engines, vast quantities of vibration data are acquired. An efficient analysis system designed to analyze dynamic rotating machinery data (accels, decels, etc.) is described. The system is built round a general purpose multi-tasking computer which not only analyses the data directly from pre-recorded tapes or rigs but allows engineers to post-analyze data at the same time. Examples of different types of presentation are given which enable easy interpretation of measured data. General acquisition rates and methods are also discussed. Author

N87-21191# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).

ACQUISITION AND PROCESSING OF NON-STATIONARY PRESSURE MEASUREMENTS IN STUDIES OF AIR INTAKE DISTORTION [ACQUISITION ET TRAITEMENT DES MESURES DE PRESSIONS NON STATIONNAIRES DANS LE CADRE DES ETUDES DE DISTORSION D'ENTREES D'AIR]

J. L. EYRAUD, F. AUZOLLE, and M. WAGNER (Office National d'Etudes et de Recherches Aeronautiques, Paris, France). In AGARD Advanced Instrumentation for Aero Engine Components 7 p (SEE N87-21170 14-31) Nov. 1986 In FRENCH (AGARD-CP-399) Avail: NTIS HC A24/MF A01

Investigations of compatibility between an aircraft air intake and the engine constitute an essential stage in the improvement of new concepts. This work is based on an experimental activity which, for full exploitation of the conditions, requires that the most complete data acquisition and processing techniques be employed. The methods described illustrate the full range of presently operational analog and digital systems. Particular emphasis is given to the importance of continuous real time analysis. Author

N87-21195# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

THE UTILIZATION OF THIN FILM SENSORS FOR MEASUREMENTS IN TURBOMACHINERY [UTILISATION DES CAPTEURS PELLICULAIRES POUR LA MESURE SUR TURBOMACHINES]

A. BRUERE, M. PORTAT, J. C. GODEFROY, and F. HELIAS. In AGARD Advanced Instrumentation for Aero Engine Components 9 p (SEE N87-21170 14-31) Nov. 1986 In FRENCH Original language document was announced as A86-46180 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

Sensor features and data analysis principles for thin films used as pressure and temperature transducers for flowfield measurements in turbomachinery are described. The devices were developed to collect data without affecting the flowfield around fixed and rotating turbine blades. The concept has been extended to thermal fluxmeters for measuring convection of the thermoelectric effect and to measuring the aerodynamics of boundary layer flows by exploiting temperature-induced changes in the resistivity of certain metals. The films have a maximum thickness of 80 microns, can be integrated into the walls of the area under investigation by vapor phase deposition, and require adhesive layers of only 2 to 4 microns. Numerical models are furnished for solid and gaseous dielectric sensor films for pressure measurements and for relating data from a thermal fluxmeter to temperature fields of flow. Author

N87-21196# Oxford Univ. (England). Dept. of Engineering Science.

INTERFEROMETRIC MEASUREMENT OF STRAINS AND DISPLACEMENTS IN ENGINE COMPONENTS

C. RUIZ, P. H. WEBB, and D. POST (Virginia Polytechnic Inst. and State Univ., Blacksburg). In AGARD Advanced Instrumentation for Aero Engine Components 13 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

The strains and displacements in engine components, and in particular in interlocking joints, have been measured by means of two interferometric methods: (1) high sensitivity Moire interferometry, using gratings with 1200 lines/mm; and (2) a coarser grating of 40 lines/mm. The two methods are described and the results compared to the predictions of a finite element program for a typical dovetail joint. The application of the technique to the assessment of fretting damage and to the lifting dovetail joints is discussed. Author

N87-21198# Rolls-Royce Ltd., Bristol (England). Advanced Projects Dept.

THE APPLICATION OF RADIATION PHYSICS AND PHOTOGRAMMETRIC TECHNIQUES FOR THE DIAGNOSIS AND SOLUTION OF MECHANICAL ENGINEERING PROBLEMS AND PERFORMANCE IMPROVEMENTS IN THE DEVELOPMENT OF AERO GAS TURBINE ENGINES AT ROLLS ROYCE

P. A. E. STEWART. In AGARD Advanced Instrumentation for Aero Engine Components 19 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

Research into the applications of penetrating radiations or particles for the non-invasive imaging and measurement of events within aero gas turbines on dynamic test at Rolls Royce is discussed. High Energy (8 MeV) X-rays are used to determine metal component movements for engine performance improvements and integrity configuration. Low energy X-rays with high speed cine fluoroscopy have been used to analyze molten metal flows in the turbine blade casting process. Cold neutrons and low energy X-rays have been used to analyze two phase flows and oil distribution in the Gem engine oil scavenge system. Positron emitting isotope techniques are being developed to determine fuel and lubrication system dynamics. The images captured by these systems are then processed by digital techniques and pattern recognition and crosscorrelation is carried out. Measurements are made from the film and video images using two and three dimensional photogrammetric methods. Author

38 QUALITY ASSURANCE AND RELIABILITY

N87-21199# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.).

TIP CLEARANCE MEASUREMENT IN MODERN COMPRESSOR COMPONENTS

HARTWIG KNOELL and KURT DING. In AGARD Advanced Instrumentation for Aero Engine Components 70 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-398) Avail: NTIS HC A24/MF A01

With regard to maximum efficiency of gas turbine compressors, small blade tip clearances during all engine operating conditions should be achieved. In order to determine the tip clearance during compressor tests, a reliable measuring technique has been developed. Using this temperature-insensitive capacitive probe system (Coulomb system), tip clearance can be monitored even during fast transient conditions. The sensors of the multichannel equipment can operate up to high temperature without cooling. Application to compressor testing is described in two examples; a high-speed centrifugal compressor rig and the intermediate-pressure compressor of a jet engine. Author

N87-29646# Royal Aircraft Establishment, Farnborough (England). Materials and Structures Dept.

DIFFUSION BONDING OF METALS

P. G. PARTRIDGE. In Advisory Group for Aerospace Research and Superplasticity 23 p (SEE N87-29641 24-26) Aug. 1987 (AGARD-LS-154) Avail: NTIS HC A10/MF A01

The need to reduce the cost and weight of aerospace metallic structures has led to an increased interest in solid state and liquid phase diffusion bonding processes, especially in combination with superplastic forming. The bonding mechanisms and bonding techniques are reviewed and the process variables that affect bond quality and strength are described with reference to bonds between Ti-alloys, Al-alloys and dissimilar metals. The importance of quality control and the limitations of current nondestructive evaluation techniques for diffusion bonding are emphasized. Finally, some trends and priorities in diffusion bonding technology are indicated. Author

N89-17686# National Aeronautical Establishment, Ottawa (Ontario). Structures and Materials Lab.

LITERATURE REVIEW ON THE DESIGN OF MECHANICALLY FASTENED COMPOSITE JOINTS

C. POON. In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 28 p (SEE N89-17685 10-31) Mar. 1988. Previously announced as N87-12872 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

This report presents a literature review of the state-of-the-art analytical and experimental methodologies adopted in the aerospace industry for the design of mechanically fastened joints in composite structures. Results and conclusions obtained from the published literature relating to the effects of critical parameters, which include composite material system, fastener configuration and joint geometry, on the mechanical behavior and failure modes of composite mechanically fastened joints are discussed. Further research required to improve the design of composite mechanically fastened joints is identified as a result of this review. Author

38

QUALITY ASSURANCE AND RELIABILITY

Includes product sampling procedures and techniques; and quality control

N87-17061# Messerschmitt-Böckow-Blohm G.m.b.H., Lemwerder (Germany, F.R.).

ULTRASONIC TESTING TECHNIQUES FOR DIFFUSION-BONDED TITANIUM COMPONENTS

GUSTAV TOBER and STEFAN ELZE. In AGARD Advanced Joining of Aerospace Metallic Materials 10 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398) Avail: NTIS HC A12/MF A01

Diffusion-bonded titanium specimens with bonding defects were tested by ultrasonic techniques in order to improve the defect detectability. High-frequency ultrasound was applied, the echo

signals were analyzed in both the time and frequency domains. Author

N87-17062# Army Construction Engineering Research Lab., Champaign, IL.

WELD QUALITY MONITOR AND CONTROL SYSTEM

F. KEARNEY, DAWN WHITE, and WILLIAM RICCI (Army Materials and Mechanics Research Center, Watertown, Mass.) In AGARD Advanced Joining of Aerospace Metallic Materials 8 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398) Avail: NTIS HC A12/MF A01

A non-contact weld quality monitor (WQM) system is being developed to detect, identify, and correct for deviations from established welding procedures and conditions which lead to weld defects in real time. The WQM continually measures with conventional transducers all primary process parameters such as current, voltage, and travel speed, and computes weld quality parameters such as heat input and weld bead geometry. In addition, the WQM monitors the spectral signature of the welding arc by means of a high resolution microprocessor controlled spectrograph. Here, the presence of weld pool and arc atmosphere contaminants, flux and shield gas effectiveness, arc energy input, and penetration/dilution into the base material can be determined. The spectral response from the welding arc and measurements of process parameters are then normalized, compared to preset operating limits, and processed in real time. Necessary adjustments to primary process parameters are made by automated compensation devices to eliminate weld defects in real time. When necessary, the specific location of discontinuities are provided to facilitate further inspection. Author

N87-17063# Rolls-Royce Ltd., Derby (England).

NDT OF ELECTRON BEAM WELDED JOINTS (MICRO-FOCUS AND REAL TIME X-RAY)

R. G. TAYLOR. In AGARD Advanced Joining of Aerospace Metallic Materials 4 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398) Avail: NTIS HC A12/MF A01

The introduction of electron beam welding (EBW) into the aero engine industry in the early 1960s has presented many new problems for non-destructive testing (NDT). Highlighted among these are the following particular problems: (1) accessibility the use of EBW has resulted in the design of many box-like components which makes it difficult, or impossible, to apply conventional NDT methods satisfactorily; (2) center-line defect orientation; and (3) extremely narrow welds which makes the detection of defects by normal radiography very unreliable. The traditional NDT methods such as conventional X-ray, fluorescent penetrant, magnetic particle, together with the occasional use of eddy current and, where accessibility permits, ultrasonics, have been extensively used for the inspection of EBW fabrications. However, the use of these methods has created considerable limitations in defect detection where extremely small defects (under 1mm) must be detected to guarantee a successful life cycle. Initially, these limitations only applied to parts manufactured by EBW, but during recent years, EBW has been increasingly used during the repair and overhaul of aero engine components and the NDT limitations now extend into these areas. Recently, significant developments have taken place which has enabled micro-focus X-ray techniques to be used in place of conventional X-ray on EBW and this has resulted in a considerable improvement in defect detection capabilities. An additional bonus has been the reduction in inspection costs and an improvement in productivity. Author

N87-17064# National Research Council of Canada, Boucherville (Quebec).

THERMOELASTIC TESTING OF STRATIFIED MATERIALS

PAOLO CIELO and MARC DUFOUR. In AGARD Advanced Joining of Aerospace Metallic Materials 15 p (SEE N87-17051 09-37) Jul. 1986 (AGARD-CP-398) Avail: NTIS HC A12/MF A01

A non-contact thermoelastic technique for the non-destructive testing of layered materials such as aluminum-epoxy laminates or metallurgical coatings is described. A pulsed laser beam heats a small area on the surface of the layer to be tested, and the thermoelastic deformation of the layer is monitored by a sensitive optical probe. Unbonded areas can be recognized from the abnormally high deformation of the unbonded layer. Localized pulsed heating is shown to be far superior than the extended

38 QUALITY ASSURANCE AND RELIABILITY

heating approach which is followed in holographic thermal stressing. The possibility to detect cohesive and adhesive defects by this technique is discussed. Two experimental configurations are described: in the first configuration the probing beam directly monitors the thermoelastic displacement of the heated area, while in the second a thermoelastically-generated annular stress wave converges towards the central probed point. Author

N67-17070# National Aerospace Lab., Amsterdam (Netherlands).

EVALUATION OF DDH AND WELD REPAIRED F100 TURBINE VANES UNDER SIMULATED SERVICE CONDITIONS

A. J. A. MOM, N. M. MADHAVA (Chromalloy Div.-Oklahoma, Midwest City), G. A. KOOL, and M. DEAN (Turbine Support Europa, Tilburg, Netherlands) In AGARD Advanced Joining of Aerospace Metallic Materials 9 p (SEE N87-17051 09-37) Jul. 1986 Previously announced as N86-32762

(AGARD-CP-398) Avail: NTIS HC A12/MF A01

Cost and delivery times of high technology turbine components are a strong impetus for the development of advanced repair processes with the ability of complete restoration of unserviceable components. One of such advanced processes, diffusion densification healing (DDH), was applied for repair of cracked and unserviceable F100 turbine vanes. The DDH process was evaluated under simulated service test conditions with respect to the conventional weld/patch coat repair procedure. The evaluation shows that the DDH process is a remarkably effective restoration process, resulting in strongly improved test behavior in relation to the original weld/patch coat procedure. Additional advantages are that scrap rates during repair are likely to be considerably reduced and that for the future some relaxation of current repair limits might even be considered. Author

N89-17253# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel

AGARD/SMP REVIEW: DAMAGE TOLERANCE FOR ENGINE STRUCTURES. 1: NON-DESTRUCTIVE EVALUATION

Nov. 1988 125 p In ENGLISH and FRENCH Meeting held in Luxembourg, 1-6 May 1988

(AGARD-R-768; ISBN-92-835-0484-4; AD-A273451) Avail: NTIS HC A06/MF A01

The AGARD Structures and Materials Panel is coordinating a series of workshops within the framework of a review of damage tolerance for engine structures. The review aims to address the areas critical to the acceptance of an approach based on damage tolerance concepts as an alternative life philosophy to that of safe-life for the design of engine components. Engineering assumptions, component design, life prediction of turbine disk and the need for common AGARD approaches to nondestructive evaluation are among the topics covered. For individual titles, see N89-17254 through N89-17261.

N89-17254# Rolls-Royce Ltd., Derby (England). Dept. of Materials and Mechanical Technology

THE IMPACT OF ENGINEERING ASSUMPTIONS ON NDE REQUIREMENTS

R. H. JEAL In AGARD, AGARD/SMP Review: Damage Tolerance for Engine Structures. 1: Non-Destructive Evaluation 6 p (SEE N89-17253 09-38) Nov. 1988

(AGARD-R-768) Avail: NTIS HC A06/MF A01

Geometrical aspects - including surface finish - have the advantage that they can be directly measured on the individual parts for comparison with those originally set. The designer can calculate the size of acceptable deviations from the norm and production is accepted or rejected on the basis of these tolerances. Material condition is a more difficult concept to deal with. It covers a wide range of phenomena ranging from cracks, scratches and porosity to the details of material microstructure which represent a deviation from the designers' assumption of a material as a continuous, isotropic, homogeneous media free from defects. These deviations are both difficult to find and their effect on performance is difficult to assess. Designers in the past used to assume safety

factors to account for the unseen presence of defects. As more efficient use of available materials has been sought, these factors have been reduced but at the price of greater perfection in the materials. This has led to increasing demands upon the ability of the designer to assess the behavior of discontinuities and set the defect standards, and for the inspection engineer to establish techniques that will find smaller and smaller defects in more and more difficult situations on ever increasing degree of certainty. The way these changing design requirements have impacted upon the problem presented to the inspection engineer is discussed. Author

N89-17255# University Coll., London (England). Dept. of Mechanical Engineering

REVIEW OF EXISTING NDT TECHNOLOGIES AND THEIR CAPABILITIES

LEONARD J. BOND In AGARD, AGARD/SMP Review: Damage Tolerance for Engine Structures. 1: Non-Destructive Evaluation 15 p (SEE N89-17253 09-38) Nov. 1988

(AGARD-R-768) Avail: NTIS HC A06/MF A01

A review of selected nondestructive test (NDT) technologies is presented with regard to their reliability and capability to detect and characterize defects in critical aero-engine components such as discs and blisks (integrally bladed discs), both in production and after service. The performance of non-destructive testing is considered both at the time of manufacture and after service for parts fabricated from powder metals including AP1 and with particular consideration given to the needs of the European Fighter Aircraft (EFA). Various NDT technologies have been considered with the aim of establishing the current capability of each technology in terms of defect detection capability and probability of detection rates. The cause of the limits on performance are reviewed and areas where development can be expected in these and other NDT technologies within the next 5 to 10 years have been identified. Author

N89-17256# Pratt and Whitney Aircraft, West Palm Beach, FL. Dept. of Materials Engineering

RELATIONSHIPS OF NONDESTRUCTIVE EVALUATION NEEDS AND COMPONENT DESIGN

JOHN A. HARRIS, JR. and M. C. VANWANDERHAM In AGARD AGARD/SMP Review: Damage Tolerance for Engine Structures 1: Non-Destructive Evaluation 8 p (SEE N89-17253 09-38) Nov. 1988

(AGARD-R-768) Avail: NTIS HC A06/MF A01

Several well publicized engine and airframe failures which occurred in the late 1960 to mid 1970's time frame resulted in emphasis on development, application and quantification of nondestructive evaluation (NDE) as opposed to reliance on a Zero Defects design philosophy. As the use of fracture mechanics as a basis for damage tolerance and retirement analysis of components became established, additional emphasis was placed on screened flaw sizes, NDE and quantification of reliability. In the late 1970's a structural assessment was conducted on the design of the F100 engine which resulted in a series of relatively sophisticated safety inspections for selected critical components. The Retirement for Cause philosophy also coupled NDE and component life analyses to enable return to service decisions for engine components. These activities were (and are) performed usually after the component designs have been finalized. The establishment of Engine Structural Integrity Programs (ENSIP) for new U.S. military engine systems has now made NDE considerations an integral part of the design process. Classification of components, fracture mechanics analyses, critical flaw sizes, material quality, NDE and quantification of inspection reliability are now incorporated in the initial design process and directly influence the resultant component designs. Statistical, based probabilistic approaches are supplementing the deterministic methods previously used. The relationships of NDE needs and component design in light of the evolution of the ENSIP approach for gas turbine engine component designs are discussed. Author

38 QUALITY ASSURANCE AND RELIABILITY

N89-17257# National Research Council of Canada, Ottawa (Ontario) Structures and Materials Lab.

IMPORTANCE OF SENSITIVITY AND RELIABILITY OF NDI TECHNIQUES ON DAMAGE TOLERANCE BASED LIFE PREDICTION OF TURBINE DISCS

A. K. KOUL, A. FAHR, G. GOULD, and N. BELLINGER (Carleton Univ., Ottawa, Ontario) In AGARD, AGARD/SMP Review: Damage Tolerance for Engine Structures. 1: Non-Destructive Evaluation 22 p (SEE N89-17253 09-38) Nov 1988 (AGARD-R-768) Avail: NTIS HC A06/MF A01

The results of a demonstration program carried out to determine the influence of the sensitivity and reliability of nondestructive inspection (NDI) techniques on the damage tolerance based life assessment of aero engine turbine discs are discussed. The program was carried out on the 5th stage compressor discs of the J85-CAN40 engine, made from the AM-355 stainless steel. The sensitivity and reliability of several NDI techniques, in detecting service induced low cycle fatigue (LCF) cracks in the disc bolt hole regions, are assessed on the basis of detectable crack sizes at 90 percent probability of detection (POD) and 90 percent POD with 95 percent confidence level. The NDI techniques examined are the liquid penetrant inspection (LPI) technique, a manual eddy current inspection (ECI) technique using two gain settings and an ultrasonic leaky wave (ULW) technique using an automated C-scan system. The safe inspection intervals (SIs) for the 5th stage compressor disc are calculated using deterministic fracture mechanics (DFM) and probabilistic fracture mechanics (PFM) principles. These calculations involve the use of the NDI data, finite element analysis and the experimental fatigue crack growth rate (FCGR) data generated on compact tension specimens machined from discs. The results indicate that the manual ECI technique with a high gain setting and the automated ULW technique are the most sensitive and reliable in detecting LCF cracks.

Author

N89-17258# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Evry Cedex (France).

SHORT TERM DEVELOPMENTS IN NON-DESTRUCTIVE EVALUATION APPLICABLE TO TURBINE ENGINE PARTS (LES DEVELOPEMENTS A COURT TERME DES CONTROLES NONDESTRUCTIFS APPLICABLES AUX PIECES DE TURBOMACHINES)

J. VIERMAN In AGARD, AGARD/SMP Review: Damage Tolerance for Engine Structures. 1: Non-Destructive Evaluation 29 p (SEE N89-17253 09-38) Nov 1988 In FRENCH (AGARD-R-768) Avail: NTIS HC A06/MF A01

An analysis of the principles forming the basis of non-destructive evaluation (NDE) techniques is presented. Excitation energy sources, medium interaction (perturbation), and sensors and signal processing are examined. Factors affecting the evolution and adaptation of NDE methods are discussed and recent developments in acoustic microscopy, ultrasonic techniques, Foucault current methods, and X-ray tomography are described.

Author

N89-17259# Naval Air Development Center, Warminster, PA. **LONG TERM POSSIBILITIES FOR NONDESTRUCTIVE EVALUATION FOR US NAVY AIRCRAFT**

W. R. SCOTT In AGARD, AGARD/SMP Review: Damage Tolerance for Engine Structures. 1: Non-Destructive Evaluation 13 p (SEE N89-17253 09-38) Nov 1988 (AGARD-R-768) Avail: NTIS HC A06/MF A01

The majority of nondestructive inspection (NDI) techniques currently in use for U.S. Navy aircraft are labor intensive, operator dependent and result in excessive aircraft down-time. For this reason NDI R and D efforts currently are directed toward developing rapid automated systems capable of remote or unattended inspection of large areas and inaccessible structures. Ongoing programs of this type that are discussed include laser ultrasonics, acoustic emission, and quantitative imaging. The primary thrust of the presentation, will cover the advantages of each technique and the technical obstacles preventing its implementation.

Author

N89-17260# Rolls-Royce Ltd., Derby (England) Dept. of Non-Destructive Testing Applications.

NEED FOR COMMON AGARD APPROACH AND ACTIONS

R. G. TAYLOR In AGARD, AGARD/SMP Review: Damage Tolerance for Engine Structures. 1: Non-Destructive Evaluation 3 p (SEE N89-17253 09-38) Nov 1988 (AGARD-R-768) Avail: NTIS HC A06/MF A01

While there is no direct evidence that the different approaches used in nondestructive tests (NDT) have affected airworthiness, there are many pressures, both technical and commercial, for requiring a common approach within the community in the future. The technical pressures arise from a need to achieve the same technical standard of product, irrespective of the place of manufacture, in order to meet the stringent damage tolerance requirements now being placed on NDE, while the commercial pressures arise from the need for industry to rationalize the methodology, so that components are processed in the same way, irrespective of the customer. An example of the problems associated with the lack of a common approach, is shown in the differing requirements of the major aero engine manufacturers, for the ultrasonic inspection of turbine discs. A study of the physics of the different methods demanded by the engine companies, shows that the same technical standard cannot be achieved, and the commercial problems are obvious when it is recognized that these different techniques are imposed on a common forging supplier. As a result of recent collaboration activities with a number of other engine manufacturers, Rolls-Royce has carried out a survey of the differences that currently exist and these are summarized.

Author

N89-17261# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Evry Cedex (France).

STATE-OF-THE-ART IN NON-DESTRUCTIVE EVALUATION OF TURBINE ENGINE PARTS (L'ETAT DE L'ART EN CONTROLE NONDESTRUCTIF DES PIECES DE TURBOMACHINE)

J. L. MEIFFREN In AGARD, AGARD/SMP Review: Damage Tolerance for Engine Structures. 1: Non-Destructive Evaluation 16 p (SEE N89-17253 09-38) Nov 1988 In FRENCH (AGARD-R-768) Avail: NTIS HC A06/MF A01

An overview of non-destructive evaluation (NDE) methods used in aeronautical engineering is presented. The use of NDE during the fabrication of turbine engine components is discussed with particular emphasis on the ultrasonic evaluation of compressor and turbine disks, thickness measurement of turbine blades, and the evaluation of welds in compressor rotors. In addition, the application of NDE techniques to the evaluation of in-service engines is discussed. The detection of fatigue cracks and ruptures in operational engine parts is addressed along with statistical approaches to NDE.

Author

N89-18477# Rolls-Royce Ltd., Derby (England). **USE OF MARKOV PROBABILITY AND RELIABILITY MODEL GENERATION METHODS IN THE ANALYSIS OF RELIABILITY OF A FAULT TOLERANT, HARDWARE AND SOFTWARE BASED SYSTEM WITH FLEXIBLE REPAIR POLICIES**

PAUL WHITE In AGARD, Software Engineering and Its Application to Avionics 23 p (SEE N89-18446 11-06) Nov 1988 Previously announced as N88 28706 (AGARD-CP-435) Avail: NTIS HC A18/MF A01

Problems in the application of traditional reliability methods to fault-tolerant systems, particularly with the fault trees approach are reviewed. The application of the Markov flow equation to reliability analysis is considered and it is shown how many problems disappear with this approach and how the basic equation can be manipulated to include repair policies, discrete events, and to calculate system reliability. How to set up a reliability model from system design information in such a way as to ensure that Markov states and transitions are correct and so as to ensure that the reliability analysis gives an upper bound for the system failures is outlined. Formulation of design information and automatic generation of a reliability model for any given system is explained and an example analysis is given based on a typical jet engine control system.

ESA

39 STRUCTURAL MECHANICS

39

STRUCTURAL MECHANICS

Includes structural element design and weight analysis; fatigue; and thermal stress

N86-27678# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

STATIC AEROELASTICITY IN COMBAT AIRCRAFT

Jan. 1986 42 p
(AGARD-R-725, ISBN-92-835-1516-1; AD-A167595) Avail: NTIS HC A03/MF A01

A review of lighter aircraft development programs over the past three decades indicates a trend of increasing emphasis on the consideration of static aeroelastic effects. While early concerns addressed only the impact on air vehicle structural integrity, current design philosophy recognizes and addresses aeroelasticity as a primary design parameter affecting structural optimization, vehicle aerodynamic stability, control effectiveness, and overall performance. Examples from wind tunnel testing, analytical studies, and operational applications are presented to justify this emphasis, illustrate current methodology and analysis techniques, and make a case for an integrated approach to the consideration of static aeroelastic effects at all stages of the design process. Author

N86-31083# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

THE PROSPECTS FOR FINITE ELEMENT ANALYSIS METHODS FOR STRUCTURAL QUALIFICATION

Apr. 1986 15 p Presented at the 61st Meeting of the Structures and Materials Panel of AGARD, Oberammergau, West Germany, 8-13 Sep. 1985
(AGARD-R-736, ISBN92-835-1526-9; AD-A171304) Avail: NTIS HC A02/MF A01

As part of its 61st Meeting the AGARD Structures and Materials Panel considered whether or not it should set up an activity to examine the possibilities of Structural Qualification by using Finite Element Analytical Methods in place of testing. As a preliminary to its discussions it heard the two papers printed here. The first of these looks in general terms at the capabilities of existing organisations and systems vis-à-vis the standards which must necessarily be established before FEM qualification procedures can be implemented. The second paper looks in rather more detail at how non linear FEM may be applied in support of structural tests. Author

N87-16376# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

PRACTICAL APPLICATION OF FINITE ELEMENT ANALYSIS TO AIRCRAFT STRUCTURAL DESIGN

Aug. 1986 138 p Lectures held in Geilo, Norway, 11-12 Sep. 1986 in Lisbon, Portugal, 15-16 Sep. 1986, at McClellan AFB, Calif., 29-30 Sep. 1986, at Kelly AFB, Tex., 2-3 Oct. 1986, and at Wright-Patterson AFB, Ohio, 6-7 Oct. 1986
(AGARD-LS-147, ISBN-92-835-1536-6; AD-A173823) Avail: NTIS HC A07/MF A01

This lecture introduces the main aspects of finite element analysis and modeling with emphasis placed on the solution of practical design problems. An outline is given of the broad principles of the finite element method with some emphasis on the limitations of the technique. This is followed by an explanation of the modeling problems encountered in the analysis of real structures together with their resolution. The use of the finite element system is included. For individual titles see N87-16377 through N87-16380.

N87-16378# British Aerospace Aircraft Group, Warton (England).

STATING THE PROBLEM: THE STEP BEFORE F. E. MODELLING

IAN C. TAIG In AGARD Practical Application of Finite Element Analysis to Aircraft Structural Design 11 p (SEE N87-16376 08-39) Aug. 1986
(AGARD-LS-147) Avail: NTIS HC A07/MF A01

Structural analysis is concerned with finding practical solutions of physical problems in the real world; finite element analysis is one powerful tool used as part of this process. Before starting to set up a finite element analysis the task should be planned and the essential features of the real world problem should be identified. Seven steps are studied: planning the analysis in relation to resources available, definition of the real structure, description of the real structure, definition of the structural context, definition of the facilities and resources available, and prescription of the solution requirements. In all cases, except formulation, these topics are dealt with discursively, without recourse to mathematics. In discussing formulation, a simple engineers theory of matrix structural analysis is presented as an everyday medium for defining and understanding the finite element solution process. Author

N87-16379# British Aerospace Aircraft Group, Warton (England). Military Aircraft Div.

MODELLING FOR THE FINITE ELEMENT METHOD

IAN C. TAIG In AGARD Practical Application of Finite Element Analysis to Aircraft Structural Design 18 p (SEE N87-16376 08-39) Aug. 1986
(AGARD-LS-147) Avail: NTIS HC A07/MF A01

Finite element modeling is not synonymous with mesh generation. The complex structures typical of aerospace, and many other industries give limited choice for clever mesh definition but contain a host of features which need to be represented, either explicitly or implicitly within the finite element model. Topics covered herein include general modeling strategy, definition of a basic mesh, local modeling of structural features including those which are below the basic mesh scale, element selection, load and inertial representation, kinematic constraints and symmetry. All topics are treated in a non-mathematical way, relating decisions which the analyst must make to the known facts about the analysis in the way that experienced people make such judgments. This naturally leads to references to expert systems which are seen as having a major impact in this field. Author

N87-16380# Air Force Flight Dynamics Lab., Wright-Patterson AFB, OH.

THE USE OF THE FINITE ELEMENT METHOD

V. B. VENKAYYA In AGARD Practical Application of Finite Element Analysis to Aircraft Structural Design 39 p (SEE N87-16376 08-39) Aug. 1986
(AGARD-LS-147) Avail: NTIS HC A07/MF A01

These lecture notes are primarily intended to provide a quick overview of the solid mechanics problem for engineers using a general purpose finite element system in the solution of aerospace structures problems. It gives a brief outline of the solid mechanics problem and some of the available options for its solution. The finite element method is explained in more detail with particular emphasis on the use of membrane element in aerospace structural analysis. Author

N87-17065# Industrieanlagen-Betriebsgesellschaft mbH, Ottobrunn (Germany, F.R.).

INFLUENCE OF WELDING FLAWS ON THE FATIGUE STRENGTH OF ELECTRON BEAM WELDMENTS IN Ti AL6 V4

WALTER SCHUETZ and WOLFRAM OBERPARLEITER In AGARD Advanced Joining of Aerospace Metallic Materials 11 p (SEE N87-17051 09-37) Jul. 1986

(AGARD-CP-398) Avail: NTIS HC A12/MF A01

Electron beam (EB) welding is a well known joining method in aircraft construction. Although a lot of data is available on the fatigue behavior of EB-welded Ti AL6 V4 alloy, only a few data on the effect of flaws in these weldments exist. Therefore artificial flaws of different size were produced in EB-weldments and the effect of these flaws on static strength, fatigue, fracture toughness and crack propagation was studied. Experience has shown, that existing flaws may be not found or heavily underestimated by non-destructive inspection (NDI). Also NDI cannot distinguish

between sharp-edged flaws (which may behave like cracks) and spherical cavities. In the present investigation they reduced the static strength up to 35%, the fatigue strength up to 50% (at $N = 10(5)$ cycles), and the fracture toughness up to 10%. Such reductions therefore must be accounted for in the design phase of Ti A16 V4 components containing Ed-welds. Author

N87-20372# Royal Netherlands Aircraft Factories Fokker, Schiphol Oost, Space Div.
ACOUSTIC EFFECTS ON THE DYNAMIC OF LIGHTWEIGHT STRUCTURES

J. J. WIJCKER In AGARD Mechanical Qualification of Large Flexible Spacecraft Structures 15 p (SEE N87-20355 13-18) Jul 1986 (AGARD-CP-397) Avail: NTIS HC A12/MF A01

The influence of the acoustic effects (surrounding air) on the dynamic behavior of lightweight structures is discussed. Emphasis is given to: the unexpected dynamic characteristics as shown during test, simulation of the acoustic loading within the finite element representation (linear domain); and comparison of the measured dynamic characteristics (modal survey) with the adapted finite element results.

N87-21197# Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.)

VIBRATION ANALYSIS BY SPECKLE INTERFEROMETRY
HARTWIG KNOELL In AGARD Advanced Instrumentation for Aero Engine Components 9 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

The vibrational modes of complex systems can be visualized with high sensitivity by laser light speckle interferometry. Electronic speckle pattern interferometry (ESPI), in contrast to holography, does not use photo-chemical storage media but, shows a live image of the vibrational modes created by the time-average method directly on a monitor screen. The particular advantage of this very useful and now almost conventional procedure of vibration analysis is demonstrated by two applications to aero-engine parts: a compressor blade and an impeller of a small centrifugal compressor. Author

N88-11139# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

RELIABILITY OF FINITE ELEMENT METHODS IN NORTH AMERICA

JERZY J. KACPRZYNSKI Jul. 1987 25 p (AGARD-R-748; AD-A187157) Avail: NTIS HC A03/MF A01

The reliability of finite element analysis techniques in place of structural tests are discussed in the context of airworthiness assessment. Using an example as illustration, it is shown that in order to obtain meaningful results, the analysis must be performed with extreme care by an experienced analyst. The reliance on the finite element analysis alone may result in serious misdiagnosis. The verification and the certification of programs and the certification of users are discussed. Some of the most important tests for validation of finite element programs are presented. Author

N88-12818# Advisory Group for Aerospace Research and Development, Paris (France). Structures and Materials Panel.

STANDARD FATIGUE TEST SPECIMENS FOR FASTENER EVALUATION

ROBIN COOK (Royal Aircraft Establishment, Farnborough, England) Nov. 1987 66 p (AGARD-AG-304; ISBN-92-835-0429-1; AD-A189002) Avail: NTIS HC A04/MF A01

An AGARD coordinated program which examines the fatigue performance and joint characteristics of a number of mechanically fastened joints with: (1) no or low secondary bending, and (2) with high secondary bending. In part 1, three types of joint are assessed which exhibit no, low, and high amounts of load transfer by the fastener. The no-load transfer joint was rejected and low and high load transfer joint were considered to be equivalent in rating fastener systems. In part 2, three types of single shear joint are considered. They are compared on the basis of load transfer and secondary bending characteristics and also on the fatigue endurance with a range of fastener systems installed. Only one joint, the UK designed Q-joint, adequately fulfilled the

requirements of a standard joint for fastener evaluation purposes.

Author

N88-26695# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

AUTOMATED MEASUREMENT OF CRACK LENGTH AND LOAD LINE DISPLACEMENT AT ELEVATED TEMPERATURE

H. P. VAN LEEUWEN, F. F. GROEP, L. SCHRA, and N. DAM (National Aerospace Lab., Emmeloord, Netherlands) Feb 1988 14 p Presented at the 65th Meeting of the Structures and Materials Panel of AGARD, Cesme, Turkey, 4-9 Oct 1987 (AGARD-R-751; ISBN-92-835-0446-1; AD-A194402) Avail: NTIS HC A03/MF A01

Test results reported in the literature show that in creep cracking tests at elevated temperature under steady load, the crack growth rate correlates best with the contour integral C^* (also called J^*) in comparison to other possible parameters. In the case of the fatigue at elevated temperature, the crack growth rate correlates best with C^* if cracking is predominantly time dependent. If, however, cracking is predominantly cycle dependent the crack growth rate correlates best with the range ΔJ of the contour integral J . It is discussed that in such testing C^* and J are fairly easily determined if, apart from load and crack length, the load line displacement is measured. A description is given of a test setup developed for elevated temperature creep cracking tests in which crack length was measured with the electrical potential drop method and load line displacement measured with two inductive transducers located inside the furnace. Measurement was automated with the aid of a personal computer which controlled the measurements and processed the results automatically. This setup can be adapted for elevated temperature fatigue testing. Author

N89-10007# Imperial Coll. of Science and Technology, London (England). Dept. of Mechanical Engineering.

BASIC STRUCTURAL DYNAMICS

D. J. EWINS In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 14 p (SEE N89-10006 01-02) Jun. 1988 (AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

Concepts are introduced which are dynamics aspects and the properties of interest as well as summarizing the appropriate analysis method, available for deriving the required information in specific cases. The task of formulating a suitable mathematical model is discussed. The use of finite element methods for this modeling task is examined. Some of the special analysis methods which are especially appropriate for dealing with the particular structural forms common in bladed assemblies are outlined. Author

N89-10016# Detroit Diesel Allison, Indianapolis, IN.

FORCED VIBRATION AND FLUTTER DESIGN METHODOLOGY

LYNN E. SNYDER and DONALD W. BURNS In AGARD, AGARD Manual on Aeroelasticity in Axial-Flow Turbo Machines. Volume 2: Structural Dynamics and Aeroelasticity 28 p (SEE N89-10006 01-02) Jun. 1988 (AGARD-AG-298-VOL-2) Avail: NTIS HC A12/MF A01

The aeroelastic principles and considerations of designing blades, disks, and vanes to avoid high cycle fatigue failure is covered. Two types of vibration that can cause high cycle fatigue, flutter, and forced vibration, will first be defined and the basic governing equations discussed. Next, under forced vibration design the areas of source definition, types of components, vibratory mode shape definitions, and basic steps in design for adequate high cycle fatigue life will be presented. For clarification a forced vibration design example will be shown using a high performance turbine blade/disk component. Finally, types of flutter, dominant flutter parameters, and flutter procedures and design parameters will be discussed. The overall emphasis is on application to initial design of blades, disks, and vanes of aeroelastic criteria to prevent high cycle fatigue failures. Author

39 STRUCTURAL MECHANICS

N89-17287# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Structures and Materials Panel.

SHORT-CRACK GROWTH BEHAVIOUR IN AN ALUMINUM ALLOY: AN AGARD COOPERATIVE TEST PROGRAMME

J. C. NEWMAN, JR. and P. R. EDWARDS (Royal Aerospace Establishment, Farnborough, England) Dec. 1988 106 p (AGARD-R-732; ISBN-92-835-0493-3; AD-A205648) Avail: NTIS HC A06/MF A01

An AGARD test program on the growth of short fatigue cracks was conducted to define the significance of the short-crack effect, to compare test results from various laboratories and to evaluate an existing analytical model to predict the growth of such cracks. The first phase of this program, the Core Program was aimed at test procedure and specimen standardization and calibration of the various laboratories. A detailed working document has been prepared and is included in this report. It describes the testing fundamentals and procedures and includes the analysis procedures used for handling the test data. The results from the test program showed good agreement among the participants on short-crack growth rates, on fatigue life to various crack sizes and breakthrough (surface- or corner-crack became a through crack), and on crack shapes. For individual titles, see N89-17288 through N89-17297.

N89-17288# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

SHORT-CRACK GROWTH BEHAVIOUR IN AN ALUMINUM ALLOY: AN AGARD COOPERATIVE TEST PROGRAM

J. C. NEWMAN, JR. and P. R. EDWARDS (Royal Aircraft Establishment, Farnborough, England) In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 1-60 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01 CSCL 20K

An AGARD Cooperative Test Program on the growth of short fatigue cracks was conducted to define the significance of the short-crack effect, to compare test results from various laboratories, and to evaluate an existing analytical crack-growth prediction model. The initiation and growth of short fatigue cracks (5 micrometer to 2 mm) from the surface of a semi-circular notch in 2024-T3 aluminum alloy sheet material were monitored under various load histories. The cracks initiated from inclusion particle clusters or voids on the notch surface and generally grew as surface cracks. Tests were conducted under several constant-amplitude (stress ratios of .2, .1, 0, and 0.5) and spectrum (FALSTAFF and GAUSSIAN) loading conditions at 3 stress levels each. Short crack growth was recorded using a plastic-replica technique. Over 250 edge-notched specimens were fatigue tested and nearly 950 cracks monitored by 12 participants from 9 countries. Long crack-growth rate data for cracks greater than 2 mm in length were obtained over a wide range in rates (10 to the -8 to 10 to the -1 mm/cycle) for all constant-amplitude loading conditions. Long crack-growth rate data for the FALSTAFF and GAUSSIAN load sequences were also obtained. Author

N89-17289# National Aerospace Lab., Amsterdam (Netherlands).

MICROSTRUCTURAL EXAMINATION OF CORE-PROGRAMME MATERIAL

R. J. H. WANHILL In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 61-65 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01

This annex describes the microstructure of the 2.3 mm thick 2024-T3 aluminum alloy sheet used in the core program. The significance of microstructure for fatigue crack growth in the low stress intensity regime is briefly discussed. The results are based on an extensive compilation and analysis of data for five different batches of 2024-T3 and T351. Author

N89-17290# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

PRELIMINARY FATIGUE TESTS ON SHORT-CRACK SPECIMENS

J. C. NEWMAN, JR., E. P. PHILLIPS, and M. H. SWAIN (Planning Research Corp., Hampton, VA.) In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 66-69 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01 CSCL 20K

The objective of the preliminary fatigue tests was to determine the stress levels to be used by the participants in the Cooperative Test Program. As previously mentioned, the United States Air Force Wright-Patterson Aeronautical Laboratory machined about 700 single-edge-notched tension (SENT) specimens from material supplied by the NASA Langley Research Center. In addition, NASA Langley machined about 50 SENT specimens from the same material. Comparison of fatigue tests conducted on the two sets of specimens indicated a large difference in fatigue behavior under constant-amplitude loading. A recovery program was initiated to resolve this difference before the specimens were distributed to participants. The following sections describe the recovery program and the preliminary fatigue tests and analyses conducted to determine stress levels for constant-amplitude, FALSTAFF, and GAUSSIAN loading. Author

N89-17291# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

ALIGNMENT VERIFICATION PROCEDURES

P. R. EDWARDS (Royal Aircraft Establishment, Farnborough, England), E. P. PHILLIPS, and J. C. NEWMAN, JR. In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 70-71 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01 CSCL 20K

In alignment verification procedures each laboratory is required to align its test machines and gripping fixtures to produce a nearly uniform tensile stress field on an un-notched sheet specimen. The blank specimens (50 mm w X 305 mm l X 2.3 mm th) supplied by the coordinators were strain gauged. Strain gauge readings were taken at all gauges (n = 1 through 10). The alignment verification procedures are as follows: (1) zero all strain gauges while specimen is in a free-supported condition; (2) put strain-gauged specimen in the test machine so that specimen front face (face 1) is in contact with reference jaw (standard position of specimen), tighten grips, and at zero load measure strains on all gauges. (epsilon sub nS0 is strain at gauge n, standard position, zero load); (3) with specimen in machine and at a tensile load of 10 kN measure strains (specimen in standard position). (Strain = epsilon sub nS10); (4) remove specimen from machine. Put specimen in machine so that specimen back face (face 2) is in contact with reference jaw (reverse position of specimen), tighten grips, and at zero load measure strains on all gauges. (Strain = epsilon sub nR0); and (5) with specimen in machine and at tensile load of 10 kN measure strains (specimen in reverse position). (epsilon sub nR10 is strain at gauge n, reverse position, 10 kN load). Author

N89-17292# Royal Aircraft Establishment, Farnborough (England).

ON-LINE SPECTRUM LOADING ACCURACY VERIFICATION

P. R. EDWARDS In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 72-74 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01

Eight laboratories carrying out variable-amplitude load tests using the FALSTAFF spectrum were visited by one of the coordinators (P.R. Edwards) and measurements taken to assess the accuracy with which the loading sequences were being applied. The measurements were taken on a portable Rainflow counting device which had a resolution of 64 levels. Thus the device was able to measure 64 x 64 triangular Rainflow matrices. All measurements were made on an alignment specimen with central strain gauges on each side of the specimen because these measurements would be more convincing than any taken from the load cell of the servohydraulic fatigue machine. The assessment of the accuracy of loading and whether the actual sequence of loads was correct was done initially by a comparison of Rainflow matrices. However, it was found that all of the conclusions that

could be drawn from such comparisons could equally be drawn from simple measurements of peaks and troughs. These measurements were extracted from the Rainflow matrix and are presented. Author

N89-17293# Planning Research Corp., Hampton, VA.

SUGGESTED PLASTIC-REPLICA METHOD

M. H. SWAIN. In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 75 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01

The Cooperative Test Program participants received their test specimens in the chemically-polished condition. Prior to testing, the notch area was cleaned with acetone and then ethanol was applied with a swab. It was then etched, which removed a very thin layer of material revealing the grain structure. A replica of the notch surface was made after each cyclic interval. The cyclic interval was selected so that some 25 to 30 replicas were taken during a test. Acetyl cellulose replica film was used. Author

N89-17294# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

APPROXIMATE STRESS-INTENSITY FACTORS FOR A SURFACE CRACK AND THROUGH CRACK AT A SEMI-CIRCULAR NOTCH

J. C. NEWMAN, JR. In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 76-77 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01 CSCL 20K

An approximate stress-intensity factor equation for a semi-elliptical surface crack located at the center of a semi-circular edge notch subjected to remote uniform stress is given. Author

N89-17295# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

LONG-CRACK GROWTH RATE DATA: CONSTANT AMPLITUDE AND FALSTAFF LOADING

E. P. PHILLIPS. In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 78-83 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01 CSCL 20K

This annex describes test procedures and presents the results from the tests for conventional, long-crack growth rate data. These data were used for comparisons with the short-crack growth rate data. Data were generated in tests with constant stress ratio load sequences ($R = -2, -1, 0$, and 0.5) and with the FALSTAFF load sequence. Results for long-crack tests with the GAUSSIAN load sequence are discussed. The constant stress ratio tests included decreasing, increasing, and constant load amplitude sequences. All cracks exceeded 6 mm in length when data were taken. All tests were conducted on center-cracked specimens of 2024-T3 aluminum alloy sheet taken from a large stock of this material held at the NASA Langley Research Center for fatigue research programs. The baseline long-crack growth rate data for this AGARD program were generated using 50 mm wide center-cracked specimens which were cut from some of the same sheets that were used to make the edge-notched, short-crack specimens. At growth rates below about 10 to the -5 mm/cycle, the baseline data were supplemented by data generated using 76 mm wide specimens made from sheets other than those used for the short-crack program. At growth rates above about 10 to the -5 mm/cycle, the baseline data were supplemented by data generated using 305 mm wide specimens made from sheets other than those used for the other two specimen sizes. The results from the 305 mm specimens were published in 1969. All specimen configurations are shown. Author

N89-17296# Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn (Germany, F.R.).

LONG-CRACK GROWTH RATE DATA: GAUSSIAN LOADING

P. HEULER. In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 84-85 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01

Conventional long-crack growth rate data under GAUSSIAN loading were generated at IABG within the AGARD short crack program on 2024-T3 sheet specimens. Test procedures and results are briefly reviewed in the following. Tests were carried out on 50

mm wide center-cracked specimens of 2024-T3 aluminum alloy sheet obtained from NASA Langley Research Center. A central slot of 0.4 by 3 mm was used as the crack starter. Specimen dimensions are shown. Author

N89-17297# P. P. Data Ltd., Fleet (England).

DATABASE PROGRAM FOR CRACK PROPAGATION DATA ACQUIRED IN THE AGARD SHORT CRACKS COLLABORATIVE EFFORT

P. R. EDWARDS. In AGARD, Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme p 86-96 (SEE N89-17287 09-39) Dec. 1988 (AGARD-R-732) Avail: NTIS HC A06/MF A01

The operation of a database program developed for use in the AGARD short cracks collaborative effort is described. Data are stored as files of crack length against number of cycles. If desired, sets of polynomial coefficients describing curves fitted to the data in each file are available. Any of the sets of data can be plotted, either a plot of crack length against number of cycles or a log-log plot of delta K (alternating stress intensity factor) against da/dN (crack growth rate), with adjustable scales in both cases. The object of the program is to enable easy cross-plotting of different sets of data on the same graph. The plots can be output to an external plotter if required, either for incorporation into technical reports or to produce viewgraphs. These features have been extensively used in this report. Least squares fit straight lines on log-log plots can be calculated and plotted for any set or sets of data. Provision exists for the fitting of polynomials to each set of data. This can be carried out interactively, because polynomials are plotted quickly on the graphics screen, and different orders of polynomial curve fit compared. If a suitable digitizing tablet is available then additional points can be added to the length against cycle curves, so as to force the polynomial to follow a desired curve, in particular, to follow the correct slope at the beginning and end of defined crack propagation curves. The program will run on Hewlett-Packard 9836/9816 or 9817/217/310/320 computers with virtually any kind of disc storage. Author

N89-17687# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Airplane Div.

COMPARISON OF EXPERIMENTAL RESULTS AND ANALYTICALLY PREDICTED DATA FOR DOUBLE SHEAR FASTENED JOINTS

J. BAUER and E. MENNLE. In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 8 p (SEE N89-17685 10-31) Mar. 1988 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

Experimental tests were carried out to investigate the strength of open holes and pin loaded holes, as well as the combination of both. The material used was 914 C/T300. The tests delivered enough information to represent the basis for the development of an analytic prediction method. The prediction method is based on a linear analysis, which provides the stress field around a hole loaded with any type of loading. To make use of this information, in order to predict the strength, some empirical influence has to be taken into account to produce good correlation between experimental and theoretical data. The obtained accuracy is shown, as well as diagrams representing theoretically derived notch sensitivity and the double shear pin peeling strength. Author

N89-17688# Air Force Flight Dynamics Lab., Wright-Patterson AFB, OH.

RECENT STUDIES ON BOLTED JOINTS IN COMPOSITE STRUCTURES

V. B. VENKAYYA, R. L. RAMKUMAR (Northrop Corp., Hawthorne, CA.), V. A. TISCHLER, B. D. SNYDER, and J. G. BURNS. In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 14 p (SEE N89-17685 10-31) Mar. 1988 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

A brief review of recent Air Force programs in bolted joints in composite structures is given. The review includes analytical methods development and experimental verification. Analytical methods address both single fastener and multifastener joints. A number of joint design variables, such as, finite geometry, fastener arrangement, joint service environment, and a number of relevant parameters are addressed. The test programs include static and

39 STRUCTURAL MECHANICS

fatigue specimens. Single fastener and multifastener joint tests were conducted to correlate the analysis results. Full scale test specimens were used to verify the overall analysis strategy. A comprehensive design guide was developed for the design and analysis of bolted joints in composite structures. This design guide is supported by four computer programs. *Author*

N89-17689# Politecnico di Milano (Italy). Dipartimento di Ingegneria Aerospaziale.

DAMAGE GROWTH IN COMPOSITE BOLTED JOINTS

V. GIAVOTTO, C. CAPRILE, and G. SALA. *In* AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 12 p (SEE N89-17685 10-31) Mar. 1988 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

Static and fatigue failures of composite joints are dominated by the growth and propagation of typical damages, up to some catastrophic condition. Starting from experimental observations some typical damage propagation patterns are identified and analyzed with simple models and finite element schemes. This extension of the fracture mechanics approach, to a broader class of damages allows some insight into the intricate behavior of joints, and gives some suggestion for interpreting and correlating experimental data. *Author*

N89-17690# Technische Hogeschool, Delft (Netherlands). Faculty of Aerospace Engineering.

STRESSES IN PINLOADED ANISOTROPIC PLATES

TH. DEJONG. *In* AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 17 p (SEE N89-17685 10-31) Mar. 1988 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

A method is presented for the calculation of stresses in an anisotropic plate with a row of equally spaced, pin-loaded holes. The pin-plate configuration represents a practical joint in a composite laminate where load is transferred from a row of mechanical fasteners into the laminate. The pins fit without clearance in the holes and they are supposed to be infinitely rigid. Numerical results are presented showing various effects of geometrical and material parameters on the stress distribution. The problem of a row of pin-loaded holes in an anisotropic plate is a complicated one of the mixed-boundary type. Several solutions can be found in literature based on simplifying assumptions regarding symmetry and geometry of the problem. The present solution is more general in those respects. It can be considered to be an application of Lekhnitskii's theory on stress distributions in anisotropic plates with holes. With this theory the determination of the stresses is reduced to the determination of two complex functions which must satisfy the specified boundary conditions of the problem. *Author*

N89-17692# Northrop Corp., Hawthorne, CA. Aircraft Div.

STRENGTH ANALYSIS OF MECHANICALLY FASTENED COMPOSITE STRUCTURES

R. L. RAMKUMAR, E. S. SAETHER, K. APPA, and V. B. VENKAYYA (Air Force Flight Dynamics Lab., Wright-Patterson AFB, OH.) *In* AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 22 p (SEE N89-17685 10-31) Mar. 1988 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

An analysis is presented for the strength prediction of bolted composite structures, based on the average stress failure criterion. The analysis incorporates analytically derived special finite elements (loaded hole, unloaded hole, plain and effective fastener elements) into the Strength Analysis of Multifastener Composite Joints (SAMCJ) computer code. The loaded hole, unloaded hole and plain elements are derived from a doubly-connected laminate analysis that accounts for the effects of finite plate dimensions via a least squares boundary collocation solution procedure. The effective fastener element is derived from a fastener analysis that accounts for fastener shear and bending effects and through-the-thickness effects in the bolted laminates. The special finite elements in the SAMCJ code are developed using Argyris' natural mode method. The bolted plates are modeled using these elements, a conventional solution procedure yields the fastener loads and the stress state in each plate, and average stress failure criteria are used for strength prediction. The characteristic distances for net section, shear-out and bearing failures are assumed to be material constants obtained through limited testing. *Author*

N89-17694# Service Techniques des Programmes Aeronautiques, Paris (France).

IMPROVEMENT OF SPECIFIC FASTENING ELEMENTS FOR ASSEMBLING COMPOSITE STRUCTURES [MISE AU POINT D'ELEMENTS DE FIXATION SPECIFIQUES POUR ASSEMBLAGES DES STRUCTURES COMPOSITES]

RAYMOND LOUIS. *In* AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 31 p (SEE N89-17685 10-31) Mar. 1988 *In* FRENCH (AGARD-CP-427) Avail: NTIS HC A14/MF A01

The development of composite material assemblages must take into account the inherent singularities of the materials used, for example, delamination, damage from impact and/or expansion, galvanic corrosion, etc. Several activities have been undertaken to improve specific fastening elements susceptible to the problems encountered with these structures. Specifically, these activities concern the development of a semi-tubular anti-peeling rivet of titanium T-40 for non-working structures; the development of interchangeable nuts that are used in association with an intermediary glass-fiber strip; and the modification of existing fasteners (structural screws and rivets). *Author*

N89-17697# National Aeronautics and Space Administration. Langley Research Center, Hampton, VA.

BEARING-BYPASS LOADING ON BOLTED COMPOSITE JOINTS

J. H. CREWS, JR. and R. A. NAIK (PRC Kentron, Inc., Hampton, VA.) *In* AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 13 p (SEE N89-17685 10-31) Mar. 1988 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

A combined experimental and analytical study has been conducted to investigate the effects of simultaneous bearing and bypass loading on a graphite/epoxy (T300/5208) laminate. Tests were conducted with a test machine that allows the bearing-bypass load ratio to be controlled while a single-fastener coupon is loaded to failure in either tension or compression. Test coupons consisted of 16-ply quasi-isotropic graphite/epoxy laminates with a centrally-located 6.35 mm bolt having a clearance fit. Onset-damage and ultimate strengths were determined for each test case. Next, a finite element stress analysis was conducted for each test case. The computed local stresses were used with appropriate failure criteria to analyze the observed failure modes and strengths. An unexpected interaction of the effect of the bypass and bearing loads was found for the onset of compression-reacted bearing damage. This interaction was caused by a decrease in the bolt-hole contact arc and a corresponding increase in the severity of the bearing loads. The amount of bolt-hole contact had a significant effect on local stresses and, thus, on the calculated damage-onset and ultimate strengths. An offset-compressible failure mode was identified for laminate failure under compression bearing-bypass loading. This failure mode appears to be unique to compression bearing-bypass loading and, therefore, cannot be predicted from simple tests. *Author*

N89-17698# Construcciones Aeronauticas S.A., Madrid (Spain).

BOLTED JOINTS IN COMPOSITES PRIMARY STRUCTURES

A. RUTZ. *In* AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 8 p (SEE N89-17685 10-31) Mar. 1988 (AGARD-CP-427) Avail: NTIS HC A14/MF A01

In the design of composite parts in primary structures, it is necessary to use bolted joints because of inspection requirements and the need for partial disassembly, reparability, access to the structure and for manufacturing breaks. The proven methodology for bolted joints in metallic structures cannot directly be applied to bolted joints in composites because of material anisotropy, susceptibility to the environment and, specially, due to the brittle behavior of typical epoxy joint members up to ultimate failure. In typical laminated multirow joints, a tension type failure generally occurs, not at the local stresses at the edge of fastener hole produces fiber breakage. Stress concentration factors governs the failure, as in metallic structures under fatigue loads. A methodology for composite bolted joint analysis must be able to size any particular joint design, avoiding the need for detail design tests. The approach under the present work correlates stress concentration factors in elastic-isotropic materials with those which appear in composites, by means of an empirically determined relief

factor. CASA has developed a test plan which includes several hundreds of coupons. Basically, bearing strength allowables and stress concentration factors, are investigated. Author

N89-17700# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Airplane Div.
MECHANISM OF SINGLE SHEAR FASTENED JOINTS
J. BAUER In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 6 p (SEE N89-17685 10-31) Mar. 1988
(AGARD-CP-427) Avail: NTIS HC A14/MF A01

"The problems arising with the strength of single shear fastened joints are considerably greater than those of double shear joints. The additional (or secondary) bending moment loads not only the cover plates, but also causes considerably bending in the fasteners. If one of the cover plates is of composite material its brittleness and relatively low bearing strength lead to new problems. Experimental data were produced with a 100 percent load transfer specimen using a carbon fiber reinforced plastic (CFRP) to metal joint. Taking the specimen configuration as a basis, the interaction of bolt bending and local load introduction into the two plates is shown in form of diagrams based on theoretical investigations. Author

N89-17703# Fraunhofer-Inst. fuer Betriebsfestigkeit, Darmstadt (Germany, F.R.).

EFFECT OF ENVIRONMENT AND IMPROVEMENT MEASURES ON STATIC AND FATIGUE STRENGTH OF BOLTED CFRP-JOINTS

J. J. GERHARZ and H. HUTH In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 16 p (SEE N89-17685 10-31) Mar. 1988
(AGARD-CP-427) Avail: NTIS HC A14/MF A01

Effects of environment, preloading, bushings, local reinforcements and joint laminate tailoring on the efficiency of carbon fiber reinforced plastic (CFRP) joints are documented. Thereby, joint efficiency at static, residual and fatigue strength is considered. The laminate lay-up, the fastener system, fastener fit and clamping stresses were not changed. The material used was 914 C/T300 or Fiberite 976/T300. Critical hot/wet condition expected in service reduced joint efficiency but preloading on fatigue design load level with superimposed temperature cycle per flight did not. Installation of metal bushings into fastener holes, local reinforcement by adding layers to the hole section, and joint laminate tailoring through strip design were introduced to reveal their ability to improve composite joint efficiency. They proved to be successful depending on design constraints and required joint performance. Author

N89-17704# Politecnico di Milano (Italy). Dipartimento di Ingegneria Aerospaziale.

STIFFNESS AND RESIDUAL STRENGTH VARIATIONS ON MECHANICAL JOINTS IN CFRP SPECIMENS IN CYCLING LOADING

C. CAPRILE and G. SALA In AGARD, Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures 24 p (SEE N89-17685 10-31) Mar. 1988
(AGARD-CP-427) Avail: NTIS HC A14/MF A01

An experimental study of the fatigue behavior of jointed specimens made of carbon fiber reinforced plastic has been carried out. Four different configurations and four laminations have been taken into account, to point out the influence of by-pass load/transfer load ratio and stacking sequence on specimen fatigue behavior. Loading frequency has been maintained at 20 C.P.S. in tension-tension tests at room temperature with dry test conditions. Fatigue loads have consisted in an alternate component (20 pct of failure load) superimposed on a constant tensile force (60 pct of failure load). The influence of different sequences of constant amplitude load blocks were also investigated. Residual strength and stiffness versus number of load cycles have been compared for the same stacking sequence by varying specimen configuration, and for different stacking sequences and equal configuration. Elastic and tensile characteristics have been monitored on-line by means of load-cells, LVDT transducers and strain gauges. Damage growth was inspected by making use of nondestructive tests like X-rays radiography with opaque enhanced penetrant liquids and electronic microscope photography. The final results have consisted

of a correlation between damage growth and residual strength and stiffness of jointed specimens. Author

43

EARTH RESOURCES AND REMOTE SENSING

Includes remote sensing of earth resources by aircraft and spacecraft, photogrammetry, and aerial photography.

N87-24950# Marconi Avionics Ltd., Rochester (England). Guidance Systems Div.

THE DIGITAL COLOUR MAP SIMPLIFIES GROUND ATTACK OPERATIONS

DAVID W. HUSSEY In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 8 p (SEE N87-24940 18-66) Feb. 1987
(AGARD-CP-404) Avail: NTIS HC A07/MF A01

A pilot flying low and fast needs to know where he is at all times, the nature of the local terrain, and his actual track. The pilot needs help in identifying waypoints, threats, and targets without distraction of his attention from the safety of the aircraft and the overall demands of the mission. The ideal way to provide this information is as a continuous color map, oriented track up, with all associated information overlaid. It must also be usable by day and by night. No currently available equipment can achieve all these aims satisfactorily, other than a digital color map generator providing video to a multifunction color CRT display. Interest is now focussing on increasing the benefits that accrue from the use of the equipment in helicopter and fixed wing aircraft, in training, operationally, and as an aid to mission planning. The ease with which the digital map database can be updated and overlaid is a factor. It is as useful during mission planning as it is to the pilot in the air. How such a computer aid might be used and some of the increases in effectiveness that follow are identified. Author

46

GEOPHYSICS

Includes aeronomy; upper and lower atmosphere studies; ionospheric and magnetospheric physics; and geomagnetism.

N87-26936# Institut d'Aeronomie Spatiale de Belgique. Brussels.

THE QUIET AND DISTRIBUTED PLASMASPHERE

J. LEMAIRE In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 7 p (SEE N87-26937 21-18) May 1987
Previously announced as N87-22498

(AGARD-CP-406) Avail: NTIS HC A13/MF A01 CSCL 22B
The plasmasphere and plasmopause are described from an observational point of view. The main properties of this inner magnetospheric region are recalled. The dynamical response of the plasmasphere to enhancements of geomagnetic activity is considered. The peeling off of the nightside plasmasphere at the onset of enhanced magnetospheric convection events is discussed. The dayside refilling mechanism is addressed. Author

N87-26939# Utah State Univ., Logan. Center for Atmospheric and Space Sciences.

MAGNETOSPHERIC CONTROL OF THE BULK IONOSPHERIC PLASMA

J. J. SOJKA and R. W. SCHUNK In AGARD, The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications 14 p (SEE N87-26937 21-18) May 1987

(Contract NSF ATM-84-17880)
(AGARD-CP-406) Avail: NTIS HC A13/MF A01

The temperature, composition, and circulation of high latitude ionosphere display a marked variation with altitude, longitude, universal time, season, solar cycle and geomagnetic activity. To a

46 GEOPHYSICS

large degree this variation is a consequence of the effect that magnetospheric electric fields, particle precipitation, and heat flows have on the ionosphere. These and other aspects of the ionosphere's response to changing magnetospheric conditions are discussed using a time dependent ionospheric model. Author

N87-26940# Institut d'Aeronomie Spatiale de Belgique, Brussels.

A MODEL FOR AN ELECTROMOTIVE FORCE GENERATOR IN THE MAGNETOSPHERE: A SOURCE OF DISCRETE AURORAL ARCS

M. ROTH, D. S. EVANS (National Oceanic and Atmospheric Administration, Boulder, Colo.), and J. LEMAIRE. In AGARD, *The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications* 12 p (SEE N87-26937 21-18) May 1987. Previously announced as N87-17421 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

Results obtained from solving Maxwell's and Vlasov's equations to obtain the electrical structure of the sheath that separates magnetospheric particle populations of different densities and temperatures are presented. It is shown that for reasonable magnetospheric plasma populations, an electric potential difference of several kilovolts exists across such a boundary. The potential can serve as the necessary electromotive force for the auroral current circuit. The collocation between a magnetospheric boundary and a discrete aurora is a natural consequence of this picture. Author

N87-26941# Los Alamos National Lab., NM.

HOSTILE ENERGETIC PARTICLE RADIATION ENVIRONMENTS IN EARTH'S OUTER MAGNETOSPHERE

D. N. BAKER, R. D. BELIAN, P. R. HIGBIE, R. W. KLEBESADEL, and J. B. BLAKE (Aerospace Corp., El Segundo, Calif.) In AGARD, *The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications* 16 p (SEE N87-26937 21-18) May 1987. Previously announced as N86-32018 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

Particular emphasis is given to highly relativistic electrons (3 approx. 10 MeV). Electron fluxes and energy spectra are shown that were measured by two high energy electron sensor systems at 6.6 R sub E from 1979 through 1984. Large, persistent increases in this population were found to be relatively infrequent and sporadic in 1979 to 1981 around solar maximum. During the approach to solar minimum (1981 to present) it is observed that the highly relativistic electrons occur with a regular 27-day periodicity and are well associated with the reestablished solar wind stream structures. The present analysis suggests that the Jovian magnetosphere is a recurrent source of this significant electron population in the outer terrestrial magnetosphere and that these electrons have a very deleterious effect on spacecraft systems due to deep dielectric charging and low-dose susceptibility effects. Author

N87-26942# Royal Aircraft Establishment, Farnborough (England). Radio and Navigation Dept.

THE USE OF P12 PULSATIONS AS INDICATORS OF SUBSTORM EFFECTS AT GEOSTATIONARY ORBIT

M. LESTER. In AGARD, *The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications* 9 p (SEE N87-26937 21-18) May 1987 (AGARD-CP-406) Avail: NTIS HC A13/MF A01

Some of the characteristics of P12 pulsations observed at mid-latitudes on the ground are reviewed and the use of certain characteristics in indicating various magnetic and particle perturbations occurring during substorms are assessed. Spacecraft charging and its effects at geosynchronous orbit are also reviewed. There is a brief discussion of how P12 pulsations might be used to predict intervals of spacecraft charging at geosynchronous orbit. Author

N87-26943# Stanford Univ., CA. STAR Lab.

WAVE-INDUCED PARTICLE PRECIPITATION FROM THE MAGNETOSPHERE AND THE ASSOCIATED IONOSPHERIC PERTURBATIONS

U. S. INAN. In AGARD, *The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications* 10 p (SEE N87-26937 21-18) May 1987 (Contract NSF DPP-82-17820; NSF DPP-80-22282) (AGARD-CP-406) Avail: NTIS HC A13/MF A01

A brief review of the gyroresonant wave-induced precipitation of energetic radiation belt particles is presented using the particular case of interactions involving lightning-generated whistler waves as an example. The interaction physics is first discussed in the context of results from a recently developed theoretical model of the whistler-particle scattering process occurring in the magnetosphere. This is followed by a discussion of the Trimpf effect, a particularly sensitive ground-based technique that has recently been used for detecting ionospheric perturbations produced by whistler-induced energetic particle precipitation from the magnetosphere on L-shells of 2 to 5. Author

N89-11933# Lancaster Univ. (England). Dept. of Environmental Science.

THE HIGH-LATITUDE IONOSPHERE: GEOPHYSICAL BASIS

J. K. HARGREAVES. In AGARD, *Media Effects on Electronic Systems in the High Latitude Region* 27 p (SEE N89-11931 03-32) Sep. 1988

(AGARD-LS-162) Avail: NTIS HC A10/MF A01

This introductory lecture summarizes concepts of the ionosphere and the magnetosphere that are fundamental to our understanding of high-latitude ionosphere. It begins with the basic theory of the ionosphere, particularly the processes of production and loss which lead to the existence of a permanent ionosphere and render the upper atmosphere electrically conducting. The structure of the magnetosphere, which strongly affects the polar regions because of coupling along the geomagnetic field lines, is then reviewed, including the form of the magnetosphere, and the plasma and energetic particles that are contained within the magnetosphere. Author

N89-11938# Lancaster Univ. (England). Dept. of Environmental Science.

THE HIGH-LATITUDE IONOSPHERE: DYNAMICAL ASPECTS, AND MODELS

J. K. HARGREAVES. In AGARD, *Media Effects on Electronic Systems in the High Latitude Region* 22 p (SEE N89-11931 03-32) Sep. 1988

(AGARD-LS-162) Avail: NTIS HC A10/MF A01

Whereas the inner magnetosphere co-rotates with the Earth, the outer region circulates in a pattern determined by the solar wind. These motions are communicated along the geomagnetic field-lines to the high-latitude ionosphere, causing F-region plasma to drift latitudinally and producing electric currents in the E region. The dynamics of the polar ionosphere are characterized by trans-polar drift from day to night and a return flow around the auroral zone. The neutral thermospheric wind is driven by solar heating, and this also flows across the polar caps from day to night sectors. Models are becoming increasingly important in upper-atmosphere geophysics. The extensive data sets now available have enabled empirical models to be compiled. These are essentially mathematical representations of the data in a form suitable for a computer. Where the theory is sufficiently well developed, it is worthwhile to develop a mathematical model based on the fundamental equations governing the phenomenon. The output from such models obviously needs to be checked against data, and they offer a useful technique for studying the fundamentals of complex phenomena. Models - some empirical, some mathematical, and some mixed - have been produced for the structure of the neutral atmosphere, the winds and tides of the thermosphere, the ionosphere, the magnetosphere, and for ionospheric radio propagation. Author

47 METEOROLOGY AND CLIMATOLOGY

N89-17750# Boston Univ., MA. Dept. of Astronomy.
MAGNETIC STORM EFFECTS ON F LAYER IRREGULARITIES NEAR THE AURORAL OVAL

JULES AARONS and ALAN S. RODGER (British Antarctic Survey, Cambridge, England) In AGARD, Scattering and Propagation in Random Media 10 p (SEE N89-17706 10-31) Mar. 1988 Sponsored in part by ONR, Washington, DC and National Environment Research Council, United Kingdom (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The effect of F layer irregularities on transionospheric transmissions and fading at HF at the equatorial, auroral, and polar latitudes was documented. Little was done on morphology and physics of irregularities noted at subauroral latitudes, in the vicinity of the plasmapause. The intensities of the irregularities are considerably less than those observed at equatorial and high latitude regions. A study was made of F layer irregularities for the month of October 1981 using a series of scintillation and spread F measurements between 0 and 70 W. This included F layer intersections at subauroral as well as auroral latitudes. In the data set a comparison was made of scintillation on one propagation path, in the Northern Hemisphere, and spread F data at a Southern Hemisphere conjugate position, the Argentine Islands. Correlation was obtained on those nights when scattering was noted over several hours. The major irregularity activity periods were separated. The separation of irregularity occurrence at subauroral latitudes into cases associated with magnetic activity and cases when magnetic activity was quiet does not allow for simple modeling or statistical ordering. Ordering by Dst rather than Ap yields the best results. During magnetic activity, the irregularities may be convected from high latitudes or created by penetration of the electric field to lower latitudes. During the recovery phase it is proposed that ring current energies supply the ultimate source of the irregularity production at F layer heights. Author

DAN WEIMER (Regis Coll., Weston, MA) In AGARD, Scattering and Propagation in Random Media 12 p (SEE N89-17706 10-31) Mar. 1988 Sponsored in part by Defense Nuclear Agency, Washington, DC (Contract F19628-86-K-0038) (AGARD-CF-419) Avail: NTIS HC A23/MF AC1

The orbiting HiLat satellite launched by the Defense Nuclear Agency in 1983 offered an opportunity for studying the ionospheric scintillation parameters in relation to the in-situ measurements of ionization density, drift velocity, field-aligned current, and particle precipitation during the sunspot minimum period. The results of such a morphological study performed by the Air Force Geophysics Laboratory based on their observations at the auroral oval station of Tromsø, Norway are discussed. The dynamics of the spatial and temporal extent of this region are illustrated in the invariant latitude/magnetic local time grid. The geometrical enhancement of scintillations observed during the alignment of the propagation path with the local magnetic L-shell is shown to be the most consistent and conspicuous feature of scintillations in the nighttime auroral oval. The steepening of phase spectral slope in this region is indicative of the presence of L-shell aligned sheet-like irregularities at long scale lengths. The seasonal variation of total electron content (TEC) determined from the differential Doppler measurements of HiLat transmissions is discussed in relation to in-situ density measurements at 830 km. The results are also utilized to illustrate the dependence of ionospheric structure parameters on short-term variability of solar activity during the sunspot minimum period. Special effort is made to illustrate that the joint study of scintillation/TEC and in-situ parameters provides an insight into the nature of magnetospheric coupling with the high latitude ionosphere. Author

47

METEOROLOGY AND CLIMATOLOGY

Includes weather forecasting and modification

N89-17751# Lowell Univ., MA. Center for Atmospheric Research.

SPECULAR SCATTER: A NEW MECHANISM FOR IONOSPHERIC BACKSCATTER

GARY S. SALES In AGARD, Scattering and Propagation in Random Media 8 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Recent investigation into backscatter from ionospheric irregularities at high frequencies (3 to 30 MHz) has indicated that the usual scatter mechanism requiring orthogonality with the field-aligned irregularities in the E and F region of the ionosphere is not sufficient to explain all the observations. Assuming field aligned electron density irregularities, ray tracing shows that clutter originates in the region where the ray becomes perpendicular to the earth's magnetic field lines within the ionosphere. The intensity of these irregularities can be described in terms of delta N/N, the fractional deviation from the ambient electron density. The actual distribution of electron density fluctuations is described using a power law spectrum with an exponent of $n \approx 2$. As will be shown, the orthogonality condition can always be satisfied in the F region of the ionosphere at mid and high latitudes near the reflecting point where the rays have become near-horizontal. The orthogonal clutter mechanism is restricted to F-region altitudes near the reflection point for obliquely propagating HF signals. In the auroral ionosphere, in addition, the E-region irregularities are expected to be intense and can contribute to the overall ionospheric clutter through the mechanism of specular scatter. This scattering mechanism was not considered before and will be described in detail. Finally, the specular scatter mechanism permits effective scatter at a wide range of altitudes throughout the F and E regions of the ionosphere. Author

N88-27669# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

ATMOSPHERIC TURBULENCE RESEARCH AT DFVLR

ANNE M. JOCHUM (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Wesseling, West Germany) Jul. 1988 19 p (AGARD-R-752; ISBN-92-835-0462-3; AD-A198045) Avail: NTIS HC A03/MF A01

A brief overview is given of work on atmospheric turbulence at DFVLR (German Aerospace Research Establishment), and describes the research tools, which include instrumented aircraft and numerical models. Some results of research on turbulence characteristics are given; these are mostly in the convective boundary layer. The report discusses their application to the study of aircraft response and airframe loadings. Author

N88-29727*# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

A SUMMARY OF ATMOSPHERIC TURBULENCE MEASUREMENTS WITH SPECIALLY-EQUIPPED AIRCRAFT IN THE US

H. N. MURROW In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of the Art in the Description and Modelling of Atmospheric Turbulence 11 p (SEE N88-29725 24-01) Dec. 1987

(AGARD-R-734) Avail: NTIS HC A09/MF A01 CSCL 04B

The technique of measurement of atmospheric turbulence in the form of true gust velocity is summarized. Specific aspects pointed out are related to NASA programs conducted over the last 15 years. Liberal use is made of references for details. Some recommendations resulting from a Spring 1986 workshop on atmospheric turbulence are also presented. Author

N89-17752# Air Force Geophysics Lab., Hanscom AFB, MA.
IONOSPHERIC SCINTILLATIONS AND IN-SITU MEASUREMENTS AT AN AURORAL LOCATION IN THE EUROPEAN SECTOR

SANTIMAY BASU, SUNANDA BASU, EILEEN MACKENZIE, and

47 METEOROLOGY AND CLIMATOLOGY

N88-29728# Royal Aircraft Establishment, Bedford (England). **MEASUREMENT AND ANALYSIS OF LOW ALTITUDE ATMOSPHERIC TURBULENCE OBTAINED USING A SPECIALLY INSTRUMENTED GNAT AIRCRAFT**

G. W. FOSTER and J. G. JONES In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the Art in the Description and Modelling of Atmospheric Turbulence 45 p (SEE N88-29725 24-01) Dec. 1987

(AGARD-R-734) Avail: NTIS HC A09/MF A01

Detailed measurements of atmospheric turbulence made by a specially instrumented Gnat aircraft at altitudes below one thousand feet over a variety of terrains are described. A program of flying yielded about 400 runs for which time histories of the three components of turbulence are available. These runs are analyzed to give parameters which summarize the statistical characteristics of the turbulence encountered. A very strong relationship between two parameters from the Statistical Discrete Gust Analysis technique and one from the Power Spectral Density technique is identified. Author

N88-29733# National Aerospace Lab., Amsterdam (Netherlands).

ACQUISITION OF GUST STATISTICS FROM AIDS-RECORDED DATA

J. B. DEJONGE, A. J. P. VANDERWEKKEN, and R. NOBACK In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 14 p (SEE N88-29725 24-01) Dec. 1987 Previously announced as N88-14586

(AGARD-R-734) Avail: NTIS HC A09/MF A01

The procedures applied to reduce B-747 acceleration data from greater than 100,000 flight hours to derived gust velocities are described. The results are presented and compared with other data sources. The validity of the assumptions made in the derivation are discussed. Author

N88-29734# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

EXTREME GUSTS DISTRIBUTION

GABRIEL COUPRY In AGARD, The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence 9 p (SEE N88-29725 24-01) Dec. 1987 In FRENCH; ENGLISH summary Original language document was announced in IAA as A87-44328

(AGARD-R-734) Avail: NTIS HC A09/MF A01

A model of extreme atmospheric turbulence is proposed based on 5 years of commercial flight data for events with load factors in excess of 0.5. The Pratt formula is found to lead to incoherent atmospheric descriptions, while the Hall formula, with appropriate choice of scale, is found to lead to a coherent turbulence description which is relatively independent of the type of aircraft considered. For strong turbulences, the average number of overshoots by a nautical mile are found to decrease exponentially with gust amplitude. The incidences of gusts exceeding a threshold value are found to obey a Poisson distribution whose mean decreases exponentially with amplitude, indicating that the probability of the occurrence of big gusts can be represented by Gumbel's extreme value theory. Author

51

LIFE SCIENCES (GENERAL)

N87-25715# Cologne Univ. (Germany, F.R.). Neurobiologische Forschung.

PHARMACOLOGICAL APPROACHES TO PERFORMANCE ENHANCEMENT IN ANIMALS

D. G. SPENCER, JR., T. SCHUURMAN, U. BENZ, E. HORVATH, and J. TRABER In AGARD Biochemical Enhancement of Performance 11 p (SEE N87-25709 19-52) Mar. 1987

(AGARD-CP-415) Avail: NTIS HC A07/MF A01

Drug effects were studied on learning and working memory performance in young, normal rats, as well as on reactions to

hypoxia and stress. While some of the treatments reduced cognitive parameters under normal conditions, none improved them in a meaningful way. However, several substances were found to improve performance disrupted by exposure to hypoxia. These substances included piracetam, nimodipine, and ipsapirone (TVX Q 7821). An additional characteristic of ipsapirone was an amelioration of negative responses to stress. Due to the well-understood mechanisms of action of nimodipine and ipsapirone, their low toxicity, and their lack of negative effects on normal cognitive performance, it is suggested that these drugs could prove to be useful therapeutic agents under conditions of high information processing loads. Author

N88-27683# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

ELECTRIC AND MAGNETIC ACTIVITY OF THE CENTRAL NERVOUS SYSTEM: RESEARCH AND CLINICAL APPLICATIONS IN AEROSPACE MEDICINE

Feb. 1988 404 p In ENGLISH and FRENCH Symposium held in Trondheim, Norway, 25-29 May 1987 Original contains color illustrations

(AGARD-CP-432; ISBN-92-835-0447-X; AD-A195265) Avail:

NTIS HC A18/MF A01

The physical and mental demands imposed on aircrew operating high performance combat aircraft will be severe. The heavy loads of information received from the aircraft sensors must be assimilated and managed in a timely and efficient manner. Severe physiological stresses will be imposed by the environment of rapid onset, high sustained G-acceleration. The purpose of this symposium was to explore the feasibility of using electrical potentials and magnetic fields of the central nervous system as objective measures of the human condition. Topics addressed include: the computer-aided imaging of background and evoked brain electrical activity; magnetoencephalography; the functional significance of P300, contingent negative variation (CNV), and electroencephalogram (EEG) events as indices of behavior; the use of physiological measures for indexing in-flight and simulator mission effectiveness; and the effects of acceleration, drugs, and diseases on CNS activity. For individual titles, see N88-27684 through N88-27721

52

AEROSPACE MEDICINE

Includes physiological factors; biological effects of radiation; and effects of weightlessness on man and animals.

N87-13932# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

BACKACHE AND BACK DISCOMFORT

Jun. 1986 274 p In ENGLISH and FRENCH Meeting held in Pozzuoli, Italy, 8-10 Oct. 1985

(AGARD-CP-378; ISBN-92-835-0392-9; AD-A171226) Avail:

NTIS HC A12/MF A01

Backache and back discomfort are serious economic and operational problems in aerospace environments. The objective of the meeting was to bring military and civilian specialists together to discuss ways and means of alleviating back problems in the cockpit. The papers address both the seating posture and the vibrational environment as contributory factors. Other topics addressed and discussed include the conditions of the spine which predispose individuals to backache, methods for evaluating and predicting back pain, educational programs for the prevention and treatment of recurrent back pain, and strategies for reducing backache in current and advanced cockpit environments. For individual titles see N87-13933 through N87-13960.

N87-13933# Liverpool Univ. (England) Dept. of Orthopaedic and Accident Surgery.

EPIDEMIOLOGY OF THE DRIVER'S BACK

J. D. G. TROUP *In* AGARD Backache and Back Discomfort 4 p (SEE N87-13932 05-52) Jun. 1986 (AGARD-CP-378) Avail: NTIS HC A12/MF A01

Back pain is one of the most prevalent of modern symptoms and backache which comes on after sitting is a typical complaint, particularly among drivers. But drivers' backache is not confined to those who seek treatment; it is common throughout the population whether patients or non-patients. Yet both the etiology and the pathomechanism remain unknown. Symptoms are related to the time spent at the wheel thus it may be inferred that they arise from the concomitant postural restraints. But static stresses in the spine arise both from the seated posture itself and from the muscular work of driving, while dynamic stresses, including vibration, arise from the motion of the vehicle. The epidemiological studies so far have not differentiated between the potential causative factors and few, if any, have taken account of other physical activities undertaken by drivers. Author

N87-13937# Israeli Air Force Aeromedical Center, Tel Hashomer.

LOW BACK PAIN AND NARROWED DISC SPACES IN FIGHTER PILOTS

P. FROMM, S. MARGALIT, and M. GROSS *In* AGARD Backache and Back Discomfort 4 p (SEE N87-13932 05-52) Jun. 1986 (AGARD-CP-378) Avail: NTIS HC A12/MF A01

Compressive forces may play a role in the development of disc degeneration. The disc spaces were measured on lateral x-rays of the lumbar spine in fighter pilots with and without a history of sciatica, and compared them to those of asymptomatic transport pilots. An arbitrary cutoff point for normal was defined and the proportion of each group with narrowed disc spaces determined. Fighter pilots with a history of sciatica had a significantly higher proportion of those with narrowed disc spaces than did asymptomatic transport pilots. Fighter pilots without low back pain had an intermediate proportion with narrowed disc spaces. It is concluded that disc degeneration may be accelerated by repeated G(z) forces experienced by pilots of fighter aircraft. Author

N87-13938# Institute of Aviation Medicine, Fuerstenfeldbruck (Germany, F.R.).

RELATIONSHIP BETWEEN BACKACHE AND FLYING DUTY IN JET- AND PROP-PILOTS DEMONSTRATED BY A FLYING WING

K. BURMEISTER and W. K. THOMA *In* AGARD Backache and Back Discomfort 16 p (SEE N87-13932 05-52) Jun. 1986 (AGARD-CP-378) Avail: NTIS HC A12/MF A01

A questionnaire assessment was performed in a collective of 88 jet- and prop-pilots. Approximately half of the pilots suffer from backache. A significant connection between the number of flying hours, annual flying stress and sports activities can not be ascertained. The duration of the sitting posture and G-loads are subjectively classified as being the highest body stress, whereas vibrations play a secondary role. The cold pilot's seat in winter and the uncomfortable harness are objects of particular complaints. Concrete facts indicate that in an effort to avoid vertebral pain the seat must be constructed in such a manner as to avoid excessive posterior pelvis tilt. 50% of the pilots questioned are of the opinion that their flying duty causes health damages. Author

N87-13940# Institute of Work Physiology, Oslo (Norway). **MUSCULO-SKELETAL ILLNESSES AMONG WORKERS EXPOSED TO LOW-INTENSITY WORK LOAD OF LONG DURATION**

R. H. WESTGAARD, T. JANSEN, R. BJORKLUND, and M. WAERSTED *In* AGARD Backache and Back Discomfort 9 p (SEE N87-13932 05-52) Jun. 1986 (AGARD-CP-378) Avail: NTIS HC A12/MF A01

Low-level, continuous muscle load of long duration has received increasing attention as a potential source of musculo-skeletal injury. This paper presents evidence which indicates a quantitative relationship between the level of static load on shoulder muscles and the risk of developing musculo-skeletal illnesses in the shoulder and neck. Constrained working postures are probably the most frequent cause of low-level, continuous muscle load, but such

loads may also develop for other reasons as illustrated by an example of a probable stress-related development of muscle tension. It is pointed out that aircraft pilots are exposed to a number of factors which can contribute to the development of muscle tension. Low-level muscle tension may therefore be an important health problem for this profession, but this remains to be demonstrated in more specific projects. Author

N87-13941# Centre d'Etudes et de Recherches de Medecine Aerospatiale, Paris (France).

THE BIOMECHANICAL CHARACTERISTICS OF THE SPINAL COLUMN: BIBLIOGRAPHIC REVIEW [ANALYSE

BIBLIOGRAPHIQUE DES CARACTERISTIQUES BIOMECHANIQUES DE LA COLONNE VERTEBRALE]

P. QUANDIEU *In* AGARD Backache and Back Discomfort 28 p (SEE N87-13932 05-52) Jun. 1986 *In* FRENCH (AGARD-CP-378) Avail: NTIS HC A12/MF A01

In order to improve dynamic models of the spinal column, it is necessary, not only to apply to the various coefficients (stiffness, damping and mass) values which are as accurate as possible, but to understand the mechanical behavior of the different biological materials. After a diagrammatic review of the anatomy of the vertebral unit, a bibliographic survey of references addressing the mechanical characteristics of the disk, the ligaments, and the vertebral body is presented. Generally accepted values of creep, relaxation and intranuclear compression, obtained during tests of flexion, extension, lateral inflexion, torsion, and disk shearing are discussed. Parameter values for ligaments are likewise addressed. Data obtained by the propagation of vibrational waves within the column are presented along with an example kinematic study. M G

N87-13942# Paris V Univ. (France).

AUTOMATIC RESEARCH ON OPTIMAL POSTURE [RECHERCHE AUTOMATIQUE DE POSTURE OPTIMALE]

A. M. COBLENTZ, J. F. COBLENTZ, P. GUENEAU, and N. BONJOUR *In* AGARD Backache and Back Discomfort 4 p (SEE N87-13932 05-52) Jun. 1986 *In* FRENCH (AGARD-CP-378) Avail: NTIS HC A12/MF A01

A new perspective on conceptual ergonomics is presented. Specifically, an automatic method for the analysis of optimal posture for a human model in a given environment is described. Algorithms incorporating dynamic programming and artificial intelligence techniques are discussed which model body position and articulation and an ideal reference. M G

N87-13943# Paris V Univ. (France) Lab. d'Anthropologie Appliquee.

BIOSTEREOMETRIC STUDY OF THE OUTWARD CURVE OF THE SPINE FOR VARIOUS REFERENCE POSITIONS [ETUDE BIOSTEREOMETRIQUE DE LA COURBURE EXTERNE DUE RACHIS POUR DIFFERENTES POSITIONS DE REFERENCE]

A. M. COBLENTZ, J. C. PINEAU, G. IGNAZI, and R. MOLLARD *In* AGARD Backache and Back Discomfort 5 p (SEE N87-13932 05-52) Jun. 1986 *In* FRENCH (AGARD-CP-378) Avail: NTIS HC A12/MF A01

An analysis of the outward curve of the spine was conducted starting with a survey of biostereometric data for a group of male subjects in standing and various sitting positions. The outward curvatures of the spine were determined from the following parameters: radius of the dorsal and lumbar curves, positions of the centers of curves, and localization of the inflexion point. Modifications of the shapes of outward contour were then studied for various sitting positions. The results of these efforts are utilized for three-dimensional modeling of the human body and applied in the analysis of positions in C.A.O. They can likewise contribute to a better understanding of the relations between the forms of the back in a functional posture and the constrained posture of seated operators. M G

N87-13944# Finsen Inst., Copenhagen (Denmark).

INVESTIGATION OF THE LUMBAR FLEXION OF OFFICE WORKERS

A. C. MANDAL *In* AGARD Backache and Back Discomfort 10 p (SEE N87-13932 05-52) Jun. 1986 (AGARD-CP-378) Avail: NTIS HC A12/MF A01

Modern furniture in schools, factories and offices is constructed in such a way that no one can use it properly. Each day people

52 AEROSPACE MEDICINE

sit for many hours hunched over their tables in postures extremely harmful to the back. A considerably better sitting posture can be obtained if the table is constructed higher and if it is tilted about 10 deg. In this way a book or item is brought closer and is at a better angle to the eye. The worst bending of the neck is thus avoided. Furthermore, the seat can, with advantage, be tilted 20 deg forward to reduce the flexion of the lumbar region. By both these means the extra 30 deg flexion, which is the most strenuous part of the flexion, is avoided. This can be demonstrated by means of an automatic camera. To control the flexion of various parts of the body, well defined anatomical points were marked on the skin or on the clothes. Author

N87-13948# Laboratoire Central de Biologie Aérospatiale, Paris (France).

NUMERICAL CONTROL OF A VIBRATING TANK FOR THE STUDY OF TRANSIENT SIGNALS IN BIOMECHANICS (COMMANDE NUMERIQUE DUN POT VIBRANT POUR LETUDE DES SIGNAUX TRANSITOIRES EN BIOMECHANIQUE)

L. PELLIEUX and B. PIEDECOCQ. In AGARD Backache and Back Discomfort 13 p (SEE N87-13932 05-52) Jun 1986 in FRENCH

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

In order to study the propagation of mechanical shock applied to the spinal column of a bioinstrumented primate, a system for the numerical control of the shock signal was developed. When using an implanted accelerometer it is necessary to consider, at the time of implantation, the temporal character of the acceleration selected by the experimenter. The mechanical excitation is effected with the aid of an electrodynamic vibrator, tank, on which is a fixed seat for the animal. The electric signal transmitted to the vibration tank is numerically calculated by a minicomputer. The system calculates, through filter components, the characteristics of the vibration generating system. It also determines the dynamic characteristics of the biological structure. The technique rests on the hypothesis of linearity and time invariance of the biological structure. However, time invariance is not necessary when the time intervals are short. Likewise, because of the retroactive algorithm used, perfect linearity is not necessary. The method and its limitations are explained and results are reported. M.G.

N87-13949# Sunnybrook Medical Centre, Toronto (Ontario). PREDICTION OF LUMBAR SPINAL SEGMENT INSTABILITY BY CENTRODE PATTERNS

S. D. GERTZBEIN, M. TILE, J. J. SELIGMAN, N. OGSTON, K. H. CHAN, G. KING, R. HOLTBY, and J. D. RUBENSTEIN. In AGARD Backache and Back Discomfort 9 p (SEE N87-13932 05-52) Jun 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

The center of rotation defines motion of the lumbar spinal segment; it is an indicator of spinal instability but since the motion segment does not move about a single axis, a locus of instantaneous axes of rotation or a centrodé is defined. Centrodés in normal cadaveric spines as well as those with degenerative disc disease have been identified using more techniques as well as by computer analysis of small angles of motion. In this study 47 spines were assessed, 22 of which were evaluated with axial loading. The normal centrodé lies within the posterior half of the disc space, averaging 22 mm in 10 specimens. In the earliest stages of degenerative disc disease the centrodé lengthens significantly (average 116 mm). Moderate disc disease shifts the centrodé inferiorly. Axial loading did not appear to influence the centrodé lengths or position. The technique is highly sensitive detecting 94% of the abnormal spines as compared with only 25% detected by means of measuring excessive motion on flexion/extension radiographs. This method is a highly reliable and quantifiable method of detecting early changes in spinal motion in degenerative disc disease prior to the well recognized radiographic abnormalities. Author

N87-13950# Uppsala Univ (Sweden). Dept of Rehabilitation medicine

EVALUATION AND PREDICTION OF BACK PAIN DURING MILITARY FIELD SERVICE

B. NORDGREN, R. SCHELE, and K. LINROTH. In AGARD Backache and Back Discomfort 7 p (SEE N87-13932 05-52) Jun 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

Questions regarding back pain in different body positions and earlier sicklisting due to back disorders have been answered by 5,093 men aged 23 to 47 (average age 37) who were about to do military field service. Fifty-three per cent reported that they had had back pain at some time and 14 per cent stated that they had been sick-listed for more than one month in all due to back trouble. A subsample was subjected to a standardized physical examination of the back, average examination time 9 min, and the frequency and location pain, stiffness or other impairments are given. Subjects who experienced back pain during field service and whose military post was physically heavier than their civilian occupation had on an average lower isometric strength in abdominal muscles as well as in back muscles than other subjects. The physical examination of the lumbar spine was more efficient in separating subjects who experienced back pain during military field service, than information on earlier sick-listing due to back trouble and heaviness of the military post as compared to civilian occupation. Author

N87-13951# Uppsala Univ (Sweden). Dept of Rehabilitation Medicine

INDIVIDUAL PREDICTABILITY OF BACK TROUBLE IN 18-YEAR OLD MEN: A PROSPECTIVE STUDY DURING MILITARY SERVICE

A. L. HELLSSING, B. NORDGREN, R. SCHELE, B. AHIBORG, and L. PAULSSON. In AGARD Backache and Back Discomfort 8 p (SEE N87-13932 05-52) Jun 1986 Submitted for publication (AGARD-CP-378) Avail: NTIS HC A12/MF A01

At enlistment 6,824 young men (mean age 18 years) answered a questionnaire concerning back trouble (BT). Out of these 999 passed a standardized physical examination. A follow-up one to four years later during the military service was done, including the same physical examination and questionnaire. The aim was to study the possibility for predicting BT during this time course and the correlations between the variables at enlistment and at discharge. Several significant correlations were found. From the first physical examination, the pain tests (springing test, coin test) correlated with the degree of back trouble at discharge. The questions concerning (1) absence from school or work and (2) effect of BT on every day life before enlistment correlated with the degree of BT at discharge. The highest predictive value, 39%, was shown from the answer to the second question. The answer to the first question showed a predictive value of 25%. None of the examination variables showed predictive value over 20%. Smoking more than 20 cigarettes/day showed a predictive value of 23%. Physical data like height, weight and muscle strength had a predictive value of less than 20%. Author

N87-13952# National Defence Medical Centre, Ottawa (Ontario). Physical Therapy Div.

A REVIEW OF THE NDMC BACK CARE EDUCATION PROGRAMME

B. P. WARRINGTON-KEARSLEY. In AGARD Backache and Back Discomfort 12 p (SEE N87-13932 05-52) Jun 1986 (AGARD-CP-378) Avail: NTIS HC A12/MF A01

The Back Care Education Program (BCEP) at the National Defence Medical Center, directed to the prevention of recurrent low back pain (LBP) is described from its development in 1978 to the present. The course content is also described, and the vicissitudes governing the transformation of the BCEP from a 10-hour five day course conducted twice a month, to the 8.5-hour two day course, to the present 7-hour one day course. Patients were surveyed through initial questionnaires and review questionnaires sent to them 6 months after education. Results show that little demonstrable difference was found between the 5-day and one-day courses. The BCEP has proven very effective in preventing the LBP condition from worsening; less effective in reducing continuous pain; very effective in controlling further attacks of LBP. The BCEP also resulted in 71.5% patients requiring no further treatment and in reducing activity limitation. The BCEP

has enabled its clientele to be more responsible for continuing care of their backs by pursuing a regime of regular exercise, activity and behavior modification and postural control. The BCEP has also proved cost effective in increasing the overall effectiveness of military personnel in reducing the number of days lost due to back injury. Author

N87-13957# Liverpool Univ (England) Dept of Orthopaedic and Accident Surgery

MEASUREMENTS OF CHANGE OF STATURE IN THE ASSESSMENT OF STATIC AND DYNAMIC SPINAL LOADING

J. D. G. TROUP. In AGARD Backache and Back Discomfort 4 p (SEE N87-13932 05-52) Jun 1986 (AGARD-CP-378) Avail NTIS HC A12/MF A01

The height of the body in the erect position varies by about 1% during the course of the day. It decreases rapidly on getting up and, depending on the pattern of work and rest, continues to reduce during the day, but recovers overnight. With conventional methods of measuring stature, these changes would go unrecognized. Apparatus has therefore been developed allowing measurement to an accuracy of at least 1 mm. Studies have been made of static loading, lifting, running, in different types of seating and in resting postures. In general, height losses are proportional to the magnitude of lumbosacral compression. In addition, height losses from exercise are related to the perception of the exertion involved; and the gains in height produced in positions of rest are proportional to ratings for relaxation or comfort. For ergonomists, therefore, the method offers a reliable means of assessing the effects of work and recovery on the spine. Author

N87-13958# Royal Air Force Inst. of Aviation Medicine, North Luffenham (England)

BACKACHE IN AIRCREW

D. G. READER. In AGARD Backache and Back Discomfort 6 p (SEE N87-13932 05-52) Jun 1986 (AGARD-CP-378) Avail NTIS HC A12/MF A01

Aircrew have long complained of backache. The backache is seldom severe, but frequently interferes with flying performance and is very distracting. A survey was conducted among UK aircrew in 1971 which showed that aircrew suffer from backache twice more frequently than groundcrew, pilots suffer more than other aircrew members and that ejection seats caused more backache than other types of seats. The survey also showed that half the aircrew never suffered from backache on the ground. The incidence of backache was high, 13% of pilots suffered on every flight, 22% suffered once a week while 45% suffered once a month. The backache is caused by the sitting position and design of the seat, which leads to loss of the lumbar curve. When the lumbar curve is restored by means of a curved rigid pad applied to the back, 50% of aircrew report that the backache is greatly improved and in 32% of cases completely resolved. A scheme has been underway for some years in the UK to provide lumbar pads for aircrew complaining of backache. The pads are simple and cheap to produce and are easy to use. However, the major disadvantage is that they require a mold for the individual's lumbar curve and then they cannot be used by other aircrew. Aircraft seat designs both for ejection seats and helicopter crew seats now incorporate lumbar support curves to prevent both loss of the lumbar curve and the subsequent backache in aircrews. The incidence of backache in aircraft incorporating these new designs is considerably lower. Author

N87-13959# Royal Air Force, Netheravon (England)

BACK PAIN IN GAZELLE AIRCREW

M. BRAITHWAITE. In AGARD Backache and Back Discomfort 8 p (SEE N87-13932 05-52) Jun 1986 (AGARD-CP-378) Avail NTIS HC A12/MF A01

The prevalence of backache among helicopter aircrew has long been known to be unacceptably high. The introduction of the Gazelle helicopter to UK service has resulted in an apparent increase in this prevalence. This paper is based on a questionnaire issued to Gazelle aircrew serving in Germany during 1981. The aim was to produce numerical evidence of the prevalence of backache in Gazelle aircrew, to delineate the factors responsible in the aircraft and to make recommendations for re-design. The major findings of the survey are that 82% of aircrew complained of Gazelle related backache, the taller pilots being worst affected. Flights lasting longer than one hour gave rise to backache in

70% of the subjects. The seat design features considered responsible were the design of the seat cushion, inadequate lumbar support, routing of the shoulder harness and the angle of seat rake. Since the completion of this survey, a trial of a new Gazelle seat has been carried out. The new design includes an improved seat cushion, inflatable lumbar support, and increased height of the harness take off point from the inertia reel. The results of the initial trial are conclusive in their support for the new seat. These improvements have been incorporated into the design of the Gazelle armoured seat currently under development. Author

N87-13960# CAE Electronics Ltd., Saint Laurent (Quebec)

SEAT ISOLATION SYSTEM

M. VANVLIET, M. MCKINNON, and R. V. KRUK. In AGARD Backache and Back Discomfort 12 p (SEE N87-13932 05-52) Jun 1986 (AGARD-CP-378) Avail NTIS HC A12/MF A01

Sustained low-frequency vibrations in helicopters, combined with poor posture imposed by control configuration, can affect the health and performance of aircrew. The attenuation of vibration is recognized as a critical problem in the design of future helicopters, and new (sidearm) control configurations under development may permit better posture. Conventional approaches isolate a pilot with a seat suspension which attenuates the dominant (vertical) axis of vibration. Such seats are typically passive, relying on a system of springs and dampers to attenuate the most critical combinations of expected frequency and g level. The bulk of such seats often precludes retrofitting them to existing air vehicles. Active shock/vibration isolation seats which offer advantages in terms of attenuation and frequency response have been proposed but no successful system has been developed to date. Some flight simulators employ g-seats to simulate g-forces acting on the pilot in high-performance aircraft. The expertise gained in developing, testing, and manufacturing the g-seat provides an ideal basis for developing an active antivibration seat. The frequency range of the g-seat includes the critical band of damaging and fatiguing vibrations in the vertical axis. Laboratory trials have demonstrated that the seat can attenuate the vibration to which the pilot is exposed. Concurrently, development of a displacement multi-axis hand controller for helicopter application is under way. Successful flight tests have been conducted with this unit configured as a side arm controller, permitting pilot to maintain an upright posture. This paper describes an approach and methodology for development of an active antivibration seat within the context of an integrated cockpit seat/control system. The intent is to achieve a high level of crew safety and comfort in concert with improved control performance. Author

N87-24070# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France) Aerospace Medical Panel

SHORT COURSE ON CARDIOPULMONARY ASPECTS OF AEROSPACE MEDICINE

Mar 1987. 130 p. Course held in Fuerstenfeldbruck, West Germany, 18-20 May 1987; in Athens, Greece, 21-23 May 1987; in Copenhagen, Denmark, 9-11 Jun 1987, and in Eskisehir, Turkey, 15-17 Jun 1987 (AGARD-R-758; ISBN-92-835-1544-7; AD-A18167;) Avail NTIS HC A07/MF A01

Lectures and case presentations delivered as part of a course on the cardiopulmonary aspects of aerospace medicine are compiled. The major thrust of the course was directed toward aeromedical decision making. Medical problems such as arrhythmias, coronary disease, valvular disease, hypertension, and bronchiopulmonary disease are addressed. Diagnostic and screening techniques are also discussed. For individual titles, see N87-24071 through N87-24079.

N87-24071# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France)

AEROMEDICAL EVALUATION AND DISPOSITION OF ELECTROCARDIOGRAPHIC ABNORMALITIES

WILLIAM B. KRUYER. In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 8 p (SEE N87-24070 17-52) Mar 1987 (AGARD-R-758) Avail NTIS HC A07/MF A01

Electrocardiographic abnormalities are discussed with regard to their aeromedical significance, evaluation, and disposition. Sinus

52 AEROSPACE MEDICINE

bradycardia, sinus and ventricular tachycardia, atrioventricular block, axis deviation, right and left bundle branch block, ventricular hypertrophy, tachyarrhythmias, atrial abnormalities, and short PR syndromes are addressed. Evaluation of the significance of these abnormalities is based on aviator cardiographic records in the USAF Central Electrocardiographic Library. The importance of natural history follow-up studies is emphasized. M.G.

N87-24072# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Clinical Sciences Div.
NONINVASIVE METHODS FOR THE DETECTION OF CORONARY ARTERY DISEASE IN AVIATORS: A STRATIFIED BAYESIAN APPROACH

JAMES R. HICKMAN, JR. In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 11 p (SEE N87-24070 17-52) Mar. 1987
 (AGARD-R-758) Avail: NTIS HC A07/MF A01

The detection of asymptomatic coronary disease is a major goal of most aeromedical services, especially those associated with high-performance aircraft. Unfortunately, the pursuit of silent coronary artery disease with contemporary noninvasive diagnostic methods has been disappointing. This lecture discusses the epidemiological principles which underlie this rather poor performance of contemporary diagnostic tools in a population where coronary artery disease is of low prevalence. The underlying statistical problem is best explained by analysis of Bayes' theorem, which applies conditional probability analysis to diagnostic tests which are not perfect. The predictive power of a positive diagnostic test is very heavily dependent upon the prevalence of the disease in the population being tested. Unlike sensitivity and specificity, which are independent of disease prevalence, predictive value is strongly influenced by stratification of the test population into subsets with high pretest probability of disease. Strategies to improve the poor performance of contemporary noninvasive tools in the testing of otherwise healthy individuals are discussed. The USAF School of Aerospace Medicine Risk Index is offered as a theoretical, but unvalidated, stratification tool. M.G.

N87-24073# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).
VALVULAR AND CONGENITAL HEART DISEASE IN THE AVIATOR

WILLIAM B. KRUYER and ROBERT S. SCHWARTZ In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 12 p (SEE N87-24070 17-52) Mar. 1987
 (AGARD-R-758) Avail: NTIS HC A07/MF A01

Many valvular and congenital heart lesions can have major impact in the aviation environment. In the flying population, such lesions are typically asymptomatic and may be subtle enough that their presence can be detected only by very careful physical or laboratory examination. Thus, valvular or congenital cardiac disease is often found in a flier in whom there is a great deal of time, effort, and monetary investment. The loss of such an individual from flying status should thus be avoided if at all possible. As in all aeromedical decisions, these considerations must be weighed against the likelihood of significant impairment while performing aviation duties resulting either directly or indirectly from the cardiac lesion of concern. In light of these conflicting considerations, a discussion of regulations and medical aspects of specific valvular and congenital problems as approached by the USAF School of Aerospace Medicine is presented. Author

N87-24074# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Clinical Sciences Div.
AEROMEDICAL ASPECTS OF MITRAL VALVE PROLAPSE

JAMES R. HICKMAN, JR. In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 7 p (SEE N87-24070 17-52) Mar. 1987
 (AGARD-R-758) Avail: NTIS HC A07/MF A01

Mitral valve prolapse (MVP) continues to be a major aeromedical problem. Current issues revolve around diagnostic criteria, aeromedical thresholds for disqualification and the lack of definitive natural history studies upon which to base aeromedical decisions. Currently, there are no existing natural history studies of incidentally discovered mitral valve prolapse in the asymptomatic male. The USAF School of Aerospace Medicine is following over 300 mitral valve prolapse subjects on a recurrent basis in order to determine this natural history. The comparison of this natural history group

with age-matched controls should be completed in approximately 1988. Preliminary data offered in this report enumerate the most common grounding causes of mitral valve prolapse in the first 202 aviators with prolapse in the study. A suggested scheme for clinical evaluation, aeromedical disposition of MVP and suggested aeromedical diagnostic criteria are offered. Author

N87-24075# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).
PULMONARY PHYSIOLOGY AND PULMONARY FUNCTION TESTING IN AEROSPACE MEDICINE

G. W. GRAY In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 8 p (SEE N87-24070 17-52) Mar. 1987
 (AGARD-R-758) Avail: NTIS HC A07/MF A01

Respiratory diseases may have serious consequences in the aviation environment, ranging from life threatening incapacitation (e.g., tension pneumothorax) to aggravation of hypoxia, acceleration atelectasis and perhaps lowered G tolerance in individuals with relatively minor degrees of small airways disease. Some concepts of respiratory physiology which are of particular relevance in the aviation environment are reviewed and current methods of pulmonary function testing which can be applied to detect asymptomatic disease in aircrew are discussed. Author

N87-24076# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Central Medical Establishment.
AEROMEDICAL DISPOSITION OF PULMONARY SARCOIDOSIS, CHRONIC OBSTRUCTIVE LUNG DISEASE, REACTIVE AIRWAY DISEASE AND SPONTANEOUS PNEUMOTHORAX

DAVID H. HULL In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 5 p (SEE N87-24070 17-52) Mar. 1987
 (AGARD-R-758) Avail: NTIS HC A07/MF A01

Four respiratory diseases are described in relation to aviation medicine: sarcoidosis, chronic obstructive lung disease, reactive airway disease, and spontaneous pneumothorax. Each is discussed in the context of flying safety, operational efficiency, and problems of treatment. Guidelines are offered for decisions on management and disposal of aircrew candidates and of trained aircrew who have a history of one of these diseases or who develop the disease during their flying career. Author

N87-24077# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).
HYPERTENSION IN THE AVIATOR

WILLIAM B. KRUYER In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 3 p (SEE N87-24070 17-52) Mar. 1987
 (AGARD-R-758) Avail: NTIS HC A07/MF A01

Systemic hypertension is one of the most commonly encountered medical problems for both the general medical practitioner and the specialist in aerospace medicine. Its frequent occurrence, its contribution to the risk of cardiovascular events, and problems with early detection and compliance with therapy all make hypertension a health problem of significant concern. It is clear from the literature that therapy for moderate and severe hypertension significantly reduces morbidity and mortality. However, much study and debate has occurred regarding the benefit of mild hypertension. The appropriateness of therapy for mild hypertension is discussed based on a review of several major studies from the world literature. Detrimental effects of thiazide diuretics have been reported, prompting interest in the use of smaller doses of thiazide diuretics as well as interest in the use of other agents as first line therapeutic choices. Current USAF policies regarding the treatment of hypertension in aviation are discussed as well as considerations that must be addressed in the study of new medications for use in the aviator population. Author

N87-24078# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Clinical Sciences Div.

CORONARY RISK FACTORS IN AEROSPACE MEDICINE

JAMES R. HICKMAN, JR. In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 8 p (SEE N87-24070 17-52) Mar. 1987 (AGARD-R-758) Avail: NTIS HC A07/MF A01

Coronary risk factors may be used in the aeromedical setting to identify aviators who are at high risk for the development of coronary artery disease and are, therefore, at a higher risk for sudden incapacitation. Coronary risks may be used to identify those aviators who need additional testing in an attempt to discover asymptomatic coronary disease. Coronary risk factor analysis should also be applied to the entire aviator population in order to identify those aviators who need routine or intensive risk factor modification. Certain lipid patterns, especially familial hyperlipidemia patterns, may be used to identify younger trainees who do not represent a good long-term training investment because of high risk of subsequent development of coronary artery disease.

Author

N87-24079# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

CARDIOPULMONARY SCREENING FOR HIGH-PERFORMANCE FLYING: SELECTION AND RETENTION ISSUES

G. W. GRAY In AGARD Short Course on Cardiopulmonary Aspects of Aerospace Medicine 4 p (SEE N87-24070 17-52) Mar. 1987 (AGARD-R-758) Avail: NTIS HC A07/MF A01

Detection methods used in the cardiopulmonary screening of aircrew are discussed with reference to candidate selection standards and retention of older experienced pilots. Aircrew candidate screening emphasizes the diagnosis of mostly asymptomatic diseases and disorders. It is designed to identify structural cardiac abnormalities and cardiac arrhythmias that may be a problem in the high-G(z) environment. Screening should also be directed toward pulmonary disorders which may compromise human effectiveness in rapid onset high G (ROHG) and high sustained G (HSG) fighter operations. In experienced aircrew, screening emphasis shifts to the detection of abnormalities which develop with age, particularly, coronary heart disease and small airways disease. Current issues including tobacco smoking, the effects of repetitive HSG on the heart and lungs, minimal coronary heart disease, and coronary angioplasty are also discussed.

M.G.

N87-25709# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

BIOCHEMICAL ENHANCEMENT OF PERFORMANCE

Mar. 1987. 132 p. In ENGLISH and FRENCH. Symposium held in Lisbon, Portugal, 30 Sep. - 2 Oct. 1986 (AGARD-CP-415, ISBN-92-835-0414-3, AD-A185128) Avail: NTIS HC A07/MF A01

In modern weapons systems, the operator is in an environment of high information flux. His ability to receive, process, and act on the information is finite and therefore full system effectiveness may never be achieved because of operator limitations. Major advances are being made in areas dealing with regulation of neuronal responsiveness. This offers a number of opportunities for exploring ways in which the biochemistry of neurons may be altered, reversibly, to increase responsiveness to neurotransmitters and/or other agents. Human performance may be enhanced through these alterations. The agents which initiate the change in neuron responsiveness may be supplied through nutrition, pharmaceuticals, or biochemicals. The use of pharmaceutical to promote sleep, increase vigilance, and to alter regulatory centers is considered. Neurotransmitter precursors were supplied via nutritional supplements. For individual titles, see N87-25710 through N87-25722.

N87-25710# Royal Air Force Inst. of Aviation Medicine, Farnborough (England).

ENHANCEMENT OF PERFORMANCE: OPERATIONAL CONSIDERATIONS

A. N. NICHOLSON In AGARD Biochemical Enhancement of Performance 6 p (SEE N87-25709 19-52) Mar. 1987 (AGARD-CP-415) Avail: NTIS HC A07/MF A01

Maintaining the effectiveness of aircrew during intensive and sustained operations requires knowledge from many disciplines. The first is that of understanding how the performance of individuals is modified by unusual patterns of work and rest, and how deterioration in performance can be limited by the use of short periods of sleep. The second is a detailed understanding of drugs and how they can be used either to preserve sleep or to maintain vigilance. The initial approach, if this is possible, must be to optimize the work pattern, but the pattern of rest can always be optimized. The most effective approach at present is likely to be the use of short periods of sleep, probably before rather than during duty periods, and to ensure restful sleep between operations by the use of hypnotics. At present the role of hypnotics is much less certain. Caffeine is used widely and is clearly effective. Drugs which modify monoaminergic transmission require a much greater understanding, both their pharmacological effects on the central nervous system and the effects on performance, both advantageous and adverse, before they can be considered for use in operations.

Author

N87-25711# Massachusetts Inst. of Tech., Cambridge. Dept. of Brain and Cognitive Sciences.

USE OF TYROSINE AND OTHER NUTRIENTS TO ENHANCE AND SUSTAIN PERFORMANCE

RICHARD J. WURTMAN In AGARD Biochemical Enhancement of Performance 4 p (SEE N87-25709 19-52) Mar. 1987 (AGARD-CP-415) Avail: NTIS HC A07/MF A01

Administration of supplemental tyrosine can increase the release of the catecholamines dopamine, norepinephrine, and epinephrine from physiologically-active neurons, and can thereby modify behaviors and other neuronal functions that are mediated by these neurotransmitters. The tyrosine acts by increasing the substrate saturation of the enzyme tyrosine hydroxylase; when a given neuron is firing frequently this enzyme becomes phosphorylated and, consequently, tyrosine-dependent. The amount of tyrosine that enters the brain varies with the plasma tyrosine ratio, i.e., the ratio of the plasma tyrosine concentration to the summed concentrations of other large neutral amino acids that compete with tyrosine for transport across the blood-brain barrier. Hence, the administration of pure tyrosine is much more effective than eating proteins, which contain tyrosine: the proteins contain and deliver to the blood stream considerably larger amounts of the other large neutral amino acids. Tyrosine administration protects rats from the neurochemical and behavioral effects of stress; its ability to enhance performance of stressed humans is under exploration.

Author

N87-25712# Army Research Inst. of Environmental Medicine, Natick, MA.

DEVELOPMENT OF A PARADIGM TO ASSESS NUTRITIVE AND BIOCHEMICAL SUBSTANCES IN HUMANS: A PRELIMINARY REPORT ON THE EFFECTS OF TYROSINE UPON ALTITUDE- AND COLD-INDUCED STRESS RESPONSES

L. E. BANDERET, H. R. LIEBERMAN (Massachusetts Inst. of Tech., Cambridge), R. P. FRANCESCONI, B. L. SHUKITT, R. F. GOLDMAN, D. D. SCHNAKENBERG, T. M. RAUCH, P. B. ROCK, and G. F. MEADORS, III In AGARD Biochemical Enhancement of Performance 12 p (SEE N87-25709 19-52) Mar. 1987 (AGARD-CP-415) Avail: NTIS HC A07/MF A01

Tyrosine is the precursor for the catecholamine neurotransmitters dopamine and norepinephrine. Recent experiments have shown the behavior of animals given tyrosine is less impaired after stressful treatments than that of animals given placebo. Whether tyrosine administration would reduce adverse behavioral and physiological effects in humans was investigated by two combined environmental stressors, hypoxia and cold. Twenty-seven young male military volunteers were tested in a double-blind crossover design. The subjects were tested once with a placebo and once with tyrosine at a control condition and at two levels of multiple environmental stressors. Performance tests evaluated simple and choice reaction time to visual stimuli,

vigilance, and processing of symbolic, numerical, verbal, and spatial materials. Blood samples were analyzed for plasma tyrosine and cortisol concentrations. Performance, symptoms, and mood were adversely affected by both levels of high altitude and cold. Tyrosine administration appeared to minimize the adverse consequences of these stressors. Tyrosine enhanced performance and reduced subjective symptoms. Mood states were also improved. Tyrosine had more beneficial effects at progressively more stressful altitude and cold conditions. Author

N87-25713# Basel Univ. (Switzerland). Dept. of Surgery Research Div.

MULTIVARIATE AND PSYCHO-PHYSIOLOGICAL FUNCTIONS OF DSIP

GUIDO A. SCHOENENBERGER, A. ERNST, and D. SCHNEIDER-HELMERT In AGARD Biochemical Enhancement of Performance 11 p (SEE N87-25709 19-52) Mar. 1987 (AGARD-CP-415) Avail: NTIS HC A07/MF A01

From 1969 to 1977 the Delta-Sleep-Inducing-Peptide (DSIP) was isolated, characterized, and synthesized. Beside humoral sleep induction, DSIP acts upon the circadian rhythmicity of the locomotor activity and transmitter concentrations in the brain as well as on that of plasma proteins and cortisol levels in rats. The DSIP influences the prolactin levels and the circadian activity of N-Acetyl Transferase. The DSIP-like immunoreactive material showed a circadian rhythmicity in breast milk during normal lactation. The DSIP plasma concentrations also exhibit a rhythmic 24 h pattern, the amplitude of which apparently depends on the magnitude of body-exercise. The DSIP in humans was found also to exert a bell shaped dose response curve exhibiting an activating effect during awake states in situations conducive to sleep. Clinically and statistically significant effects upon sleep architecture were seen from 1 h through 20 h after injection; adverse effects were never observed. Single dose treatments of insomnia showed significant normalization effects of DSIP in all sleep parameters as did repeated administrations in chronic insomniacs. Daytime performance was found to improve after DSIP injections which at a higher dose exerted a beneficiary effect in organic insomniacs. In summary DSIP is suggested not only to be a sleep promoting and maintaining peptide but a supramodulatory active psychophysiological programming substance. Author

N87-25714# Centre d'Etudes et de Recherches de Medecine Aerospatiale, Paris (France). Div. de Neurophysiologie Appliquee. **INTRODUCTION OF A NEW STIMULANT: CRL 40476 [PRESENTATION D'UN NOUVEAU STIMULANT: LE CRL 40476]**

C. L. MILHAUD and D. P. LAGARDE In AGARD Biochemical Enhancement of Performance 7 p (SEE N87-25709 19-52) Mar. 1987 In FRENCH (AGARD-CP-415) Avail: NTIS HC A07/MF A01

The use of stimulants constitutes one of the possible approaches to maintaining vigilance during sustained, long-duration operations. The efficiency and safety of the stimulant CRL 40476 was evaluated using the macaque rhesus. Measurements of nocturnal activity, as well as the interpretation of electroencephalographic records provide evidence of a powerful anti-sleep effect without the disturbance of the sleep pattern. The safety studies showed an absence of side effects on vegetative and behavioral functions, particularly those typical of amphetamines, for the dosages utilized to maintain wakefulness. Operational experimentation will be able to provide a preliminary determination of effective doses and administration frequencies for healthy humans. M.G.

N87-25716# Centre d'Essais en Vol, Bretigny-sur-Orge (France). Lab. de medecine Aerospatiale.

THE EVALUATION OF VIGILANCE IN STUDIES OF AERONAUTIC PHARMACOLOGY [L'EVALUATION DE LA VIGILANCE DANS LES ETUDES DE PHARMACOLOGIE EN AERONAUTIQUE]

J. L. POIRIER and H. VIEILLEFOND In AGARD Biochemical Enhancement of Performance 8 p (SEE N87-25709 19-52) Mar. 1987 In FRENCH (AGARD-CP-415) Avail: NTIS HC A07/MF A01

The design and results of various tests addressing two aspects of vigilance, psychomotor response and memorization, are described. The tests included short-term memorization tasks, visual

compensatory pursuit/tracking along two axes coupled with a secondary task measuring the response time of the subject to a visual cue, and visual pursuit tasks in a dynamic simulated-flight environment. The effects of four drugs were assessed: the psychotrope Medifoxamine 50, the antihistamine Astemizole, the psychostimulant Debrumyl, and the vasodilator RU 24722. M.G.

N87-25717# Centre d'Essais en Vol, Bretigny-sur-Orge (France). Lab. de Medecine Aerospatiale.

THE EFFECT OF ACETYL-DL-LEUCINE ON THE VESTIBULO-OCCULAR REFLEX IN HUMANS [EFFET DE L'ACETYL-DL-LEUCINE SUR LA PERFORMANCE DU REFLEXE VESTIBULO-OCCULAIRE CHEZ L'HOMME]

A. LEGER, D. LEJEUNE, and H. VIEILLEFOND In AGARD Biochemical Enhancement of Performance 8 p (SEE N87-25709 19-52) Mar. 1987 In FRENCH (AGARD-CP-415) Avail: NTIS HC A07/MF A01

The effect of the antivertiginous agent acetyl-dl-leucine on the vestibulo-ocular reflex was tested. Twelve volunteers were administered the drug or a placebo via intravenous injection and subjected to vestibular stimulation. Electro-oculography was used to record horizontal nystagmus during and after rotations. The results demonstrate that acetyl-dl-leucine, administered at therapeutic doses, did not alter the quantitative characteristics of the vestibulo-ocular reflex. M.G.

N87-25718# Harvard Medical School, Boston, MA. Dept. of Physiology and Biophysics.

HOMEOSTATIC, ENTRAINMENT AND PACEMAKER EFFECTS OF DRUGS THAT REGULATE THE TIMING OF SLEEP AND WAKEFULNESS

MARTIN C. MOORE-EDE and THOMAS A. HOUPPT In AGARD Biochemical Enhancement of Performance 9 p (SEE N87-25709 19-52) Mar. 1987 (AGARD-CP-415) Avail: NTIS HC A07/MF A01

The timing of wakefulness and sleep in humans and other diurnal primates is influenced not only by the duration of prior wakefulness or prior sleep, but also by the phase of the circadian timing system. In continuous, round-the-clock operations, or with transportation between time zones, conflicts frequently occur between these determinants of arousal state. The predictive circadian component favors wakefulness and sleep at phases consistent with the recent history of environmental and internal time cues. On the other hand, the reactive homeostatic component is principally determined by the length of prior wakefulness on the particular day in question. Investigations of pharmacological agents which influence the timing of sleep and wakefulness indicate they may exert their effects directly on the neuronal/humoral mechanisms responsible for the generation of sleep, or by altering the phase of the circadian system. The circadian effects may either be achieved by influencing the interaction between environmental light-dark cycles and circadian pacemakers. Examples of drugs which appear to have predominantly homeostatic effects, pacemaker effects, or entrainment effects are discussed. An appropriate strategy for the management of alert wakefulness at any hour of day and night must use the appropriate pharmacological tools to manage circadian and homeostatic components of wakefulness and sleep. Author

N87-25719# Secretariat General de la Defense Nationale, Paris (France).

SIDE EFFECTS OF HYPNOTIC BENZODIAZEPINES ON THE VIGILANCE AND EFFICIENCY OF PERSONNEL AFTER AWAKENING [EFFETS RESIDUELS DES BENZODIAZEPINES HYPNOTIQUES SUR LA VIGILANCE ET L'EFFICIENCE DES PERSONNELS AU REVEIL]

L. CROCC and M. A. CROCC In AGARD Biochemical Enhancement of Performance 13 p (SEE N87-25709 19-52) Mar. 1987 In FRENCH (AGARD-CP-415) Avail: NTIS HC A07/MF A01

In order to detect and evaluate the side effects of hypnotic benzodiazepines on the vigilance and efficiency of personnel after awakening, a double blind study was performed with three hypnotic benzodiazepines which satisfy military operational requirements. At four day intervals sixteen subjects were administered one of five substances in uncertain order (placebo, Loprazolam 1 mg, Triazolam 0.25 mg, Triazolam 0.50 mg, and Flunitrazepam 1 mg). On awakening, psychometric tests were performed which

determined the subjective state, attention, psychomotor efficiency, short- and long-term memory, mathematical reasoning, performance with complex tasks, and performance with information overload. The results showed the existence of a psychometric deterioration, manifested in the final test scores, with higher intellectual functions (reasoning, complex tasks, and information overload) being more greatly affected than gross aptitudes (attention and memory). However, differences in noticeable deterioration were evident between subject groups and individuals and between the various drugs. M.G.

N87-25720# Naval Health Research Center, San Diego, CA. Behavioral Psychopharmacology Dept.

SEDATING AND NONSEDATING SLEEPING AIDS IN AIR OPERATION

CHERYL L. SPINWEBER In AGARD Biochemical Enhancement of Performance 12 p (SEE N87-25709 19-52) Mar. 1987 Sponsored by the Department of the Navy (AGARD-CP-415) Avail: NTIS HC A07/MF A01

Both sedating and nonsedating sleeping aids may be appropriate for use in specific operational environments to promote sleep and permit efficient utilization of rest periods. Sedating agents, such as the benzodiazepine triazolam, produce an impairment window which is a period of time postadministration when performance and responsiveness during sleep are impaired. Nonsedating agents, such as the amino acid L-tryptophan, enhance sleep but do not alter performance of responsiveness at any time postadministration. In a field trial of the use of L-tryptophan in the U.S. Marines airlifted from California to Okinawa, L-tryptophan increased total sleep time the first night after arrival. This sleep enhancement was associated with significantly faster reaction times the next day, sparing of short-term memory from jet-lag effects, and more rapid recovery of reaction time over the first three days after arrival. Which type of agent to use in support of an air operation will be determined by the nature of the environments in which rest periods will occur and the duration of scheduled sleep times. Author

N87-25721# School of Aerospace Medicine, Brooks AFB, TX. Aerospace Medical Div.

FB-111A AIRCREW USE OF TEMAZEPAM DURING SURGE OPERATIONS

WILLIAM F. STORM and ROBERT C. PARKE In AGARD Biochemical Enhancement of Performance 12 p (SEE N87-25709 19-52) Mar. 1987 (AGARD-CP-415) Avail: NTIS HC A07/MF A01

The objectives of this field study were to evaluate the performance capabilities and sleep patterns of USAF FB-111A aircrews using temazepam as a sleep aid during premission crew rest. Seven 2-man aircrews participated in two data collection periods. During each period, a crew flew a pair of extended duration nighttime missions, one each on consecutive nights. The mission on the first night was an actual FB-111A training mission. The mission the subsequent night was flown in a high-fidelity simulator. Crews were administered 30 mg temazepam for the daytime crew rest interval between one pair of actual and simulated missions and a placebo for the crew rest between the other pair of missions. Sleep during daytime crew rest was of longer duration and better quality with temazepam than with the placebo. Twelve hours after drug ingestion, aircrew performance of the simulator missions and selected laboratory tests was similar to that with the placebo. Author

N87-25722# Service de Sante pour l'Armee de l'Air, Paris (France). Dept. de Psychiatrie et Hygiene Mentale Aerospatiales. **PHOBIC MANIFESTATIONS AMONG EXPERIENCED PILOTS (LES MANIFESTATIONS PHOBQUES CHEZ LES PILOTES CONFIRMES)**

J. R. GALLE-TESSONNEAU In AGARD Biochemical Enhancement of Performance 5 p (SEE N87-25709 19-52) Mar. 1987 In FRENCH (AGARD-CP-415) Avail: NTIS HC A07/MF A01

Fear-of-flight phobic responses are not uncommon among experienced pilots. The associated clinical expressions are numerous and varied: psychological, somatic, or behavioral. Early therapeutic intervention of acute reaction states is often favorable. The prognosis is most uncertain in organized pathological conditions and evolving chronic modes. M.G.

N87-27391# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France) Technical Information Panel.

AGARD GUIDE TO AEROSPACE AND DEFENCE TECHNICAL REPORT SERIES IN NATO COUNTRIES

May 1987 348 p (AGARD-R-743; ISBN-92-835-1549-8; AD-A182802) Avail: NTIS HC A15/MF A01

A guide is presented to technical reports series relating to aerospace and defence research and development currently published by governments, contractors, research laboratories or universities in NATO member countries. The guide lists reports series from Belgium, France, the Federal Republic of Germany, the Netherlands, Norway, the United Kingdom, the United States and international organizations. Information given includes a technical report series code, a title (where available), name and address of the organization producing the series, availability (where known), type of organization and other helpful information provided by the producers. Two indexes are provided: an overall one by number; and one by number within country. Author

N87-30065# Britannia Airways Ltd., Luton (England). **IN-FLIGHT ASSESSMENT OF WORKLOAD USING PILOT RATINGS AND HEART RATE**

ALAN H. ROSCOE In Advisory Group for Aerospace Research The Practical Assessment of Pilot Workload p 78-82 (SEE N87-30054 24-54) Jun. 1987 (AGARD-AG-282) Avail: NTIS HC A07/MF A01

At present the most used and probably the most reliable methods for assessing pilot workload in flight are based on some form of subjective reporting by experienced test pilots. Subjective opinions are susceptible to bias and preconceived ideas and so may occasionally result in false estimates of workload. For more than 15 years subjective reporting at RAE Bedford has been augmented by recording their heart rates. At first pilots described workload in a relatively unstructured manner but the need for some form of rating scale was soon apparent. After much trial and error, a 10 point rating scale using the concept of spare capacity was developed. The overall design is based on the Handling Qualities Rating Scale of Cooper and Harper. During the past 8 years a number of flight trials have used pilot ratings and heart rate responses to assess workload. The rationale for using heart rate in assessing pilot workload is based on the concept of neurological arousal. The technique is described and examples of its use are given. Also listed and briefly discussed are limitations and pitfalls of the technique. Author

N88-11366# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

SLEEP AND WAKEFULNESS: HANDBOOK FOR FLIGHT MEDICAL OFFICERS, SECOND EDITION

A. N. NICHOLSON and BARBARA M. STONE (Royal Air Force Inst. of Aviation Medicine, Farnborough, England) Jul. 1987 75 p

(AGARD-AG-270(E); AD-A186763) Avail: NTIS HC A04/MF A01

The first edition of this handbook was published in 1982, and since then the understanding of sleep and wakefulness has advanced considerably. This new handbook emphasizes the management of aircrew and the problems they experience in coping with irregularity of rest and activity. Author

N88-12923# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

HUMAN RESPIRATORY RESPONSES DURING HIGH PERFORMANCE FLIGHT

R. M. HARDING (Institute of Aviation Medicine, Farnborough, England) Nov. 1987 93 p

(AGARD-AG-312; ISBN-92-835-1561-7; AD-A191601) Avail: NTIS HC A05/MF A01

The respiratory responses of experienced pilots were studied during flight in a high performance jet aircraft. Over 38 hours of physiological monitoring was carried out involving over 47,000 breaths. The importance and relevance of information about these respiratory responses is reviewed, with particular emphasis on the difficulties of in-flight recording and the history of such experimentation in four specific areas of respiratory physiology.

52 AEROSPACE MEDICINE

respiratory frequency and flow, added external resistance, hyperventilation, and the metabolic cost of flying. Author

N88-27684# New York Univ., New York. Dept. of Psychology. **STUDIES OF THE INTACT HUMAN BRAIN: IMPLICATIONS FOR PERFORMANCE**

LLOYD KAUFMAN In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 17 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The development and testing of multi-channel neuro-magnetometers are discussed in relationship to providing information needed concerning brain activity. Also discussed is the relationship between the number of sensing channels and the background noise. A brief account of some of the analytical methods applied to neuromagnetic data is provided. B.G.

N88-27685# New York Medical Coll., NY. Div. of Biological Psychiatry.

CEEG DYNAMIC BRAIN MAPPING: A NEW METHOD TO EVALUATE BRAIN FUNCTION IN DIFFERENT PSYCHOLOGICAL AND DRUG CONDITIONS

TURAN M. ITIL, KURT Z. ITIL, EMIN ERALP, A. AKMAN (HZI Research Center, Tarrytown, N.Y.), and A. MANCO In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 16 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The electroencephalogram (EEG), discovered more than half a century ago, is still the only non-invasive, simple and objective method to continuously and repetitively study brain function, and has recently gained new significance since quantification by microprocessors was developed. Quantification of single-lead EEG proved to be of significant value in psychotropic drug development. Discoveries of the psychotropic properties of drugs and the determination of bioavailability of CNS-active compounds validated this method. It was demonstrated that the brain's bioelectrical activity, even recorded in only one area of the brain, can represent brain function and is closely associated with human behavior. A newly-developed brain function monitoring system using multi-lead, broad frequency spectrum Computer-analyzed Electroencephalogram (CEEG) with Dynamic Brain Mapping seems to be a very promising methodology to study human behavior and to monitor its changes due to external and internal factors. Author

N88-27686# EEG Systems Lab., San Francisco, CA. **FOURTH GENERATION NEUROCOGNITIVE PATTERN ANALYSIS SYSTEM**

A. S. GEVINS, N. H. MORGAN, S. L. BRESSLER, D. S. GREER, B. COSTALES, K. SMITH, and R. FAUCETTE In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 13 p (SEE N88-27683 21-51) Feb. 1988 Original contains color illustrations (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The generic term neurocognitive pattern (NCP) analysis is used to refer to procedures being developed to extract spatiotemporal neurocognitive patterns from the unrelated neuroelectric noise of the brain. Recordings with up to 64 scalp channels during highly controlled tasks are now routine in the laboratory, as is the extended signal processing sequence required to extract minute neurocognitive signals from gigabyte sets of single-trial data. More robust measures of the degree of functional interdependency between electrodes were developed and applied to several prior neuropsychological models of the rapidly shifting cortical network accompanying expectancy, stimulus registration and feature extraction response preparation and execution, and updating to feedback about response accuracy. These results suggest that it is possible to characterize functional interdependencies of event-related processing between local neural areas by measuring the wave congruence and lag time of appropriately preprocessed low-frequency brain waves. Determining the distributed functional network of specialized areas of the brain producing the observed patterns is a formidable problem which is being attacked on a number of fronts. Author

N88-27687# New York Univ. Medical Center. Brain Research Labs.

NORMATIVE DEVELOPMENTAL EQUATIONS FOR THE EEG AND THEIR SENSITIVITY TO NEUROLOGICAL AND PSYCHIATRIC DISORDERS

E. R. JOHN and L. S. PRICHEP In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 7 p (SEE N88-27683 21-51) Feb. 1988 Prepared in cooperation with Kline (Nathan S.) Inst. for Psychiatric Research, Orangeburg, N.Y. Original contains color illustrations (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Although the electroencephalogram (EEG) is altered by many brain dysfunctions, its clinical utility is severely limited by reliance upon visual pattern recognition and subjective interpretation. The goal was to not only replace subjective judgments by objective quantification, but to extend the utility of electrophysiological examinations beyond their traditional role in the detection of neurological disorders to the assessment of cognitive impairments and the evaluation of psychiatric patients. The initial studies were focussed on the problem of learning disabilities in children. As the techniques evolved, they were applied successfully to the assessment of pediatric neurological patients, to adult patients with mild head injury, cerebrovascular disease including transient ischemic attacks, alcoholism, cognitive impairment due to senile dementia, affective disorders, and psychoses. The method which was developed for these purposes, called neurometrics, is based upon the computerized extraction of a wide variety of objective indices of brain function as reflected in electrophysiological activity, the multivariate statistical evaluation of these quantitative measures, and the display of diagnostically significant findings in color coded topographic maps easily interpretable by the clinician without extensive specialized training. Author

N88-27688# Royal Air Force Inst. of Aviation Medicine, Farnborough (England).

THE APPLICATION OF NON-STATIONARY DATA ANALYSIS TECHNIQUES IN THE IDENTIFICATION OF CHANGES IN THE ELECTROENCEPHALOGRAPH ASSOCIATED WITH THE ONSET OF DROWSINESS

NICOLA A. WRIGHT, R. G. BORLAND, and AMANDA MCGOWN In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 5 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The electrical activity of the brain was analyzed using techniques to detect the occurrence of non-stationarities associated with transitional states between alert wakefulness and sleep. Eight minutes of resting eyes closed data were used in the analysis. A visual inspection was performed to classify the record into epochs of varying lengths according to the different states of arousal. Three states were defined: alert wakefulness, drowsy sleep, and a transitional state. Nonstationary data analysis techniques were used to identify these changes automatically. The techniques used were autoregressive modeling, in which the prediction error was used as a criterion to detect change, and evolutionary power spectrum analysis, where a spectral ratio was defined to detect differences between short epochs of the signal. In addition, the autocorrelation function was calculated for a limited number of lags, and changes in the function with reference to previous epochs used to identify the onset of change. These techniques were compared with methods of analysis based on a pre-defined epoch length, to determine the most efficient method of detecting changes associated with the transition between alertness and drowsiness. A discriminant function was calculated for each of the three visually classified states to define a classification rule, which was then used to allocate the segments produced by each of the automatic analysis techniques to one of the three states of alertness. Finally, the performance of each technique was assessed in terms of its ability to correctly classify segments of data. Author

N88-27689# National Hospital, Oslo (Norway). Lab. for Clinical Neurophysiology.

A STATISTICAL PROCEDURE FOR THE EVALUATION OF PRESENCE/NON-PRESENCE OF STIMULUS-RELATED EEG ACTIVITY

NILS IRGENS BACHEN *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 9 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Averaging of a sufficient number of stimulus-related sample functions is a commonly applied method for the demonstration of evoked activity in the electroencephalogram (EEG). However, problems may arise in the visual evaluation of averaged waveforms when the signal-to-noise ratio is low, such as for instance in certain cerebral disease conditions, or when the intensity of the stimuli is low. In such situations the question of presence or not of evoked activity may be of material importance. Even experienced observers will find it difficult to give a reliable answer if their judgment has to depend only on visual assessment of the averaged waveforms obtained. A statistical test for the presence of evoked activity may be a guide to the correct decision in such cases. A statistical procedure based on phase value measurements of Fourier component in the post stimulus sample functions is presented. The distribution of these phase values is uniform in the interval 0 to 360 degree when the EEG sample functions contain no evoked activity. On the other hand, an aggregation of phase values in a certain angular region and hence a nonuniform distribution is to be expected if evoked activity is present. A statistical procedure testing a null hypothesis assumption of uniformity may thus be applied in the evaluation of presence/nonpresence of stimulus-related activity in the critical situations. A test of the Kolmogorov-Smirnov type, Kuiper's V(sub n) test, was applied with satisfactory results. Author

N88-27690# Dalhousie Univ., Halifax (Nova Scotia). Dept. of Ophthalmology.

DISSECTING THE VISUAL AND AUDITORY PATHWAYS BY MEANS OF THE TWO-INPUT TECHNIQUE

D. REGAN and M. P. REGAN *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 9 p (SEE N88-27683 21-51) Feb. 1988 Sponsored by the National Sciences and Engineering Research Council, Canada, MRC, Canada and AFOSR, Washington, D.C. (AGARD-CP-432) Avail: NTIS HC A18/MF A01

An evoked potential for identifying the nonlinear characteristics of specialized sensory neural mechanisms in the human brain is described. For example, subjects viewed a grating pattern modulated at F(sub 1) Hz superimposed on a second grating modulated at F(sub 2) Hz. The VEP consisted of about 20 discrete frequency components, each of less than 0.004 Hz bandwidth. Most would be destroyed by conventional averaging, but could be measured by zoom-FTT technique that gives 25,000 resolvable bins over DC-100 Hz. A mathematical treatment was developed such that the pattern of behavior among these VEP components fingerprints the nonlinear processing. Orientation tuning bandwidths (20 deg) and the spatial frequency tuning of a phase-independent visual mechanism; strong interactions between response to orthogonal orientations; and a possible EP means of investigating the auditory hair cell transducer characteristic are reported. Author

N88-27691# Consiglio Nazionale delle Ricerche, Rome (Italy). Istituto di Elettronica dello Stato Solido.

SQUID INSTRUMENTATION FOR NEUROMAGNETIC STUDY OF COMPLEX BRAIN ACTIVITY

GIAN LUCA ROMANI *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 7 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The impressive results obtained during the last few years by applying the neuromagnetic method to the investigation of brain physiology and pathology have given an extraordinary impulse to the development of large multi-sensor systems, which should permit, in a relatively near future, to simultaneously detect the distribution of the magnetic field over a large area of the scalp and to achieve a real time functional localization of active cerebral sources. An outline of the main instrumental problems in the choice

of an optimal sensor configuration (for large multichannel systems) is presented, with particular emphasis on the capability featured by different kinds of superconducting gradiometers to identify complex cerebral sources, and on the need for more sophisticated model sources. Author

N88-27692# Consiglio Nazionale delle Ricerche, Rome (Italy). Istituto di Elettronica dello Stato Solido.

ELECTRIC AND MAGNETIC BRAIN ACTIVITY RELATED TO COGNITIVE PERFORMANCE

ROBERT M. CHAPMAN, IVO MODENA, LIVIO MARICI, VITTORIO PIZZELLA, GIAN LUCA ROMANI, CARLO SALUSTRI, JOHN W. MCCRARY, and SUSAN GARNSEY (Rochester Univ., N. Y.) *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 8 p (SEE N88-27683 21-51) Feb. 1988 (Contract MH40703; HD22271; EY01319) (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Cognitive performance and brain activity; memory storage component in evoked potentials; connotative meaning; and syntactic differences in words and linguistic processing were examined. B.G.

N88-27693# Muenster Univ. (Germany, F.R.). Inst. of Experimental Audiology.

NEUROMAGNETIC EVIDENCE OF PLACE MECHANISMS FOR FREQUENCY AND INTENSITY CODING IN THE HUMAN AUDITORY CORTEX

M. HOKE, C. PANTEW, K. LEHNERTZ, and B. LUETKENHOENER *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 12 p (SEE N88-27683 21-51) Feb. 1988 Sponsored by Deutsche Forschungsgemeinschaft, West Germany and Heinrich-Hertz-Stiftung, West Germany (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The influence of two decisive parameters of the acoustic stimulus (frequency and intensity) on the auditory evoked magnetic field in response to tone-burst stimulation was investigated in four normal-hearing subjects. The influence was quantified in terms of changes of the parameters of an equivalent current dipole (spatial coordinates, direction, and strength). The frequency dependence was investigated by varying the carrier frequency of the tone-burst between 250 and 4000 Hz in octave steps with the intensity kept constant at 60 dB HL, while the intensity dependence was investigated by varying the intensity of a 1000 Hz tone-burst between 30 and 80 dB HL in 10 dB steps. The parameters of an equivalent current dipole (ECD) were determined such that a maximum correspondence between observed and calculated field distribution (semi-infinite volume model) was obtained. The main results are as follows: the location of the ECD changes significantly as a function of test frequency and intensity. Especially the depth increases with the logarithm of test frequency which proves that also in humans the tonotopic organization of the cochlea is maintained in the auditory cortex. The decrease in depth of the ECD with increasing stimulus intensity supports the hypothesis that place mechanisms also play a role for intensity coding. Author

N88-27694# Simon Fraser Univ., Burnaby (British Columbia). Brain Behaviour Lab.

THE INTERACTION OF THALAMO-CORTICAL SYSTEMS IN THE 40 HZ FOLLOWING RESPONSE

H. WEINBERG, D. CHEYNE, P. BRICKETT, R. GORDON, and R. HARROP *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 6 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The study reported is an extension of the initial auditory experiments to include the study of 40 Hz vibration of glabrous skin receptors and examination of the interaction of simultaneous (in phase) auditory and tactile stimulation. The data presented suggest that different systems are active in response to 40 Hz tactile vibration and auditory stimulation, although the EEG response at the vertex remains quite similar. B.G.

52 AEROSPACE MEDICINE

N88-27695# Simon Fraser Univ., Burnaby (British Columbia). Brain Behaviour Lab.

A STUDY OF SOURCES IN THE HUMAN BRAIN ASSOCIATED WITH STEREOPSIS

H. WEINBERG, P. BRICKETT, A. ROBERTSON, D. CRISP, D. CHEYNE, and R. HARROP. In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 6 p (SEE N88-27683 21-51) Feb. 1988. Sponsored by the Defence and Civil Inst. of Environmental Medicine, Canada.

(AGARD-CP-432) Avail: NTIS HC A18/MF A01

The purpose of the initial stage of the research was to confirm with myoelectrography (MEG) the evidence for multiple stages of processing binocular information, establish what these stages are, and estimate location of generators. Initial experiments are designed to compare the magnetic fields evoked by dynamic random-dot stereograms (DRDSs) and dynamic RDCs in the same subject to see if the DRDC evoked field is similar to the early component of the response to the DRDS. The continuation of these experiments is concerned with the later component of the evoked field and the nature and location of the estimated sources. Author

N88-27696*# Illinois Univ., Champaign. Dept. of Psychology. EVENT-RELATED BRAIN POTENTIALS AS INDICES OF MENTAL WORKLOAD AND ATTENTIONAL ALLOCATION

ARTHUR F. KRAMER, EMANUEL DONCHIN, and CHRISTOPHER D. WICKENS. In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 15 p (SEE N88-27683 21-51) Feb. 1988. Sponsored by NASA, Ames Research Center, Moffett Field, Calif. (Contract F49620-79-C-0233)

(AGARD-CP-432) Avail: NTIS HC A18/MF A01 CSCL 06P

Over the past decade considerable strides were made in explicating the antecedent conditions necessary for the elicitation, and the modulation of the amplitude and latency, of a number of components of the event-related brain potential (ERP). The focus of this report is on P300. The degree to which the psychophysiological measures contribute to issues in two real-world domains (communication devices for the motor impaired and the assessment of mental workload of aircraft pilots) are examined. Author

N88-27697# York Univ., Downsview (Ontario). Dept. of Physical Education.

THE EFFECTS OF HYPOXIA ON P300 AND REACTION TIME

B. FOWLER, B. KELSO, J. P. LANDOLT, and G. PORLIER (Defence and Civil Inst. of Environmental Medicine, Downsview, Ontario) In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 7 p (SEE N88-27683 21-51) Feb. 1988

(Contract DCIEM-W7711-6-9019)

(AGARD-CP-432; DCIEM-87-RR-12) Avail: NTIS HC A18/MF A01

This experiment investigated the effects of three levels of arterial oxygen saturation (SaO₂ of 75, 70, and 65 percent) on reaction time (RT) and P300 latency and amplitude. Ten subjects responded to visually presented male or female names in an oddball paradigm with accuracy controlled at a high level. Hypoxia increased both RT and P300 latency in a dose-related manner and these variables were strongly correlated. Hypoxia did not influence P300 amplitude. The increase in P300 latency is interpreted as further evidence that hypoxia allows stimulus evaluation processes and that, under the right circumstances, P300 could be used to index the effects of hypoxia on performance. Author

N88-27699# Washington Univ., Saint Louis, MO. Behavior Research Lab.

COGNITIVE TASK DEMANDS AS REFLECTED IN PHYSIOLOGICAL MEASURES

JOHN A. STERN and LANCE O. BAUER (Oklahoma Univ., Oklahoma City.) In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 11 p (SEE N88-27683 21-51) Feb. 1988 (Contract F49620-83-C-0059)

(AGARD-CP-432) Avail: NTIS HC A18/MF A01

Three experiments are described in which cognitive demands were manipulated. The task was a modified Sternberg paradigm comprised of three task stimuli: the cue, providing information about the memory set, the memory set itself, and a test stimulus, a member of the memory set on half the trials. Among variables investigated were set size and nature of the stimulus material. Physiological measures included EEG event-related potentials (ERP) to the three stimuli (task-RSPs), ERPs to probe stimuli (probe-ERPs), and flashes irrelevant to performance. Three measures derived from the eye blink and one heart rate measure were used. Results demonstrated ERP changes related to task difficulty. Some involved the ERP to the memory stimulus and some, the probe ERP. Heart rate changes, some related to expectancy, others to task demands, were also obtained. Blink probability, duration and timing, all reflected stimulus expectancy and difficulty. These results suggest that work load, as well as attention, can be evaluated using physiological measures. Author

N88-27702# Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario).

PSYCHOPHYSIOLOGICAL MEASURES OF DROWSINESS AS ESTIMATORS OF MENTAL FATIGUE AND PERFORMANCE DEGRADATION DURING SLEEP DEPRIVATION

R. A. PIGEAU, R. J. HESLEGRAVE, and R. G. ANGUS. In AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 16 p (SEE N88-27683 21-51) Feb. 1988

(AGARD-CP-432) Avail: NTIS HC A18/MF A01

A methodology developed to measure drowsiness electrophysiologically as an index of chronic fatigue experienced during periods of sleep loss is described. Nine volunteers performed a continuous cognitive workload schedule with 15 minute breaks occurring every 2 hours throughout a 64 hour sleep deprivation experiment. To measure fatigue a 4 minute eyes closed relaxation period was embedded once every hour within a battery of cognitive tasks. The subjects were instructed to relax with their eyes closed but remain awake and alert. The EEG signals collected during these periods were both visually scored and computer quantified. Two raters visually scored the signals for: time of first stage 1 sleep onset, number of stage 1 sleep onsets, shortest and longest time in stage 1, and total amount of stage 1 sleep (or deepest). Period analysis was performed on the digitized data and a drowsiness scale was developed by subtracting the amount of theta and delta from alpha while controlling for individual differences by dividing the results by alpha minus theta minus delta activity present in the baseline. The results indicate that for individual subjects drowsiness onset latencies, performance, subjective scales, and the drowsiness index are all intercorrelated. It is suggested that these EEG techniques, as well as the methodology of embedding eyes close relaxation periods, yield sensitive measures for detecting differential levels of drowsiness during sleep deprivation. Author

N88-27703# EEG Systems Lab., San Francisco, CA.
**NEUROPHYSIOLOGICAL PATTERNS OF OPERATIONAL
 FATIGUE: PRELIMINARY RESULTS**

A. S. GEVINS, B. A. CUTILLO, R. M. FOWLER-WHITE, J. ILLES, S. L. BRESSLER, and J. C. MILLER (Test Group, 6520th, Edwards AFB, Calif.) *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 9 p (SEE N88-27683 21-51) Feb. 1988 Sponsored by AFOSR, Washington, D.C., School of Aerospace Medicine, Brooks, AFB, Tex., National Inst. of Neurological and Communicative Diseases and Strokes, Washington, D.C. and NSF, Washington, D.C. Original contains color illustrations (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Impaired behavior consequent to prolonged mental work is commonly attributed to the effects of fatigue on higher cognitive functions rather than to changes in rote perceptuomotor or motor functions. A deeper understanding of these effects awaits better knowledge of the underlying neurophysiological mechanisms. Here a modest contribution is made toward this end with a study of event-related, spatiotemporal neuroelectric patterns of five U.S. Air Force test pilots performing a high-load visuomotor monitoring task while alert, becoming fatigued, and fully fatigued. The preliminary results suggest that although neural systems responsible for primary visual stimulus processing remain relatively unaffected, cortical associative areas implicated in task-specific response inhibition are affected even during early stages of fatigue. With further research, it may be possible to design on-line devices for predicting transient cognitive lapses and performance decrements resulting from operational fatigue. Author

N88-27705# Burden Neurological Inst., Bristol (England).
**EVENT-RELATED AND STEADY POTENTIAL CHANGES IN THE
 BRAIN RELATED TO WORKLOAD DURING TRACKING**

W. C. MCCALLUM, R. COOPER, and P. V. POCOCCOCK *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 10 p (SEE N88-27683 21-51) Feb. 1988 Sponsored by British Aerospace Limited and the Ministry of Defence, United Kingdom (AGARD-CP-432) Avail: NTIS HC A18/MF A01

In two experiments event-related potentials (ERPs) and slow potential changes were recorded from normal subjects performing a visual tracking in which the level of difficulty was systematically varied. In the second experiment a secondary discrimination task was added to increase the level of operator load and to probe the allocation of cerebral processing resources. The most notable feature to emerge was a protracted slow potential shift, associated with the primary task. The amplitude of this shift proved to be sensitive to the difficulty manipulations such that increased difficulty resulted in increased negativity. However, a memory task introduced in the early part of each trial tended progressively to decrease the amplitude of the shift as the memory demand increased. The ERPs to the individual points of decision and response during the course of a trial were also found to be sensitive to the level of task loading. The introduction of the secondary task resulted in a possible further increase in the negative shift to tracking, but in reductions in the amplitude of late cognition components of the secondary task ERPs compared with their levels when this task was presented on its own. Author

N88-27706# EEG Systems Lab., San Francisco, CA.
**NEUROPHYSIOLOGICAL PRECURSORS OF ACCURATE
 VISUOMOTOR PERFORMANCE**

A. S. GEVINS, B. A. CUTILLO, S. L. BRESSLER, N. H. MORGAN, R. M. FOWLER-WHITE, D. S. GREER, J. ILLES, J. C. DOYLE, R. S. TANNEHILL, and G. M. ZEITLIN *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 11 p (SEE N88-27683 21-51) Feb. 1988 Sponsored by AFOSR, Washington, D.C., School of Aerospace Medicine, Brooks, AFB, Tex., NSF, Washington, D.C., National Inst. of Neurological Diseases and Strokes, Washington, D.C. and ONR, Washington, D.C. Original contains color illustrations (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Using advanced, signal processing techniques, the rapidly changing, spatial mass neuroelectric patterns associated with preparation and execution of precise right- and left-hand finger pressures in response to visual numeric stimuli in seven healthy

right-handed adult male subjects were measured. Previously unseen pre-stimulus differences between patterns associated with subsequently accurate and inaccurate performance were revealed. A spatially specific, multi-component neural preparatory set, composed of invariant left frontal and midline precentral components and hand-specific central and posterior parietal components, appear to be essential for accurate performance of certain types of difficult visuomotor tasks. When this preparatory set is weakened, or inappropriate, subsequent performance is likely to be inaccurate. Author

N88-27708# Naval Biodynamics Lab., New Orleans, LA. Impact Sciences Dept.

**EVOKED POTENTIAL ANALYSIS OF IMPACT ACCELERATION
 EXPERIMENTS**

DAVID L. MATSON and MARC S. WEISS *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 13 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The use of somatosensory evoked potentials (SEPs) as an assessment tool for transient injury in rhesus macaques undergoing impact acceleration in the -Gx direction is examined. Adult male rhesus macaques, seated on a sled and restrained (except for the head and neck), were accelerated at peak sled accelerations ranging from 95.5 to 1039.6 m/sec squared. The sled was decelerated by friction forces ranging from 0.7 to 3.0 m/sec squared. Somatosensory stimuli were delivered prior to, during, and after impact. Amplified SEP activity was telemetered and recorded on magnetic tape. The raw SEP data were digitized and analyzed off-line. Results for cortical SEPs are consistent with and extend previous analyses, suggesting a threshold for transitory changes in cervical SEP latencies in macaques at peak -Gx sled accelerations below 550 m/sec squared. This threshold is below the threshold for single impact -Gx neuropathological injury in macaques (800 m/sec squared), and suggests a role for cortical SEPs in establishing injury criteria for humans. Author

N88-27709# School of Aerospace Medicine, Brooks AFB, TX.
**EEG INDICES OF G-INDUCED LOSS OF CONSCIOUSNESS
 (G-LOC)**

NITA L. LEWIS, JENNIFER B. MCGOVERN, JAMES C. MILLER, DOUGLAS R. EDDY, and ESTRELLA M. FORSTER (Rothe Development, San Antonio, Tex.) *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 12 p (SEE N88-27683 21-51) Feb. 1988

(AGARD-CP-432) Avail: NTIS HC A18/MF A01
 To investigate the utility of the electroencephalogram (EEG) as an indicator of state of consciousness, human brain activity was recorded during exposure to rapid onset (6 G/sec) centrifugation (+7G). Eight healthy volunteers were given at least two sessions of sustained acceleration on the USAFSAM human centrifuge. The sessions were conducted without G-suits and subjects were instructed to relax and not attempt anti-G straining maneuvers. Six subjects each experienced two episodes of G-induced loss of consciousness (G-LOC) while one subject lost consciousness once and experienced visual blackout once. One subject remained conscious but experienced visual grayout in both sessions. The EEG signals were recorded with EEG Grass gold-cup electrodes which were held in place by using gauze and collodion. Data were digitized at 256 samples per second and transferred to a DEC PDP-11/55 computer for analysis. Results demonstrated a shift from beta to delta activity with pronounced absence of beta activity during unconsciousness. These results are in keeping with findings in the anesthesia and aerospace medicine literature. The EEG can be useful in detecting unconsciousness during acceleration. Author

52 AEROSPACE MEDICINE

N88-27710# Naval Air Development Center, Warminster, PA.
DETECTION OF ACCELERATION (+Gz) INDUCED BLACKOUT BY MATCHED-FILTERING OF VISUAL EVOKED POTENTIALS
JOHN G. NELSON, JOSEPH P. CAMMAROTA, and LEONID HREBIEN *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 13 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

In air-combat-maneuvering and on human centrifuges, moderate levels of positive acceleration (+Gz), coupled with moderate rates of onset, produce visual symptoms which are ordinarily progressive: decreasing visual sensitivity, dimming of visual field, peripheral light-loss, and central light-loss of consciousness; subjective visual symptoms are the most commonly used tolerance end point in acceleration research. In order to provide an objective indication of the integrity of the visual system, a method for real-time monitoring of the steady-state visual evoked potential (VEP) was developed. Using the Fast Fourier Transform (FFT), a method for maximizing the signal-to-noise ratios was developed: a digital, frequency domain, non-white-noise matched filter, with evaluation only at the expected response peak. Experiments on the U.S. Naval Development Center's Human Centrifuge demonstrated that the response does progressively decrease, disappearing at black-out. Improved computer facilities have permitted evaluation of alternative methods of processing, and the effectiveness of such processing. Data from a static experiment using four stimulus repetition rates and two electrode positions showed that windowing of the time record prior to FFT does not necessarily improve detection. Author

N88-27712# Aerospace Medical Research Labs., Wright-Patterson AFB, OH.
MOTION EVOKED VESTIBULAR POTENTIALS
G. WILSON, R. LUCIANI, and D. RATINO (Air Force Human Resources Lab., Williams AFB, Ariz.) *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 5 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Motion evoked potentials (MER) were collected from subjects while they were rotated from side to side in a seated position. The MERs were biphasic with major component mean latencies of 278 and 388 msec. It is concluded that the MERs are of brain origin and not due to artifacts from the recording environment. The latencies of the waveform components of the MER suggests that the MER results from the onset of the rotation stimulus. Differences between the MERs reported and those of other published reports may be due to the added involvement of the saccule/utricle apparatus and the more rapid onset of the stimulus. Author

N88-27713# Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario).
THE EFFECT OF MILD HYPOXIA ON THE VESTIBULAR EVOKED RESPONSE
W. D. FRASER, N. BLACK, D. E. EASTMAN, and J. P. LANDOLT *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 10 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The effect of hypoxia on the long-term vestibular evoked response was examined in eight sitting subjects on a small target light that rotated with the subject. Evoked responses were recorded during 10 minutes of rotational stimulation after breathing each gas mixture for a minimum of 25 minutes. For intermittent clockwise (CW) rotation in the horizontal plane, a reproducible negative potential developed at electrode sites located between the vertex and the linked ears during air breathing conditions. It peaked close to the point of maximum velocity of the sinusoidal stimulus. The results indicate that the cortical processing of vestibular sensations may be affected even under very mild phyoxic conditions. Animal studies have indicated that the levels of hypoxia used in this study can significantly alter neurotransmitter metabolism in brain tissue. Modification in neurotransmitter synthesis and concentration by the hypoxic conditions may explain the susceptibility of cortical processing of sensory information to very mild hypoxia. Compensatory changes in cerebral blood flow and neurotransmitter

synthesis may be responsible for the reduced effect under the more severe hypoxic conditions. Author

N88-27714# Hordt Research, Development and Therapy, Rodgau (Germany, F.R.).
MEASUREMENT AND CLASSIFICATION OF THE MODE OF ACTION OF ANTIDEPRESSANT DRUGS
ALBRECHT FRAUENDORF, DAVID JOHNSON, and LOTHAR DEMISCH (Johann-Wolfgang-Goethe-Univ., Frankfurt am Main, West Germany) *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 9 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

In a comparison of the chronic effects on the central nervous system of five new generation antidepressant, a dose-response study was performed with 5 to 7 healthy subjects per substance. Following standard medical screening, intraindividual comparisons after one week at each of the three dosages. Two MAO-inhibitors, a NA-reuptake inhibitor, a serotonin-reuptake inhibitor, and an alpha 1/alpha 2 adrenergic receptor, and serotonin S sub 2 (receptor-antagonist). The visual evoked potentials were recorded from electrode position O sub z between O sub 1 and O sub 2. The brightness, contrast, and color channels of the visual system were stimulated using on-off, checkerboard, and color changes respectively. After digitizing, the evoked potentials were subjected to Fourier filtering and analyzed in the standard EEG frequency ranges delta, theta, alpha, and beta. This improved stability and precision of measurement without phase shifts. The latency changes of all components were measured and used to form attenuation and activation coefficients in each range. With the help of factor analysis, an activity profile of the effects of each of these drugs in the CNS was plotted in three-dimensions. Both activation and attenuation coefficients were used to classify the effects of the antidepressants at the cortical level. Author

N88-27715# Johann-Wolfgang-Goethe-Univ., Frankfurt am Main (Germany, F.R.).
MEASUREMENT OF ELECTRICAL ACTIVITY IN THE CNS WITH CORTICAL EVOKED POTENTIALS AND EEG: EFFICACY PROFILES OF DRUGS USING FACTOR ANALYSIS
DAVID JOHNSON, ALBRECHT FRAUENDORF (Hordt Research, Development and Therapy, Rodgau, West Germany), and KURT OFFENLOCH *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 8 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

In a series of experiments with 20 healthy, subjects per substance, the influences of a new nootropic drug and three cardiovascular agents on the CNS were measured and placebo controlled. The EEG and visual cortical evoked potentials were recorded from electrode position O sub z between O sub 1 and O sub 2 according to the 10 to 20 system. Three channels of the visual system were selectively stimulated (contrast, brightness, and color using checkerboard, flash, and color change). Acute and chronic studies were reported. Each VEP was filtered into the standard EEG-frequency range. Latency changes of the EP were evaluated in each range and analyzed with the Fourier technique. The cardiovascular substances caused a significant latency increase of beta-components with apparent latencies of 80 to 100 ms. This attenuation was shown in the contrast and even stronger in the color channel of the visual system. For the nootropic substance, a significant latency decrease was found for three components of the visual evoked potential in the theta-range. Their latencies are from 170 to 360 ms. The results of the EEG analysis are compared to the EP results. Generalized changes for groups of substances and highly specific profiles of activity for individual substances may be measured using this set of stimulus and analysis techniques. Activation and attenuation of activity for one and the same substances also were measured indicating multiple modes of actions. This may reflect cognitive processes and sensorimotor activity. Author

N88-27716# Centre d'Etudes et de Recherches de Medecine Aerospatiale, Paris (France). Div. de Neurophysiologie Appliquee.
AN APPROACH TO STUDYING THE EFFECTS OF PSYCHOSTIMULANTS ON CEREBRAL ELECTRICAL ACTIVITY IN THE NON-HUMAN PRIMATE [UNE APPROCHE DES EFFETS DE PSYCHOSTIMULANTS SUR L'ACTIVITE ELECTRIQUE CEREBRALE CHEZ LE PRIMATE NON HUMAIN]
 D. LAGARDE and C. MILHAUD *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 11 p (SEE N88-27683 21-51) Feb. 1988 *In* FRENCH
 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The effects of three psychostimulant substances on brain electrical activity in the rhesus monkey were studied. The prime objective of these experiments was to obtain a data base of EEG properties and the changes caused by well-known psychostimulants at different dosages, and compare them to the EEG modifications induced by experimental psychotropic drugs. The power spectral density was used to analyze EEG data into different frequency bands for caffeine, d-amphetamine sulfate, and the experimental drug CRL 40476. In general, the results showed that caffeine caused a significant increase in delta activity, some decrease in the theta and alpha bands, and variable decreases in the beta band. Amphetamine produced an increase in delta and alpha activities, relative stability with signs towards an increase in theta activity, and a clear decrease in beta activity. The CRL 40476 caused important increases in delta activity, no changes in theta and alpha activity, and some decrease in the level of beta activity. Author

N88-27717# Italian Air Force Aerospace Medical Center, Rome. Neuropsychophysiology Group.

SPONTANEOUS CEREBRAL ELECTRICAL ACTIVITY DURING PROLONGED HYPOGLYCEMIA: A QUANTITATIVE STUDY IN HUMANS

SILVIO PORCU, ROBERTO BERTI, and ALBERTO LALA *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 12 p (SEE N88-27683 21-51) Feb. 1988
 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The importance of neuroglycopenia secondary to hypoglycemia as a possible cause or contributing factor in aircraft accidents was stressed. The study was designed to investigate the neurophysiological correlations of neuroglycopenia. The generation of spontaneous cerebral electrical activity in healthy young adults is quantified in a computer-assisted study, with subjects placed under fixed hypoglycemic conditions. Author

N88-27718# Dalhousie Univ., Halifax (Nova Scotia). Dept. of Ophthalmology.

RELATION BETWEEN VEP AND VISUAL FUNCTION IN LESIONS OF THE OPTIC NERVE AND VISUAL PATHWAY

D. REGAN and D. NEIMS *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 8 p (SEE N88-27683 21-51) Feb. 1988 Sponsored in part by Medical Research Council of Canada, Multiple Sclerosis Society of Canada, Baker Trust of Canada and NIH, Bethesda, Md.
 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Several authors have claimed that visual evoked potential (VEP) abnormality is not closely related to sensory visual loss in patients with multiple sclerosis. However, all of the studies assessed sensory visual loss entirely in terms of Snellen visual acuity. Recent findings indicate the possibility that this lack of correlation between VEPs and sensory data might be due, at least in part, to the inability of Snellen's test to detect the full range of visual losses associated with visual pathway dysfunction. Before discussing abnormalities of pattern VEPs in patients with demyelinating diseases, the reasons why the Snellen acuity provides only an incomplete test of visual function loss are explained. Author

N88-27720# Royal Air Force, Wroughton (England). Neurology Dept.

DETECTION OF LATENT EPILEPSY IN AIRCREW CANDIDATES

R. T. G. MERRY *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 3 p (SEE N88-27683 21-51) Feb. 1988
 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Epilepsy is a common medical disorder, with a prevalence of 0.5 to 0.8 percent, and is the commonest cause of accidents due to medical incapacity in drivers. Although imperfect, the electroencephalogram (EEG) is useful in the detection of a latent predisposition to epilepsy, and is recommended as an obligatory part of the initial medical examination of candidates for military aircrew. Author

N88-27721# Oficinas Gerais de Material Aeronautico, Alverca (Portugal).

THE AUDITORY EVOKED RESPONSE IN MILITARY PILOTS

NUNO A. A. CASTELOBRANCO, JOSE H. MARVAO, M. SALOME CASTELOBRANCO, and ANTONIO J. ENTRUDO (Portugal Air Force Hospital.) *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 8 p (SEE N88-27683 21-51) Feb. 1988
 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

This study relates to the effect of G forces, through an aerobatic flight profile without G suit protection, upon twenty military pilots with varying flight experience. The auditory evoked response during rest showed significant differences in wave 5 and in the 1 to 5 interval. Immediately following the flight, differences were observed in wave 3. These results suggest the importance which this electrophysiological method may have on measuring accumulated fatigue. Immediate fatigue implies complex mathematical problems presently under study. Simultaneously, hemorrhheologic, hormonal and biochemical studies were conducted for a better understanding of the physiological effects of fatigue. Though it is recognized that the test population is relatively small (20 pilots), an expanded study is underway in order to compile more conclusive data. Author

N89-12171# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

MOTION CUES IN FLIGHT SIMULATION AND SIMULATOR INDUCED SICKNESS

Jun. 1988 196 p *In* ENGLISH and FRENCH Symposium held in Brussels Belgium, 29 Sep. - 1 Oct. 1987
 (AGARD-CP-433; ISBN-92-835-0466-6; AD-A202492) Avail: NTIS HC A09/MF A01

These proceedings include seventeen papers, ensuing discussions of the papers, and a Round Table Discussion from the Symposium sponsored by the AGARD Aerospace Medical Panel held in Brussels, Belgium. The frequency of reports of undesirable effects associated with simulator training has increased as simulator usage has increased to offset the higher costs and risks of conducting training in the complex modern aircraft. Review of current and anticipated future trends in simulator design features suggests that additional problems will arise if research on the etiology of simulator-induced motion sickness and other unwanted simulator effects is insufficient to counteract problems before they arise. The objective of this symposium was to examine simulator-induced effects, their operational implications, and their etiology in order to develop ideas for reducing undesired effects. For individual titles, see N89-12172 through N89-12188.

N89-12172# Essex Corp., Orlando, FL.
ETIOLOGICAL SIGNIFICANCE OF EQUIPMENT FEATURES AND PILOT HISTORY IN SIMULATOR SICKNESS

R. S. KENNEDY, K. S. BERBAUM, G. O. ALLGOOD, N. E. LANE, M. G. LILIENTHAL (Naval Training Systems Center, Orlando, Fla.), and D. R. BALTZLEY *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 22 p (SEE N89-12171 03-52) Jun. 1988
 (AGARD-CP-433) Avail: NTIS HC A09/MF A01

The U.S. Navy has conducted a survey in 10 flight trainers where motion experience questionnaires and performance tests were administered to pilots before and after 1200 separate exposures. From these measures on pilots, several findings

52 AEROSPACE MEDICINE

emerged: (1) specific histories of motion sickness were predictive of simulator sickness symptomatology; (2) postural equilibrium was degraded after hops in some simulators; (3) self-reports of motion sickness symptomatology revealed three major symptom clusters: gastrointestinal, visual, and vestibular; (4) certain pilot experiences in simulators and aircraft were related to severity of symptoms experienced; (5) simulator sickness incidences varied from 10 to 60 percent; (6) substantial perceptual adaptation occurs over a series of hops; (7) in two moving-base flight trainers motion sickness incidence appeared to be related to the amount of acceleration (energy) experienced in frequency ranges around 0.2 Hz. The findings are discussed in the context of sensory conflict theory and recommendations are made for simulator design criteria. Suggestions are made as to how to relate simulator and equipment configuration to the separate symptom clusters as an aid to the diagnosis of specific problems within particular simulators. It is believed that this holds promise in diagnosing simulator equipment problems (e.g., alignment, inertial motion profile, cue asynchrony) since different symptom clusters may be related to different equipment features. Author

N89-12173# National Aerospace Lab., Amsterdam (Netherlands).

TECHNOLOGY INVOLVED IN THE SIMULATION OF MOTION CUES: THE CURRENT TREND

H. A. MOOIJ *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 15 p (SEE N89-12171 03-52) Jun. 1988

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

The subject of motion cue generation is a topic that requires serious attention from all involved in the design, development and manufacture of flight simulators. The enhanced realism in the depiction of terrain, sky, and other aircraft available in current visual systems has been associated with an increasing number of instances of simulator sickness. This form of sickness is the constellation of symptoms which may be experienced by pilots as a result of flying a simulator. As one of the introductory papers of the AGARD Aerospace Medical Symposium on Motion cues in flight simulation and simulator induced sickness this paper presents observations concerning the current trend in visual and motion systems. After an introduction of basic cueing methodology in flight simulation, the overview concentrates on developments in image generation, image display, platform motion cue generation and motion hardware mechanisms. The paper concludes with some observations concerning the importance of maintenance and calibration of flight simulator installations. Author

N89-12174# Royal Air Force Inst. of Aviation Medicine, Farnborough (England).

AETIOLOGICAL FACTORS IN SIMULATOR SICKNESS

A. J. BENSON *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 8 p (SEE N89-12171 03-52) Jun. 1988

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

The clinical features of simulator sickness are similar to the malaise induced by other motion stimuli. The essential etiology of the condition is considered to be the same as in other types of motion sickness, namely, the mismatch between the motion information provided by the body's sense organs and the brain's internal model of expected motion cues. The mismatch can be between concomitant inputs provided by the angular and linear acceleration transducers of the vestibular apparatus, or between visual and vestibular inputs. More significantly, in a fixed base simulator it is the absence of expected inertial cues when the ambient visual system is stimulated by the external world, visual display that engenders neural mismatch. Even when the simulator has a motion base, quantitative and temporal disparities between visual and inertial cues commonly occur and can contribute, along with visual distortions and other anomalies, to the induction of the motion sickness syndrome. Author

N89-12175# Laboratoire de Medecine Aerospatiale, Bretigny-sur-Orge (France). Centre d'Essais en Vol.

HORIZONTAL STUDY OF THE INCIDENCE OF SIMULATOR INDUCED SICKNESS AMONG FRENCH AIR FORCE PILOTS (ETUDE HORIZONTALE DE L'INCIDENCE DU MAL DES SIMULATEURS DANS LES FORCES AERIENNES FRANCAISES)

A. LEGER, P. SANDOR, and R. P. DELAHAYE (Service de Sante pour l'Armee de l'Air, Paris, France) *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 7 p (SEE N89-12171 03-52) Jun. 1988 *In* FRENCH; ENGLISH summary (AGARD-CP-433) Avail: NTIS HC A09/MF A01

Reports of simulator sickness obtained from pilots in the Air Force of France are summarized. Of 164 pilots responding, 153 responses were judged suitable for general descriptive analysis, and 132 were retained for detailed analysis. In contrast to other studies in which on-site investigators evaluated effects induced by specific simulators, questionnaires were used to obtain information on the past simulator experience of pilots (and motion sickness in general) from different units of the French Air Force. Thus, the results are based on questionnaires answered anonymously relating to past experience in different simulators over a number of years. Sixty-seven percent of those responding had experienced simulator-induced sickness to some degree, but the majority of effects elicited were moderate and decreased rapidly after several sessions. Aftereffects were absent in 51 percent, insignificant in 34.8 percent, moderate in 9.8 percent, and severe in 3.8 percent of the responding subjects. In contrast with an earlier study, statistically significant relationship between simulator sickness and motion sickness in general (indicated by scores from a motion sickness questionnaire) was not found. Author

N89-12176# Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario).

SIMULATOR INDUCED SICKNESS AMONG HERCULES AIRCREW

L. E. MAGEE, L. KANTOR, and D. M. C. SWEENEY *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 8 p (SEE N89-12171 03-52) Jun. 1988

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

The purposes of this study were to investigate the incidence, severity and time-course of simulator sickness among pilots and flight engineers training on a C-130H (Hercules) flight simulator, and to assess the influence of flight experience on susceptibility. Evidence of simulator sickness was collected by questionnaire, tests of balance, and observation. The questionnaires were completed at the conclusion of a four-hour training session and 20 hours later. The balance tests were performed immediately prior to and immediately following the training session. Overt signs of pallor, sweating, drowsiness and visual nystagmus were also recorded at these times. Thirty-five of the 42 aircrew (i.e., 83 percent) tested reported characteristic symptoms of simulator sickness. The most prevalent were eyestrain, mental and physical fatigue, and after-sensations of motion. Some effects persisted following simulator training for many hours although most were not severe. Few had delayed onset. Although eleven subjects (26 percent) reported loss of balance at the end of the training session, performance on the balance tests improved; this suggests a practice effect which masks ataxia. With the exception of occasional nystagmus, no overt signs of simulator sickness were evident. The relationships between aircraft experience, both general and type-specific, and diagnostic scores based on symptoms were examined. There was no evidence to indicate that experience influenced susceptibility to simulator sickness. Author

N89-12177# Royal Air Force Inst. of Aviation Medicine, Farnborough (England).

SIMULATOR SICKNESS IN THE ROYAL AIR FORCE: A SURVEY

J. W. CHAPPELOW *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 11 p (SEE N89-12171 03-52) Jun. 1988

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

A questionnaire survey was undertaken of pilots with experience of two air combat simulators. Two hundred and seventy one respondents completed questionnaires, some up to two years retrospectively and others immediately after a simulator session. There were, thus, four separate studies. The questionnaires sought

information on the incidence of disequilibrium and other symptoms experienced in the simulator and after leaving it. The proportion of those suffering at least one symptom in the simulator varied between 50 percent and more than 90 percent across studies (53.5 percent overall). However, not all the symptoms reported were unequivocally ascribable to disequilibrium. The proportion of each sample reporting delayed symptoms was between 10 percent and 50 percent (13 percent overall). The effect on the respondents' motivation to use the simulator was negligible. Author

N89-12178# Army Aeromedical Research Lab., Fort Rucker, AL.

SIMULATOR SICKNESS IN US ARMY AND NAVY FIXED- AND ROTARY-WING FLIGHT SIMULATORS

DANIEL W. GOWER, JR., MICHAEL G. LILIENTHAL, ROBERT S. KENNEDY, and JENNIFER E. FOWLKES (Essex Corp., Orlando, Fla.) *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 20 p (SEE N89-12171 03-52) Jun. 1988 (AGARD-CP-433) Avail: NTIS HC A09/MF A01

As technology has been developed to provide improved visual and motion systems in operational flight trainers and weapons tactics trainers, there have been increasing reports of the occurrence of simulator sickness. Simulator sickness here refers to one or more symptoms which can occur while in a simulator, immediately after exposure, or at some later time. Flight instructors have complained these symptoms interfere with simulator usage. More critical is the potential for in-flight problems due to prolonged physiological effects. As a result, flight activities after simulator flight have been limited in some commands. The U.S. Army Aeromedical Research Laboratory at Fort Rucker, Alabama, and the Naval Training Systems Center at Orlando, Florida, conducted field surveys to document the extent of the simulator sickness problems at operational fixed and rotary-wing simulator sites. Data are pooled from 10 different Navy flight simulators and the Army's AH-64 flight simulator. The total number of surveys is about 1500, with the number of subjects in each simulator type ranging from 18 to 280. The simulator sickness incidence rates and the relative frequency of specific symptoms are presented and correlational factors such as flight experience, simulator experience, and flight mode also are presented. Difficulties in assessing the duration of simulator sickness effects are noted, and attempts made to present the symptom duration for the Army's AH-64 combat mission simulator (CMS). Unique to this CMS is its use of the helmet display unit (HCU) in conjunction with the other visuals in the simulator. Author

N89-12179# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

THE USE OF VESTIBULAR MODELS FOR DESIGN AND EVALUATION OF FLIGHT SIMULATOR MOTION

STEVEN R. BUSSOLARI, LAURENCE R. YOUNG (Massachusetts Inst. of Tech., Cambridge), and ALFRED T. LEE *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 11 p (SEE N89-12171 03-52) Jun. 1988 (Contract NAG2-12)

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

Quantitative models for the dynamics of the human vestibular system are applied to the design and evaluation of flight simulator platform motion. An optimal simulator motion control algorithm is generated to minimize the vector difference between perceived spatial orientation estimated in flight and in simulation. The motion controller has been implemented on the Vertical Motion Simulator at NASA Ames Research Center and evaluated experimentally through measurement of pilot performance and subjective rating during VTOL aircraft simulation. In general, pilot performance in a longitudinal tracking task (formation flight) did not appear to be sensitive to variations in platform motion condition as long as motion was present. However, pilot assessment of motion fidelity by means of a rating scale designed for this purpose, were sensitive to motion controller design. Platform motion generated with the optimal motion controller was found to be generally equivalent to that generated by conventional linear crossfeed washout. The vestibular models are used to evaluate the motion fidelity of transport category aircraft (Boeing 727) simulation in a pilot performance and simulator acceptability study at the Man-Vehicle Systems Research Facility at NASA Ames Research Center. Eighteen airline pilots, currently flying B-727, were given a series of flight scenarios in the simulator under various conditions of

simulator motion. The scenarios were chosen to reflect the flight maneuvers that these pilots might expect to be given during a routine pilot proficiency check. Pilot performance and subjective rating of simulator fidelity was relatively insensitive to the motion condition, despite large differences in the amplitude of motion provided. This lack of sensitivity may be explained by means of the vestibular models, which predict little difference in the modeled motion sensations of the pilots when different motion conditions are imposed. Author

N89-12180# German Army Hospital, Ulm (Germany, F.R.). Abt. Neurologie und Psychiatrie.

MOTION CUES IN EVERY DAY LIFE

J. KRIEBEL, A. KORNHUBER, and M. LANG (Ulm Univ., West Germany) *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 8 p (SEE N89-12171 03-52) Jun. 1988

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

Motion cues are perceived via different sensory modalities. Convergence of teleceptive and proprioceptive sensory information is a prerequisite of task-related sensible motor reaction. Research with event-related brain potentials (ERP) delivers important functional and topographical information of these complex interactions. From ERP data the function of the frontomesial supplementary motor area (SMA) could be analyzed. Their important role in timing sequential tasks and connecting the sensory and motor system is demonstrated. Sensory dysfunctions might irritate the onset and sequence of task related motor reactions. Vestibular evoked cerebral potentials are chosen to demonstrate the restrictions of the interpretation of the ERP results. From steady state evoked and transient evoked potentials further knowledge can be expected. Author

N89-12181# Virginia Polytechnic Inst. and State Univ., Blacksburg, Dept. of Industrial Engineering and Operations Research.

MANIFESTATION OF VISUAL/VESTIBULAR DISRUPTION IN SIMULATORS: SEVERITY AND EMPIRICAL MEASUREMENT OF SYMPTOMATOLOGY

JOHN G. CASALI and LAWRENCE H. FRANK (Pacific Missile Test Center, Point Mugu, Calif.) *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 18 p (SEE N89-12171 03-52) Jun. 1988

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

Reported incidence rated of vehicular simulator induced sickness in operators is highly variable both within and between devices. Recent literature reviews show that documented incidence rates range from 0 to nearly 90 percent in flight devices and even higher in some driving devices. However, the severity of the simulator sickness problem is not adequately gauged by a simple count of those operators experiencing one or more physiologic symptoms. Instead, a battery of metrics is useful in identifying and properly assessing an induced state of simulator sickness. This is of particular importance with the recent thrust in empirical research toward determination of the effects of simulator design parameters, such as control loop delays, on operator sickness and performance. This paper reviews the symptomatology experienced by operators of flight and driving simulators. Drawing upon this review, dependent measures are recommended for use in simulator-sickness research, including self-report forms, specific physiologic indices, postural equilibrium tests, performance tests, and susceptibility prediction instruments. A tabular documentation of published research studies concerning simulator sickness is also provided. Author

N89-12182# Pacific Missile Test Center, Point Mugu, CA.

MODELLING OPERATOR CONTROL PERFORMANCE AND WELL-BEING AS A FUNCTION OF SIMULATOR VISUAL AND MOTION SYSTEM TRANSPORT DELAYS

LAWRENCE H. FRANK and JOHN G. CASALI (Virginia Polytechnic Inst. and State Univ., Blacksburg) *In* AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 7 p (SEE N89-12171 03-52) Jun. 1988

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

The role of visual-motion coupling delays and cueing order on operator performance and uneasiness was assessed in driving simulators by means of a response surface methodology central-composite design. The most salient finding of the study was that visual delay appears to be more disruptive to an

52 AEROSPACE MEDICINE

individual's control performance and well-being than is motion delay. Empirical multiple regression models were derived to predict 10 reliable measures of simulator operator driving performance and comfort. Principal components analysis on these 10 models decomposed the dependent measures into two significant models which were labeled vestibular disruption and degraded performance. Examination of the empirical models revealed that, for asynchronous delay conditions, better performance and well-being were achieved when the visual system led the motion system. A secondary analysis of the role of subject gender and perceptual style on susceptibility to simulator sickness revealed that neither of these independent variables was a significant source of variance. Author

N89-12183# Centre de Medecine Aerospatiale, Brussels (Belgium).

AN INVESTIGATION OF SIMULATOR SICKNESS AND AN ELECTRONYSTAGMOGRAPHIC STUDY (ENQUETE SUR LE MAL DES SIMULATEURS DE VOL COUPLEE A UNE ETUDE NYSTAGMOGRAPHIQUE)

G. DEHEYEN, P. DEGRAFF, and P. VANDENBOSCH. In AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 5 p (SEE N89-12171 03-52) Jun. 1988. In FRENCH; ENGLISH summary. (AGARD-CP-433) Avail: NTIS HC A09/MF A01

Simulator sickness, which is related to travel sickness, is a product of high technology, safety requirements and budgetary limitations. This new pathology affects experienced pilots and is the result of conflicting sensations, experienced in an unfamiliar environment. We conducted a survey of a Belgian Air Force fighter squadron in order to evaluate the frequency of simulator sickness and the symptoms experienced. Ten percent of the pilots questioned regularly experienced simulator sickness and twenty-five percent felt it occasionally in varying degrees. We also attempted to objectify the problems of vertigo and disorientation by means of an electronystagmographic study of 12 pilots during their training on a flight simulator. We were surprised by the poor ocular response during the simulated flight. Nystagmic movements appeared rarely and then only fleetingly, mainly at the end of a turn. They were all low amplitude. We were not able to establish a correlation between the objective vestibular responses and the subjective feelings of simulator sickness. Author

N89-12184*# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

HEAD-MOUNTED SPATIAL INSTRUMENTS: SYNTHETIC REALITY OR IMPOSSIBLE DREAM

STEPHEN R. ELLIS, ARTHUR GRUNWALD, and MORDEKHAI VELGER. In AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 8 p (SEE N89-12171 03-52) Jun. 1988.

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

A spatial instrument is defined as a display device which has been either geometrically or symbolically enhanced to better enable a user to accomplish a particular task. Research conducted over the past several years on 3-D spatial instruments has shown that perspective displays, even when viewed from the correct viewpoint, are subject to systematic viewer biases. These biases interfere with correct spatial judgements of the presented pictorial information. It is also found that deliberate, appropriate geometric distortion of the perspective projection of an image can improve user performance. These two findings raise intriguing questions concerning the design of head-mounted spatial instruments. The design of such instruments may not only require the introduction of compensatory distortions to remove the neutrally occurring biases but also may significantly benefit from the introduction of artificial distortions which enhance performance. These image manipulations, however, can cause a loss of visual-vestibular coordination and induce motion sickness. Additionally, adaptation to these manipulations is apt to be impaired by computational delays in the image display. Consequently, the design of head-mounted spatial instruments will require an understanding of the tolerable limits of visual-vestibular discord. Author

N89-12185# York Univ. (Ontario). Human Performance Lab. INFLUENCE OF VECTION AXIS AND BODY POSTURE ON VISUALLY-INDUCED SELF-ROTATION AND TILT

I. P. HOWARD, B. CHEUNG, and J. LANDOLT (Defence and Civil Inst. of Environmental Medicine, Downsview, Ontario) In AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 8 p (SEE N89-12171 03-52) Jun. 1988. (AGARD-CP-433) Avail: NTIS HC A09/MF A01

Yaw vection is induced by a scene rotating about spinal axis (z axis), pitch vection by a scene rotating about an axis in the mid-frontal plane (y axis) and roll vection by a scene rotating about an axis parallel to the line of sight (x axis). Each of these axes can be vertical or horizontal, making six conditions in all, of which only four have been studied previously. We studied vection and illusory body tilt under all six conditions, with a full rotating field, reduced somesthetic cues and in a situation in which body rotation could occur. Yaw vection around a vertical axis was strongest. Forward pitch vection was stronger than backward pitch vection. Contrary to previous reports, for most subjects backward illusory tilt was much stronger than forward illusory tilt. Two subjects experienced 360 deg body rotation in the horizontal-pitch condition. The direction of pitch axis asymmetry was found to be consistent and not related to the asymmetry of vertical optokinetic nystagmus. Author

N89-12186# York Univ. (Ontario). Human Performance Lab. VECTION AND THE SPATIAL DISPOSITION OF COMPETING MOVING DISPLAYS

I. P. HOWARD, M. OHMI, W. SIMPSON, and J. P. LANDOLT (Defence and Civil Inst. of Environmental Medicine, Downsview, Ontario) In AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 8 p (SEE N89-12171 03-52) Jun. 1988.

(Contract DCIEM-97711-4-7936/8SE84-00110)

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

In Experiment 1 we investigated the relative effectiveness of two superimposed displays in generating circular vection as a function of: (1) the separation in depth between them, (2) their perceived relative distances, and (3) which display was in the plane of focus. Circular vection was found to be governed by the display that was perceived to be more distant, even when it was actually nearer. Vection was not affected by whether the near or far display was in the plane of focus, nor by which display was fixated or pursued by the eyes. In Experiment 2 we asked whether the generally held belief that vection is induced most effectively by the peripheral stimuli is due to an artifactual effect of perceived distance. The experiment assessed the separate contributions of foreground-background and central-peripheral placement of competing displays. It was found that both factors contribute in an interactive way to the experience of vection. In Experiment 3 we investigated how linear forward vection induced by a looming visual display is affected by the near-far relationships of competing displays. Author

N89-12187# University Hospital, Leuven (Belgium) Dept of Otolaryngology and Equilibrium.

CUES FOR TRAINING VERTIGO, PROVIDING SUGGESTIONS FOR THE MANAGEMENT OF SIMULATOR SICKNESS

MARCEL E. NORRE. In AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 4 p (SEE N89-12171 03-52) Jun. 1988.

(AGARD-CP-433) Avail: NTIS HC A09/MF A01

Clinical experience with exercise treatment for vertigo has confirmed the extreme adaptability of the balance system. Vestibular Habituation Training (VHT) for provoked (positioning) vertigo provides some interesting cues in the scope of the theme of this meeting, related to simulator sickness. The disabling sensation, called motion sickness, means only a disturbance similar to vertigo in both, the sensory observation of the environment by the three sensors results in a sensory mismatch. In vertigo it is one of the

BEHAVIORAL SCIENCES

Includes psychological factors; individual and group behavior; crew training and evaluation; and psychiatric research.

sensors that works in a wrong way and in motion sickness it is an unusual presentation of the environment structure that causes the mismatch. Provoked vertigo as well as motion sickness is linked to actual working of the system. In both situations the system has to work up changing relationships: in the provoked vertigo the changing situation has no contradiction in se related to a normal working schedule of the system, whereas it has in motion sickness. In both cases it must be possible to re-organize the effect of the changed sensory input by central adaptation. Clinical experience confirmed it: repeated exposure to the mismatch is the very stimulus and has a positive effect in provoked vertigo. Persons with motion sickness can be habituated in the same way as we observe it for our patients with provoked vertigo: i.e., progressively by exposure and specifically, related to the stimulus pattern of the exposure. Author

N89-12188* National Aeronautics and Space Administration, Lyndon B. Johnson Space Center, Houston, TX.

PREADAPTATION TO THE STIMULUS REARRANGEMENT OF WEIGHTLESSNESS: PRELIMINARY STUDIES AND CONCEPTS FOR TRAINER DESIGNS

D E PARKER and M F RESCHKE In AGARD, Motion Cues in Flight Simulation and Simulator Induced Sickness 9 p (SEE N89-12171 03-52) Jun. 1988 Prepared in cooperation with Miami Univ., Oxford, Ohio

(AGARD-CP-433) Avail. NTIS HC A09/MF A01

An effort to develop preflight adaptation training (PAT) apparatus and procedures to adapt astronauts to the stimulus rearrangement of weightless spaceflight is being pursued. Based on the otolith tilt-translation reinterpretation model of sensory adaptation to weightlessness, two prototype preflight adaptation trainers (PAT) have been developed. These trainers couple pitch movement of the subject with translation of the visual surround. Subjects were exposed to this stimulus rearrangement for periods of 30 m. The hypothesis is that exposure to the rearrangement would attenuate vertical eye movements was supported by two experiments using the Miami University Seesaw (MUS) PAT prototype. The Dynamic Environment Simulator (DES) prototype failed to support this hypothesis: this result is attributed to a peculiarity of the DES apparatus. A final experiment demonstrated that changes in vertical eye movements were not a consequence of fixation on an external target during exposure to a control condition. Together these experiments support the view that preflight adaptation training can alter eye movements in a manner consistent with adaptation to weightlessness. Following these initial studies, concepts for development of operational preflight trainers were proposed. The trainers are intended to: demonstrate the stimulus rearrangement of weightlessness; allow astronauts to train in altered sensory environment; modify sensory motor reflexes; and reduce/eliminate space motion sickness symptoms. Author

N89-17399* Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France) Aerospace Medical Panel

SLEEP AND WAKEFULNESS: HANDBOOK FOR FLIGHT MEDICAL OFFICERS, 2ND EDITION

A N NICHOLSON and BARBARA M STONE (Royal Aircraft Establishment, Farnborough, England) 1987 92 p (AGARD-AG-270(F)) Avail. NTIS HC A05/MF A01

The first edition of this handbook was published in 1982, and since then the understanding of sleep and wakefulness has advanced considerably. This new handbook emphasizes the management of aircrew and the problems they experience in coping with irregularity of rest and activity. Author

N87-29505# Centre d'Etudes et de Recherches de Medecine Aerospatiale, Paris (France).

STUDY OF ANTICIPATION MECHANISMS IN THE AERONAUTICAL ENVIRONMENT [ETUDE DES MECANISMES D'ANTICIPATION EN AERONAUTIQUE]

R. AMALBERTI, CL. VALOT, and J.-P. MENU In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 14 p (SEE N87-29503 24-06) Feb. 1987 In FRENCH

(AGARD-CP-414) Avail. NTIS HC A14/MF A01

Pilot behavior during anticipation activities is discussed. These types of activities make use of the ability to mentally represent the result of changes produced in a given situation, allowing for related events and real action potentials. Anticipation activities may take place at various levels including initial mission planning and necessitated in-flight changes thereto, during the use of standard procedures to accomplish various flight maneuvers and other highly routine acts, and during the acquisition and transfer of information to and from the hardware system using its displays and controls. Both behavioral observation and interview techniques with experienced and inexperienced pilots were used to reveal the rules by which these anticipation activities are carried out and how they differ as a function of the specific knowledge of the pilot at a given point in time and the available time to consider alternate responses. M.G.

N87-29506# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.) Helicopter and Military Aircraft Group

THE TASK TAXONOMY METHOD: A BASIS FOR AN EXPERT SYSTEM ON HUMAN RELIABILITY

R. SEIFERT and K. BRAUSER In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 8 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail. NTIS HC A14/MF A01

A survey of human error (HE), its definition, nature of HE and the categorization of HE's, causes and prevention measures is described. Then a HE rating scale is introduced, which allows the assignment of HE probability (HEP) values measured into 10 reliability classes (RC). Based on HEP values measured for a number of human performances, a Task Taxonomy Method is developed. This method allows the assignment of a relative weight to all task factors and to all performance shaping factors involved in the task performance. The task taxonomy method is a tool to predict the HEP and RC of tasks allocated to man. Such a predictive tool is used for analysis, definition and design of man machine systems. Rules of an Expert System are described which facilitates the application and use of the task taxonomy method. Author

N87-30060# McDonnell-Douglas Corp., Long Beach, CA. **MENTAL WORKLOAD MEASUREMENT IN OPERATIONAL AIRCRAFT SYSTEMS: TWO PROMISING APPROACHES**

MICHAEL BIFERNO In Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 44-51 (SEE N87-30054 24-54) Jun. 1987

(AGARD-AG-282) Avail. NTIS HC A07/MF A01

When evaluating aircraft systems, the most useful mental workload (MWL) measures are those which can be employed in-flight or full mission simulations. This requires measures to be noninterfering, relatively unobtrusive, and provide estimates of operationally relevant MWL while maintaining high levels of validity and reliability. In the context of automated systems, the strategy was to define MWL as language based mental activity and to develop subjective ratings (opinion scale) in the short term and event related brain potential (ERP) measures in the long term. Subjective ratings are being employed to estimate the required degree of attention to perform information processing, mental operations, and actions. This organization aids in the identification of undesirable MWL levels associated with system displays, logic, and controls. In addition to providing a quantitative workload rating,

53 BEHAVIORAL SCIENCES

this technique elicits verbal explanations if high MWL levels are reported
Author

N88-27698# Organisatie voor Toegepast Natuurwetenschappelijk Onderzoek Soesterberg (Netherlands) Human Performance Group

USING ERPS TO STUDY HUMAN INFORMATION PROCESSING

A. W. K. GAILLARD *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 6 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The event-related brain potential (ERP) technique may provide an inobtrusive measure of the processing of psychological information during task performance. Some investigators regard ERPs even as a direct manifestation of the ongoing psychological processes. Before such a strong claim can be made several methodological problems have still to be solved. The definition and identification of the various components in the ERP, the separation of exogenous and endogenous components, and the different ways in which inferences can be made about psychological processes on the basis of ERP components, is the low comparability of ERP measures across paradigms are discussed.
Author

N88-27701# Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario).

THE EFFECT OF ENDOGENOUS ALPHA ON HEMISPHERIC ASYMMETRIES AND THE RELATIONSHIP OF FRONTAL THETA TO SUSTAINED ATTENTION

R. PIGEAU, R. HOFFMANN, S. PURCELL, and A. MOFFITT (Carleton Univ., Ottawa, Ontario) *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 16 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Data are represented which suggest that the degree of hemispheric alpha asymmetry is related to resting eyes closed endogenous alpha activity. Also, it is demonstrated that frontal theta activity varies with the difficulty level of an additional task. Both results share a common emphasis on electrophysiological individual difference. The electroencephalogram (EEG) recordings from 54 right-handed subjects performing 5 cognitive tasks were collected and quantified using period analysis. The subjects were rank ordered on the basis of their hemispherically averaged alpha activity during an eyes closed baseline condition. A similar procedure was performed for frontal theta to distinguish theta generators. Utilizing a L-R/L-R asymmetry index the results indicate that high and middle alpha generators displayed the hypothesized and asymmetry relationship whereas the low alpha generators did not. This implies that low alpha generating subjects may negatively affect EEG laterality studies. Results from the addition task indicate that hemispherically averaged theta activity varies curvilinearly as a function of increasing task difficulty. Subjects displaying higher performance scores on the additional task also demonstrate higher frontal theta values, suggesting theta is associated with sustained focused attention of higher order cognitive processes.
Author

N88-27707# Naval Aerospace Medical Research Lab., Pensacola, FL

THE NEUROELECTRIC SELECTION OF NAVAL AVIATION PERSONNEL: AN EVALUATION

R. R. STANNY, D. L. REEVES, M. R. BLACKBURN, and G. R. BANTA (Naval Medical Research and Development Command, Bethesda, Md.) *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 8 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

The value of using event-related potentials to predict success in naval aviation is examined. The background of the project, some methodological considerations, and the approach to the problem are discussed. Some early results have become available and are encouraging.
Author

N88-27711# Veterans Administration Hospital, Sepulveda, CA. Neuropsychology Research Dept.

ELECTROENCEPHALOGRAPHIC CORRELATES OF PILOT PERFORMANCE: SIMULATION AND IN-FLIGHT STUDIES

M. B. STERMAN, G. J. SCHUMMER, T. W. DUSHENKO, and J. C. SMITH *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 16 p (SEE N88-27683 21-51) Feb. 1988 (Contract AF-AFOSR-0231-83; AF-AFOSR-0335-82) (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Both laboratory and in-flight studies were performed in order to evaluate the utility and feasibility of EEG monitoring as a means of identifying central nervous system correlates of performance and G-force effects during military flight operations. Four studies were conducted, two with controlled laboratory simulation, and two in actual flight during military training missions. Data analysis focused on EEG power-spectral density characteristics and their temporal modulation, specifically in sensorimotor and visual cortical areas. Several consistent findings emerged. During competent performance, a highly unique discrepancy appeared between the left and right hemispheres in central 8 to 15 Hz activity. This pattern disappeared as performance degraded. The temporal modulation of this activity also reflected these changes. During high G-force situations, power at frequencies below 8 Hz was progressively and non-specifically enhanced. Continued competent performance, however, was still reflected by the pattern described. These findings are discussed in terms of their neurophysiological implications.
Author

N88-27719# Hellenic Air Force General Hospital, Athens (Greece). Neurological Clinic.

CORRELATION BETWEEN EEG ABNORMAL ACTIVITY AND AIRCRAFT ACCIDENTS: A LONG TERM OBSERVATION

A. STAVROPOULOS *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 5 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

During 1975 to 1976, 64 student pilots of the Hellenic Air Force Air Academy were studied with electroencephalographic protocol including activation procedures. In 13 of them, abnormal encephalographic activity was observed. During their 10-year flying career as fighter pilots, six pilots with abnormal EEGs were involved in 10 aircraft accidents due to pilot error, while only 3 pilots of the 51 with normal EEGs were involved in 4 accidents due to pilot errors.
Author

54

MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT

Includes human engineering, biotechnology, and space suits and protective clothing.

N87-13934# Rheinische Braunkohlenwerke A.G., Cologne (Germany, F.R.) Hauptabteilung Arbeitsmedizin

RELATIONSHIPS BETWEEN WHOLE-BODY VIBRATION AND DISORDERS OF THE BACKBONE DIAGNOSED ON OPERATORS OF EARTH-MOVING MACHINERY

G. ZERLETT *In* AGARD Backache and Back Discomfort 5 p (SEE N87-13932 05-52) Jun. 1986 (AGARD-CP-378) Avail: NTIS HC A12/MF A01

A study was based on interviewing 352 operators of earth-moving machinery who had been exposed to whole-body vibration for at least 3 years. A further examination dealt with the evaluation of available X-rays showing different parts of the spines of 251 machinery operators who had been exposed to vibration for at least 10 years. The discomfort most often mentioned was impairment of health and well-being during and after the working shift (mentioned by 75% and 59% respectively). Apart from that, the percentage of subjects complaining about spinal discomforts was much higher for the exposed group than for the non-exposed group (70% and 54% respectively). The epidemiologic study resulted in an objective confirmation of the spinal discomforts

indicated, 2/3 of which had been related by the operators to the lumbar spine. Of all disorders diagnosed for the operators, the lumbar syndrome accounted for the greatest share by far 81%. In three cases, diagnosis for the operators was avulsion fracture of the spinous process of a vertebral body in the cervical column. The frequency distribution resulting from the radiographic examination of 251 earth-moving machinery operators with at least a 10 years exposure to whole-body vibration showed that morphological changes in the lumbar spine occur earlier and much more frequently than in the case of non-exposed persons.

Author

N87-13935# Institut National de Recherche et de Sécurité pour la Prévention des Accidents du Travail et des Maladies Professionnelles, Vandœuvre (France).

THE WORKPLACE VIBRATION ENVIRONMENT OF OFF-ROAD MACHINES

P. BOULANGER, P. DONATI, J. P. GALMICHE, and L. ROURE
In AGARD Backache and Back Discomfort 11 p (SEE N87-13932 05-52) Jun. 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

Measurements made with manufacturers and users enabled I.N.R.S. to evaluate the vibration exposure at the workplace of about 70 different off-road machines presently used in France and the efficiency of machine suspension seats. Measurements were obtained from accelerometers mounted triaxially, placed on the seat pan and on the floor beneath the seat. More than 150 runs were performed to consider a range of typical operating conditions of vehicles studied. According to the standard AFNOR NF E 90-401 the vibration exposures measured on running vehicles fitted with pneumatic tires (dumpers and off-road trucks, tractor scrapers, off-road fork lift trucks, etc.) were greater than those recorded in excavators and back-hoe loaders while digging trenches. The driver: were exposed mainly to vertical vibration unless the vehicles were used for excavating or scraping. In addition, the results show how poor the isolation provided by the seat vertical suspension systems is, especially for those vehicles fitted with pneumatic tires. This proves the necessity to apply seat test code as defined by the French standard AFNOR E 58-074 for off-road machines. The measurements made on the floor beneath the seat generally validate the pertinence of input vibration spectral classes recommended by this standard to test seats in the laboratory although some modifications are suggested. Particularly, it is proposed to include the dumpers and off-road trucks and to define two new classes to take into account horizontal vibrations when necessary.

Author

N87-13936# Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario).

BACK PAIN AND DISCOMFORT RESULTING FROM EXPOSURE TO VIBRATION IN TRACKED ARMoured VEHICLES

D. BEEVIS and S. E. FORSHAW In AGARD Backache and Back Discomfort 7 p (SEE N87-13932 05-52) Jun. 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

The interrelationship of vehicle ride, operator exposure and back pain was studied using a pool of drivers from the Combat Arms School (CAS), who were required to drive long hours in M113 armored personnel carriers. Among the 28 CAS M113 drivers with back problems, ten had recurrent lower back pain to the extent that time was missed from work. Of the ten, one required surgery during the period of the investigation, and another six, who were free from congenital abnormalities of the spine, were found by X-ray examination to have changes such as degenerative disc disease. A three-aspects approach was taken for the investigation. The first aspect was to review the medical history of the pool drivers for the three years prior to the investigation, and to compare them with those of two other groups of drivers. One group, (RCR drivers), drove the same vehicle but for fewer average hours per week. The other group (Centurion drivers), drove a slower, heavier vehicle for a similar number of hours per week. The second aspect of the study was to review the exposure history of the three groups of drivers. This was done using a modified version of the questionnaire developed by Fitzgerald and Crotty. The third aspect of the study involved the recording and analysis of the ride characteristics of the M113 and the Centurion. Accelerations were measured in three orthogonal axes at the driver's buttocks, as each vehicle was driven at representative speeds over various types of road and terrain. A one-third

octave-band analysis of the data was then compared with the exposure limit (EL), the fatigue decreased proficiency boundary (FDP), and the reduced comfort boundary (RC) of ISO 2631. Specific results and data analysis are outlined and it is concluded that the high incidence of back pain observed in the pool driver group was the result of poor posture and exposure to intense levels of vibration and shock for periods exceeding the exposure limits recommended by ISO 2631, and that the incidence of back pain among RCR and Centurion drivers was related to poor driving posture.

M.G.

N87-13939# Army Aeromedical Research Lab., Fort Rucker, AL.

BACK DISCOMFORT IN US ARMY HELICOPTER AIRCREW MEMBERS

D. F. SHANAHAN, G. R. MASTROIANNI, and T. E. READING
In AGARD Backache and Back Discomfort 10 p (SEE N87-13932 05-52) Jun. 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

The relationship of back discomfort to military helicopter flight operations was studied in this questionnaire survey of 802 U.S. Army helicopter pilots. Of the surveyed population, 584 (72.8%) pilots reported experiencing back discomfort while flying over the last two years. The discomfort generally was described as a dull ache confined to the lower back, with a mean onset time of 88 minutes into a mission. The relationship of reporting the pain to physical characteristics, past medical history, physical activity, and aviation experience is discussed. For over half of the respondents (50.1%), the pain was transient (less than 24 hours duration), resolving rapidly after discontinuing a provoking flight. Nevertheless, there was a significant number of aviators who reported persistent symptoms lasting over 48 hours (14.5%). Possible etiologies of the pain for both groups, as well as potential methods of prevention are discussed.

Author

N87-13945# Loughborough Univ. of Technology (England) Dept. of Human Sciences.

VEHICLE VIBRATION AND BACK PAIN

J. SANDOVER In AGARD Backache and Back Discomfort 9 p (SEE N87-13932 05-52) Jun. 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

Although it is often suggested that chronic low back pain in professional drivers is related to vibration or posture, we have only a limited theoretical framework to work with. Well organised, prospective epidemiological studies may demonstrate that chronic low back pain in drivers or pilots is related to high levels of vibration or poor posture. However, they will get us little further without the theoretical base. In this paper, it is assumed that chronic back pain is dependent primarily on disc degeneration and that disc degeneration, in turn, arises from fatigue-induced damage to the vertebral end-plates or to the tissues of the annulus. It will be shown that in either case, time to failure is related to an exponential function of stress such that instantaneous stress maxima are more important than long term (e.g., r.m.s.) stress values. We usually assume the some frequency weighting function is needed to predict, from vehicle vibration, the spinal stress that may lead to malfunction. This function may be based on equal discomfort contours, biomechanics data or a simple model. It is shown that basic assumptions on the effects and on frequency weighting can markedly affect the evaluation of particular vibration environments.

Author

N87-13946# Technische Univ., Munich (Germany, F.R.)

IN-VIVO EXPERIMENTS ON THE RESPONSE OF THE HUMAN SPINE TO SINUSOIDAL G SUB Z VIBRATION

F. W. HAGEN, C. J. WIRTH, J. PIEHLER, W. PLITZ, G. O. HOFMANN, and T. ZWINGERS In AGARD Backache and Back Discomfort 12 p (SEE N87-13932 05-52) Jun. 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

The transmissibility of the human spine to vertical G(z)-vibration was up to now investigated mainly by measurements on the body-surface and the head. As it is known that vibration transmission between skin-soft tissue-bone is not linear, we thought it necessary to insert percutaneous K-wires into the spinous process for direct measurements. In 11 healthy subjects at various defined heights of the spine including the head the amplitude ratio was measured to the sacrum and in comparison to the shake table. The tests were performed in standing and sitting position on a

54 MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT

shake table with vibration control system. The natural frequency of the spine was confirmed by additional in-vitro tests on isolated lumbar spine segments under special conditions. The human spine acts as a vibration system with three defined areas of resonance. The spinal column causes an adsorption up to the head. Rigid body segments as well as fusional to spinal segments lead to increased strain in neighbouring segments. This was proved by in vivo as well as in vitro investigation. A new set-up for in vitro tests was developed. Author

N87-13947# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

IN VIVO MEASUREMENTS OF VIBRATION TRANSMISSION IN THE HUMAN SPINE Abstract Only

G. B. J. ANDERSSON, M. M. PANJABI, L. JORNEUS, and E. HULT *In its Backache and Back Discomfort* 2 p (SEE N87-13932 05-52) Jun. 1986 Sponsored in part by Swedish Work Environment Fund

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

Although conclusive evidence does not exist, there are many epidemiological surveys suggesting an increase risk of low back pain in persons exposed to vibrations. Theoretical calculations indicate that spinal motion segment components can be stressed by whole body vibration exposure to the degree that fatigue failure can occur. Further, it is also known that vibration can interfere with disc nutrition. Several studies have been published in which the response of the trunk as a whole to vibration was measured. These measurements were usually made with a single uniaxial accelerometer placed on the head of the subject or at some place on the surface of the trunk. The output accelerations have then been related to the input, i.e., vibration transfer functions have been calculated. In this paper, in vivo experiments are discussed in which vibration was measured in the three principal directions in the sagittal plane with accelerometers attached directly to lumbar vertebrae in human volunteers. Author

N87-13953# Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario). Biosciences Div.

POSTURAL FATIGUE AND THE BACKACHE OF HELICOPTER PILOTS

T. J. BOWDEN *In AGARD Backache and Back Discomfort* 10 p (SEE N87-13932 05-52) Jun. 1986

(AGARD-CP-378; DCIEM-85-P-30) Avail: NTIS HC A12/MF A01

A review of the literature on the back pain of helicopter pilots suggests that postural fatigue, rather than specific injury to the spine, may be the cause of much of the reported pain. Postural fatigue is defined here as 'fatigue in specific muscles whose continuous activity is required to maintain a working posture. Descriptions of the back pain of helicopter pilots are compared with those of the phenomenon of postural fatigue. It is significant that there is a strong association between the pilot's back pain and actual flight duty. Biomechanical aspects of the pilot's environment and of tasks within the cockpit are assessed as potential causes of postural fatigue. Both posture and vibration within the cockpit may be possible causes, since both conditions may impose continuous activity on muscles of the lower back. Postural fatigue is a temporary problem, but the causes of postural fatigue, such as sedentary work in awkward postures, are considered by many authors to be related to increased incidence of chronic back pain, back disease and related disability. Repeated exposure to postural fatigue may increase the likelihood of mechanical back injury by reducing the effectiveness of the protection given to the spine by its supporting muscles during tasks involving bending and lifting. Electromyography has been used to index postural fatigue in the laboratory, as well as in the civilian work environment. By objectively defining muscle activity and fatigue, electromyographic methods may allow the objective assessment of different ergonomic proposals to relieve the back pain in helicopter pilots. Author

N87-13954# Vermont Univ., Burlington. Dept. of Orthopaedics and Rehabilitation.

MUSCLE FATIGUE IN STATIC AND VIBRATIONAL SEATING ENVIRONMENTS

M. H. POPE, D. G. WILDER, and D. D. DONNERMEYER *In AGARD Backache and Back Discomfort* 10 p (SEE N87-13932 05-52) Jun. 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

In order to perform an objective assessment of muscle fatigue in a UH-1-H cockpit seating environment, instrumentation was developed to sense and use as an outcome measure the shift in the center frequency of the electromyographic (EMG) spectrum of the dorsal lumbar musculature. Subjective assessment of fatigue was accomplished by means of a visual analog scale indicating discomfort as a function of duration of exposure to the seated environment. Twenty subjects (10 male and 10 female) were exposed to the same seating environment (in terms of both static posture and vibration exposure) as that experienced by the UH-1-H helicopter pilot. The vibration environment of a UH-1-H helicopter was recorded and reproduced using a servohydraulic vibration simulator. Each exposure lasted two hours. Marginally significant fatigue, as measured by the center frequency shift method, occurred only as a result of the sustained static posture. In contrast, all exposures to this seating environment, in both static and vibration modes, produced significant subjective discomfort in both buttocks and lower back. Thus, the predominant cause of back discomfort and fatigue in this instance appears to be the UH-1-H specific seated posture rather than the UH-1-H specific vibrational environment. Author

N87-13955# Laboratoire de Medecine Aerospatiale, Bretigny-sur-Orge (France).

LOWER BACK PAIN IN HELICOPTER PILOTS: ETIOPATHOLOGICAL FACTORS (LOMBALGIES DES PILOTES D'HELICOPTERES FACTEURS ETIOPATHOGENIQUES)

J. L. POIRIER, D. LEJEUNE, P. J. METGES, and H. VIEILLEFOND *In AGARD Backache and Back Discomfort* 7 p (SEE N87-13932 05-52) Jun. 1986 In FRENCH

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

Back pain is presently one of the occupation related hazards of concern to the helicopter pilot. The physiopathogenesis is tied to two factors: posture and vibration. From the postural point of view, our aim was to determine the specific positional characteristics of the spine of a subject seated at the pilot station. Beginning from data obtained with radiography, we have defined rules for the conception and realization of helicopter seats. As concerns mechanical vibration, we conducted a comparative study of the vibration transmissibility for various helicopter seats and seat cushions. It is now possible to contribute improvements to pilot comfort in the postural domain from the point of view of vibration protection. M.G.

N87-13956# Tor Vergata Univ., Rome (Italy). Dept. of Electronic Engineering.

VIBRATION MEASUREMENTS ON HELICOPTER AIRCREW: A NEW APPROACH

M. A. D. PETTERNELLA, R. BERTI (Aerospace Medicine Center, Rome (Italy)), A. LALA, and R. ANTONINI *In AGARD Backache and Back Discomfort* 12 p (SEE N87-13932 05-52) Jun. 1986

(AGARD-CP-378) Avail: NTIS HC A12/MF A01

A method is proposed for obtaining the time-dependent pattern of vibrations transmitted to the seated pilot, by means of a map showing the direction and magnitude of all measured vectors. The pattern easily allows the observer to distinguish between rotational and translational motion. Because the direction of translational motion (or the axis of rotational motion) is not the same in different flight conditions, a suitable reorientation of the frame of reference is required in order to compare the various situations. In this way it is also possible to observe changes of the spin axis or of the direction line, in case of rotational or translation motion respectively. Some results obtained from measurements on board a helicopter at two sites (seat and backrest) are presented. Three orthogonal acceleration vectors are examined. Patterns corresponding to different flight conditions are shown, before and after frame reorientation. The paper closes with a frequency analysis of some of the measurements, comparing amplitudes and phases of the spectral components at the same frequencies, before and after frame reorientation. Author

N87-18987# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

IMPROVED GUIDANCE AND CONTROL AUTOMATION AT THE MAN-MACHINE INTERFACE

WALTER M. HOLLISTER, ed. Dec. 1986 123 p (AGARD-AR-228; ISBN-92-835-1537-4; AD-A177651) Avail: NTIS HC A06/MF A01

Modern control and display technology has already reduced significantly the workload associated with piloting all forms of airborne vehicles. However, increased demands on the pilot make it desirable to establish how automation may further reduce both the cognitive and decision-making workload of the pilot. There is evidence that under high workload, in poor visibility, or for maximum combat capability, the pilot could perform better with control inputs more directly related to the outputs over which he needs control. There are also basic questions as to what information the pilot really needs, what control and management functions can be automated, and what functions must the pilot retain to perform his task satisfactorily in relation to different mission aspects. The AGARD GCP/WG.07 members were asked to identify the most promising options for improved automation at the man-machine interface of flight vehicles and present their findings. Author

N87-23644# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Ergonomics and Cockpit System.

COMPUTER SIMULATION STUDIES ON HUMAN CONTROL RELIABILITY IN MANUAL AIRCRAFT CONTROL: THE ORIGIN OF PIO

K. BRAUSER and R. SEIFERT. In AGARD Flight Simulation 19 p (SEE N87-23633 17-09) Sep. 1986 (AGARD-CP-408) Avail: NTIS HC A16/MF A01

Pilot induced oscillations usually are defined as a sensitive indication of bad handling qualities. In the view of human performance reliability, PIO's are related to input errors with respect to the control characteristics of the controlled system. It is a general rule that man will make errors while performing arbitrary tasks under the influence of possible performance shaping factors (PSFs). A recently developed Task Taxonomy Method is used as a tool for the assessment of Human Error Probabilities (HEP) depending quantitatively on the effects of performance shaping factors (PSF) like task dimensions and characteristics, operator characteristics, system characteristics and environment factors. Using this Task Taxonomy procedure, HEP values for the manual aircraft control task have been calculated. HEP values are drastically increased (0.5 to 0.9) by the influence of bad handling qualities, while good handling qualities may only reduce the HEP value to 0.1, because other PSF's may remain still active. Therefore PIO incidents remain possible, even in aircraft with good handling qualities. This has been demonstrated by means of SAINT computer simulations using appropriate HEP values. Author

N87-25769# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

IMPACT OF FUTURE DEVELOPMENTS IN ELECTRONIC TECHNOLOGY ON COCKPIT ENGINEERING

R. EGGLESTON, ed. (Air Force Wright Aeronautical Labs., Wright-Patterson AFB, Ohio.) Jun. 1987 29 p (AGARD-R-757; ISBN-92-835-1551-X; AD-A183571) Avail: NTIS HC A03/MF A01

Presented are the results of the Cockpit Engineering subpanel of an AGARD workshop on The Potential Impact of Future Developments in Electronic Technology on the Future Conduct of Air Warfare held at the SHAPE Technical Center in The Hague, Netherlands, from 21 to 25 October 1985. The report considers the issue of how advances in electronics technology are expected to impact cockpit engineering for future airborne weapon systems, surveys the cockpit engineering problem, and provides a limited treatment of the considerations and developments believed to be needed to ensure that the potential offered by new electronic technologies is realized in future weapon systems. Author

N87-29504# Massachusetts Inst. of Tech., Cambridge. Dept. of Aeronautics and Astronautics.

AUTOMATION AT THE MAN-MACHINE INTERFACE

WALTER M. HOLLISTER. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 10 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

There is a recognized need for automation. However, detailed analysis shows that the term automation is too broad for making specific research recommendations. The specific characteristics vary in kind and degree as a function of the piloting tasks. In some cases, the task should be left entirely to the pilot. In many cases, computer aiding is the best choice. A method for allocating functions between automated systems and the pilot is presented using the theory of divided attention. It describes a structured approach for reducing the control dwell fraction with improved flying qualities. There is a need for fundamental research into the understanding of how the human pilot operates as part of the aircraft and weapons control system. Author

N87-29507# Washington Univ., Saint Louis, MO.

CLOSING THE MAN-MACHINE LOOP: ON THE USE OF PHYSIOLOGICAL MEASURES TO AFFECT COMPUTER-CONTROLLED DEVICES

J. A. STERN, G. F. WILSON, and M. THEISSEN (General Dynamics Corp., Fort Worth, Tex.) In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 5 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

Results suggest that physiological information: heart rate, eye blink, etc., as well as information about operator performance and system characteristics, could be used to alert the operator, change displays, or permit the hardware to take over certain functions. Utilization of physiological data from the operator must be used with certain cautions in mind. For example, physical exertion causes changes in heart rate. The system would have to be provided with information concerning physical exertion, so that the heart rate data could be appropriately interpreted in a larger context. This is true of the information concerning aircraft performance as well, where the pattern of inputs from various sensors is analyzed in order to make a decision about an action to be taken. Author

N87-29508# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, CA.

THE EFFECTS OF DISPLAY-CONTROL I/O, COMPATIBILITY, AND INTEGRALITY ON DUAL-TASK PERFORMANCE AND SUBJECTIVE WORKLOAD

PAMELA S. TSANG (Illinois Univ., Savoy), SANDRA G. HART, and MICHAEL A. VIDULICH. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 9 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01 CSCL 05H

The utility of speech technology was evaluated in terms of three dual task principles: resource competition between the time shared tasks, stimulus central processing response compatibility, and task integrality. Empirical support for these principles was reviewed. Two studies investigating the interactive effects of the three principles were described. Objective performance and subjective workload ratings for both single and dual tasks were examined. It was found that the single task measures were not necessarily good predictors for the dual task measures. It was shown that all three principles played an important role in determining an optimal task configuration. This was reflected in both the performance measures and the subjective measures. Therefore, consideration of all three principles is required to insure proper use of speech technology in a complex environment. Author

N87-29509# Royal Air Force, London (England).

A STUDY OF PILOT FLIGHT INFORMATION CROSSMONITORING PERFORMANCE

V. P. SCHMIT. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 12 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

A experiment is discussed which investigated the ability of the pilot to crossmonitor between Head Up display and Head Down instruments. In a situation with high error rates, no subsidiary tasks

54 MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT

and with explicit exclusion of troubleshooting (i.e., a best case), results show a low error detection rate, long detection times and significant flying performance decrements while crossmonitoring. Error detection performance is correlated not with the amount of time spent crossmonitoring, but with the frequency at which the pilot chooses to crossmonitor. Extrapolation from the results suggests that, at least for the conditions of this experiment, crossmonitoring should occur every 22 to 23 sec to ensure acceptable error detection. The evidence points clearly to the need to remove the crossmonitoring task from the pilot and make it an automated function for future aircraft. Author

N87-29510# Centre d'Etudes et de Recherches de Medecine Aerospatiale, Paris (France).

SOPHISTICATED INTEGRAL CONTROL METHODS FOR USE IN FLIGHT (LES MOYENS DE COMMANDE INTEGRES SOPHISTIQUES SERONT-ILS CONCUS POUR ETRE UTILISABLES EN VOL)

J.-P. MENU, G. SANTUCCI, and R. AMALBERTI In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 6 p (SEE N87-29503 24-06) Feb. 1987 In FRENCH

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

The changing nature of display and control requirements for modern aircraft and the various means by which information is transferred to and from the pilot are reviewed. Some of the known factors affecting human performance are discussed including: (1) desaturation and contrast loss in electronically generated information during high illumination inflight conditions; (2) the effects of high acceleration on both foveal and peripheral presentations of information; (3) manual control designs which obscure some settings when engaged; and (4) the improper labeling of display and control devices. The potential use of voice interactive control devices, especially in overcoming problems inherent in multitask situations, is also discussed. Finally, the relative merits of dedicated and multifunctional displays and controls are examined along with the theoretical causes of increased higher cognitive workloads required by multifunction devices. M.G.

N87-29516# Centre d'Etudes et de Recherches de Medecine Aerospatiale Paris (France) Lab. Central de Biologie Aerospatiale.

ORGANIZATION OF DISPLAYS IN THE VISUAL SPACE OF THE COMBAT AIRCRAFT PILOT (ORGANISATION DES VISUALISATIONS DANS L'ESPACE VISUEL DU PILOTE D'AVION DE COMBAT)

J.-P. MENU and R. AMALBERTI In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 12 p (SEE N87-29503 24-06) Feb. 1987 In FRENCH (AGARD-CP-414) Avail: NTIS HC A14/MF A01

The psychophysiological problems associated with the specific organization of cockpit displays were examined through laboratory studies and pilot surveys. The response time associated with the transition between head-up and head-down displays was measured under various conditions. It was found that reduced transition times could be obtained through the use of intermediate display concepts. Illumination level and visual adaptation were identified as important factors in the optimal integration of displays. M.G.

N87-30054# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

THE PRACTICAL ASSESSMENT OF PILOT WORKLOAD

ALAN H. ROSCOE, ed. (Britannia Airways Ltd., Luton, England) Jun. 1987 141 p

(AGARD-AG-282; ISBN-92-835-1546-3; AD-A184834) Avail: NTIS HC A07/MF A01

Whether one is attempting to reduce workload in the cockpit of a combat aircraft to improve mission effectiveness, or to optimise workload levels on the flight deck of a civil airliner to improve safety, it is important to be able to assess workload in practical terms. In the case of the civil transport aircraft the findings of the President's Task Force on Crew Complement have underlined the need to assess workload in flight reliably in order to satisfy certification requirements for new aircraft. The main purpose of this report is to provide guidance for the assessment of pilot workload in practical situations. The various techniques available for assessing pilot workload are introduced and briefly reviewed.

Some techniques that have been successful inflight are presented along with techniques for assessing workload for the purpose of aircraft certification. For individual titles, see N87-30055 through N87-30069.

N87-30055# Ergometrics Technology, Inc., Dayton, OH.

IN-FLIGHT WORKLOAD ASSESSMENT USING EMBEDDED SECONDARY RADIO COMMUNICATIONS TASKS

CLARK A. SHINGLEDECKER In Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 11-14 (SEE N87-30054 24-54) Jun. 1987

(AGARD-AG-282) Avail: NTIS HC A07/MF A01

The embedded secondary task methodology was developed to improve the practical utility of dual task measures for inflight workload assessment, while retaining many of the scientific advantages associated with traditional laboratory secondary tasks. The concept of the embedded secondary task is based on the hypothesis that instrumentation limitations, task intrusion, and poor operator acceptance can be minimized by designing secondary tasks which are fully integrated with system hardware and with the crewmember's conception of the mission environment. By their nature, such tasks are realistic components of crewstation activity, yet their performance can be manipulated and measured independently of the primary activities of interest. While several classes of aircrew activity are potential candidates for use as embedded tasks, radio communications tasks are particularly suitable for this purpose. Such tasks closely resemble the nonadaptive discrete secondary tasks used in numerous workload studies and have many properties of good measurement tasks. Measurement techniques are described and examples of use are given along with limitations. Author

N87-30056# Douglas Aircraft Co., Inc., Long Beach, CA.

USE OF TASK TIMELINE ANALYSIS TO ASSESS CREW WORKLOAD

G. STONE, R. K. GULICK, and R. F. GABRIEL In Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 15-31 (SEE N87-30054 24-54) Jun. 1987

(AGARD-AG-282) Avail: NTIS HC A07/MF A01

As systems have become more sophisticated, the role of humans in operating and maintaining them has grown more complex. There has been a steadily growing recognition that human characteristics, particularly limitations and abilities, must be considered in some depth in system design if design objectives are to be met. The size and role of the crew represent critical decisions. Mission performance has a direct relationship to the ability of the crew to carry out all of the required functions. The use of workload measures to assess the viability of a selected crew complement as well as other crew interfaces was considered. Several techniques are listed which are used to assess workload including task/timeline analysis measures. It appears to be the most easily implemented and could meet most of the established criteria. A model was developed to utilize this workload measure in the design, verification of design improvements, and certification of recent aircraft. This approach is presented and discussed in detail. E.R.

N87-30057# Boeing Co., Seattle, WA.

PILOT SUBJECTIVE EVALUATION OF WORKLOAD DURING A FLIGHT TEST CERTIFICATION PROGRAMME

FRANK T. RUGGIERO and DELMAR M. FADDEN In Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 32-36 (SEE N87-30054 24-54) Jun. 1987

(AGARD-AG-282) Avail: NTIS HC A07/MF A01

To date there is no agreed upon definition of mental workload and therefore there is no agreement on how it should be measured. Three aspects of mental workload are agreed upon: it is a multidimensional construct, a clear distinction must be maintained between imposed mental load (task load) and the mental load as experienced (subjective load), and the use of subjective ratings should be central to any investigation of workload. The Pilot Subjective Evaluation (PSE) process developed in conjunction with the FAA is outlined which supplements the analytical, simulator, and flight test crew workload evaluation techniques used to demonstrate compliance with the minimum crew size requirement regulations. Author

54 MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT

N87-30058# Deutsche Forschungsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.). Inst. for Flight Guidance. **THE USE OF SUBJECTIVE WORKLOAD ASSESSMENT TECHNIQUE IN A COMPLEX FLIGHT TASK**

F. V. SCHICK and R. L. HANN (Aerospace Medical Research Labs., Wright-Patterson AFB, Ohio.) In Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 37-41 (SEE N87-30054 24-54) Jun. 1987 (AGARD-AG-282) Avail: NTIS HC A07/MF A01

Techniques for measuring mental workload can be divided into three basic categories: physiological, behavioral, and subjective. One particular technique belonging to the subjective group of methods, which always use some form of operator self-report (e.g., rating scales or questionnaires) is discussed. In order to deal with the undesirable properties of subjective methods, a procedure known as the Subjective Workload Assessment Technique (SWAT) was developed. In SWAT, subjective workload is defined as being composed of three dimensions: time load, mental effort load, and psychological stress load. This method is introduced and discussed. E.R.

N87-30059# Illinois Univ., Urbana-Champaign. Dept. of Psychology.

WORKLOAD METHODOLOGY

EMANUEL DONCHIN and CHRISTOPHER D. WICKENS In Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 42-43 (SEE N87-30054 24-54) Jun. 1987

(AGARD-AG-282) Avail: NTIS HC A07/MF A01

The goal of the proposed technique is to employ two converging methodologies to track the workload changes during the ILS approach to landing. The two methodologies, based upon the Event Related Brain Potential (ERP) and the Sternberg Memory Search task, provides information that is both sensitive, detecting variations in resource demand when they occur, and diagnostic, localizing these changes within the multidimensional space underlying human processing resources. Each of these techniques are briefly described. The ERP is a transient series of voltage oscillations in the brain that can be recorded from the scalp in response to the occurrence of a discrete event. The Sternberg Memory Search requires the pilot to identify whether or not a displayed character is one of a set of characters that is held in short term memory. Author

N87-30061# Ergometrics Technology, Inc., Dayton, OH. **CORTICAL EVOKED RESPONSE AND EYEBLINK MEASURES IN THE WORKLOAD EVALUATION OF ALTERNATIVE LANDING SYSTEM DISPLAYS**

R. D. O'DONNELL and GLENN WILSON In Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 52-55 (SEE N87-30054 24-54) Jun. 1987 Prepared in cooperation with Aerospace Research Labs., Wright-Patterson AFB, Ohio

(AGARD-AG-282) Avail: NTIS HC A07/MF A01

Based on the results of a number of studies, it was decided to construct a battery of physiological tests, each of which had shown some promise in laboratory studies of being sensitive to various aspects of workload. This Neuropsychological Workload Test Battery (NWTB) is undergoing validation testing in several simulator environments. Two of the most promising measures from this battery are the transient cortical evoked response and several analyses of eyeblink behavior. It is becoming clear that these techniques can contribute complementary types of information on the amount of workload being experienced by the operator, and could form the basis of a measurement system which would tap both global and specific aspects. Rationales are given for these techniques along with a description and examples of their use. E.R.

N87-30062*# National Aeronautics and Space Administration. Langley Research Center, Hampton, VA.

IN-FLIGHT ASSESSMENT OF WORKLOAD USING INSTRUMENT SCAN

J. R. TOLE (Digital Analysis Corp., Reston, Va.) and R. L. HARRIS, SR. In Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 56-59 (SEE N87-30054 24-54) Jun. 1987

(AGARD-AG-282) Avail: NTIS HC A07/MF A01

During instrument flight, the pilot obtains information concerning aircraft state by cross checking or scanning the flight instruments. The exact method of scanning the instrument panel varies from pilot to pilot but there are some basic features common to a good scan pattern. The method discussed may be considered a candidate for workload studies with piloting tasks which will invoke a regular visual scan (spatial/temporal pattern of eye movements) during instrument flight. It is important to point out that instrument scan by itself is not a complete indicator of workload nor is task attention necessarily associated with where the pilot happens to be looking at a particular instant. However, whenever instrument scan is required in a piloting task, analysis of scanning behavior may yield important direct or indirect information concerning workload. Author

N87-30063# British Aerospace Dynamics Group, Hatfield (England). Test Pilots Office.

FLIGHT TEST EVALUATION OF CREW WORKLOAD. PART 1: AIRCRAFT CERTIFICATION FOR A MINIMUM CREW OF TWO PILOTS

W. A. WAINWRIGHT In Advisory Group for Aerospace Research The Practical Assessment of Pilot Workload p 60-68 (SEE N87-30054 24-54) Jun. 1987

(AGARD-AG-282) Avail: NTIS HC A07/MF A01

The method developed to certificate the BAe 146 for operation by a minimum crew of two pilots to regulations is described. The method is based primarily on subjective assessment of workload but employs objective data to support that assessment. All the data were collected from one flying phase and no flight or ground simulator assessments were performed, neither were the results correlated with any previous evaluation. The flight test evaluation used a variety of assessment methods, including practical demonstration, qualitative and quantitative subjective evaluation, subjective comparison with similar aircraft types, and objective physiological evaluation. All confirmed that the crew workload on the BAe 146 was compatible with operation by a minimum crew of 2 pilots. This method is briefly discussed. Author

N87-30064# Royal Air Force Strike Command, High Wycombe (England).

MEASUREMENT OF AIRCREW WORKLOAD DURING LOW-LEVEL FLIGHT. PART 1: A COMPARISON BETWEEN IN-FLIGHT AND POST FLIGHT ASSESSMENT METHODS

I. GAVIN LIDDERDALE In Advisory Group for Aerospace Research The Practical Assessment of Pilot Workload p 69-77 (SEE N87-30054 24-54) Jun. 1987

(AGARD-AG-282) Avail: NTIS HC A07/MF A01

The results of a comparative study of the use of inflight and postflight methods of subjective workload assessments in a modern military combat aircraft are presented. The assessments were made during a demanding low level flight task which was undertaken to assess workload and define crew cooperation procedures for pilot and navigators during terrain following flight. The inflight workload assessments were made using a modified version of the Cooper-Harper scale which is referred to as the Bedford Scale. Postflight ratings were made using a method of pairwise comparisons based on a method reported by Saaty. Other measures, including physiological recordings and voice tapes were also taken during the trials to provide additional data. From the results of the trials, it was found that both methods of subjective workload assessment produced similar results and a rank order analysis gave high correlations. A hypothetical Recce/Attack task for fast jet aircraft was chosen to illustrate the application of the workload measurement techniques described. The technique relies on the use of subjective ratings scales and physiological measures supported by voice recordings and flight data recordings. Author

54 MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT

N87-30066# Cranfield Inst. of Tech., Bedford (England). Applied Psychology Unit.

THE ASSESSMENT OF WORKLOAD IN HELICOPTERS

HELEN C. MUIR and ROBERT ELWELL *In* Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 83-89 (SEE N87-30054 24-54) Jun. 1987 (AGARD-AG-282) Avail: NTIS HC A07/MF A01

In aviation an assessment of workload is often used as one component in a program of research. The objective of the research may vary from an assessment of the activities of the crew to an evaluation of either cockpit modifications or operational changes. Thus workload assessments will form one of a series of stages in the research. A model is presented in which the stages of the investigation which will proceed and follow the workload assessment are described. An application of this approach to the assessment of workload in helicopters is used to illustrate the practical implications of the model. Author

N87-30067# Airbus Industrie, Blagnac (France).

ASSESSING WORKLOAD FOR MINIMUM CREW CERTIFICATION. PART 1: STATIC WORKLOAD ANALYSIS AND PERFORMANCE ANALYSIS

J. J. SPEYER, A. FORT, J. P. FOUILLOT, and R. D. BLOMBERG *In* Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 90-115 (SEE N87-30054 24-54) Jun. 1987 Prepared in cooperation with Centre de Recherches de Medecine Aeronautique, Paris (France) and Dunlap and Associates, Inc., Norwalk, Conn. (AGARD-AG-282) Avail: NTIS HC A07/MF A01

The critical importance of man machine interaction has been recognized in the field of aircraft handling qualities. The recognition that man machine interaction is part of a complex information transfer process between pilots, the aircraft and ground facilities is relatively new. Classical are the systematic methods for assessing aircraft handling qualities, which inspired the approach to workload assessment presented. Also classical topics in flight test are the determination of static and dynamic stability, the former indicating the tendency of an aircraft to return to its equilibrium position, the latter indicating the way an aircraft returns to its equilibrium position. Analogous to the complementarity of these evaluations, the Static Taskload and the Dynamic Workload Methods were developed. Both methods address particular workload functions and factors. These methods are briefly described and discussed. Author

N87-30068# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, CA.

MEASUREMENT OF PILOT WORKLOAD

SANDRA G. HART *In* Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 116-122 (SEE N87-30054 24-54) Jun. 1987 (AGARD-AG-282) Avail: NTIS HC A07/MF A01

A multistage process for evaluating the workload of a five-minute segment of flight including approach and landing for a typical transport aircraft was described. The goal of the analysis was to compare the workload of the two pilots. Four types of measurement techniques were suggested: Analytic (a preliminary task and time line analysis identified task requirements and target performance levels); Performance (flight path control, communications, and interval production); Physiological (heart rate and heart rate variability); and Subjective ratings (a multidimensional technique developed at NASA Ames). Author

N87-30069# National Aerospace Lab., Amsterdam (Netherlands).

INVESTIGATION OF WORKLOAD MEASURING TECHNIQUES: A THEORETICAL AND PRACTICAL FRAMEWORK

RENE C. VANDEGRAAFF *In* Advisory Group for Aerospace Research and the Practical Assessment of Pilot Workload p 123-130 (SEE N87-30054 24-54) Jun. 1987 (AGARD-AG-282) Avail: NTIS HC A07/MF A01

A number of considerations involved in the setting up of an investigation dealing with the problem of being able to draw conclusions from a variety of experimental measures in a complex task situation are discussed. Several implications are pointed out, such as the problem of dealing with contradictory outcomes, the designating of artefacts, and the problem of formulating final conclusions with the (a priori) availability of a superior method for evaluating other methods. An experimental program is outlined

which is based on (normal) approach conditions for civil fixed wing aircraft. The task conditions in this experiment are selected to serve as an operationally based framework for comparing different workload evaluation methods, for evaluating the effects of specific task conditions and for investigating the strategies needed for drawing final conclusions from a variety of outcomes. Author

N88-11668# Royal Netherlands Air Force, The Hague.

DEVELOPMENT, TESTING AND EVALUATION OF A NIGHT VISION GOGGLE COMPATIBLE BO-105 FOR NIGHT LOW LEVEL OPERATION

R. H. FRIEDERICY *In* AGARD, Rotorcraft Design for Operations 8 p (SEE N88-11649 03-05) Jun. 1987 (AGARD-CP-423) Avail: NTIS HC A14/MF A01

With the recommended equipment package, it was demonstrated that a BO-105 helicopter could be operated by experienced helicopter pilots at low level at night over fairly unfamiliar terrain under adverse weather conditions. The helmet mounted night vision goggles (NVG) gave a night low level capability. The third generation image intensifying tube (IIT) added an extra darkness and reduced visibility margin. The blue NVG cockpit lighting made easy monitoring of flight and engine performance instruments possible and allowed the use of navigation equipment. This greatly improved confidence and reduced workload. Author

N88-19559# British Aerospace Public Ltd. Co., Lancashire (England). Military Aircraft Div.

COMPUTER AIDED TACTICS FOR AIR COMBAT

N. MITCHELL *In* AGARD, Advances in Air-Launched Weapon Guidance and Control 11 p (SEE N88-19553 12-15) Dec. 1987 (AGARD-CP-431) Avail: NTIS HC A06/MF A01

In order to achieve maximum operational effectiveness with an acceptable crew workload, the new generation of NATO fighter aircraft will contain a significant degree of automation and computer support for the crew. One key area of support is computer aided tactics, which help the crewman to assess the complex air battle situation, select appropriate targets, and plan the best method of attack. A microcomputer tactical aid called MITAC is described. By computing a range of possible aircraft and missile flight paths and processing the results through a sequence of tactical flight rules, MITAC can offer the crewman useful advice on recommended attacks and their consequences. It provides good insight into the sort of facility that could be available in the next generation of fighter cockpits. Author

N88-20186# McDonnell-Douglas Helicopter Co., Mesa, AZ. Engineering and Training Simulation.

REDUCING ROTARY WING AIRCRAFT DEVELOPMENT TIME/COST THROUGH THE USE OF SIMULATION

S. RAMACHANDRAN, W. E. RICHESON, and D. C. BORGMAN *In* AGARD, Flight Vehicle Development Time and Cost Reduction 8 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

Advances in simulation technology have made man-in-the-loop simulation highly capable, desirable and affordable for rotorcraft design and development. Since the use of simulation as a design tool is relatively new to the helicopter industry, the U.S. Army/McDonnell Douglas Helicopter Company AH-64A (Apache) is used as an example to evaluate the potential cost and time savings realizable through the use of simulation. It is shown that a modern full mission engineering simulator when used effectively could provide cost savings of several millions of dollars, and could reduce helicopter development and flight test by at least a year or two. The means to exploit the full potential of simulation during rotorcraft design, development, and test are also discussed. Author

N88-27700# Royal Army Medical Coll., London (England).

CAN CNV AMPLITUDE PREDICT ABILITY TO ACCOMPLISH A DEMANDING TASK?

PETER ABRAHAM *In* AGARD, Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 2 p (SEE N88-27683 21-51) Feb. 1988 (AGARD-CP-432) Avail: NTIS HC A18/MF A01

Increased Contingent Negative Variation (CNV) was related to attention, effort, and quick response to stimuli, while decreased

CNV amplitude was related to distraction, delayed reaction times, and disorder of mental or emotional functioning. These observations suggest that CNV amplitude measured in the laboratory might be a useful predictor of an individual's ability to accomplish a demanding sensorimotor task under operational conditions. One such task is the operation of a surface-to-air missile known as Blowpipe. Firing this weapon requires rapid responses to that information, under stressful conditions. It also requires auditory stimuli emanating from the weapon. Thus firing operation is not unlike a CNV-generating situation. The Blowpipe training program afforded an opportunity to test the usefulness of CNV measurement for predicting operational performance as assessed during the firing of real missiles on a testing range. It was hypothesized that low laboratory CNV amplitude would predict unsuccessful Blowpipe firing and vice versa. The CNV amplitude was measured in 75 soldiers engaged in training as missile operators. Sixty-nine subjects completed the qualifying course and fired real missiles. Those who showed poor firing performance had CNV amplitudes at the extremes of the range. Selection strategies are discussed.

Author

N88-27704# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.
FIGHTER PILOT PERFORMANCE DURING AIRBORNE AND SIMULATOR MISSIONS: PHYSIOLOGICAL COMPARISONS
JUNE J. SKELLY, BRADLEY PURVIS, and GLENN WILSON. In AGARD. Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine 18 p (SEE N88-27693 21-51) Feb. 1988
(AGARD-CP-432) Avail: NTIS HC A18/MF A01

The growing importance of simulators for training, research, and certification focuses attention on how little is known about whether the behavioral outcomes obtained in a simulator really represent the operational situation. The research addresses this issue, and proposes that use of physiological measures to examine the correspondence between pilot responses during actual missions and comparable simulated missions. Physiological measures of electrical brain activity, heart rate, and eye movements were taken while pilots flew tactical training missions in both the A-7 aircraft and simulator. These measures did discriminate between: flight position (wing vs lead); actual and simulated flight; type of mission event (e.g., takeoff, maneuvers, weapons delivery), and individual pilots.

Author

N88-27749# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.
ENGINEERING DATA COMPENDIUM. HUMAN PERCEPTION AND PERFORMANCE. USER'S GUIDE
KENNETH R. BOFF, ed. and JANET E. LINCOLN, ed. (Dayton Univ., OH) 1988 142 p Prepared in cooperation with NASA, Washington, ASD, Wright-Patterson AFB, OH, Human Engineering Labs., Aberdeen Proving Ground, MD, Human Systems Div., Brooks AFB, TX, Army Research Inst. for the Behavioral and Social Sciences, Alexandria, VA, Naval Training Systems Center, Orlando, FL, Air Force Human Resources Lab., Wright-Patterson AFB, OH, and AGARD, Neuilly-Sur-Seine, France
(LC-87-19560) Avail: NTIS HC A07/MF A01 CSCL 05H

The concept underlying the Engineering Data Compendium was the product of a research and development program (Integrated Perceptual Information for Designers project) aimed at facilitating the application of basic research findings in human performance to the design and military crew systems. The principal objective was to develop a workable strategy for: (1) identifying and distilling information of potential value to system design from the existing research literature, and (2) presenting this technical information in a way that would aid its accessibility, interpretability, and applicability by systems designers. The present four volumes of the Engineering Data Compendium represent the first implementation of this strategy. This is the first volume, the User's Guide, containing a description of the program and instructions for its use.

F.M.R.

N88-28630# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.
ENGINEERING DATA COMPENDIUM. HUMAN PERCEPTION AND PERFORMANCE, VOLUME 1
KENNETH R. BOFF, ed. and JANET E. LINCOLN, ed. (Dayton Univ., OH) 1988 923 p Prepared in cooperation with NASA, Washington, ASD, Wright-Patterson AFB, OH, Human Engineering Labs., Aberdeen Proving Ground, MD, Human Systems Div., Brooks AFB, TX, Army Research Inst. for the Behavioral and Social Sciences, Alexandria, VA, Naval Training Systems Center, Orlando, FL, Air Force Human Resources Lab., Wright-Patterson AFB, OH, and AGARD, Neuilly-Sur-Seine, France
(LC-87-19560) Avail: NTIS HC A99/MF E03 CSCL 05H

The concept underlying the Engineering Data Compendium was the product of a research and development program (Integrated Perceptual Information for Designers project) aimed at facilitating the application of basic research findings in human performance to the design of military crew systems. The principal objective was to develop a workable strategy for: (1) identifying and distilling information of potential value to system design from existing research literature, and (2) presenting this technical information in a way that would aid its accessibility, interpretability, and applicability by system designers. The present four volumes of the Engineering Data Compendium represent the first implementation of this strategy. This is Volume 1, containing sections on Visual Acquisition of Information, Auditory Acquisition of Information, and Acquisition of Information by Other Senses.

F.M.R.

N88-28631# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.
ENGINEERING DATA COMPENDIUM. HUMAN PERCEPTION AND PERFORMANCE, VOLUME 2
KENNETH R. BOFF, ed. and JANET E. LINCOLN, ed. (Dayton Univ., OH) 1988 977 p Prepared in cooperation with NASA, Washington, ASD, Wright-Patterson AFB, OH, Human Engineering Labs., Aberdeen Proving Ground, MD, Human Systems Div., Brooks AFB, TX, Army Research Inst. for the Behavioral and Social Sciences, Alexandria, VA, Naval Training Systems Center, Orlando, FL, Air Force Human Resources Lab., Wright-Patterson AFB, OH, and AGARD, Neuilly-Sur-Seine, France
(LC-87-19560) Avail: NTIS HC A99/MF E04 CSCL 05H

The concept underlying the Engineering Data Compendium was the product of a research and development program (Integrated Perceptual Information for Designers project) aimed at facilitating the application of basic research findings in human performance to the design of military crew systems. The principal objective was to develop a workable strategy for: (1) identifying and distilling information of potential value to system design from existing research literature, and (2) presenting this technical information in a way that would aid its accessibility, interpretability, and applicability by system designers. The present volumes of the Engineering Data Compendium represent the first implementation of this strategy. This is Volume 2, which contains sections on Information Storage and Retrieval, Spatial Awareness, Perceptual Organization, and Attention and Allocation of Resources.

F.M.R.

N88-28632# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.
ENGINEERING DATA COMPENDIUM. HUMAN PERCEPTION AND PERFORMANCE, VOLUME 3
KENNETH R. BOFF, ed. and JANET E. LINCOLN, ed. (Dayton Univ., OH) 1988 860 p Prepared in cooperation with NASA, Washington, ASD, Wright-Patterson AFB, OH, Human Engineering Labs., Aberdeen Proving Ground, MD, Human Systems Div., Brooks AFB, TX, Army Research Inst. for the Behavioral and Social Sciences, Alexandria, VA, Naval Training Systems Center, Orlando, FL, Air Force Human Resources Lab., Wright-Patterson AFB, OH, and AGARD, Neuilly-Sur-Seine, France
(LC-87-19560) Avail: NTIS HC A99/MF E03 CSCL 05H

The concept underlying the Engineering Data Compendium was the product of a research and development program (Integrated Perceptual Information for Designers project) aimed at facilitating the application of basic research findings in human performance to the design of military crew systems. The principal objective was to develop a workable strategy for: (1) identifying and distilling information of potential value to system design from existing research literature, and (2) presenting this technical information in a way that would aid its accessibility, interpretability, and

54 MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT

applicability by system designers. The present four volumes of the Engineering Data Compendium represent the first implementation of this strategy. This is Volume 3, containing sections on Human Language Processing, Operator Motion Control, Effects of Environmental Stressors, Display Interfaces, and Control Interfaces (Real/Virtual). F.M.R.

N88-29291# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

VISUAL EFFECTS IN THE HIGH PERFORMANCE AIRCRAFT COCKPIT

Apr. 1988 149 p Lectures held in Brussels, Belgium, 28-29 Apr. 1988, in Copenhagen, Denmark, 2-3 May 1988, in Ankara, Turkey, 5-6 May 1988, and in Athens, Greece, 9-10 May 1988 (AGARD-LS-156; ISBN-92-835-0456-9; AD-A199306) Avail: NTIS HC A07/MF A01

Vision is the key sensory mode by which a pilot receives the vast majority of the information required to successfully fly the aircraft and accomplish his mission. Visual information is received both directly (viewing through the windscreen, heads-up display and visor) and indirectly (viewing instruments, graphics displays and imaging displays) in a continuous stream. The ability of the pilot to perceive, assimilate and act on this vast amount of visual information greatly depends on the quality of the presentation of this information. There are many factors that can reduce the effective visual capability of the pilot. Many of these factors are presented and their effect on vision and visual performance are discussed. For individual titles, see N88-29292 through N88-29299.

N88-29292# Royal Air Force Inst. of Aviation Medicine, Farnborough (England).

VISION AND VISUAL PROTECTION IN FAST JET AIRCRAFT

D. H. BRENNAN In AGARD, Visual Effects in the High Performance Aircraft Cockpit 13 p (SEE N88-29291 23-54) Apr. 1988

(AGARD-LS-156) Avail: NTIS HC A07/MF A01

Aircrew flying fast jets such as the F-16 require high visual standards in order to be able to react quickly to tactical and emergency situations within their environment. The basic visual physiology of importance in flight is discussed together with the visual standards and associated test methods that are necessary for optimum performance. The hazards of solar radiation are reviewed together with suggestions for the optical and spectral quality of visors and corrective eyewear. Author

N88-29293# Royal Danish Air Force, Vojens.

VISUAL RELATED ACCIDENTS/INCIDENTS

L. SIMONSEN In AGARD, Visual Effects in the High Performance Aircraft Cockpit 8 p (SEE N88-29291 23-54) Apr. 1988

(AGARD-LS-156) Avail: NTIS HC A07/MF A01

Man has evolved as a creature intended to walk on two feet on the surface of the earth, but has acquired the skill to construct machines which enables him to fly. The process has required this basic man to learn, by training, some necessary skills for adapting his sensory systems. This sensory adaptation is rather fragile and will under situations of stress break down and cause accidents or incidents. Based on accidents/incidents, the different break down modes of man's visual sensory system in the high performance aircraft cockpit are discussed. Author

N88-29294# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.

VISION THROUGH AIRCRAFT TRANSPARENCIES

H. LEE TASK In AGARD, Visual Effects in the High Performance Aircraft Cockpit 14 p (SEE N88-29291 23-54) Apr. 1988

(AGARD-LS-156) Avail: NTIS HC A07/MF A01

The primary purpose is to discuss in detail the optical and visual effects of aircraft transparencies including windscreens, canopies, head-up display (HUD) combiners, and visors. The majority of the paper will treat aircraft windscreens and canopies with primary emphasis on high performance aircraft. Author

N88-29295# Societe pour l'Equiment des Vehicules, Gosseles (Belgium). Service des Essais en Vol.

GENERAL OPERATIONAL AND TRAINING VISUAL CONCERNS

O. AGNEESSENS In AGARD, Visual Effects in the High Performance Aircraft Cockpit 17 p (SEE N88-29291 23-54) Apr. 1988 Prepared in cooperation with Societe Anonyme Belge de Constructions Aeronautiques, Brussels, Belgium (AGARD-LS-156) Avail: NTIS HC A07/MF A01

After having stated all the requirements for man-machine interface in modern cockpits, taking into account all the operational requirements, and also the physiological and environmental constraints, the emphasis is put on visual displays, more precisely on the heads-up display (HUD). How they are realized, the information which is presented to the pilot and the physiological problems encountered are discussed such as: effects of G and vertigo. For the latter, the most often cited causes of vertigo are studied. New systems are also cited such as Helmet Mounted Display (HMD) or Night Vision Goggles (NVG). Both are still under development. The need for simulators and the physiological problems associated with their use are addressed. Author

N88-29296# Royal Netherlands Air Force, Zeist.

MAINTENANCE OF VISION-RELATED COMPONENTS

J. M. HARTS In AGARD, Visual Effects in the High Performance Aircraft Cockpit 11 p (SEE N88-29291 23-54) Apr. 1988

(AGARD-LS-156) Avail: NTIS HC A07/MF A01

Visual obtained information is of the highest importance for the pilot to fulfill his mission or in some cases to survive. Though the pilot is offered more and more information by audio-means, for example aircraft-warnings, the eyes of the pilot are his most important source of information. Through maintenance of vision-related components it can be assured that needed information can reach the pilot undamaged. Within the Royal Netherlands Airforce this maintenance encloses mainly cleaning, checking, and replacement of the vision-related component. As part of checking and replacement of the Head-Up Display boresighting is essential to assure a proper mounting, needed for accurate weapon-delivery. Author

N88-29297# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.

NIGHT LIGHTING AND NIGHT VISION GOGGLE COMPATIBILITY

ALAN R. PINKUS In AGARD, Visual Effects in the High Performance Aircraft Cockpit 16 p (SEE N88-29291 23-54) Apr. 1988

(AGARD-LS-156) Avail: NTIS HC A07/MF A01

Proper lighting of aircraft instruments, panels, controls, indicators, and displays is essential in high performance aircraft. The lighting must be useable over a large range of ambient conditions; especially during dawn or dusk transitions and at night. It must be uniform, have low glare, and be continuously dimmable to very low luminance levels, so the pilot can become partially dark adapted for good, out-of-the-cockpit vision. Various aspects of cockpit lighting such as intensity levels, contrast, luminance and color uniformity, red versus white versus blue-green general lighting, color coding, and other parameters are discussed. Daytime lighting requirements will be noted throughout because they are an important part of the overall design of the lighting system. A special area of interest is night vision goggle compatible cockpit lighting. As night missions evolve, night vision goggles (NVGs) are being used with greater frequency. The characteristics and usage of NVGs are overviewed. Methods of achieving night vision goggle compatibility in the cockpit using filtered incandescent lamps, external bezels, floodlighting, light emitting diodes, electroluminescent lamps, microlouver material, and black flight suits are described. Author

N88-29298# Aerospace Medical Research Labs., Wright-Patterson AFB, OH.

DISPLAY SYSTEM IMAGE QUALITY

ALAN R. PINKUS and H. LEE TASK In AGARD, Visual Effects in the High Performance Aircraft Cockpit 17 p (SEE N88-29291 23-54) Apr. 1988

(AGARD-LS-156) Avail: NTIS HC A07/MF A01

High performance aircraft employ several types of display systems including panel-mounted cathode-ray tube (CRT) displays,

head-up displays (HUDs), and helmet-mounted displays (HMDs). These may be used to produce imagery from onboard sensors or to provide information in a symbolic format. There are a number of parameters that are used to characterize these displays such as resolution, contrast ratio, luminance, number of gray shades, line rate, interlace ratio, bandwidth, and modulation transfer functions. In the case of the HUDs and HMDs, there are other parameters that further describe the display such as distortion, transmittance, field of view, exit pupil diameter, vergence, and field curvature. These systems, the measurement of various parameters, and how they affect the quality of the display system are described. In addition, methods will be presented that combine the display parameters with human visual system characteristics to produce image quality metrics that are related to operator performance. Author

N88-29299# Societe pour l'Equipment des Vehicules, Gosselies (Belgium).

FUTURE VISUAL ENVIRONMENT AND CONCERNS

D. AGNEESSENS *In* AGARD, Visual Effects in the High Performance Aircraft Cockpit 14 p (SEE N88-29291 23-54) Apr. 1988 Prepared in cooperation with Societe Anonyme Belge de Constructions Aeronautiques, Brussels, Belgium (AGARD-LS-156) Avail: NTIS HC A07/MF A01

Visual displays play an important role in the cockpit, where the information coming from various sensors is presented to the aircrew, after processing by computers. A classification of the displays is done, considering the needs in modern cockpit architecture, where different systems are possible according to the mission envisaged. For daylight operations, HMD/S or FLIR systems are considered, with their advantages but also their shortcomings and limitations. For night operations, NVG, LLLTV, or FLIR systems are assessed, and the current problems discussed. The protection of the eyes of the aircrew against intense sources of light, such as laser or nuclear flash, is also considered briefly. Author

N88-29736# Systems Technology, Inc., Hawthorne, CA.

PILOT MODELING

DUANE T. MCRUER *In* AGARD, Advances in Flying Qualities 30 p (SEE N88-29735 24-01) May 1988 (AGARD-LS-157) Avail: NTIS HC A09/MF A01

A description is presented of pilot control behavior in general. The essential features of pilot dynamics are emphasized for closed loop control of an aircraft. The crossover model is presented as the simplest and most useful model for the majority of flying qualities analyses. Two models are developed in some detail: a structural isomorphic form which accounts for some human subsystems as well as the total input output behavior; and an algorithmic optimal control model which attempts to mimic the pilot's total response only. Both full and divided attention conditions are treated. Author

N88-29737# Systems Technology, Inc., Hawthorne, CA.

PILOT MODELING APPLICATIONS

IRVING L. ASHKENAS *In* AGARD, Advances in Flying Qualities 38 p (SEE N88-29735 24-01) May 1988 (AGARD-LS-157) Avail: NTIS HC A09/MF A01

The role of pilot opinion and rating in defining flying qualities, and the pilot adapted control behavior that impinges on such ratings are delineated and discussed. This is preparatory to the exemplary application of frequency domain pilot models to the examination and elucidation of a variety of flying qualities situations. This examination starts with single loop situations which progress in complexity, and then shifts to multiple loop cases, which also progress in complexity. This succession is designed to increasingly reveal the basic pilot centered requirements for good flying qualities. Such requirements, which stem from easily achieved pilot adaption and good resulting closed loop responses, are more generally applicable to new unknown situations than are classical requirements on the open loop controlled element dynamic parameters. However, the latter do in fact influence the ease of piloted closure and the resulting closed loop responses so, when properly expressed in terms of characteristics in the projected crossover frequency region, may also achieve a degree of generality. The pilot centered requirements illustrated by the examples are collected and briefly discussed. Author

N88-29741# Pisa Univ. (Italy). Dipartimento di Ingegneria Aerospaziale.

THE OPTIMAL CONTROL PILOT MODEL AND APPLICATIONS

MARIO INNOCENTI *In* AGARD, Advances in Flying Qualities 17 p (SEE N88-29735 24-01) May 1988 (AGARD-LS-157) Avail: NTIS HC A09/MF A01

The modeling of the human pilot behavior plays an important role in the preliminary analysis of aircraft handling qualities. This is especially true when the designer is confronted with nonconventional aircraft dynamics, tasks and/or lack of sufficient handling qualities data base. One modeling technique is reviewed which was developed in the early 1970's and has been widely used since then: the optimal control model of the human pilot. The model has been validated in a number of tasks and used in the analysis as well as the synthesis of manual control loops. The capabilities of the model are evaluated in the pilot rating prediction, in the analysis and in the synthesis of pilot/vehicle control loops from the handling qualities standpoint. Author

N89-18009# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Guidance and Control Panel.

THE MAN-MACHINE INTERFACE IN TACTICAL AIRCRAFT DESIGN AND COMBAT AUTOMATION

Jul. 1988 296 p *In* ENGLISH and FRENCH Symposium held in Stuttgart, Fed. Republic of Germany, 28 Sep. - 1 Oct. 1987 (AGARD-CP-425; ISBN-92-835-0471-2) Avail: NTIS HC A13/MF A01

Twenty-six unclassified papers of the 31 given at the symposium are presented. The papers were presented under the following headings: Combat scenarios and mission segment requirements; Human capabilities and limitations; Technological capabilities and limitations concerning situations awareness; Technological capabilities and limitations of combat automation; Crew station implementation, and System integration. For individual titles, see N89-18010 through N89-18034.

N89-18010# Test Wing (6510th), Edwards AFB, CA.

MISSION PLANNING AND PROPER DESIGN: THE LONG RANGE CONNECTION

GARY W. MATTHES *In* AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 4 p (SEE N89-18009 10-54) Jul. 1988 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

Mission planning in tactical fighter operations is as important today as it was in any tactical operations of the past. The mission planner's task, whether performed by a pilot or a system operator, can be made easier and less susceptible to errors if designers understand the planners task and design to both move the workload to the planning room and minimize planning by proper choice of operational modes and aircraft sensors. There is a special connection between planning requirements and the design of the avionics suite to include its cockpit layout in a tactical fighter. However, this relationship should not be a simple function: i.e., cockpit workload should not decrease at the expense of ever increasing preflight workload. The move should always be to design cockpits and avionics that move as many functions as possible to the preflight planning room thus easing the pilots inflight duties and allowing him to focus on flying the craft and keeping abreast of the tactical situation. One man's opinion is presented of the importance of mission planning, now and in the future. This opinion was formed over 22 years of flying a wide variety of tactical fighters. Author

N89-18011# Defence Medical Services Directorate, London (England).

HUMAN LIMITATIONS IN FLIGHT AND SOME POSSIBLE REMEDIES

D. C. READER *In* AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 8 p (SEE N89-18009 10-54) Jul. 1988 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

The biodynamic effects of high speed flight can produce sudden loss of consciousness without warning whereas most aircrew are used to the prodromal loss of vision. New advances in the anti G systems design can improve G tolerance but training is foreseen as the short term answer to this problem. Amongst the environmental stresses that limit performance are thermal, vibration,

54 MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT

noise and NBC defence. Personal conditioning is of benefit under high thermal stress, active noise reduction can limit the reduction of noise at the ear and NBC defensive ensembles protect against NBC agents. The design of the man machine interface can both enhance and detract from crew performance in flight. Head up displays, night goggles, helmet mounted displays, computer graphics, digital maps and integrated sensor displays can be viewed as new features which greatly increase mission capability. Finally, cockpit and system automation offers the chance of significant advances in cockpit design as management tasks can be completely relegated to the electronic crew member, leaving the human as the ultimate decision maker involved only when absolutely necessary. Author

N89-18012# School of Aerospace Medicine, Brooks AFB, TX. THE PILOT IS NOT THE LIMITING FACTOR IN HIGH PERFORMANCE AIRCRAFT

R. R. BURTON and W. C. ALEXANDER In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 10 p (SEE N89-18009 10-54) Jul. 1988 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

The physiologic requirements to validate a +G sub z tolerance model based on arterial pressure (Pa), eye-heart vertical distance (h), and hydrostatic pressure (P sub H) are investigated. Venous return (VR) and intrathoracic pressure (P sub I) are considered the major physiologic parameters involved in supporting this model at levels above 9 G. Venous return was determined to be adequate to support Pa during either relaxed lower level G tolerance or high sustained G. Some concern exists regarding VR during long duration G exposures, because of the delayed compliant nature of veins. P sub I, the physiologic basis for the anti G straining maneuver (AGSM), was found to be a function of inspiratory volume (V sub I); and therefore, as the subject is reclined to reduce h, the reduction in V sub I prevents a maximum AGSM limiting tolerance to 15 G. On the other hand, pilot pronation may not limit V sub I, and higher G tolerance may be possible. Fatigue was recognized as an important dimension of G tolerance and, as such, was examined as a limiting physiologic function at high sustained G. Primarily, because of the functional coupling between G-level and G-duration tolerances, if one is not G tolerance limiting, neither is the other. Author

N89-18013# British Aerospace Public Ltd. Co., Bristol (England).

A MODEL TO PREDICT VISUAL PERFORMANCE AT THE MAN-DISPLAY INTERFACE IN THE COCKPIT

DIANA F. JOHNSON In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 8 p (SEE N89-18009 10-54) Jul. 1988 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

Some of the problems are summarized which are typically encountered when viewing displays in the military cockpit. It is suggested that design and development of display configurations can be made quicker, cheaper, and more effective than present methods by using mathematical models of the man display interface to predict visual performance. The requirements for such models are discussed. A state of the art model which was developed at British Aerospace is reviewed. The model comprises spectral manipulation routines to calculate how the emission spectrum from a display is modified before reaching the eye, together with a psychophysical vision model which provides an objective measure of visibility. The benefits of using such a model are described. Finally, suggestions are made for future work to extend the present models. Author

N89-18014# Air Force Flight Test Center, Edwards AFB, CA. PILOT WORKLOAD ASSESSMENT: A FLIGHT TEST APPROACH

REGINA M. PAPA and JANICE R. STOLIKER In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 12 p (SEE N89-18009 10-54) Jul. 1988 Previously announced in IAA as A88-38716 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

The present methodology for the assessment of the pilot workload effects of integration between a fighter aircraft and a specialized sensor augmentation system, with a view to the question of single seat cockpit effectiveness is described. It also allows the collection of subjective data pertinent to issues of cockpit

controls and displays, situational awareness, task complexity, survivability, and safety. Two different subjective workload metrics (supplemented by structured interviews) are used: the subjective workload assessment technique, and a modified Cooper-Harper type scale tailored for this application through the inclusion of a performance factor. E.R.

N89-18015# National Aerospace Lab., Amsterdam (Netherlands).

CONSIDERATIONS CONCERNING THE ASSESSMENT OF PILOT WORKLOAD FOR COMPLEX TASK CONDITIONS

R. C. VANDEGRAAFF In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 15 p (SEE N89-18009 10-54) Jul. 1988 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

Workload research has led to the development of various measures, mostly concerning difference aspects of task workload. A number of ways concerning the problem of being able to draw conclusions from a variety of experimental measures in a complex task situation are discussed. Several implications are pointed out, such as the problem of dealing with contradictory outcomes, the designating of artefacts, and the problem of formulating final conclusions without the availability of a superior method for evaluating other methods. These considerations were examined in detail in an inflight study concerning the assessment of pilot workload under various instrument approach conditions. The findings are compared with the results of a former inflight experiment dealing with pilot workload. A discussion is given of the results consisting of subjective ratings, physiological measures, and task performance measures. A strategy is discussed dealing with the formulation of final conclusions. Author

N89-18016# Aerospace Medical Research Labs., Wright-Patterson AFB, OH.

ADVANCES IN WORKLOAD MEASUREMENT FOR COCKPIT DESIGN EVALUATION

MARIS M. VIKMANIS In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 10 p (SEE N89-18009 10-54) Jul. 1988 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

The stressful mission environment for tactical aircraft in the 1990's will require improved integration of pilot and machine to assure successful operations. Research has focused on the development of quantitative pilot performance and workload measures. Improved methods for defining pilot functions, tasks, and performance variables were developed along with test design and data analysis techniques to support cockpit evaluations. Significant advances in the measurement of workload were made using subjective and neurophysiological techniques. Research on measures of pilot situation awareness and decision making, critical toward understanding the pilot interface with automated systems, is underway. The approach has been to establish a solid base of lab research followed by the test and evaluation of measurement techniques in complex flight simulators and then actual flight experiments. Author

N89-18017# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Group.

MODING STRATEGY FOR COCKPIT DATA MANAGEMENT IN MODERN FIGHTER AIRCRAFT

R. SEIFERT and H. NEUJAHN In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 8 p (SEE N89-18009 10-54) Jul. 1988 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

A method for moding strategy of cockpit data management in fighter aircraft has been extended to include assessment of access time allowed for information elements and control and differentiation of the mission tasks according to demand type (importance, frequency of use). This method developed so far renders the operational requirement for the cockpit moding. The steps of specifying the cockpit moding are as yet not so well defined. That is why the term moding strategy is used instead of method in the title. The method of deriving the operational requirements and the subsequent tasks to be performed within the process of cockpit moding are examined. The design driving mission is not detailed. The criteria applicable to define and breakdown missions in different scenarios are dealt with elsewhere. Author

N89-18018# Aeritalia S.p.A., Caselle Torinese (Italy). Gruppo Sistemi Avionici ed Equipaggiamenti.

A MAN-MACHINE INTERFACE SOLUTION: THE EAP GLARE SHIELDS

LUIGINO BONETTO and GIANFRANCO TERRANDO /in AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 9 p (SEE N89-18009 10-54) Jul. 1988 (AGARD-CP-425) Avail: NTIS HC A13/MF A01

Continuous improvements in capabilities of military aircrafts require sophisticated navigation, communication and weapon systems. In the mean time pilots are required to interact with these systems by using data entry facilities or synthetic data displays. Control panels using traditional push buttons with fixed legend cannot be flexible enough to meet these new requirements. An original solution is presented to control the systems through an integrated alphanumeric keyboard facility using custom push button matrix with programmable LED display legend. Design and development activities were carried out; two pieces of equipment named LEFT and RIGHT GLARE SHIELDS are now operational on the EAP demonstrator. Author

N89-18019# Air Force Avionics Lab., Wright-Patterson AFB, OH.

PANORAMIC COCKPIT CONTROL AND DISPLAY SYSTEM (PCCADS)

N. SCHWARTZ and EUGENE ADAM (McDonnell Aircraft Co., St. Louis, MO.) /in AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 10 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

A real time, pilot interactive demonstration and test of a large area fighter cockpit display was conducted. The test of this large area, full color display was conducted in a mock-up cockpit at a simulation facility. This display used essentially the entire instrument panel area to present a moving map with symbology and other information overlain and also presented sensor imagery and other information as required. The information presented could be customized for a particular mission phase or other need. A touch sensitive display as well as other advanced control concepts were also demonstrated in conjunction with the large area display. This display and control concept simplifies and automates many of the control and display functions for the pilot of an advanced fighter aircraft. The results of demonstration and testing with ten pilots are presented. Author

N89-18020# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

MULTISENSOR TARGET RECONNAISSANCE

G. BAUER /in AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 5 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

An example of the concept of a knowledge based sensor fusion system is presented, which combines a radar primary sensor with an IR secondary sensor. The radar's wide range of view is used for Target Recognition over a large area, while the IR sensor's high resolution at a small angle of aperture is employed for target classification. Author

N89-18021# Centre d'Enseignement et de Recherches de Medecine Aeronautique, Paris (France).

PILOTS AS SUPERVISORS AND MANAGERS OF AUTOMATIC SYSTEMS: A RISKY NEW FACTOR IN MAN-MACHINE SYSTEMS RELIABILITY (PILOTES SUPERVISEURS ET GESTIONNAIRES DE SYSTEMES AUTOMATIQUES UN NOUVEAU ROLE BIEN RISQUE POUR LA FIABILITE DU COUPLE HOMME-MACHINE)

R. AMALBERTI /in AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 8 p (SEE N89-18009 10-54) Jul. 1988 In FRENCH

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

The evolution of the man-machine task related to automated airborne systems is discussed. Cognitive functioning in control processes, information acquisition, and modifications of pilot tasks are addressed. Author

N89-18022# Dassault-Breguet Aviation, Saint Cloud (France).

EXPERT SYSTEM MAN-MACHINE INTERFACE FOR A COMBAT AIRCRAFT COCKPIT

JEAN SAULAIS and PIERRE LARROQUE /in AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 7 p (SEE N89-18009 10-54) Jul. 1988 In FRENCH; ENGLISH summary

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

Through developing navigation and attack systems on combat aircraft and by analyzing the new operational concepts, an ever increasing workload is required from the pilot. An important part of the workload lies in getting the management information to the pilot. In case of very low level flying, getting this information becomes especially light; the pilot cannot divert his attention from outside the cockpit to watch over the vehicle and its systems. For this reason, modern fighter cockpit are already oriented toward using head-up terminals for displaying built-up information. Enhancements were made on displays in order to increase the capacity of collimated data. In addition, synthetic voice warnings are already used and day after day, the pace of speech processing is increasing. Expert systems are being studied for the purpose of operating at two levels, depending both on its importance with respect to the mission and on the workload inferred by the expert system in the different steps of the mission. Author

N89-18023# Centre d'Essais en Vol, Istres (France).

LESSONS LEARNED FROM THE USE OF NEW COMMAND SYSTEMS (ENSEIGNEMENTS TIREES DE L'UTILISATION DE NOUVEAUX SYSTEMES DE COMMANDE)

JACQUES ROSAY /in AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 7 p (SEE N89-18009 10-54) Jul. 1988 In FRENCH

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

The general informatization of combat aircraft has allowed the introduction of radically new cabin architectures and command systems. In these new interfaces, the information that is exchanged between the pilot and machine can undergo processing and take on various forms. The range of possibilities for these processing techniques and forms is virtually limitless. Experiences in the use of certain system elements -- screens, control boards, voice command systems, and ergonomically adapted displays are discussed along with various physical and mental human-factors considerations. Author

N89-18024# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Visual Display Systems Branch.

DESIGN CONSIDERATIONS FOR VIRTUAL PANORAMIC DISPLAY (VPD) HELMET SYSTEMS

DEAN F. KOCIAN /in AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 32 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

Some of the fundamental performance and design parameters that should be considered for the successful evolution and integration of a new type of helmet mounted display (HMD) system intended for use in the military aircraft cockpits are described. It is called a virtual panoramic display (VPD). The parameters discussed include field-of-view, exit pupil, image quality, eye relief, collimation, alignment, size, weight, system integration, etc. For the first time the associated helmet system is considered as an integral subsystem that must be designed to support the requirements of the HMD. Trade-offs relating to the intended VPD applications, HMD design and its impact on the associated image source and display electronics are discussed. Design issues and considerations are developed primarily from the viewpoint of the VPD system integrator. Author

N89-18025# British Aerospace Aircraft Group, Preston (England). Military Aircraft Division.

TOWARDS THE NEXT GENERATION FIGHTER COCKPIT: THE EAP EXPERIENCE

KATHARINE M. WYKES and MAURIZIO SPINONI (Aeritalia S.p.A., Turin, Italy) /in AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 18 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

The main design is outlined of the cockpit of the Experimental Aircraft Program (EAP) aircraft. The structured design process that

54 MAN/SYSTEM TECHNOLOGY AND LIFE SUPPORT

was followed is described. The main features of the resulting cockpit are outlined, together with some of the rationale behind their design. These include: (1) Display coding: how the format hierarchy is managed, how the formats were constructed and how color has been used on the displays; (2) The hands on throttle and stick concept and how this applies to the EAP; (3) A manual data entry facility capable of controlling ten different subsystems through totally multifunction devices; and (4) An intelligent warning system based on the use of a digitized voice. These facilities have been flying for over a year now and the experience gained during their design and subsequent flight testing is helping to form the basis for the European Fighter Aircraft cockpit design. Author

N89-18026# British Aerospace Public Ltd. Co., Brough (England).

PILOT INTEGRATION AND THE IMPLICATIONS ON THE DESIGN OF ADVANCED COCKPITS

R. S. KALAWSKY In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 16 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

A totally enclosed cockpit may quickly become the driving factor for the next generation of tactical fighter aircraft and will deny access to the pilot of essential outside world cues. Also, the number of sensory systems carried aboard the aircraft is increasing, with the threat of unacceptable pilot workload. Pilot and aircraft reaction times may be a decisive factor in any conflict situation in the future, so the pilot must have a greater situation awareness than ever before. The future cockpit designer must have a greater appreciation and awareness of the human factors related issues, and tailor system performance to match human performance limits. The cockpit situation is assessed and how the pilot can be successfully integrated with newly emerging technologies to overcome the problems introduced by a closed cockpit philosophy and increased workload is examined. An insight into one possible cockpit solution is studied. Author

N89-18027# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

PILOT CONTROL DEVICES

W. FUCHS, R. KODWEISS, and M. WEIDEL In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 13 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

Advanced cockpit design requires geometry improvements to accommodate greater pilot percentile ranges, to reduce pilot fatigue and discomfort, to increase G-load resistance and to allow a different ejection path. Simulator trials were performed to optimize the installation positions of control devices for different seat angles, the control parameters including gain and force gradients as well as the use of force and displacement signals. The simulator results will be scaled down for inflight use. Adaptive gain shaping and a reduction of control force using higher controller damping were tested. A method for reducing the risk of loss of consciousness and means to increase pilot efficiency is discussed. Author

N89-18028# Technische Hogeschool, Delft (Netherlands), Faculty of Aerospace Engineering.

ACTIVE AND PASSIVE SIDE STICK CONTROLLERS: TRACKING TASK PERFORMANCE AND PILOT CONTROL BEHAVIOUR

R. J. A. W. HOSMAN and J. C. VANDERVAART In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 11 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

A servo controlled side stick featuring hydraulic actuators with hydrostatic bearings was developed. Due to its smooth operation, low noise characteristics and high bandwidth, a great variety of dynamic characteristics can be simulated. This research tool can very conveniently be used as a conventional passive stick to assess the desired side stick dynamics for future fly by wire aircraft. Still more important is that with a servo controlled side stick, stick force and stick displacement can be controlled virtually independent. This feature can be used for experimental research to investigate the perception and feedback of stick force and stick displacement by the pilot's neuromuscular system in the control task. After a short description of the side stick controller hardware, results of a tracking experiment in a moving base flight simulator is presented. Considerable improvement in tracking performance

and significant changes of measured pilot control behavior were found for the active when compared to the passive control stick. Author

N89-18029# National Research Council of Canada, Ottawa (Ontario), Flight Research Lab.

THE USE OF INTEGRATED SIDE-ARM CONTROLLERS IN HELICOPTERS

J. M. MORGAN and S. R. M. SINCLAIR In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 11 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

Research conducted with integrated side stick controllers in a variable stability helicopter is reviewed. The investigations involve the use of three different types of controllers. The advantages and disadvantages of integrated controllers are discussed and an informed opinion of their applicability is presented. Finally, data acquired during a succession of piloted experiments, indicating that Level 1 handling qualities are achievable with these types of controllers, are summarized. Author

N89-18030# Boeing Helicopter Co., Philadelphia, PA.

ADVANCED FLIGHT CONTROL SYSTEM FOR

NAP-OF-THE-EARTH FLIGHT

STEVEN I. GLUSMAN, CHARLES DABUNDO, and KENNETH H. LANDIS In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 15 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

A digital/optical flight control system was implemented on a UH-60 Black Hawk helicopter to determine flight control system requirements for Nap-of-the-Earth (NOE) flight. Small-displacement side stick controllers with unique force trim positions were an integral part of the control system design. Controller configurations could be readily altered from a fully integrated 4-axis side stick controller to separated controller and configurations including (3 + 1) collective and (2 + 1 + 1). Control laws were implemented with a model following architecture that facilitates variation of control response characteristics. The Automatic Flight Control System was designed to provide level 1 handling qualities and the Primary Flight Control System was implemented to achieve level 2 handling qualities. The interrelational effects of controller configuration and piloting task on handling qualities was investigated. Handling qualities were evaluated using precision hover and low speed tasks typical of NOE flights as well as tasks performed at airspeeds from 80 to 120 knots. Piloted results are presented with recommendations for future systems. Author

N89-18031# Aerospace Medical Research Labs., Wright-Patterson AFB, OH, Human Engineering Div.

MATCHING CREW SYSTEM SPECIFICATIONS TO HUMAN PERFORMANCE CAPABILITIES

KENNETH R. BOFF In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 9 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

Despite spectacular advances in display systems and data handling technologies, modern crew systems confront their operators with a large volume of codified information which competes for scarce attentional and control resources. Achieving an optimal fit between system capabilities and the perceptual and performance characteristics of the operator requires the presence of at least three elements: (1) Usable data resources, human performance data; (2) An effective interface providing methods and media to support accession and evaluation of these data, and (3) Sophisticated and Motivated users. Designing for active presence of these elements requires understanding of and assumes some ability to influence individual, organizational and regulatory variables that jointly support the design and acquisition processes. Author

60 COMPUTER OPERATIONS AND HARDWARE

N89-18032# Aerospace Medical Research Labs., Wright-Patterson AFB, OH.

INTEGRATED CONTROL AND AVIONICS FOR AIR SUPERIORITY

JAMES A. KOCHER / In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 7 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

The Integrated Control and Avionics for Air Superiority (ICAAS) Program is a program to develop, design, and demonstrate selected fighter aircraft technologies needed to kill and survive when outnumbered in air combat engagements. Design emphasis is placed upon functional integration of sensors, fire control, flight control, weapons and interface with the pilot to achieve improved close-in combat. Details of the ICAAS concept and design approach are presented. Author

N89-18033# Air Force Flight Test Center, Edwards AFB, CA. **AFTI/F-16 IMPACT OF COCKPIT AUTOMATION ON PILOT ACCEPTANCE**

MARK A. STUBBEN / In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 10 p (SEE N89-18009 10-54) Jul. 1988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

The Advanced Fighter Technology Integration (AFTI) F-16 Joint Test Force recently completed a developmental flight test program investigating a fully automated weapons delivery system. The F-16 boasted an impressive array of automatic systems that increased the effectiveness of both the pilot and airframe as an overall weapon system. The highly modified F-16 testbed was fitted with a digital flight control system, a conformally mounted infrared sensor/laser ranging pod, integrated fire/flight control computers, a digital color moving map, and a voice recognition system. The AFTI/F-16 integrated these sensors, avionics, and flight control systems into an Automated Maneuvering and Attack System (AMAS), capable of full authority automatic air to surface weapons delivery with profiles down to 200 ft above ground level. Test results of the developmental flight test program are presented and an assessment is provided of the individual AMAS subsystems on the overall workload of the pilot and the pilot acceptance of a fully automated weapons delivery system. Author

N89-18034# Army Aviation Systems Command, Moffett Field, CA. Aeroflightdynamics Directorate.

ADVANCED HELICOPTER COCKPIT AND CONTROL CONFIGURATIONS FOR HELICOPTER COMBAT MISSION TASKS

LORAN A. HAWORTH, ADOLPH ATENCIO, JR., COURTLAND BIVENS, ROBERT SHIVELY, and DANIEL DELGADO / In AGARD, The Man-Machine Interface in Tactical Aircraft Design and Combat Automation 16 p (SEE N89-18009 10-54) Jul. 1988 Previously announced as N88-14988

(AGARD-CP-425) Avail: NTIS HC A13/MF A01

Two piloted simulations were conducted by the U.S. Army Aeroflightdynamics Directorate to evaluate workload and helicopter-handling qualities requirements for single pilot operation in a combat Nap-of-the-Earth environment. The single pilot advanced cockpit engineering simulation (SPACES) investigations were performed on the NASA Ames Vertical Motion Simulator, using the Advanced Digital Optical Control System control laws and an advanced concepts glass cockpit. The first simulation (SPACES I) compared single pilot to dual crewmember operation for the same flight tasks to determine differences between dual and single ratings, and to discover which control laws enabled adequate and single pilot helicopter operation. The SPACES II simulation concentrated on single pilot operations and use of control laws thought to be viable candidates for single pilot operations workload. Measures detected significant differences between single pilot task segments. Control system configurations were task dependent, demonstrating a need for inflight reconfigurable control system to match the optimal control system with the required task. Author

N89-18440# Volkswagen A.G., Wolfsburg (Germany, F.R.) Research and Development Div.

REQUIREMENTS AND CRITERIA FOR THE PASSIVE SAFETY OF AUTOMOBILES

R. WEISSNER / In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 6 p (SEE N89-18421 11-03) Dec. 1988

(AGARD-CP-443) Avail: NTIS HC A15/MF A01

Success was achieved in the last 17 years in increasing traffic safety. The number of people killed has dropped dramatically despite a considerable increase in the number of vehicles involved. The passive safety requirements imposed on passenger vehicles and the technical concepts designed to satisfy these requirements, are examined. The interpretation of the functions leads to the definition of the basic demands to be made of an occupant restraint systems. Use can be made, for example, of belt force limiters to reduce the forces acting on the occupant during the restraint process. A belt lock-up or belt pre-tensioners can be used to limit the throw-forward distance. Numerous measures have to be taken to make a restraint system comfortable. Belt height adjustment, for example, provides an individual adaptation of belt position. An important safety feature is the seat plus head restraint. The seat has a considerable influence on the effectiveness of the entire system both in the event of a head-on collision and in the case of a rear end collision. If it is assumed that there is good correlation between the load values measured with dummies and the real risk of injury for a person involved in an accident, the possible benefit of any safety measure can be forecast. The efforts to improve passive safety must also include cyclists, motor cyclists, and pedestrians. It is hoped that the number of people who sustain serious injuries or even lose their lives as a result of a traffic accident will continue to drop in the future. This goal will be attained if all those involved sustain their efforts to increase road traffic safety. Author

N89-18442# Centre d'Essais en Vol, Bretigny-sur-Orge (France) Lab. de Medecine Aerospatiale.

DESIGN AND SIMULATED-CRASH VALIDATION OF A DYNAMIC RESPONSE RECORDER (CONCEPTION D'UN ENREGISTREUR DE GRANDEURS DYNAMIQUES ET VALIDATION AU COURS D'UN CRASH SIMULE)

J. M. CLERE, D. LEBRUN, J. DOBUA, and J. L. POIRIER / In AGARD, Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness 7 p (SEE N89-18421 11-03) Dec. 1988 In FRENCH

(AGARD-CP-443) Avail: NTIS HC A15/MF A01

A small lightweight instrument was developed to record the degree of acceleration experienced by an anthropomorphic manikin during an aircraft crash, with application to the study of the aircraft/seat/occupant interaction. Upon impact, the device automatically records data from the nine locations for a period of six seconds. The performance of the present instrument was experimentally validated during the dropping of a DC-10 fuselage from a height of 6 m. M.G.

60

COMPUTER OPERATIONS AND HARDWARE

Includes hardware for computer graphics, firmware, and data processing

N87-19920# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France) Technical Information Panel.

THE APPLICATION OF MICROCOMPUTERS TO AEROSPACE AND DEFENCE SCIENTIFIC AND TECHNICAL INFORMATION WORK

Oct. 1986 119 p Lecture series held in London, England, 16-17 Oct. 1986, in Ankara, Turkey, 20-21 Oct. 1986 and in Rome, Italy, 23-24 Oct. 1986

(AGARD-LS-149; ISBN-92-835-1538-2; AD-A173314) Avail: NTIS HC A06/MF A01

In 1978 the theme of Lecture Series 92 was the opportunity offered in automation of library and information services by cheap-

60 COMPUTER OPERATIONS AND HARDWARE

faster minicomputer equipment, and new database and applications software. Speakers addressed the feasibility of automation; the techniques for the necessary systems studies; and cost effectiveness in units of tens of man years of programming and equipment costing 100,000 or more. There is now a radical change in what an information specialist may reasonably expect, due largely to the development of the low cost, reliable, general purpose microcomputer. The speakers in this lecture series report the growing role of the microcomputer in cataloguing and library housekeeping; in accessing shared information resources through local and wide networks, and in new approaches to information management and retrieval. For individual titles see N87-19921 through N87-19929.

N87-19921# Strathclyde Univ., Glasgow (Scotland). Dept. of Information Science.

APPLICATIONS IN LIBRARY MANAGEMENT, REQUISITIONS, LOANS AND STOCK CONTROL

PAUL F. BURTON. In AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work. 5 p (SEE N87-19920 12-60) Oct. 1986 (AGARD-LS-149) Avail: NTIS HC A06/MF A01

Applications of the microcomputer in library management, requisitions, loans and stock control are discussed. That the microcomputer has provided numerous libraries and information services (LIS) with an opportunity to automate routines which were previously denied to them because of their size and (usually) their lack of funding, has now achieved the status of a cliché. Plummeting costs of hardware coupled with increasing sophistication and power of software (albeit at increased prices) mean that all but the smallest LIS can now contemplate automation of most routines, including that cluster of applications which is referred to as housekeeping. Indeed, it could be said that these smaller LIS are most able to benefit from computer-based automation, since they are being faced with increasing demands upon their services, demands which have to be met with low (and sometimes reducing) staffing levels. Despite this, the take-up rate of microcomputers has not been high, though there are signs that it is increasing steadily. This can be explained in part by the restrictions of funding which these LIS have faced (in common with all others), but it has to be said that there remains a certain lack of awareness among some LIS managers. Growing number of LIS managers are implementing microcomputers for house-keeping applications, including management tasks, acquisitions, circulation control and aspects of stock management. Author

N87-19929# Strathclyde Univ., Glasgow (Scotland). Dept. of Information Science.

PROCUREMENT AND MANAGEMENT OF MICROCOMPUTER-BASED SYSTEMS

PAUL F. BURTON. In AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work. 6 p (SEE N87-19920 12-60) Oct. 1986 (AGARD-LS-149) Avail: NTIS HC A06/MF A01

Microcomputer-based systems appear to offer an inexpensive approach to library and information system automation. However, to be effective, efficient and cost-effective, it is still necessary to apply some well-established principles to the specification and procurement of micro-based systems. The procurement process, some of the difficulties associated with micro systems, and the difficulties of finding suitable software are discussed. Once installed, a micro-computer system can provide a number of management problems, caused, not least, by the inexperience of operators and the direct impact of the systems (as compared with large systems, which are often supported and operated by qualified personnel). Author

N87-24948# Naval Air Development Center, Warminster, PA. MACHINE ARCHITECTURES FOR ARTIFICIAL INTELLIGENCE COMPUTING

RAYMOND P. KIRSCH and CHRISTOPH H. HEITHECKER. In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations. 11 p (SEE N87-24940 18-66) Feb. 1987 (AGARD-CP-404) Avail: NTIS HC A07/MF A01

Alternatives to the von Neumann architectural model are under study by members of the advanced computer architecture community. Recent developments in multiprocessor technology can

be shown to provide performance speed increases in the execution of expert systems. Several of these efforts are followed closely and are assessed. Author

N87-29520# Naval Ocean Systems Center, San Diego, CA. RAPID PROTOTYPING OF USER-COMPUTER INTERFACES DURING SYSTEM DESIGN

G. A. OSGA. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems. 10 p (SEE N87-29503 24-06) Feb. 1987 (AGARD-CP-414) Avail: NTIS HC A14/MF A01

Rapid Prototyping is a process of creating a simulation of a user interface to a completed computer system, early in the design process, before the underlying or application software is developed. This process allows the presentation of display formats and system procedures to users early in the design process, allowing for behavioral data collection and numerous iterations in the user computer interface (UCI) design. The development and use of rapid prototyping software in an expert system development project is discussed. The user interface is a high resolution screen with multiple windows, using a mouse as the primary input device. A design procedure for an interface to an expert system is discussed which includes: (1) an Interface Design Tool, (2) an interface design checklist, and (3) the collection of and analysis of behavioral data during interface testing. Author

N88-10797# Centre National de la Recherche Scientifique, Toulouse (France).

COMPUTING SYSTEMS DEPENDABILITY AND FAULT TOLERANCE: BASIC CONCEPTS AND TERMINOLOGY

J. C. LAPRIE. In AGARD, Fault Tolerant Considerations and Methods for Guidance and Control Systems. 15 p (SEE N88-10796 02-08) Jul. 1987 (AGARD-AG-289) Avail: NTIS HC A07/MF A01

Provided is a conceptual framework for expressing the constituents of dependable computing, i.e., the impairments to dependability: faults, errors and failures, the means for dependability fault avoidance, fault tolerance, fault removal and fault forecasting; the measures of dependability reliability and availability. Emphasis is placed on the dependability impairments and on fault tolerance. Informal but precise definitions are given. Author

N89-10833# Electronique Serge Dassault, Saint Cloud (France). A HIGHLY RELIABLE COMPUTER FOR AIRBORNE APPLICATIONS

MICHEL MUENIER. In AGARD, Computing Systems Configuration for Highly Integrated Guidance and Control Systems. 17 p (SEE N89-10831 02-01) Jun. 1988 (AGARD-LS-158) Avail: NTIS HC A08/MF A01

The reliability features of the CMF (French Military Computer) AIR embedded computer supporting its operational software are described. This computer was designed to meet the requirements of the ACE (European Combat Aircraft)/RAFA (E.D. aircraft). Therefore, it has to be highly dependable to satisfy severe physical requirements (size, weight, power consumption, etc.) and to support real-time software execution (this software being written in high-level languages such as Ada and LTR3, a French Pascal-like real-time language). The general structure of the computer is first presented, emphasis being placed on the technological choices (for example, the use of ASICs, Application Specific Integrated Circuits). The various protective mechanisms provided at the level of the machine (hardware and microcode) are then presented: data access control and code execution control. Finally, a short presentation of the software production environment is given. In conclusion, the compromise made between operational dependability and performance characteristics are summarized. Author

N89-10837# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH. Avionics Lab.

HIGH SPEED PARALLEL PROCESSING NETWORKS FOR ADVANCED ARCHITECTURES

D. REED MORGAN. In AGARD, Computing Systems Configuration for Highly Integrated Guidance and Control Systems 17 p (SEE N89-10831 02-01) Jun 1988

(AGARD-LS-158) Avail: NTIS HC A08/MF A01

Many force multiplier improvements in vehicle control, situation awareness and crew decision aiding will be made possible if affordable, flyable supercomputers and associated software can be developed for next-generation military aircraft. New functional architectures will emerge because dramatic improvements in processing speed can be implemented through tightly coupled networks. Unconstrained system architectures can be developed where the system designer will have the capability to fuse together needed logical functions irrespective of previous boundaries. In addition, increased local processing (e.g., smart sensors) will be made possible to improve threat and target classification. Robust use of real-time artificial intelligence at both local, functional and system levels will be achievable, along with improvements in fault tolerance and system diagnostics. Author

N89-11395# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. **COMPUTATIONAL FLUID DYNAMICS: ALGORITHMS AND SUPERCOMPUTERS**

WOLFGANG GENTZSCH, KEN W. NEVES, and H. YOSHIHARA, ed. (Boeing Military Airplane Development, Seattle, Wash.) Mar. 1988. 195 p

(AGARD-AG-311; ISBN-92-835-0448-8; AD-A196777) Avail: NTIS HC A09/MF A01

Cost-effective vectorization of fluid dynamic codes, in particular the Navier-Stokes Code, is covered relative to the supercomputer architecture. Subjects include current supercomputer architecture; minisupercomputers; impact of hardware on computing; software migration issues; benchmarking; guidelines on FORTRAN vectorization at the do-loop level; restructuring of basic linear algebra algorithms; and restructuring guidelines for basic fluid dynamic codes. A glossary of supercomputing terms is given in the Appendix. For individual titles, see N89-11396 through N89-11401.

N89-11396# Boeing Computer Services Co., Seattle, WA.

HARDWARE ARCHITECTURE, CHAPTER 2

KEN W. NEVES. In AGARD, Computational Fluid Dynamics: Algorithms and Super Computers p 11-53 (SEE N89-11395 02-60) Mar 1988

(AGARD-AG-311) Avail: NTIS HC A09/MF A01

An overview of computer architectures is given. The purpose is not to offer a text book description of the electronics behind computing, but rather an appreciation of the barriers on computer development that have led to the complex design of today's supercomputers. This introductory section will examine: (1) the need for increased computer power as a result of the pressure from new computational processes; (2) the limits and barriers of hardware; (3) a brief history of parallelism; and (4) an overview of parallelism in today's computers. Following this Background section, an in-depth look at today's supercomputer architectures and emerging computer products is given. In chapter 3, the impact of new hardware architecture on algorithms will be examined. Like computational fluid dynamics, supercomputing has developed a set of terms, definitions, and ad hoc descriptions of common processes. In this monograph most of these terms will be defined when used. Nevertheless, in an attempt to aid the reader, an informal glossary of supercomputing terms is included in an appendix. Author

COMPUTER PROGRAMMING AND SOFTWARE

Includes computer programs, routines, and algorithms, and specific applications, e.g., CAD/CAM.

N87-19922# Canadian Forces Coll., Toronto (Ontario).

MICROCOMPUTER-BASED CATALOG CREATION SOFTWARE OPTIONS FOR SMALL LIBRARIES

C. E. MURPHY. In AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work 7 p (SEE N87-19920 12-60) Oct 1986

(AGARD-LS-149) Avail: NTIS HC A06/MF A01

The microcomputer-based catalog creation options available to small libraries are discussed. Possible criteria for software evaluation are suggested. Two catalog creation software packages, INWAGIC, a database management system and CARD DATALOG, an off-the-shelf catalog creation program are described in terms of the suggested software evaluation criteria. Microcomputer-based catalog creation software -- software intended to enable libraries to build an in-house database of machine-readable bibliographic records -- can provide small libraries with an affordable means of transcending the information retrieval limitations of the traditional catalog and of automating some of the routine functions associated with the generation of cataloging products. However, microcomputer-based catalog creation can also prove to be an expensive trap for the unwary. Author

N87-19925# Ashford (J. H.) Associates Ltd., Maidenhead (England).

MICROCOMPUTERS IN INFORMATION RESOURCE SHARING. PART 1: DATA AND GRAPHICS SYSTEMS

J. H. ASHFORD. In AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work 9 p (SEE N87-19920 12-60) Oct 1986

(AGARD-LS-149) Avail: NTIS HC A06/MF A01

The number of online numeric data sources now exceeds that of the bibliographic and full text systems. Most of the databases are of financial or economic data, but a significant proportion deals with scientific, technical and medical information, and environmental studies are well covered. Examples of North American and European sources are given, and issues of data quality and property rights are discussed. The application of data from a shared source normally involves access in a language specialized to that database, and the subsequent use of flexible software to format and present the retrieved data. This final step may be done on the host system, using programs provided by the data vendor, but is increasingly being transferred to the user's micro computer, using either general purpose software, or micro computer versions of mainframe utilities. The scope of analysis, tabulation and graphical presentation now on offer is considered, and the implications for choice of micro computer systems, and for information staff training and career development are considered. Author

N87-19928# Ashford (J. H.) Associates Ltd., Maidenhead (England).

TRENDS IN SOFTWARE AND SYSTEM DEVELOPMENT

J. H. ASHFORD. In AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work 12 p (SEE N87-19920 12-60) Oct 1986

(AGARD-LS-149) Avail: NTIS HC A06/MF A01

The developments in microcomputers now being applied in information work have, in the majority of cases, been adopted from innovations directed at very much larger markets. Present trends are to reduce real costs of both software and equipment, which is helpful in making existing systems cheaper, but not necessarily good for new library oriented developments. The need for fast retrieval is becoming more important, and developments in electronic publishing and document exchange will be important. The integration of text, graphics and images is improving depending partly on new software ideas, and partly on the availability of optical disc storage for large volumes of data. Text retrieval is becoming a feature of some relational database systems, offering an alternative to inverse file approaches, and the use of signature

61 COMPUTER PROGRAMMING AND SOFTWARE

representations may lead both to simple small scale retrievers, and to methods of identifying duplicate records in archives.

Author

N87-20200# National Aerospace Lab., Amsterdam (Netherlands).

FLEXIBLE GRID GENERATION FOR COMPLEX GEOMETRIES IN TWO SPACE DIMENSIONS BASED ON VARIATIONAL PRINCIPLES

B. OSKAM and G. H. HUIZING. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 14 p (SEE N87-20199 13-02) Nov. 1986. Sponsored by Netherlands Agency for Aerospace Programs.

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A method is described that is suitable for the numerical generation of boundary-conforming curvi-linear coordinate systems. The method is based on the decomposition of a multiply connected domain into a number of simply connected zones. In each zone the grid is computed by solving a system of Euler equations that minimizes a functional of the unknown transformation functions. This system of equations and the natural boundary conditions of the minimization problem are discussed. A first illustration of this technique is given for the case of a three-element airfoil. Author

N87-20201# Aircraft Research Association Ltd., Bedford (England).

A DISCUSSION ON A MESH GENERATION TECHNIQUE APPLICABLE TO COMPLEX GEOMETRIES

N. P. WETHERILL, J. A. SHAW, C. R. FORSEY, and K. E. ROSE. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 12 p (SEE N87-20199 13-02) Nov. 1986. Sponsored by Ministry of Defence and British Aerospace.

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A general three-dimensional block structured grid generation technique is described. It was coupled with an Euler algorithm to simulate the flow around complicated aerodynamic configurations. The flow field is subdivided into a set of non-overlapping blocks and grids are generated simultaneously in all of the blocks using an elliptic grid generation method. Appropriate boundary conditions applied on the face of the blocks ensure that grid lines pass smoothly between blocks leaving the grid globally smooth. Details of the surface and field grid generation are given and techniques to control the position of grid points are highlighted. Grid topologies for complicated civil and military configurations are discussed. Examples are given of grids for complicated configurations and some results of flow calculations on block structured grids are shown. Author

N87-20202# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.). Theoretical Aerodynamic Group.

NUMERICAL GRID GENERATION AROUND COMPLETE AIRCRAFT CONFIGURATIONS

WILLY FRITZ. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 8 p (SEE N87-20199 13-02) Nov. 1986.

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A method for accurately generating boundary conforming, three-dimensional computational grids applicable to realistic aircraft configurations is presented. Configurations with an arbitrarily shaped and positioned wing, a horizontal tail (or canard) and a vertical tail attached to an arbitrarily shaped fuselage can be treated. The grid generation technique divides the computational domain into multiple rectangular blocks whose structure follow the natural lines of the configuration. For each of these contiguous sub-regions the grids are generated separately and then patched together to cover the entire physical region. The grids for the sub-regions are generated by the solution of elliptical partial differential equations (PDE). The method is an automated procedure but with interactive control and optimization possibilities which enable the user to produce coordinate lines with sufficient continuity across the block boundaries. Due to the block structure and the data organization of the method very fine grids (up to several millions of grid points) for complete aircraft configurations can be generated. Author

N87-20203# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.

GEOMETRY DEFINITION AND GRID GENERATION FOR A COMPLETE FIGHTER AIRCRAFT

THOMAS A. EDWARDS. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 12 p (SEE N87-20199 13-02) Nov. 1986. Previously announced as N86-28050.

(AGARD-CP-412) Avail: NTIS HC A19/MF A01 CSDL 09B

Recent advances in computing power and numerical solution procedures have enabled computational fluid dynamicists to attempt increasingly difficult problems. In particular efforts are focusing on computations of complex three-dimensional flow fields about realistic aerodynamic bodies. To perform such computations, a very accurate and detailed description of the surface geometry must be provided, and a three-dimensional grid must be generated in the space around the body. The geometry must be supplied in a format compatible with the grid generation requirements, and must be verified to be free of inconsistencies. A procedure for performing the geometry definition of a fighter aircraft that makes use of a commercial computer-aided design/computer-aided manufacturing system is presented. Furthermore, visual representations of the geometry are generated using a computer graphics system for verification of the body definition. Finally, the three-dimensional grids for fighter-like aircraft are generated by means of an efficient new parabolic grid generation method. This method exhibits good control of grid quality. Author

N87-20204# Royal Aircraft Establishment, Farnborough (England) Aerodynamics Dept.

AN ASSESSMENT OF THE USE OF LOW-ORDER PANEL METHODS FOR THE CALCULATION OF SUPERSONIC FLOWS

J. S. SMITH and D. S. WOODWARD. In AGARD Applications of Computational Fluid Dynamics in Aeronautics 8 p (SEE N87-20199 13-02) Nov. 1986.

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

Three low-order panel methods developed for the analysis of supersonic flows were used to make calculations for a number of test configurations, with the aim of establishing the range of problems for which this class of computational method yields adequate solutions. The programs investigated were the Woodward USSAERO/C program, the related NLRAERO program, and the British Aerospace Warton supersonic panel program. Results obtained using these programs were evaluated against theoretical and experimental data for a number of test cases covering wing-alone, body-alone and wing-body geometries. It is concluded that low-order panel methods can provide adequate solutions for supersonic flows about wings, bodies and wing-body combinations, provided the assumptions implicit in the linearised potential flow model are not violated. Examples show that the prediction of lift and pitching moment curve slopes for quite complex configurations may be acceptable, but that the detailed pressure distributions are not always predicted satisfactorily. In particular, serious problems are encountered in calculating the flow about wings with rounded supersonic leading edges due to the linearised flow model which is used. Author

N87-29521# British Aerospace Aircraft Group, Preston (England) Advanced Systems Dept.

A GRAPHICAL AID TO IKBS PROGRAM DEVELOPMENT

P. J. KEARNEY and B. HUNT. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 18 p (SEE N87-29503 24-06) Feb. 1987.

(AGARD-CP-414) Avail: NTIS HC A14/MF A01

Intelligent Knowledge Based Systems (IKBS) developments fall into 2 categories: real time airborne applications of system automation and tactical decision aid type, and ground based expert systems. The first of these presents major difficulties with regard to Quality Assurance testing of the codes produced, while the second suffers from the inappropriateness of stand alone workstations and classical artificial intelligence (AI) approaches within the industrial aerospace context. British Aerospace is applying its extensive experience in conventional software methodologies to the new demands presented by IKBS, both to the developer and the user. One of the tools under development is known as GRIN (Graphical Representation of an Inference Network) and is described, together with an overview of an approach to AI. GRIN presents an inference network in a dynamic diagrammatic form, which maximizes the user's comprehension of

61 COMPUTER PROGRAMMING AND SOFTWARE

the knowledge base, and hence eases development and maintenance of an IKBS. It is considered that this tool and the philosophy behind it will reinforce the view that IKBS represents a natural extension of programming technology rather than a radical change. Author

N88-10816# Electronique Serge Dassault, Saint Cloud (France). **HOW TO USE PROLOG FOR EXPERT SYSTEM PROGRAMMING**

MICHEL MUENIER, PATRICK TAILLIBERT, and SERGE VALENNES. In AGARD, *Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control* 8 p (SEE N88-10806 02-08) Aug. 1987 (AGARD-LS-155) Avail: NTIS HC A07/MF A01

A description is given of how PROLOG is used to develop expert systems. It is shown that PROLOG had to be extended towards an object oriented representation. The basic mechanisms that should occur in such a representation to make expert programming easier are discussed. The EMICAT (MI4) environment, constructed on this PROLOG extension so that knowledge can be represented and used in the form of production rules, is described. The implementation of this environment is briefly described. Author

N88-10817# Carleton Univ., Ottawa (Ontario). Dept. of Systems and Computer Engineering.

REAL-TIME EXPERT SYSTEMS: A STATUS REPORT

B. A. BOWEN. In AGARD, *Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control* 15 p (SEE N88-10806 02-08) Aug. 1987 (AGARD-LS-155) Avail: NTIS HC A07/MF A01

The control algorithm for complex physical plants is usually based on a model, either discrete or linear, which describes the appropriate response to data obtained from sensors located throughout the plant. Models of plant behavior are usually based on a Markov process assumption or on some linear system approximation. Many subtle characteristics beyond the range of the assumptions or approximations are either ignored or the appropriate response is obtained by fine-tuning after the control system is installed. A comprehensive state-of-the-art summary of the status, progress, issues and directions in the use of knowledge-based systems in real-time control applications is given. Author

N88-20182# Aeritalia S.p.A., Turin (Italy). Combat Aircraft Group.

DEVELOPMENT COST REDUCTION USING INTEGRATED CAE-CAD-CAM TECHNIQUES

DAVIDE FALCO. In AGARD, *Flight Vehicle Development Time and Cost Reduction* 9 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

The conventional process for new aircraft design and development is based on sequential analysis and test cycles. Using an integrated CAE-CAD-CAM technique it is possible to increase the depth of different configuration analyses, to reduce the cycle time and even the number of cycles required, and to achieve optimized design, thereby improving the product, shortening the overall development time, and reducing development costs. The capability of CAD systems to manipulate 3-D geometric models utilizing a standard components data base, allows the integrated development of aerodynamic and structural configurations, and of systems layout. A computerized mock-up developed at CAD permits the convergence on a unique mathematical model of different disciplines, facilitating integration between structures and equipment. The CAD total data base integrated with analysis and manufacturing permits direct data transfer from engineering to manufacturing (CAM) and in addition makes faster and cheaper the embodiment of modifications during the development phase. Author

N88-20191# British Aerospace Aircraft Group, Warton (England). Military Aircraft Div.

TIME AND COST REDUCTION THROUGH COMPUTER INTEGRATED MANUFACTURE

J. B. COX. In AGARD, *Flight Vehicle Development Time and Cost Reduction* 7 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

CAD/CAM, since its introduction about 10 years ago, has provided only a limited increase in productivity and has had very little effect on the timespan from initiation of design to delivery of the first unit from production. Further productivity benefits and a reduction in the time taken to produce the first prototype can only be achieved by a more flexible approach to design and manufacture. This in turn puts a greater strain on the Company's support system and a much greater integration of the whole activities of the Company are required. Computer systems are a necessary means of producing the level of integration through Information Technology. This requirement is moving us from CAD/CAM to Computer Integrated Manufacture (CIM). The paper concludes with a review of the steps being taken within British Aerospace towards reducing project lead times and costs. Author

N88-23795# Naval Weapons Center, China Lake, CA. **DEVELOPING SYSTEMS USING STATE-OF-THE-ART CAD/CAM TECHNOLOGY**

VERNON A. ANDERSON and DAVID J. BREWER (Space and Naval Warfare Systems Command, Charleston, S.C.). In AGARD, *The Design, Development and Testing of Complex Avionics Systems* 7 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

Here, state-of-the-art CAD-CAM refers to mission-specific applications with the ability to describe a design that is independent of technology at certain levels; that is, which describes a design in a manner independent of any particular implementation, yet allows integrated verification across design boundaries. Such a high-level approach pays high dividends in transferring designs from one technology to another. Presented here are some structures useful for improving understanding of technology, systems, CAD/CAM, and communications across interfaces. A technology planning and communications framework concerning a hierarchical system schema is introduced for looking at the spectrum of user tasks in the life cycle of electronic products. The Navy's acquisition strategy and plans for computer-aided design/computer-aided manufacturing are presented. Author

N88-23798# British Aerospace Public Ltd. Co., Preston (England). Military Aircraft Div.

SOFTWARE ENGINEERING FOR THE BRITISH AEROSPACE EXPERIMENTAL AIRCRAFT PROGRAMME (EAP)

W. E. R. KELLAWAY. In AGARD, *The Design, Development and Testing of Complex Avionics Systems* 14 p (SEE N88-23767 17-06) Dec. 1987 Sponsored in part by the Ministry of Defence, United Kingdom (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The software engineering approach adopted by British Aerospace in the specification, design and implementation of the Avionics and Utility Systems Management software for the Experimental Aircraft Program (EAP) is described. The software life cycle and supporting methods and tools are described, in particular the Controlled Requirements Expression (CORE) method, supported by the CORE Work Station, and the PERSPECTIVE programming support environment. The considerable benefits obtained in both productivity and quality are highlighted and developments leading to a full Integrated Project Support Environment (IPSE) are indicated. Author

N88-23800# General Research Corp., Santa Barbara, CA.

A SOFTWARE LIFE CYCLE SUPPORT ENVIRONMENT

L. Y. BAJWA and FRANK S. LAMONICA (Rome Air Development Center, Griffiss AFB, N.Y.). In AGARD, *The Design, Development and Testing of Complex Avionics Systems* 19 p (SEE N88-23767 17-06) Dec. 1987 (AGARD-CP-417) Avail: NTIS HC A18/MF A01

The Software Life Cycle Support Environment (SLCSE) is a distributed, computer-based environment of software development tools and methods which span the full spectrum of the software life cycle and are integrated through a common and consistent

61 COMPUTER PROGRAMMING AND SOFTWARE

user interface and a life cycle project data base. Primary features of the SLCSE are: (1) it supports both the development and management of complex mission-critical computer resources (MCCR) software systems; (2) it is multilingual, supporting the Air Force standard higher order languages including MIL-STD-1589B (JOVIAL J73) and MIL-STD-1815A (Ada); and (3) through its unifying framework, it enables the integration of both newly developed and existing software tools. The SLCSE development effort, highlights of SLCSE architecture, requirements and top-level design are discussed. The implementation approach is described along with the results of the first build. Testing and verification plans are discussed and risk areas identified. Long-term plans to evolve the SLCSE beyond the current contractual requirements are discussed. Author

N88-29313# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Fluid Dynamics Panel. **THREE DIMENSIONAL GRID GENERATION FOR COMPLEX CONFIGURATIONS: RECENT PROGRESS** JOSEPH F. THOMPSON, J. L. STEGER, and H. YOSHIHARA, ed. (Boeing Military Airplane Development, Seattle, Wash.) Mar. 1988. 162 p. (AGARD-AG-309; ISBN-92-835-0451-8; AD-A196776) Avail: NTIS HC A08/MF A01

Some of the capabilities of the Computational Fluid Dynamics (CFD) community are surveyed for gridding complex three dimensional configurations. The intent is to provide some insight as to the present state of grid generation for aircraft configurations in order to help assess whether this task presents a long term stumbling block to routine use of CFD in aerodynamic applications. A brief review is given of some of the techniques that are available for generating body conforming curvilinear grids. In order to assess capabilities in grid generation, colleagues at selected institutions were solicited to describe their experiences and difficulties in grid generation of complex configurations. For individual titles, see N88-29314 through N88-29325.

N88-29314# Boeing Military Airplane Development, Seattle, WA. **LESSONS LEARNED IN THE MESH GENERATION FOR PN/S CALCULATIONS** H. YOSHIHARA. In AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 15-22 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

Experiences encountered in the 2D mesh generation with the elliptic differential equation method are described for the parabolized Navier-Stokes calculations over a generic fighter at a supersonic Mach number and for a wing/fuselage at hypersonic Mach numbers. Importance of the mesh quality is stressed, and the need of an improved cost effective treatment of the shocks is pointed out. Author

N88-29315# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA. **THREE-DIMENSIONAL ELLIPTIC GRID GENERATION FOR AN F-16**

REESE L. SORENSON. In AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 23-28 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01 CSCL 09B

A case history depicting the effort to generate a computational grid for the simulation of transonic flow about an F-16 aircraft at realistic flight conditions is presented. The flow solver for which this grid is designed is a zonal one, using the Reynolds averaged Navier-Stokes equations near the surface of the aircraft, and the Euler equations in regions removed from the aircraft. A body conforming global grid, suitable for the Euler equation, is first generated using 3-D Poisson equations having inhomogeneous terms modeled after the 2-D GRAPE code. Regions of the global grid are then designated for zonal refinement as appropriate to accurately model the flow physics. Grid spacing suitable for solution of the Navier-Stokes equations is generated in the refinement zones by simple subdivision of the given coarse grid intervals. That grid generation project is described, with particular emphasis on the global coarse grid. Author

N88-29316# Aircraft Research Association Ltd., Bedford (England).

COMPONENT ADAPTIVE GRID GENERATION FOR AIRCRAFT CONFIGURATIONS

N. P. WEATHERILL and J. A. SHAW. In AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 29-39 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

A method is presented which is capable of generating component adaptive grids. The approach is illustrated using wing-body-canard geometries but is applicable to a wide range of complex aerodynamic configurations. The new method of topology generation, combined with the approach taken to grid control, provide a powerful means of exploring the most suitable topology for a given geometry. Grid control parameters are available to the user to modify the grids for particular geometries but the system does not require the user to partake in long interactive sessions on a workstation to generate grids. The suitability of the component adaptive grids for flow simulation is demonstrated by comparing theoretical predictions with experiment. Author

N88-29317# General Dynamics Corp., Fort Worth, TX. **GENERATION OF MULTIPLE BLOCK GRIDS FOR ARBITRARY 3D GEOMETRIES**

J. P. STEINBRENNER, S. L. KARMAN, JR., and J. R. CHAWNER. In AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 40-55 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

A grid generation procedure was developed to create complex block grid systems, beginning with the generation of block surfaces, up to the generation of the full block volume grids. The multiple block concept is shown to facilitate the gridding of very complex geometries and also to allow larger sized grids to be run with a multiple block Euler solver. The entire grid generation process is broken into logical steps, each step is described in detail. Three examples of grid systems generated with these techniques are given, thereby validating the procedure. Finally, current research topics in grid generation and future plans are discussed. Author

N88-29318# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA. **GRID GENERATION ON AND ABOUT A CRANKED-WING FIGHTER AIRCRAFT CONFIGURATION**

ROBERT E. SMITH, JOAN I. PITTS, LARS-ERIK ERIKSSON, and MICHAEL R. WIESE (Computer Sciences Corp., Hampton, Va.) In AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 56-64 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01 CSCL 09B

Experiences at the NASA Langley Research Center generating grids about a cranked wing fighter aircraft configuration is described. A single block planar grid about the fuselage and canard used with a finite difference Navier-Stokes solver is also described. A dual block nonplanar grid about the complete configuration and used with a finite volume Euler solver is presented. The very important aspect of computing the aircraft surface grid, starting with a standardized model description, is also presented. Author

N88-29319# Messerschmitt-Boelkow G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Group.

GRID GENERATION FOR AN ADVANCED FIGHTER AIRCRAFT A. EBERLE and W. SCHWARZ. In AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 65-76 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

The grid generation process for a realistic and complex fighter type aircraft is described. The method is based on the solution of biharmonic equations and uses a single block concept. Only a few user specified input parameters are necessary for the construction of the space grid and therefore this grid generation system is very simple to handle. The grid is intended for calculations with an Euler code at transonic and supersonic speeds. Author

61 COMPUTER PROGRAMMING AND SOFTWARE

N88-29320# Tennessee Univ. Space Inst., Tullahoma. Dept. of Engineering Science and Mechanics.

ALGEBRAIC GRID GENERATION FOR FIGHTER TYPE AIRCRAFT

JOHN STEINHOFF *In* AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 77-84 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

A systematic procedure is presented for synthesizing a complex computational grid for fighter type aircraft out of a number of simpler elementary grids. This method is useful when a grid is required over an object which, though complex, consists of a number of simpler pieces, such as an aircraft with a number of lifting surfaces. The procedure presented allows a smooth complex grid to be generated which becomes exactly equal to each elementary grid as the surface corresponding to that elementary grid is approached. In this way, methods which may have previously been developed for each piece do not have to be changed and can be used as black boxes, whether they are algebraic, partial differential equation based, or whether the grids are just given numerically. This blending technique is only one of several tools which was used to generate effective grids. Other techniques include projection methods for generating surface grids. Some advantages and limitations of the method are discussed and examples are given of its use in generating complex fighter grids.

Author

N88-29321# Mississippi State Univ., Mississippi State. Dept. of Aerospace Engineering.

COMPOSITE GRID GENERATION FOR AIRCRAFT CONFIGURATIONS WITH THE EAGLE CODE

JOE F. THOMPSON and LAWRENCE E. LIJEWSKI (Air Force Armament Lab., Eglin AFB, Fla.) *In* AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 85-95 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

A general three dimensional grid generation code based on a composite block structure is discussed. The code can operate either as an algebraic generation system or as an elliptic generation system. Provision is made for orthogonality at boundaries and complete continuity at block interfaces. The code can operate in two or three dimensions, or on a curved surface. The input is structured to be user oriented, and arbitrary block configurations can be treated.

Author

N88-29322# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.). Inst. fuer Theoretical Fluid Mechanics.

ANALYTICAL SURFACES AND GRIDS

HELMUT SOBIECZKY *In* AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 96-105 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

The use of analytical shape generation is described for wing-body configurations and flow boundary conditions. Flexibility in geometry definition allows for simple computational grid interpolation. A test case for experiment and code validation is illustrated.

Author

N88-29323# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.). Theoretical Aerodynamics.

MESH GENERATION FOR INDUSTRIAL APPLICATION OF EULER AND NAVIER STOKES SOLVERS

W. FRITZ, W. HAASE, and W. SEIBERT *In* AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 106-123 (SEE N88-29313 23-61) Mar. 1988 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

A considerable increase has been made in recent years in the ability to compute flow fields about three dimensional configurations. In order to reach their full potential, robust grid generation techniques for complicated aerodynamic configurations must be developed. Three different methods are presented which can be characterized as automatic grid generation for complete aircraft configurations, completely interactive grid generation and generation of solution adaptive grids for Navier-Stokes calculations. Although all the presented grid generation techniques use only elliptical grid generation, they show already that there is no unique grid generation technique.

E.R.

N88-29324# Calspan Field Services, Inc., Arnold AFS, TN. **EXPERIENCE WITH THREE DIMENSIONAL COMPOSITE GRIDS**

J. A. BENEK, T. L. DONEGAN, and N. E. SUHS *In* AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 124-138 (SEE N88-29313 23-61) Mar. 1988 Previously announced as N87-26021 (AGARD-AG-309) Avail: NTIS HC A08/MF A01

Experience with the three dimensional, chimera grid embedding scheme is described. Applications of the inviscid version to a multiple body configuration, a wing-body-tail configuration, and an estimate of wind tunnel wall interference are described. Applications to viscous flows include a 3-D cavity and another multi-body configuration. A variety of grid generators is used, and several embedding strategies are described.

Author

N88-29325# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.). Inst. fuer Entwurfsaerodynamik.

GRID GENERATION AROUND TRANSPORT AIRCRAFT CONFIGURATIONS USING A MULTI-BLOCK STRUCTURED COMPUTATIONAL DOMAIN

R. RADESPIEL *In* AGARD, Three Dimensional Grid Generation for Complex Configurations: Recent Progress p 139-153 (SEE N88-29313 23-61) Mar. 1988

(AGARD-AG-309) Avail: NTIS HC A08/MF A01

A new grid generation code is described which is based on the multi-block approach. Grid generation around 3-D configurations is divided into 3 major parts, namely, surface definition, surface grid generation and field grid generation. Coons' patches are used to define the surfaces and their intersection lines. Surface grids and field grids are generated using the numerical solution of an elliptic system. An effective means for the control of the grid spacing was developed which is based on an iterative determination of the source terms in the elliptic system. The code is used to generate grids around a wing-body combination and a high bypass nacelle configuration.

Author

N89-10049# Raytheon Co., Bedford, MA. Missile Systems Div. **COMPARISON OF STATISTICAL DIGITAL SIMULATION METHODS**

PAUL ZARCHAN *In* AGARD, Guidance and Control Systems Simulation and Validation Techniques 16 p (SEE N89-10048 01-08) Jul. 1988

(AGARD-AG-273) Avail: NTIS HC A07/MF A01

The various statistical digital simulation methods used in the preliminary analysis and synthesis of a homing missile guidance system are compared. A unifying example is used to illustrate the advantages and computer costs of each of the methods.

Author

N89-10050# Dynetics, Inc., Huntsville, AL. **A GENERIC SEEKER SIMULATION FOR THE EVALUATION OF ACTIVE RF GUIDANCE SYSTEMS**

FRANK T. CAMPOS *In* AGARD, Guidance and Control Systems Simulation and Validation Techniques 9 p (SEE N89-10048 01-08) Jul. 1988

(Contract F08635-83-C-0123)

(AGARD-AG-273) Avail: NTIS HC A07/MF A01

The essential features of a generic simulation of an active radio frequency (RF) air-to-air missile seeker is described. The concept of generic simulations is supported by the need for a common test-bed of system models and simulation technology capable of supporting advanced seeker development programs. An extensive library of target, environment, and RF seeker models was incorporated within a modular program structure featuring tri-level hierarchy of program control that allows the selective management of program options for specifying the fidelity and functional implementation of models used at the component, subsystem, and system levels. The Generic Seeker Simulation offers considerable flexibility for simulating a broad range of RF seeker configurations and has a significant potential for supporting the evaluation of competitive designs and advanced seeker technologies.

Author

61 COMPUTER PROGRAMMING AND SOFTWARE

N89-10051# Magnavox Electronic Systems Co., Fort Wayne, IN. Control Systems Operation.
DIGITAL SIMULATION TECHNIQUES FOR END GAME PHENOMENA

MARTIN E. TANENHAUS and DUANE J. CART In AGARD, Guidance and Control Systems Simulation and Validation Techniques 37 p (SEE N89-10048 01-08) Jul. 1988 (AGARD-AG-273) Avail: NTIS HC A07/MF A01

This report is based on efforts to develop a color graphics based analytical methodology for determining end game performance of smart sensors on missiles and projectiles. These sensor systems defend against present and future target threats. The development of a computer based methodology to define and test weapon system sensor performance requirements, predict end game sensor and fuze burst point distributions, assess weapon system effectiveness, and evaluate advanced weapons design concepts is presented. A graphics driven target modeling methodology is presented, together with verification, correlation, and validation techniques. A complex radar target model with detailed graphics, radar cross section (RCS), glint, imagery analysis, and target Doppler signature output was developed. A sensor system signal processor model is developed and exercised with the target model to provide system performance assessments. Verifiable correlation between system model performance and real hardware was obtained. End game system function results are utilized in a weapons effectiveness simulation and appraisal.

Author

N89-10052# Raytheon Co., Bedford, MA.
DESIGN CRITERIA FOR HARDWARE-IN-THE-LOOP SIMULATION FACILITIES

S. J. POWERS and M. E. SISLE In AGARD, Guidance and Control Systems Simulation and Validation Techniques 10 p (SEE N89-10048 01-08) Jul. 1988 (AGARD-AG-273) Avail: NTIS HC A07/MF A01

The criteria used in the design of a Hardware-in-the-Loop (HIL) simulation facility are outlined. Although dealing with a missile interceptor facility, the criteria are directly applicable to any electronic weapon system simulation facility. The first step in the process is defining the role that the facility will play in the development cycle. Facility requirements which drive the model and data requirements are then defined and the facility design follows from the requirements. Following completion of the facility development is the conduct of system integration tests. Verification/validation criteria are established and met, the process is complete, allowing the facility operation to begin. Facility operation and maintenance become ongoing functions.

Author

N89-11397# Boeing Computer Services Co., Seattle, WA.
ALGORITHM AND GENERAL SOFTWARE CONSIDERATIONS
KEN W. NEVES In AGARD, Computational Fluid Dynamics: Algorithms and Super Computers p 55-98 (SEE N89-11395 02-60) Mar. 1988 (AGARD-AG-311) Avail: NTIS HC A09/MF A01

This chapter of the study examines the relationship between hardware architecture and computational performance. The setting is scientific computation of a generic sense (i.e., application non-specific). In subsequent chapters, the general implications discussed here will be applied to algorithms specific to computational fluid dynamics and to the major computational approaches used in that field. In order to give meaningful appreciation of the concepts discussed, frequent use of examples on specific hardware architectures will be utilized. Quite often several machine types will be included, and several will not. The reasons for this are twofold: (1) it is not always possible to obtain exactly the same benchmark results across machine types, and (2) it is not our intent to give a definitive comparison of machine performance. These reasons may seem superficial at first glance, yet they are fundamental to the reality of the state-of-the-art of computer metrics.

Author

N89-11398# Technische Univ., Regensburg (Germany, F.R.).
VECTORIZATION OF FORTRAN PROGRAMS AT DO-LOOP LEVEL

W. GENTZSCH In AGARD, Computational Fluid Dynamics: Algorithms and Super Computers p 99-108 (SEE N89-11395 02-60) Mar. 1988 (AGARD-AG-311) Avail: NTIS HC A09/MF A01

In previous chapters the impact of computer hardware on algorithm performance was discussed. It was made clear that the most effective use of the supercomputers comes from sound understanding of computer architecture and an appropriate computational strategy. In this and subsequent chapters, the focus will be on fluid dynamics applications. Today, and for some years to come, the major interface between the scientist and the computer will continue to be FORTRAN. Some common techniques are presented which are useful in dealing with code optimization within the critical loops of FORTRAN, and in Chapter 5 the important consequences of restructuring the linear algebra algorithms common in CFD applications. Finally, in Chapter 6, major applications will be reviewed from a computational perspective giving a broad-based approach utilizing proper FORTRAN, proper algorithms, and awareness of architectural dependencies. Here we restrict ourselves to discussing some helpful coding techniques, which are easy to understand and to implement. However, it should be emphasized that the selection of an appropriate algorithm is generally far more important than fancy programming techniques (see Chapter 5).

Author

N89-11399# Technische Univ., Regensburg (Germany, F.R.).
RESTRUCTURING OF BASIC LINEAR ALGEBRAIC ALGORITHMS, CHAPTER 5

W. GENTZSCH In AGARD, Computational Fluid Dynamics: Algorithms and Super Computers p 109-139 (SEE N89-11395 02-60) Mar. 1988 (AGARD-AG-311) Avail: NTIS HC A09/MF A01

In the previous chapter the vectorization of typical do-loops arising in CFD problems was discussed. Until now, we have not considered the algebraic structure of the basic algorithm, by far the most important consideration. Indeed, a good algorithm poorly coded is usually preferable to a poor one optimally coded. For this reason, in the following, we turn our attention to the restructuring of some basic linear algebraic algorithms such as matrix*vector and matrix*matrix operations, linear recursions up to more complex algorithms and iterative methods for the solution of linear algebraic systems of equations with sparse matrices. Problems involving linear algebraic calculations consume large quantities of computer time. If substantial improvements can be made within the arithmetic section, a significant reduction in the overall computation time will be realized.

Author

N89-18449# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

SOFTWARE PRODUCTIVITY THROUGH ADA ENGINES

RICK A. LONG In AGARD, Software Engineering and Its Application to Avionics 4 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

The use of correct computer hardware to increase programmer productivity is explained. An Air Force program is used for specific information and examples.

Author

N89-18450# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

SOFTWARE DEVELOPMENT GUIDELINES

DENICE S. JACOBS In AGARD, Software Engineering and Its Application to Avionics 2 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

Due to the growing complexity of avionic systems, the development cycle for mission critical software has evolved into a collective process of organized tasks. These tasks are distinct levels of effort which are implemented by the developer to ensure the creation of a reliable, operational system. Four principle tasks are summarized which have proven to be excellent procedures for developing avionics software. The first and foremost task of the project manager is to establish a Configuration Control Board (CCB) as the central core of technical management. It consists of a group of key hardware and software engineers who mutually govern the status of system development, and incorporate design changes on an agreed-to basis. The second task is to logically

61 COMPUTER PROGRAMMING AND SOFTWARE

separate the software project into well-defined phases of development. This, too requires the cooperation of both hardware and software teams to work together in accordance with a master schedule. The third task is to create an automated data base which contains the latest interface specifications (ICDs) and system message definitions for use by the engineers. Finally, the last task is to procure hardware emulators and stand-alone test stations as an effective means of testing software prior to system integration and tests. Author

N89-18451# Thomson-CSF, Malakoff (France). RCM Div.
ON THE CONDITIONS AND LIMITS OF USER INTERVENTION IN DELIVERED SOFTWARE MANUFACTURER'S VIEWPOINT
JEAN R. CHARVOZ In AGARD, Software Engineering and Its Application to Avionics 12 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

High capacity data processing architectures are now available in avionics. The development of embedded software have become a major activity in most avionic equipment manufacturing companies. These companies are faced with challenges. To meet customer requirements, the manufacturer often has to satisfy different, and sometimes contradictory, conditions. These issues include: the characteristic development of equipment which includes software (types, activities, tasks, skills, and facilities); the equivalency of software modification to a partial redevelopment and the difficulties inherent; and the conditions under which a customer may modify the software of the equipment. Some answers are provided to aspects of the process of giving a user the autonomy to perform software modifications. Author

N89-18453# Computer Sciences Corp., Falls Church, VA.
CONVERSION TO ADA: DOES IT REALLY MAKE SENSE
ROBERT A. CONVERSE and MITCHELL J. BASSMAN In AGARD, Software Engineering and Its Application to Avionics 5 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

Change is an integral part of any useful operational system. Changes are required for any number of reasons, ranging from minor errors that exist in the system to major system upgrades to meet totally new and different requirements. For the U.S. Department of Defense (DOD), the manner in which systems are changed is of significant interest. Major system upgrades occur in virtually every system at various times during their operational lifetime. One way to manage the changes and to reduce the long term costs associated with them is the use of the Ada programming. Avionics is an application area within DOD for which the use of Ada is a serious consideration. However, in addition to reducing the long term costs, the avionic software must also meet stringent real-time performance and resource utilization requirements. Some of the issues associated with the use of Ada to accomplish system changes are addressed. Background and general issues will be discussed as well as some concerns that are specific to avionics systems. Author

N89-18455# British Aerospace Aircraft Group, Preston (England). Military Aircraft Div.

EMBEDDING FORMAL METHODS IN SAFRA
ANDREW BRADLEY In AGARD, Software Engineering and Its Application to Avionics 9 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

The SAFRA software development method was used extensively and successfully for the production of real-time avionic systems at BAe Warton. The method couples a powerful, yet simple, semi-formal specification (CORE) and design (MASCOT) approach to provide an environment covering the complete life cycle. Embedding formal methods into this established approach will combine requirements capture and structuring techniques with mathematically formal specification and designs, facilitating mathematical proof of safety critical elements. Following an overview of SAFRA, a brief introduction is provided to formal methods and identifies 2, a method founded on set theory and logic, for detailed investigation. An interface between semi-formal and formal techniques is defined and the results of applying the combined method to a number of avionic specification studies are summarized and discussed. It is concluded by considering the potential benefits and costs of adopting formal methods on large scale, avionic software projects. Author

N89-18456# Allied-Signal Aerospace Co., Fort Lauderdale, FL. Air Transport Avionics Div.

FORMALIZING A THEORY OF REAL-TIME SOFTWARE SPECIFICATION

ROBERT D. BUSSE In AGARD, Software Engineering and Its Application to Avionics 22 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

The approaches taken to specify the requirements and design of real-time embedded systems software range from not at all to informal textural specifications to semiformal graphics-based languages for data flow, control flow, state transition, and data structure diagrams to formal approaches such as VDM and HOS. Each approach has some problems when applied to the specification of large software systems. Part of the reason is that there are few formally defined models of the specification hierarchy commonly associated with requirements, design, and implementation specifications. Such a model is required as a point of reference in discussions about such specification issues and completeness and consistency analysis performed by some of the current generation CASE tools. A model can provide guidance in the identification of just what information to specify; regardless of the syntactic aspects of the specification approach used to capture this semantic information. In addition, such a model can be applied as the deductive inference model underlying an AI-assisted CASE environment capable of exercising a greater expert understanding of the information being specified. Such a model is presented in the form of a theory of Real-time Embedded System Specification (RESS). A partial vocabulary of the theory is presented along with the basic axioms and representative theorems. Author

N89-18457# Shape Technical Center, The Hague (Netherlands).

THE STATE OF PRACTICE IN ADA-BASED PROGRAM DESIGN LANGUAGES

LAWRENCE G. JONES In AGARD, Software Engineering and Its Application to Avionics 6 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

The use of Ada in avionics and other systems is assuming more importance due to a growing body of national policies dictating its use in mission critical systems. This has created a need for software engineering techniques that incorporate Ada concepts so that the transition from a system design to an Ada implementation is more easily achieved. One of the most common techniques is to use an Ada-based program design language (ADL). The current state of practice in Ada-based program design languages is surveyed by examining some leading reports on the subject. Among the more important efforts, the surveys of existing ADLs conducted for the U.S. Naval Avionics Center (NAC), the Institute of Electrical and Electronics Engineers Recommended Practice for ADLs, the ADL guidelines produced for Transport Canada, and the ADL guidelines produced for NAC are discussed. It is noted that the state of practice is considered to be too immature for standardization. However, some of the major findings are summarized and point to future directions. Author

N89-18458# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

DEBUGGING DISTRIBUTED ADA AVIONICS SOFTWARE

MARC J. PITARYS In AGARD, Software Engineering and Its Application to Avionics 8 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

Future avionics systems will consist of distributed fault-tolerant architectures. The operational flight software will be written in the Ada programming language and use a distributed operating system. Developing and maintaining this software requires new and innovative debugging techniques to reduce cost, time, and complexity. Two specific techniques are described. These are the dynamic trace buffers and the software Built-In-Support-Functions (BISFs). First the need for new approaches to debugging distributed Ada software is addressed. The implementation of each of the techniques is presented. The Avionics Laboratory is the only organization to successfully demonstrate both techniques with MIL-STD-1750A computers. Observations and recommendations for using these techniques will be reported. Author

61 COMPUTER PROGRAMMING AND SOFTWARE

N89-18459# Computer Technology Associates, Inc., Ridgecrest, CA.

AUTOMATED ADA CODE GENERATION FOR MILITARY AVIONICS

ROBERT S. ARDREY, II /in AGARD, Software Engineering and Its Application to Avionics 9 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The experience with Ada-directed software development methodologies is presented. These include functional programming the use of class instances object-oriented design, and Ada as a program design language. Built upon prior experience, an automated Ada code generation environment is described. The environment addresses the enhancement of existing software tools, new development currently underway, and compiler support for military flight computers such as the AN/AYK-14. Finally, military avionics applications of such an environment are discussed. Predicted improvements in the areas of prototyping, productivity, reusability, and maintainability are examined. Author

N89-18460# Sparta, Inc., Laguna Hills, CA. Software and Systems Technology Div.

VERIFICATION AND VALIDATION OF FLIGHT CRITICAL SOFTWARE

PIO DEFEO and ANTHONY DETHOMAS (Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.) /in AGARD, Software Engineering and Its Application to Avionics 10 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The complexity and the fault tolerance requirements of flight critical systems are rapidly increasing. New techniques and methods must be developed and must be integrated with existing methods so that the rigorous technical objectives of the verification and validation process of such systems can be met at reasonable cost. Some of the advanced requirements of these systems are examined in critical areas for system architecture and software design. Some promising techniques are described which can effectively support architectural design and analysis and software development and verification. Author

N89-18461# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.

GUIDELINES FOR EVALUATION OF SOFTWARE ENGINEERING TOOLS

ROBERT E. MARMELESTEIN /in AGARD, Software Engineering and Its Application to Avionics 6 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Because the mandated use of inadequate software engineering tools in the software lifecycle can have devastating effects on program costs, the need for a taxonomy to evaluate these tools is readily apparent. This taxonomy should contain guidelines which are applicable to the design of a new tool or the selection of an existing one. A basic taxonomy is defined for evaluating software engineering tools. Author

N89-18462# Rome Air Development Center, Griffiss AFB, NY. Command and Control Software Technology Div.

RISE: REQUIREMENTS AND INCREMENTAL SPECIFICATION ENVIRONMENT

KEVIN M. BENNER /in AGARD, Software Engineering and Its Application to Avionics 7 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

An environment for capturing requirements and incrementally developing a formal specification is introduced. This environment, called RISE, is based upon Place/Transition (P/T) Nets. The P/T nets are extended within RISE to support timing requirements and hierarchical decomposition as well as providing other extensions necessary for the development of software specifications. The main focus of this effort was to define the semantics of hierarchical decomposition of P/T nets. Author

N89-18463# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Military Aircraft and Helicopter Div.

THE MBB TEST STRATEGY AND TOOL SET FOR SOFTWARE AND SYSTEM INTEGRATION

HERMANN HESSEL and WALTER WAGNER /in AGARD, Software Engineering and Its Application to Avionics 6 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Based on a generic system development concept a test strategy was established with MBB Military Aircraft and Helicopter Division. In order to support this strategy a tool set was developed which is being used for all projects and throughout all development phases. Due to its free configurability it can easily be adapted to production line applications as well as to other purposes. Author

N89-18464# DDC International A/S, Lyngby (Denmark).

TOOLS FOR DEVELOPING REAL-TIME EMBEDDED SYSTEMS IN ADA: NEEDS, PORTABILITY AND EFFICIENCY

ELISABETH BROE CHRISTENSEN /in AGARD, Software Engineering and Its Application to Avionics 4 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Ada offers some facilities, which were not part of older languages. To take advantage of Ada for real-time embedded applications, the development tools must support these facilities, and be done in an efficient manner. The experiences from a tool project, the DDC-I symbolic debugger project, which has as its goal to provide a tool which can fulfil the demands of real-time embedded applications in Ada is presented. Author

N89-18465# British Aerospace Aircraft Group, Warton (England). Military Aircraft Div.

THREE GENERATIONS OF SOFTWARE ENGINEERING FOR AIRBORNE SYSTEMS

A. Q. WARD /in AGARD, Software Engineering and Its Application to Avionics 11 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The serious practice of software engineering is a relatively recent phenomenon and there is a minimum of reported experience in the use of methods and tools to support its applications. The technology can be viewed as progressing through several generations typified by the form in which development information is stored and accessed and the nature of the life cycle. The former is described in terms of a file, data and a knowledge base, the latter as progressing from a phase to an object oriented life cycle. Experience with a typical first generation tool set is described briefly through the airborne software for the Experimental Aircraft Project. This is based largely on the use of structured methods for requirements and design, a programming support environment supporting the use of MASCOT and Pascal and rigorous management and control procedures. An advantageous cost benefit analysis of the project is reported. A move to the second generation of software engineering is being planned under the auspices of the Eurofighter Project by the adoption of an Integrated Project Support Environment (IPSE). The general characteristics of an IPSE are discussed including the tool interface and its relevance to emerging standardization activities such as CAIS and PCTE Plus. A longer term view of software is presented with an intimation of the scale and nature of future projects and a form of life cycle better suited to the needs. The requirements for software engineering to support artificial intelligence, safety critical applications, and rapid prototyping are reviewed. Author

N89-18466# Anchor Software Management, Falls Church, VA. SOFTWARE READINESS PLANNING

JACK COOPER /in AGARD, Software Engineering and Its Application to Avionics 6 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

A method is presented wherein the capability to support and make changes to avionics system software during the readiness phase of its life cycle can be guaranteed. In recognizing that the supportability of the software is completely determined during its development, the method centers around pre-development planning, decisions, and actions on the part of the avionics system's acquisition manager. Discussed are the software engineering considerations that must be included in the contract to facilitate the future supportability of the software. That is followed by a description of contractual requirements to be placed on the

61 COMPUTER PROGRAMMING AND SOFTWARE

software support environment used to develop the avionics software to ensure the life cycle supportability of the target avionics software. Two tools, a management Plan and a contracting Standard, that supported the method for ensuring software supportability are described. *The Plan provides a vehicle for joint, customer and contractor, management of the developmental software support environment. The Standard provides the contractual life cycle supportability requirements.* Author

N89-18467# Control Data Corp., Minneapolis, MN.

AN AVIONICS SOFTWARE EXPERT SYSTEM DESIGN

JUDY L. BRINK and RONALD B. HAYNES (Rome Air Development Center, Griffiss AFB, NY.) In AGARD, Software Engineering and Its Application to Avionics 8 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The scope is to define an expert software system, implemented in Ada, for avionics in the 1990's, using a table-driven design that was developed in a demonstration program as the prototype, in order to support tactical decision making applications. As a synopsis of what follows it will: point out the relevancy to the avionics community; give a historical example of a table-driven design in the area of reconnaissance management systems; describe the design logic behind this historical example by providing a single thread through the system; discuss the conceptual enhancements that need to be folded on top of this historical example, as an additional layer, in order to produce an expert software system; and provide a summary highlighting some reasons the avionics community should move in this direction from a software perspective. Author

N89-18473# Naval Weapons Center, China Lake, CA. Missile Software Branch.

CAN ADA (MIL-STD-1815A) FLY MISSILES

CARL W. HALL In AGARD, Software Engineering and Its Application to Avionics 6 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The transition of the MIL-STD-1815A (Ada) language and associated technology into the Navy missile domain beginning in October 1984 was explored. The project was funded by Independent Exploratory Development (IED) funds. It had a principal objective to develop operational software for a typical Navy missile in Ada, while examining the issues associated with deployment of the Department of Defense (DOD) standard language in a real-time missile environment. The project lasted 3 years and was finished in September 1987 with the Ada software running in a breadboard version of the missile guidance computer. The final version of the software has almost all the missile functions included with the exception of the safety module. Safety deals with the range requirements during testing and the data were not available. The computer and software are being moved to the Hardware-In-the-Loop (HWIL) facility where they will be integrated with various missile hardware and a six degree-of-freedom simulation. Current plans are to seek funding to fly a test missile at the Naval Weapons Center range with a modified version of the IED Ada code. Author

N89-18474# National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.

ACCELERATED CONVERGENCE FOR SYNCHRONOUS APPROXIMATE AGREEMENT

J. P. KEARNS, S. K. PARK (College of William and Mary, Williamsburg, VA.), and J. A. SJOGREN In AGARD, Software Engineering and Its Application to Avionics 8 p (SEE N89-18446 11-06) Nov. 1988

(Contract NAG1-787)

(AGARD-CP-439) Avail: NTIS HC A18/MF A01 CSCL 09B

The protocol for synchronous approximate agreement presented by Dolev et. al. exhibits the undesirable property that a faulty processor, by the dissemination of a value arbitrarily far removed from the values held by good processors, may delay the termination of the protocol by an arbitrary amount of time. Such behavior is clearly undesirable in a fault tolerant dynamic system subject to hard real-time constraints. A mechanism is presented by which editing data suspected of being from Byzantine-failed processors can lead to quicker, predictable, convergence to an agreement value. Under specific assumptions about the nature of values transmitted by failed processors relative to those transmitted by

good processors, a Monte Carlo simulation is presented whose qualitative results illustrate the trade-off between accelerated convergence and the accuracy of the value agreed upon. Author

N89-18475# Agusta Sistemi S.p.A., Tradate (Italy).

ROBUST ALGORITHM SYNCHRONIZES MODE CHANGES IN FAULT-TOLERANT ASYNCHRONOUS ARCHITECTURES

ANTONIO SILVA In AGARD, Software Engineering and Its Application to Avionics 8 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The need for protection against common-mode failures, in hardware and in software, as well as the need to cut hardware costs and complexity, has led to redundant asynchronous architectures. The resulting random phase sampled-data systems are loosely coupled, reducing fault propagation, but need to make homogeneous decisions whenever certain event combinations occur. Since decisions are basically boolean operations, a method was developed to achieve homogeneous agreement on discrete signals, without imposing constraints on input or architectural characteristics to the system designer. The method saves the critical problem of synchronized change of operational mode in avionics systems, where a safe all or none way of making decisions is of primary importance. Author

N89-18480# Bell Telephone Labs., Inc., Whippany, NJ.

FUNCTIONAL PROGRAMMING LANGUAGES AND MODERN MULTIPROCESSOR ARCHITECTURES: THE EMSP EXAMPLE

J. DENNIS SEALS and GERALD W. GRUBE In AGARD, Software Engineering and Its Application to Avionics 8 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Future military systems will require a mix of signal, data, control/decision processing at throughput levels ranging from 0.1 to 4 billion operations per second. Estimates of the embedded software to support these systems range from 0.5 to 10 million lines of code. Early in 1980, the Navy recognized the severity of these problems and awarded a contract to design a revolutionary computer architecture that would meet their signal processing needs through the year 2000. The result was the EMSP architecture that combines the programming simplicity of a functional language with the power of a modular, scalable, heterogeneous multiprocessor. The glue that binds these two attributes is a data-flow control mechanism that provides a transparent interface between the application user and the machine hardware. The successful integration of a functional graph language and a multiprocessor architecture is reported. Author

N89-18485# Office National d'Etudes et de Recherches Aeronautiques, Toulouse (France). Dept. d'Etudes et de Recherches en Informatique.

ROLE AND DESIGN OF A SOFTWARE ENGINEERING DATA BASE IN THE CONTEXT OF AN ADVANCED SUPPORT ENVIRONMENT

MICHEL LEMOINE and LAURENT POMMIER (Ecole Nationale Supérieure de l'Aéronautique et de l'Espace, Toulouse, France) In AGARD, Software Engineering and Its Application to Avionics 11 p (SEE N89-18446 11-06) Nov. 1988 Sponsored by ESPRIT Programme

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

The role and the design of a software engineering data base in an Advanced Support Environment are addressed. A first introduction recalls the evolution of the file management system, from the earlier beginning of the operating system up to now where sophisticated ones are available. It is shown why the classical file management system is not sufficient in the context of the software development process. Thus object management systems are under consideration. Their role is examined and for some software engineering environment, their main functionalities are exhibited. But because they are independent on the languages they support, the work occurs at the macroscopic semantics of the manipulated objects. Further more, they only concern static (or predefined) properties of the development process. Thus there is great need for a software engineering data base in which more semantics can be taken into account, especially at the level of the object description. This will guarantee the consistency of the information stored in a project data bases. Author

62 COMPUTER SYSTEMS

62

COMPUTER SYSTEMS

Includes computer networks and special application computer systems.

N87-19924# Leicester Polytechnic (England).

APPLICATION OF LAN'S AND ELECTRONIC OFFICE TECHNIQUES IN THE LIBRARY

M. W. COLLIER. In AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work. 11 p (SEE N87-19920 12-60) Oct. 1986 (AGARD-LS-149) Avail: NTIS HC A06/MF A01

The local area network (LAN) is a method of connecting computers and peripherals at very high speed. The technology has been under development since the early seventies and started to become commercially available about 1980. Commercial development accelerated in the early eighties as microcomputers became used for business and professional purposes. Microcomputer LAN's are now a major sector of the office automation industry. This paper reviews the technology and leading types of microcomputer LAN and explores how the technology can be integrated with existing library systems. Normal office automation applications such as word processing, database management, spreadsheets and accounting systems can be implemented in a networked mode. Networking provides the additional benefits of connectivity and resource sharing. In the library context networking is particularly important for electronic mail, information transfer and information sharing. There is potential for integrating downloaded information from external databases into local systems. Office automation applications are fundamental to library and information management. Systems may be seen as sources of management information as well as a medium for transmission. An effective automated office is in effect a decision support system. An automated office is also composed of people, and the introduction of such pervasive technology is complex. Attention must be paid to the human factors which as yet are little understood. Author

N89-18476# International Business Machines Corp., Endicott, NY.

DEFINITIONS AND REQUIREMENTS FOR DISTRIBUTED REAL-TIME SYSTEMS

CHRISTINA BERGGREN. In AGARD, Software Engineering and Its Application to Avionics 5 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

The performance parameters are defined for distributed real-time control systems and the differences in requirements are described between these and the other major categories of distributed real-time systems: resource sharing. Examples of explicit values for the performance parameters are given for some applications. Finally, an evaluation is made of the applicability of existing and emerging communications standards to real-time distributed control systems. Author

N89-18479# Messerschmitt-Boelkow-Rohm G.m.b.H., Munich (Germany, F.R.). Dynamics Div.

TASK INTERACTIONS IN DISTRIBUTED MACHINES OF EMBEDDED COMPUTER SYSTEMS

D. FLEMMING and H. GRUNDNER. In AGARD, Software Engineering and Its Application to Avionics 16 p (SEE N89-18446 11-06) Nov. 1988 (AGARD-CP-439) Avail: NTIS HC A18/MF A01

The programming and implementing of embedded real-time computer systems is one of the most difficult problems of data-processing technology. The parallel and non-deterministic actions within the systems are hard to describe and check. Nearly all languages designed for real-time applications, as e.g., real-time FORTRAN, Coral 66, and RTL/2 are incomplete tools to solve the problem of concurrency because of their inherently sequential nature. The programming language Ada offers constructs for the description of task interactions in a very abstract manner without relation on the architecture of the target machine. The harmonization of a message driven distributing machine architecture

with the programming language Ada, is described. The problem of concurrency is described in general and a communication concept for task interactions is proposed. Analysis of the real-time requirements for future applications leads to the definition of a set of message types, where deterministic and undeterministic task interactions can be achieved. Based on this definition a distributed machine architecture is presented that consists of a network of computing units and an autonomous communication system, designed to reduce all administration work to a minimum. A special no-wait-send communication procedure is modeled in the Ada language. Restrictions and augmentations for Ada programming language are worked out subsequently and demonstrated by examples. It is shown that Ada has valuable constructs for the description of even hard real-time applications by defining the right system concept. This concept is based on a message-driven distributed machine architecture and an autonomous communication procedure. Author

63

CYBERNETICS

Includes feedback and control theory, artificial intelligence, robotics and expert systems.

N87-24945*# National Aeronautics and Space Administration Langley Research Center, Hampton, VA.

ARTIFICIAL INTELLIGENCE AND ITS IMPACT ON COMBAT AIRCRAFT

LAWRENCE M. OTT, KATHY ABBOT, ALFRED KLEIDER, D. MOON, and JOHN RETELLE (Defense Advanced Research Projects Agency, Arlington, Va.) In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 4 p (SEE N87-24940 18-66) Feb. 1987 (AGARD-CP-404) Avail: NTIS HC A07/MF A01 CSDL 09B

As the threat becomes more sophisticated and weapon systems more complex to meet the threat, the need for machines to assist the pilot in the assessment of information becomes paramount. This is particularly true in real-time, high stress situations. The advent of artificial intelligence (AI) technology offers the opportunity to make quantum advances in the application of machine technology. However, if AI systems are to find their way into combat aircraft, they must meet certain criteria. The systems must be responsive, reliable, easy to use, flexible, and understandable. These criteria are compared with the current status used in a combat airborne application. Current AI systems deal with nonreal time applications and require significant user interaction. On the other hand, aircraft applications require real time, minimum human interaction systems. In order to fill the gap between where technology is now and where it must be for aircraft applications, considerable government research is ongoing in NASA, DARPA, and three services. The ongoing research is briefly summarized. Finally, recognizing that AI technology is in its embryonic stage, and the aircraft needs are very demanding, a number of issues arise. These issues are delineated and findings are provided where appropriate. Author

N88-10813# Centre de Recherches de la Compagnie Generale d'Electricite, Marcoussis (France).

GENERATING DIAGNOSTIC KNOWLEDGE FROM A STRUCTURAL AND FUNCTIONAL DESCRIPTION

JEAN-FASCAL AUBERT, JEAN-MICHEL CORNILLE, and ALAIN MELLER. In AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 4 p (SEE N88-10806 02-08) Aug. 1987 Sponsored by French Defense Ministry (AGARD-LS-155) Avail: NTIS HC A07/MF A01

The problem of diagnostic knowledge acquisition is discussed. A front-end to a diagnostic system under development that provides aids to the expert in the process of diagnosis rules design is presented. This front-end uses structural and functional modeling. It is thought to be general enough to be applied to other applications. Author

NUMERICAL ANALYSIS

Includes iteration, difference equations, and numerical approximation.

N88-10814# Lear Siegler, Inc., Grand Rapids, MI. Instrument and Avionic Systems Div.

A REVIEW OF THE KNOWLEDGE ENGINEERING PROCESS
MICHAEL W. BIRD In AGARD, Knowledge Based Concepts and Artificial Intelligence: Applications to Guidance and Control 12 p (SEE N88-10806 02-08) Aug. 1987
(AGARD-LS-155) Avail: NTIS HC A07/MF A01

An overview of all parts of the knowledge engineering process is given. The basic types of data structures used for representing knowledge in an expert system are described, including production rules and frames. The computer based tools available for assisting engineers in acquiring and testing knowledge bases are discussed. Also covered is the validation of expert systems. Author

N89-18482# Thomson-CSF, Issy les Moulineaux (France). Expert System Lab.

SPOCK: A TOOL FOR REAL TIME ARTIFICIAL INTELLIGENCE
[SPOCK: UN OUTIL POUR L'INTELLIGENCE ARTIFICIELLE TEMPS REEL]

J. P. LACROIX, G. A. BERTHON, FRANCOIS FAGES (Thomson-CSF, Orsay, France), and P. REPUSSEAU In AGARD, Software Engineering and Its Application to Avionics 11 p (SEE N89-18446 11-06) Nov. 1988 In FRENCH, ENGLISH summary Translation was announced as N89-10574

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

Airborne expert systems must take into account very harsh real time conditions which, when combined with the environmental conditions of the object computer, require the development of new solutions. The proceduralization obtained by compiling the RETE algorithm toward symbolic, procedural, or real time oriented target languages provides a solution to the primary problems of airborne applications: speed requirements, memory control, harmonization of symbolic parts with the traditional portions of the applications. The approach is supported by the SPOCK family of tools (-LSP, C, LTR3, Ada) developed by the Central Research Laboratory of Thomson-CSF which offers significant improvements over presently available products. One of the SPOCK applications in Thomson-CSF is a helicopter mission and system which takes into consideration the threats and terrain, thanks to integration with an airborne cartographic data base. Author

N89-18484# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

MULTI-INPUT DECISION AID PROCEDURE: APPLICATION TO MULTI-SENSOR TARGET CLASSIFICATION [PROCEDURE D'AIDE A LA DECISION MULTI-INFORMATEURS APPLICATION A LA CLASSIFICATION MULTI-SENSEURS DE CIBLES]

A. APPRIOU In AGARD, Software Engineering and Its Application to Avionics 15 p (SEE N89-18446 11-06) Nov. 1988 In FRENCH

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

A decision making process designed to handle the majority of selection problems associated with multiple information inputs is described beginning with both an objective and exhaustive formulation of this class of problems. The process described, characteristic of those incorporated into expert systems capable of carrying on different options in an interactive mode, is illustrated through an application to multi-sensor target classification. This application lends itself to discussion of the behavior of a number of techniques for data fusion and the adaptive formulation of the decision problem. An extension of the decision methods to a resource allocation process is presented. Starting from the simultaneous analysis of preliminary information about a certain number of situations, the resource allocation process allows the processing of one of these situations to be attributed to each of the input sensors, so as to provide the best evaluation of the ensemble of situations. A comparison of various open solutions is carried out by a simulation of the classification scenario. Author

N87-16377# Cranfield Inst. of Tech., Bedford (England). Coll. of Aeronautics.

INTRODUCTION TO FINITE ELEMENT BASICS

A. J. MORRIS In AGARD Practical Application of Finite Element Analysis to Aircraft Structural Design 35 p (SEE N87-16376 08-39) Aug. 1986

(AGARD-LS-147) Avail: NTIS HC A07/MF A01

A solution technique which is numerically stable, easily programmed and can be adapted to a wide range of problem types without excessive interference by the user is provided by the finite element method, from a structural viewpoint. The essence of the finite element method involves dividing the structure into a suitable number of small pieces called finite elements. The intersections of the sides of the elements occur at nodal points or nodes and the interference between elements are called nodal lines and nodal planes. For structural problems involving static or dynamic applied loads, the behavior of the structure is defined in terms of displacements and/or stresses. Within each of the elements a pattern or shape is selected for the unknown displacement or stress. In the case of a displacement field the shape function defines the behavior of displacements within an element in terms of unknown quantities specified at the element nodes. These nodal values are known as nodal connection quantities and allow the deformation behavior in one element to be communicated to adjacent elements. In the case of an assumed stress field in the element the connection quantities are different but the underlying principle is the same. E.R.

N87-20205# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

NEW NUMERICAL TECHNIQUES IN THE METHOD OF SINGULARITIES FOR APPLICATION TO COMPLEX THREE-DIMENSIONAL CONFIGURATIONS [TECHNIQUES NUMERIQUES NOUVELLES DANS LES METHODES DE SINGULARITES POUR L'APPLICATION A DES CONFIGURATIONS TRIDIMENSIONNELLES COMPLEXES]

T. H. LE, Y. MORCHOISNE, and J. RYAN In AGARD Applications of Computational Fluid Dynamics in Aeronautics 22 p (SEE N87-20199 13-02) Nov. 1986 In FRENCH Original language document was announced in IAA as A87-21085

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A singularity method for the analysis of steady irrotational inviscid incompressible flows around complex three-dimensional bodies is developed and demonstrated. The technique is based on numerical integration and a steepest-descent solution procedure and employs a simple lumping scheme to improve the accuracy while providing significantly lower computation times than conventional methods. Results for sample problems involving a helicopter fuselage and a wing are presented in tables and graphs. E.R.

N87-20211# Naval Surface Weapons Center, Silver Spring, MD Applied Mathematics Branch.

A SECOND ORDER GODUNOV METHOD FOR TACTICAL MISSILES

A. B. WARDLAW, JR. and S. F. DAVIS In AGARD Applications of Computational Fluid Dynamics in Aeronautics 10 p (SEE N87-20199 13-02) Nov. 1986

(AGARD-CP-412) Avail: NTIS HC A19/MF A01

A second order Godunov scheme is described for steady supersonic flow. This scheme, which marches the solution in space, is cast in a finite volume formulation and uses a mesh generated by a multiple zone procedure. Second order accuracy is obtained by computing local slopes and adding a predictor step. The bow shock is fit using the information contained within the Riemann problem. The scheme is applied to body-alone and finned configurations for which measurements are available. Reasonable agreement is obtained between experiment and calculation without the use of artificial viscosity or special procedures. Author

64 NUMERICAL ANALYSIS

N89-17741# Wayne State Univ., Detroit, MI. Dept. of Mathematics.

ON FUNCTIONAL APPROACH TO RANDOM WAVE PROPAGATION PROBLEMS

P. L. CHOW *In* AGARD, Scattering and Propagation in Random Media 6 p (SEE N89-17706 10-31) Mar. 1988 Sponsored by NSF, Washington, DC (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The method of functional integration for wave propagation through random media is presented. The method is applied to calculate the coherent and mutual coherent functions for a parabolic wave. It is shown that a correction to the parabolic Markovian approximation can be easily made in this setting. Then the method is also applied to the random Helmholtz equation. It is possible to solve this problem by either Feynman's path integral or Wiener's integral. Asymptotic evaluation of such functional integrals is described. Examples and general remarks are provided. Author

N89-17742# Cambridge Univ. (England). Dept. of Applied Mathematics and Theoretical Physics.

NUMERICAL SIMULATION OF WAVE PROPAGATION IN RANDOM MEDIA

MARK SPIVACK *In* AGARD, Scattering and Propagation in Random Media 5 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Numerical simulation of random wave propagation has numerous applications. It enables the examination of individual features of the wave-field and the modeling of actual experiments. Statistical quantities such as average power spectra of intensity fluctuations can also be obtained for comparison with theory. Some of the techniques and uses of numerical simulation are explained and some of the results which emerge are described. Author

N89-17745# Pennsylvania State Univ., University Park. Center for the Engineering of Electronic and Acoustic Materials.

MULTIPLE SCATTERING OF WAVES IN RANDOM MEDIA CONTAINING NON-SPHERICAL SCATTERERS

VASUNDARA V. VARADAN, VIJAY K. VARADAN, and YUSHIEH MA *In* AGARD, Scattering and Propagation in Random Media 8 p (SEE N89-17706 10-31) Mar. 1988 (Contract DAAG29-84-K-0187; DAAG29-85-K-0234) (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The effect of multiple scattering, scatterer geometry, statistics of the positional and orientational distribution functions on the propagation of time harmonic electromagnetic waves in a medium containing a random distribution of nonspherical scatterers are considered. Some of the features that complicate the analysis are: the size of the scatterers is comparable to the wavelength of the propagating wave, the volume fraction occupied by the scatterers need not necessarily be small, and the impedance mismatch between the scatterers and the host medium need not necessarily be small. These in turn necessitate some of the effects to be examined, namely: detailed modeling of scatterer geometry and scatterer response, multiple scattering effects, and the effects of correlations. Some recent results using nonspherical statistics for the second moment of the field are presented. The pair correlation function for spheroidal particles was generated by Monte Carlo simulation as a function of the distance between them and the direction of the vector joining their centers. At present the pair correlation function is being generated for randomly oriented spheroids and the effects of interparticle forces are considered as well as high order correlation functions for clusters of particles. All of these were incorporated into the multiple scattering calculations and compared with available experimental results. Author

234

65

STATISTICS AND PROBABILITY

Includes data sampling and smoothing; Monte Carlo method; and stochastic processes.

N89-17611# Sverdrup Technology, Inc., Eglin AFB, FL. Operations Research Dept.

STATISTICAL TECHNIQUES APPLIED TO ANALYSIS OF AIMPOINT DISTRIBUTIONS

V. DARRYL THORNTON and JOSEPH M. CONRAD *In* AGARD, Guidance and Control of Precision Guided Weapons 8 p (SEE N89-17605 10-15) Nov. 1988 (AGARD-CP-435) Avail: NTIS HC A05/MF A01

The intent is to illustrate the application of several statistical techniques that seek to maximize the amount of information gained. A stepwise multiple regression technique is presented that assists in the identification of significant parameters. Having identified these parameters, a Chi-square goodness-of-fit technique is used to test the hypothesis that the form of the proposed aimpoint distribution is, as an example, bivariate normal. Finally, a second regression technique is presented that generates coefficients corresponding to those parameters that were found to be the most significant. Using these coefficients, sensor performance parameters may then be predicted in those areas where data is sparse. Author

66

SYSTEMS ANALYSIS

Includes mathematical modeling; network analysis; and operations research.

N87-16004# Science Applications International Corp., Huntsville, AL.

LETHAL AIR DEFENSE SUPPRESSION TECHNOLOGY BASE DEFINITION

HAROLD L. PASTRICK, JOHN A. FRECH, WILLIAM R. DAY, and ANTHONY BIELE (Air Force Armament Lab., Eglin AFB, Fla.) *In* AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 10 p (SEE N87-16000 08-15) Jun. 1986 (AGARD-CP-388) Avail: NTIS HC A12/MF A01

One of the major thrusts of the Air Force Armament Laboratory is to develop technologies for the advanced weapons required to accomplish lethal defense suppression. In order to develop the long range investment strategy for this thrust, a Technology Base Definition Study for lethal defense suppression was conducted. A major product was a Long-Range Integrated Technology Plan which: identifies specific technology efforts, outlines their required maturity dates to meet the envisioned weapon system needs, and then establishes the investment strategy required to meet the thrust objectives. In addition to, and in support of the development of the long-range plan, a threat survey, a user survey, a system survey, and a technology survey, as well as a cost and operational effectiveness analysis, was conducted and published as separate reports. It was concluded that the required technologies to achieve a cost effective weapon system would best be directed toward a long-range, semi-ballistic missile with a dispenser/submunition warhead. Six major technology areas were described for further research and development exploitation through the year 1998 and a total of eleven elements were defined in the 12 year planning cycle. Author

N87-16006# National Aerospace Lab., Amsterdam (Netherlands).

TACTICAL MISSION PLANNING AND MANAGEMENT

P. J. M. URLINGS and A. L. SPIJKERVELT. In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 9 p (SEE N87-16000 08-15) Jun. 1986. Previously announced as N87-14198 (AGARD-CP-388) Avail: NTIS HC A12/MF A01

The operational requirements for automation of tactical mission planning and management are summarized. Based on these requirements, the CAMPAL-system is reviewed. Analysis software packages are highlighted, since they provide the CAMPAL-system with planning features for penetration and attack. Developments in tactical mission planning and management suggested by advances in knowledge engineering and expert systems are discussed. ESA

N87-16009# Electronique Serge Dassault, Saint Cloud (France). **GUIDED STAND-OFF WEAPONS AND THE EVALUATION OF MEANS FOR LAUNCH CALCULATION: THE APPLICATION OF NEW TECHNIQUES (LES ARMES GUIDÉES TIÈRES A DISTANCE DE SECURITE ET L'ÉVOLUTION DES MOYENS DE CALCUL EMBARQUE: L'APPORT DES TECHNIQUES NOUVELLES)**

J. P. QUEMARD. In AGARD Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems 8 p (SEE N87-16000 08-15) Oct. 1985. In FRENCH (AGARD-CP-388) Avail: NTIS HC A12/MF A01

The future development and utilization of guided standoff weapons is examined with particular emphasis on the development of required system software. Possible computer/software architectures are described and the utilization of artificial intelligence techniques is discussed. B.G.

N87-24940# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Avionics Panel. **ADVANCED COMPUTER AIDS IN THE PLANNING AND EXECUTION OF AIR WARFARE AND GROUND STRIKE OPERATIONS**

Feb. 1987 140 p. In ENGLISH and FRENCH. Meeting held in Kongsberg, Norway, 12-16 May 1986. Original contains color illustrations (AGARD-CP-404; ISBN-92-835-0410-0; AD-A182096) Avail: NTIS HC A07/MF A01

The pace and complexity of modern air warfare have reached the point where advanced computer aids are essential to assist the aircrew and the commander on the ground. Computers are now used extensively in the operation and control of specific equipment, such as advanced weapon systems, surveillance radars, electronic warfare and communications systems. However, there are still many areas which rely heavily on human decision making. The increasing use of Artificial Intelligence (AI) techniques, including Intelligent Knowledge Based Systems (IKBS) and Expert Systems will at one extreme allow decision making to be increasingly automated or controlled by non-expert personnel, and at the other extreme greatly extend the capabilities of military commanders. The successful application of computers should provide improved effectiveness, flexibility, and reliability resulting in a saving of resources and personnel. For individual titles, see N87-24941 through N87-24955.

N87-24941# Software Sciences Ltd., Farnborough (England). Electronic Warfare Dept.

THE USE OF KNOWLEDGE BASED SYSTEMS TECHNIQUES IN ESM PROCESSING

J. H. PALFREYMAN. In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 8 p (SEE N87-24940 18-66) Feb. 1987 (AGARD-CP-404) Avail: NTIS HC A07/MF A01

The Electronic Support Measures (ESM) System attempts to detect, analyze, and classify sources of radio and radar emissions in the environment. The ESM system provides valuable emitter classification information to the host platform's Command and Control System or associated Electronic Countermeasures (ECM) equipment. However, the current generation of Automatic ESM systems often produce ambiguous or incorrect emitter classifications in the adverse conditions of actual conflict. The application of Knowledge Based Systems techniques to ESM

processing are described and the development and evaluation of a Knowledge Based ESM system model aimed specifically at improving the emitter classification capability of automatic ESM are outlined. Author

N87-24942# Rome Air Development Center, Griffiss AFB, NY. **DARPA'S AIRLAND BATTLE MANAGEMENT PROGRAM AND USAF'S TACTICAL EXPERT MISSION PLANNER (TEMPLAR)**

PETER F. H. PRIEST, II. In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 6 p (SEE N87-24940 18-66) Feb. 1987 (AGARD-CP-404) Avail: NTIS HC A07/MF A01

The Defense Advanced Research Projects Agency (DARPA) has a long history of supporting research in the areas of Artificial Intelligence (AI). The DARPA Strategic Computing Program is developing an AI technology base upon which several applications programs are being built including the AirLand Battle Management Program (ALBM). The ALBM program office is cofunding the U.S. Air Force's first major AI application: Rome Air Development Center's Tactical Expert Mission PLanner (TEMPLAR). The TEMPLAR program is an advanced development level effort that is building upon demonstrated systems at the exploratory development level as well as the Strategic Computing tech base. The TEMPLAR program and its links to the AirLand Battle Management and Strategic Computing Programs are described. Author

N87-24943# Rome Air Development Center, Griffiss AFB, NY.

KRS: A KNOWLEDGE-BASED MISSION PLANNER

KEVIN M. BENNER and MICHAEL L. HILTON. In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 7 p (SEE N87-24940 18-66) Feb. 1987 (AGARD-CP-404) Avail: NTIS HC A07/MF A01

The KRS program is a knowledge-based system for planning offensive-counter-air missions. The KRS aides human planners in preparing Air Tasking Orders and can either be used interactively as a plan verifier or autonomously as a plan generator. The KRS informs the user of any logical or doctrinal inconsistencies in a plan, and keeps track of resources and target status. Users can communicate with KRS via a natural language interface, pop-up menus, or a mouse pointing device. An overview of the KRS's capabilities, its knowledge representation schemes, how KRS verifies plans, and how plans are automatically generated, are presented. Author

N87-24944# Rome Air Development Center, Griffiss AFB, NY. **DECISION AID FOR THREAT PENETRATION ANALYSIS**

ROBERT J. KRUCHTEN. In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 7 p (SEE N87-24940 18-66) Feb. 1987 (AGARD-CP-404) Avail: NTIS HC A07/MF A01

A concept is described for a threat penetration aid. A proof-of-concept version of this aid was built at RADC on a Symbolics 3670 Lisp processing system. Route planning aids were created in the past to find a path through an area of ground threats. Unfortunately these aids tend to be limited by a narrow perspective of the threat environment and a mathematical approach that makes it difficult to add features. The intent of this effort was to create an aid that used heuristic reasoning to simplify the analysis and which had a more global perspective of the environment than the existing aids. Although there is recent work, most notably a TRW effort for in-flight replanning, that offers a more global perspective of the environment than existing aids, the approach used is unique. The concept presented offers great increases in speed over present route planning aids at a slight loss of precision. In addition, the aid goes beyond simple route optimization and can grow to directly assist in choosing tactics, electronic warfare applications, or saturation techniques. It also can quickly add, delete, modify, or move threats. It can take on these additional tasks by exploiting its speed advantage and data structure. The basic architecture of the aid, some of its limitations, its advantages, its growth potential, and finally some recommendations for application development and further research are described. Author

66 SYSTEMS ANALYSIS

N87-24947# Naval Air Systems Command, Washington, DC
INTEGRATED MULTISENSOR TARGETING
 PETER G. KRUEGER, ERNESTO BENITES, DOUGLAS W. COWAN, W. RODNEY DITZLER, and ALFRED G. SUTTON (Naval Weapons Center, China Lake, Calif.) In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 9 p (SEE N87-24940 18-66) Feb 1987

(AGARD-CP-404) Avail: NTIS HC A07/MF A01

The integrated multisensor targeting effort is a United States Navy Exploratory Development program directed at the development and demonstration of multisensor targeting algorithms for air-to-air application. The program for developing the capability is described. The current algorithm development is presented. The simulation tool and the real-time system which support the development and demonstration of the algorithms, respectively, also are described, and finally the plans for testing the capability are discussed briefly. Author

N87-24951# Naval Weapons Center, China Lake, CA.
CONSOLIDATED LAND ATTACK MISSION PLANNING STATION (CLAMPS)

ROBERT T. HINTZ, M. J. BOYD, and D. LUBBEN In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 14 p (SEE N87-24940 18-66) Feb 1987

(AGARD-CP-404) Avail: NTIS HC A07/MF A01

The proposed mission planning station described is a result of a Naval Weapons Center discretionary funded study performed in conjunction with the AV-8B Program Office in 1985. The approach described draws heavily on the development and deployment of digital map technology for use on modern attack aircraft. The characteristics of the digital map are derived from a draft product specification currently being prepared for submission to the Defense Mapping Agency (DMA), and the AV-8B requirements document for a digital map capability. The envisioned digital map would utilize optical disk storage for the map, and additional solid state storage for the annotation generated by the planning station. The mission planning station is shown in three configurations ranging from a baseline capability (which may even be appropriate for an individual aircraft), up to a fully capable station capable of interacting with other digital data bases and even generating its own optical disk.

Author

N87-24952# National Aerospace Lab., Amsterdam (Netherlands).

AUTOMATION STRATEGY AND RESULTS FOR AN AIRBASE COMMAND AND CONTROL INFORMATION SYSTEM (ABCCIS)

R. P. DEMOEL and W. N. VANDRANEN (Royal Netherlands Air Force, The Hague) In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 18 p (SEE N87-24940 18-66) Feb 1987

(AGARD-CP-404) Avail: NTIS HC A07/MF A01

Automation is considered the appropriate way to improve the effectivity of preparation and deployment of weapon systems in the increasingly complex scene of battle. This automation is aiming for the support of the activities, because, according to the opinion of the RNLAf, human intellectual capacity is essential to a balanced commercial and control process. Human intelligence and creativity combined with speed and storage capacity of the computer may improve the quality of the preparation and the effectivity of the deployment of weapon systems. Author

N87-24953# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

CURRENT STATE OF AN EXPERT SYSTEM [TENUER A JOUR DE SITUATION PAR SYSTEME EXPERT]

GERARD KITTEN and LOIC LEGUISQUET In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 4 p (SEE N87-24940 18-66) Feb 1987 In FRENCH

(AGARD-CP-404) Avail: NTIS HC A07/MF A01

Artificial intelligence methods are discussed in the context of decision aid systems employed by the French tactical air force. In particular, the development and use of an expert system for military C3I (command, control, communications and intelligence) is addressed. M.G.

N87-24954# Electronic System GmbH, Munich (Germany, F.R.)

COMPUTER AIDED SENSOR PLACEMENT OPTIMIZATION

A. KAINZINGER and W. RATH In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 7 p (SEE N87-24940 18-66) Feb 1987 (AGARD-CP-404) Avail: NTIS HC A07/MF A01

The problem of optimal sensor placement increases with the mobility of the sensors. Threats e.g., caused by missile technologies lead to sensor systems, where some of the sensors are highly mobile. Thus the optimization of sensor placement for a given surveillance area becomes a complex and time critical task if constraints (operations areas, terrain modulation, terrain accessibility, sensor capabilities, tactical objectives, and assumed tactical objective of the WP forces) are taken into account. A layer model is presented for the computer aided stepwise optimization of sensor placement. The computer tool is based on digitized terrain data containing information about the height and cultures. The layer model is based on interactive procedures and automatic decision guidance. The software can be installed on minicomputers with a color display and color printer thus making it a mobile transportation tool which can be used online in the field. Author

N87-24955# Marconi Avionics Ltd., Rochester (England) Airborne Display Div.

AN INTEGRATED AIRCRAFT NAVIGATION AND DISPLAY SYSTEM UTILISING AN ON-BOARD COMPOSITE DATA BASE

M. L. BUSBRIDGE and D. J. PULESTON In AGARD Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations 4 p (SEE N87-24940 18-66) Feb 1987

(AGARD-CP-404) Avail: NTIS HC A07/MF A01

It is likely that future aircraft will contain a central data base containing feature details, ground elevation, low flying obstruction data, intelligence, and mission data. Recent advances in technology have made it possible to implement such a data base within an aircraft. The existence of a central data base facilitates many functions for both low level ground attack and air defense aircraft. These functions include: improved moving map displays, precision navigation systems, cover radar shadowing, surface to air missile site intervisibility, and perspective terrain displays for use in adverse visibility conditions. The integration of such a system is currently being finalized and forms part of an ongoing flight trials program in fixed wing jet aircraft. Author

71

ACOUSTICS

Includes sound generation, transmission, and attenuation.

N89-17737# Cambridge Univ. (England) Ocean Acoustics Group.

INTENSITY FLUCTUATIONS DUE TO MOVING POINT SOURCES

B. J. USCINSKI In AGARD, Scattering and Propagation in Random Media 7 p (SEE N89-17706 10-31) Mar 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

An understanding of point sources in random media is essential if dealing with real sources, and effects such as source motion. Reliable theory now exists for the intensity fluctuations due to point sources in such media. Numerical simulations of such fluctuations agree with theoretical results. The intensity fluctuation theory and simulations were extended to deal with the case of a moving source and observer. It is shown that as regards ensemble averaged quantities such as the intensity fluctuation spectra there is reciprocity between motion of the source and that of the observer. However, such reciprocity does not exist if one is dealing with the detailed fluctuation pattern arising in a particular realization of a random medium. Author

N89-17740# Virginia Polytechnic Inst. and State Univ., Blacksburg, Dept. of Electrical Engineering.

ON THE APPLICABILITY OF CONTINUOUS SCATTERING METHODS TO DISCRETE SCATTERING PROBLEMS

IOANNIS M. BESIERIS *In* AGARD, Scattering and Propagation in Random Media 6 p (SEE N89-17706 10-31) Mar 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The equivalence between continuous and discrete scattering modeling was examined at two statistical levels: the direct interaction/ladder approximation (continuous) - Twersky approach (discrete), and the first order smoothing approximation (continuous, discrete). Full first and second order moment equivalence was established only at the level of the first order smoothing (or bilocal) approximation and, even then, for soft scatterers with weak transition operators Author

74

OPTICS

Includes light phenomena, and optical devices.

N87-13273# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Electromagnetic Wave Propulsion Panel.

GUIDED OPTICAL STRUCTURES IN THE MILITARY ENVIRONMENT

H. HODARA, ed. and P. CROSIGNANI, ed. May 1986 310 p Meeting held in Istanbul, Turkey, 23-27 Sep. 1985

(AGARD-CP-383; ISBN-92-835-0391-0; AD-A171227) Avail: NTIS HC A14/MF A01

A new technology has arisen and is expanding quickly, single mode structures in the form of optical fibers and planar waveguides operating at long wavelength, 1.3 micron and beyond, with minimum attenuation and dispersion. Fibers with attenuation below 0.5 dB/km, and bandwidths in the hundreds of GHz-Km have opened up long distance, repeaterless transmission on land and underwater. In addition, the single mode structure has bred a new class of passive devices: sensors capable of detecting sound, magnetic field, motion, temperature, humidity and many other characteristics, all of them approaching the theoretical detection limit. New active components are developing: single mode, high efficiency, long life chips operating at room temperature, electro-optic switches and components capable of generating new frequencies through Raman scattering and other nonlinear phenomena. For individual titles see N87-13274 through N87-13306.

N87-13274# Naval Research Lab., Washington, DC.

PROGRESS IN OPTICAL FIBER SENSORS

T. G. GIALLORENZI *In* AGARD Guided Optical Structures in the Military Environment 13 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

A review of the status of Optical Fiber Sensor Technology is presented and the effects of laser noise and demodulation techniques on performance are reviewed. Recent work on the development of fiber telemetry scheme for use with optical fiber sensors is also detailed. Author

N87-13276# McDonnell-Douglas Astronautics Co., Huntington Beach, CA.

COMPARISON OF RING LASER AND FIBER-OPTIC GYRO TECHNOLOGY

E. UDD, S. F. WATANABE, and R. F. CAHILL *In* AGARD Guided Optical Structures in the Military Environment 14 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

Substantial progress has been made in recent years toward the development of producible fiber-optic rotation sensors. These devices have the potential of being the solid-state replacement for many applications currently using mechanical gyro technology. Ring laser gyro technology which has been under development for approximately 23 years is now being introduced into commercial and military aircraft for inertial navigation. The fundamentals of the usage of Sagnac interferometry for rotation sensing is reviewed

as well as the differences between fiber-optic gyro and ring laser gyro technology. Examples are given of applications where fiber-optic gyro or ring laser gyro technology is particularly suitable. Distinctions are made between analog fiber-optic gyros which offer the lowest possible cost but are limited in performance capability and digital fiber-optic gyros which offer the wide dynamic range and accurate scale factor correction required for more stringent applications. Author

N87-13277# Litton Systems (Canada) Ltd., Rexdale, (Ontario) Advanced Optical Systems Group.

CLOSED LOOP FIBER OPTIC GYRO

D. H. LEWIS, B. BEDNARZ, J. A. DANOWYCH, K. JEW, G. JOSLIN, and W. A. YOUNG *In* AGARD Guided Optical Structures in the Military Environment 10 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

A breadboard closed loop gyroscope using ordinary single mode fiber and a multi-mode diode laser is described. Closed loop rotation rate bias stability data are presented for both short term and long term. The performance of the gyro is displayed in the frequency domain as well as in the time domain. The performance achieved was a rotation rate noise of 5 deg/hr for 1 sec. integration, 0.55 deg/hr for 100 second integration and an extrapolated drift of 0.09 deg/hr. The long term (6 hours) bias stability was 1 deg/hr Author

N87-13278# Plessey Co. Ltd., Romsey (England).

PROGRESS WITH MULTIPLEXED SENSOR ARRAYS BASED ON REFLECTION AT SPLICED JOINTS BETWEEN SENSORS

J. P. DAKIN, C. A. WADE and P. B. WITHERS *In* AGARD Guided Optical Structures in the Military Environment 6 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

Recent progress made in developing a time-division-multiplexed, fiber optic hydrophone array using optical time domain reflectometry (OTDR) techniques is reported. Recently, improvements have been made in four main areas: (1) development of partially reflecting splices; (2) development of a high power single mode gas laser for use in the present system; (3) development of a balanced-optical-path arrangement to allow shorter coherence length sources to be used in future systems; and (4) development of an all-fiber frequency shifter, with the ultimate aim of producing a complete all-fiber system. E.R.

N87-13279# Plessey Co. Ltd., Romsey (England).

MAGNETIC AND PRESSURE SENSORS USING THE COMPENSATED POLARIMETRIC SENSOR CONFIGURATION

J. P. DAKIN, C. R. BATCHELLOR, and J. A. REX *In* AGARD Guided Optical Structures in the Military Environment 7 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

The identical lengths of high birefringence fiber spliced together with a 90 deg axial rotation to couple their orthogonal birefringent axes form the basis of a compensated polarimetric optical fiber sensor. This can be used to detect differential strains in the two fiber lengths caused by such phenomena as hydrostatic pressure or magnetic fields (the strain being introduced by magnetostrictive material bonded to the fiber). Magnetic and pressure sensors were constructed using this principle and show good sensitivity yet better stability than Mach-Zehnder arrangements. Author

N87-13280# Consiglio Nazionale delle Ricerche, Florence (Italy). Istituto di Ricerca sulle Onde Elettromagnetiche.

FIBER OPTIC DEVICE FOR TEMPERATURE REMOTE SENSING

A. M. SCHEGGI, M. BRENCI, G. CONFORTI, F. COSI, R. FALCIAI, and A. G. MIGNANI *In* AGARD Guided Optical Structures in the Military Environment 5 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

An optical-fiber temperature sensor is presented which is based on light amplitude modulation induced by a thermosensitive cladding applied on the distal end of the fiber. The experimental set-up for detecting and processing the signal is described, and the measured characteristics of the thermometer are reported. Author

74 OPTICS

N87-13281# National Bureau of Standards, Boulder, CO. **OPTICAL FIBER SENSORS FOR THE MEASUREMENT OF PULSED ELECTRIC CURRENTS**

G. W. DAY, J. D. O. MCFADDEN, L. R. VEESER (Los Alamos National Lab., N. Mex.), G. I. CHANDLER, and R. W. CERNOSEK (Sandia National Labs., Albuquerque, N. Mex.) *In* AGARD Guided Optical Structures in the Military Environment 9 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

Recent progress in the design of fiber sensors for pulsed electric currents is reviewed. Several of the most useful sensor configurations are described and compared. Models are used to predict the transfer function of these sensors, their sensitivity to non-ideal fiber properties, particularly linear birefringence, and methods for overcoming these problems. Other recent research is examined to suggest the prospect for sensors with improved sensitivity and stability. Author

N87-13282# Fondazione Ugo Bordoni, Rome (Italy). Istituto Superiore P. T.

NONLINEAR ELLIPSE ROTATION IN A LOW-BIREFRINGENCE OPTICAL FIBER

B. CROSIGNANI, S. TRILLO, P. DI PORTO, and S. WABNITZ *In* AGARD Guided Optical Structures in the Military Environment 3 p (SEE N87-13273 04-74) May 1986 Prepared in cooperation with Rome Univ., Italy

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

The rotation of the polarization ellipse taking place in a low-birefringence single mode optical fiber and associated with the nonlinear optical Kerr effect is theoretically investigated. A detailed description of a proposed experiment for measuring the nonlinear refractive index through the ellipse rotation is also furnished. Author

N87 13283# Thomson-CSF, Orsay (France). Lab. Central de Recherches.

PROGRESS IN OPTICAL FIBER GYROSCOPES USING INTEGRATED OPTICS

H. C. LEFEVRE, J. P. BETTINI, S. VATOUX, and M. PAPUCHON *In* AGARD Guided Optical Structures in the Military Environment 13 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

A quarter of a liter brass-board of a fibergyro using a multifunction integrated optic circuit (splitter, polarizer and phase modulator), a superluminescent diode and 250 meters of polarization holding fiber is described. The photon noise limited random walk performance is 0.004 deg/sq. rt. H. A simple model to evaluate birefringence induced non-reciprocities, and an original method of signal processing, the digital phase ramp, to solve the problem of scale factor linearity and accuracy are also presented. Author

N87-13284# Bell Telephone Labs., Inc., Murray Hill, NJ. **WAVELENGTH DIVISION MULTIPLEXING AT 1.5 MICRONS FOR HIGH CAPACITY OPTICAL TRANSMISSION**

J. HEGARTY, N. A. OLSSON, and R. A. LOGAN *In* AGARD Guided Optical Structures in the Military Environment 8 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

A method is described for multiplexing several channels of information, closely spaced in wavelength, together in one single-mode fiber. The results are reported of a recent 10-channel experiment at 1.5 micrometers in which 10 distributed feedback lasers, modulated at 2 Gbits/s, were multiplexed together and transmitted over 68.3 km of fiber giving a system capacity of 1.37 terabit-km/s. The channel spacing was 1.35 nm and the multiplexer insertion loss was 3 db. Crosstalk, including Raman crosstalk, was found to be negligible. Author

N87-13285# Consiglio Nazionale delle Ricerche, Florence (Italy). Istituto di Ricerca sulle Onde Elettromagnetiche.

A SPHERICAL WAVEGUIDE MULTIPLEXER-DEMULTIPLEXER

V. RUSSO, S. SOTTINI, G. C. RIGHINI, and S. TRIGARI *In* AGARD Guided Optical Structures in the Military Environment 8 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

A wavelength multiplexer-demultiplexer (MUX - DEMUX) which can work also a tapping element was suggested and tested. This

device is based on the imaging properties of a hemispheric geodesic lens. The aberrations of this lens were evaluated and some examples of the potential performance of the device are given: in particular the MUX - DEMUX seems to be quite interesting in the case of monomode fibers, showing a diffraction limited performance. Experimental tests are in progress, utilizing a spherical waveguide fabricated by ion exchange on a glass substrate, and gratings with 540 or 1200 grooves/mm. The results already available are quite encouraging and confirm the expected advantages of this approach with respect to previous devices. Author

N87-13287# McDonnell-Douglas Astronautics Co., Huntington Beach, CA.

OPTICAL QUADRATURE DEMODULATOR FOR COHERENT DETECTION AND SENSOR APPLICATIONS

S. F. WATANABE, A. A. JOSEPH, H. B. TURNER, S. A. HOLMES, and J. T. FREIDAH *In* AGARD Guided Optical Structures in the Military Environment 6 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

A new device was designed, built and demonstrated which provides exceptional performance in a very small, potentially very low cost unit. Balanced quadrature detection for homodyne or heterodyne detection of phase or frequency encoded signal information is accomplished with microradian phase sensitivities over a broad range of environments and for a broad dynamic range of signal levels and frequencies. Results of current development testing are presented along with brief discussions of potential applications to coherent detection for interferometers, sensors, and communications. Author

N87-13288# Siemens A.G., Munich (Germany, F.R.). Research Labs.

EFFECTS OF OPTICAL FEEDBACK ON THE PERFORMANCE OF HIGH DATA RATE SINGLE-MODE FIBER SYSTEMS

R. KEIL, K. MATHYSSEK, and E. HOERMANN *In* AGARD Guided Optical Structures in the Military Environment 15 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

Performance measurements data accomplished on a 678 Mbit/s single-mode fiber optic transmission system for various laser diode structures and more importantly under different near- and far-end optical feedback conditions are presented. Specifically, for two integral coupling schemes i.e., the drawn fiber taper with a lens and hemispherically ended graded index fiber lens (GRINFLENS) the near-end optical feedback are modelled and simple method for its experimental assessment are given. Feedback induced variations of lasing spectra and of mode partition noise and their influences on bit error rate (BER) data are experimentally determined for a dispersive single-mode fiber transmission link with the two coupling arrangements. Comparative measurements were done with a butt-coupled fiber and with a non-dispersive fiber system. Furthermore, far-end reflections from a connector joint and their quantitative influence on BER data were investigated. Author

N87-13289# Barr and Stroud Ltd., Glasgow (Scotland).

PERFORMANCE OF INTEGRATED OPTICAL FREQUENCY SHIFTERS PIGTAILED TO HIGH BIREFRINGENCE FIBRES USING ION-MILLED GROOVES

I. ANDONOVIC, W. JOHNSTONE, D. N. MACFADYEN, A. MCDONACH, M. S. NER, and S. BEAUMONT *In* AGARD Guided Optical Structures in the Military Environment 8 p (SEE N87-13273 04-74) May 1986 Prepared in cooperation with Glasgow Univ., Scotland

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

The practical application of lithium niobate integrated optical devices in the severe military environments that will be experienced by the fiber optic gyroscope, requires the development of a cheap, efficient and robust means of interconnecting optical fibers and integrated optical chips. One technique for fiber to chip coupling is the use of ion-milled alignment grooves in the Lithium Niobate substrate to accurately locate the fiber end with the end of the waveguide. This technique uses a photolithographic process for the most precise alignment stages and is therefore amenable to mass production and automation. Efficient coupling of light was observed between optical fibers chemically etched to a diameter of about ten microns and waveguides formed by the indiffusion of

titanium. The use of chemically etched optical fibers and ion-milled grooves allows a high packing density of chip/fiber connections, offering space saving in terms of device lengths as well as lateral separation. Results are presented for the coupling of light to integrated optical waveguides from high birefringence optical fibers using ion-milled alignment grooves, and the degree of polarisation preservation achieved is related to the performance of integrated optical phase modulators. Author

N87-13290# Arizona Univ., Tucson. Optical Sciences Center. **NONLINEAR PLANAR GUIDED WAVE INTERACTIONS AND DEVICES**

G. I. STEGEMAN, C. T. SEATON, and H. G. WINFUL (GTE Labs., Inc., Waltham, Mass.) In AGARD Guided Optical Structures in the Military Environment 9 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

A variety of applications of third-order nonlinear integrated optics to optical signal processing are discussed. These include guided wave devices based on an intensity-dependent refractive index such as upper and lower threshold devices, all-optical switching devices, all-optical modulation devices, optical logic, and optical bistability. Multiple waveforms mixing with degenerate four-wave mixing to produce signal convolution and time inversion on a picosecond time scale are also discussed. Author

N87-13292# Arizona Univ., Tucson. Optical Sciences Center. **INTEGRATED OPTICS OPTICAL LIMITERS**

C. T. SEATON, J. D. VALERA, and G. I. STEGEMAN In AGARD Guided Optical Structures in the Military Environment 7 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

Two novel, low-power, guided-wave optical limiters were demonstrated. Both are based on intensity-dependent refractive indices and involve phenomena unique to optical waveguides. The first utilizes newly discovered nonlinear guided waves that exhibit optical-limiting action for a film bounded by a nonlinear medium. The second relies on an intensity-dependent reduction in coupling efficiency when waveguide modes are excited by prism or grating couplers. In both cases, preliminary experiments have demonstrated optical limiting action. Author

N87-13293# ANT Nachrichtentechnik, Backnang (Germany, F.R.). **PIN-FET PREAMPLIFIER FOR HIGH-SPEED OPTICAL TRANSMISSION SYSTEMS**

B. SCHWADERER In AGARD Guided Optical Structures in the Military Environment 6 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

The design of a hybrid integrated PIN-FET transimpedance preamplifier is given for long-haul optical transmission systems at 1.3 micrometers wavelength with bit rates of 140 Mbit/s and 565 Mbit/s. The preamplifier uses a GaInAs/InP PIN-photodiode with a dark current of less than 10 nA, a high spectral responsivity of greater than 0.7 A/W at 5V bias supply and a GaAs-MESFET with 45 mS transconductance and about 0.7 pF input capacitance. Using transimpedance-resistors of 50 kilo-ohm and 25 kilo-ohm the design goals of receiver sensitivities are -43 dBm for the 140 Mbit/s system and -36.7 dBm for the 565 Mbit/s system respectively for BER equal to or less than 10⁻⁹. The measured values of -42.8 dBm and -35.8 dBm including connector losses are within the predicted ranges. Author

N87-13295# Siemens A.G., Munich (Germany, F.R.). Research Labs. **ACOUSTOOPTIC SPECTRUM ANALYZER USING A PLANAR BRAGG-CELL**

M. STOCKMANN and P. CLEMENS In AGARD Guided Optical Structures in the Military Environment 5 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

The design principles and the performance characteristics of a miniaturized acoustooptic RF-spectrum analyzer are presented. The device yields a time-band-width-product of more than 300. Using a planar Bragg-cell fabricated on a LiNbO₃ substrate and air between Bragg-cell and detector array the time-bandwidth-product was doubled compared to the minibus as well as the integrated optic spectrum analyzer for the same device length. The time

resolution of the spectrum analyzer is 33 usec and its linear dynamic range 28 dB. Author

N87-13296# Naval Research Lab., Washington, DC. Optical Sciences Div. **PREPARATION AND PROPERTIES OF INFRARED TRANSMITTING HEAVY METAL FLUORIDE GLASS OPTICAL FIBERS**

D. C. TRAN In AGARD Guided Optical Structures in the Military Environment 6 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

In present silica fiber technology, optical attenuation at the intrinsic minimum level of about 0.15 dB/km at 1.6 micrometer has been attained. Non-oxide glasses based on heavy metal fluorides potentially can offer intrinsic minimum losses several orders of magnitude lower than that of silica, owing to a lower Rayleigh scattering loss contribution and an extended infrared absorption edge. As a result, heavy metal fluoride glasses are most promising for long distance repeaterless optical communication heavy metal fluoride glasses are most promising for long distance repeaterless optical communication systems. The published literature on fluoride glasses and fiber is studied to provide a complete review of the present state-of-the-art in the field. Candidate fluoride glasses for fiberization are evaluated on the basis of their infrared transparency as well as their glass forming ability. The synthesis of high optical quality bulk fluoride glasses by conventional casting and the fabrication of fibers using both preform and crucible techniques are discussed. The optical properties of the fluoride glass fiber are evaluated based on the absorption loss contribution associated with hydroxyl groups and transition metal/rare-earth impurities, and on the scattering loss component arising from both Rayleigh scattering and processing induced defects such as microcrystallization, phase separation and particle inclusions. Author

N87-13297# Standard Telecommunication Labs. Ltd., Harlow (England). **GLASS FIBRES FOR TRANSMISSION IN THE 8-12 MICROMETERS WAVEBAND**

N. J. PITT and M. G. SCOTT In AGARD Guided Optical Structures in the Military Environment 8 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

Chalcogenide glasses, crystalline halides and hollow waveguides were assessed for transmission in the 8 to 12 micrometer waveband. Of these, chalcogenide glasses were selected for development of fiber optic materials. The bulk properties of a range of glasses were studied and compositions chosen to optimize transmission and thermal stability. The role of major impurities and the procedures used to minimise them are described. Selected compositions were drawn into long lengths of polymer coated fiber with diameters controlled accurately up to 500 micrometers. Current fibers transmit at CO₂ laser wavelengths with losses of 5 to 10 dB/m but potential for substantial improvement still exists. Mechanical testing has shown that with suitable coatings chalcogenide fibers are flexible enough to sustain a bend radius of the order of 1 cm. Author

N87-13298# Stanford Univ., CA. Crystal Science Div. **SINGLE CRYSTAL FIBERS**

R. S. FEIGELSON In AGARD Guided Optical Structures in the Military Environment 9 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

Single crystal fibers are just now emerging as a new frontier in both materials science and device technology. Various methods have already been developed for the preparation of single crystal fibers of a wide range of materials with useful properties. Along with discussions of fiber growth methods and potential applications for single crystal fibers, current research on the growth of laser, nonlinear optic, and IR transmitting single crystal fibers are also discussed. Author

74 OPTICS

N87-13299# Rennes Univ. (France). Lab. de Chimie Minerale D.

FLUORIDE GLASSES FOR INFRARED WAVEGUIDES [VERRES FLUORES POUR GUIDES D'ONDE INFRA ROUGE]

J. LUCAS *In* AGARD Guided Optical Structures in the Military Environment 7 p (SEE N87-13273 04-74) May 1986 *In* FRENCH

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

The realization of optical waveguides is more promising beginning with materials in the glassy state than to begin with polycrystalline or monocrystalline materials. At the present time, the glasses which correspond to the best compromise between the bandwidth of transmission, the ultra-transparency potential, low diffusion loss, and fiber preparation techniques are the fluoride glasses. The tetrafluoride glasses with a zirconium base permits transmission through fiber of up to 4 microns, those with a base of the heavy metals (thorium, indium, rare earths, etc.) up to 5 microns. The potential applications in long distance telecommunications (considering very low theoretical losses, 10(-3) dB/km) are discussed as well as short distance applications involving collection technologies and energy transport. Author

N87-13300# British Telecom Research Labs., Ipswich (England).

WIDE BANDWIDTH, LONG DISTANCE FIBRE-OPTIC COMMUNICATION SYSTEMS

S. D. WALKER, L. C. BLANK, and L. BICKERS *In* AGARD Guided Optical Structures in the Military Environment 9 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

Recent advances in laser, fiber and receiver technology have allowed a series of unrepeatable optical transmission system experiments to be carried out. These spans ranged from 90 km to 250 km at line-rates from 34 Mbit/s to 2 Gbit/s. At data-rates of 34 Mbit/s and 140 Mbit/s, a single-line 1.525 micrometers distributed feedback laser was used in conjunction with step-index monomode fiber spans up to 251.6 km. In a second set of experiments, a 1.55 micron multi-longitudinal-mode laser gave error-free transmission over lengths of dispersion-shifted fiber up to 233 km. For gigabit transmission experiments, a 1.535 micron single-line laser and dispersion-shifted fiber provided a further system option which resulted in a recent fully-regenerated 2 Gbit/s, 90 km trial featuring commercially-available GaAs logic components. The various system configurations implemented are described and the technical options for further long-span, unrepeatable optical transmission experiments using current and developmental direct-detection technology in the 1.5 micron wavelength region are reviewed. Author

N87-13301# TRW, Inc., Redondo Beach, CA. Fiber Optic Communications.

PERFORMANCE OF RF FIBER OPTIC LINKS

T. R. JOSEPH and W. E. STEPHENS *In* AGARD Guided Optical Structures in the Military Environment 12 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

RF fiber optic links have numerous applications to microwave systems. To fully exploit their usefulness, the RF system designer must understand their properties in terms of the performance parameters that are used to describe the terminal properties of other RF components such as loss, signal to noise, linearity, and dynamics. The performance of direct and external modulation fiber optic links in terms of those parameters are explained. Specific examples of a 4.1 to 4.7 GHz direct modulation link and a 2.0 to 12.0 GHz external modulation link are used. Author

N87-13302# Shape Technical Center, The Hague (Netherlands).

FIBER OPTICS: A SURVIVABLE AND COST-EFFECTIVE TRANSMISSION MEDIUM FOR TERRESTRIAL NETWORKS

M. ASLAM *In* AGARD Guided Optical Structures in the Military Environment 10 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

The performance of a fiber-optic transmission system is affected by nuclear radiation. The nuclear scenario is discussed vis the terrestrial network, the essential characteristics are identified, and on this basis the principles for the design of a strategic communication fiber-optic cable system are derived. The details

of a cost analysis applicable to various scenarios are also given; the costs of each scenario are compared with those of a microwave line-of-site system of approximately the same capacity. Author

N87-13303# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Dynamics Div.

SINGLE-MODE-FIBERS FOR FIBEROPTIC-GUIDED MISSILES: A COMPARISON WITH GRADED-INDEX MULTIMODE FIBERS

K. H. NIEDERHOFER and W. D. SCHUCK *In* AGARD Guided Optical Structures in the Military Environment 8 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

For a few years there have been activities in the application of optical fibers as a broadband, secure transmission medium between a ground-station and tactical missiles for ranges of about 10 km. The idea is to put the gunner's eye, i.e., a suitable imaging device, into the missile to provide a lock-on-after-launch capability together with a man-in-the-loop option. A key problem is the rapid payout of the fiber from the missile during flight. Several successful flight test campaigns have been carried out, where Kevlar-reinforced graded-index multimode fibers have been used for transmission of command- and TV-signals. The affects of additional attenuation resulting from the reinforcement, the bobbin-technology and payout process are well controlled. For the first development of fiberoptic guidance systems single-mode transmission was not taken into account, since the suitable components were expensive, sensible and not readily available. Today the single-mode technology is quite advanced and offers some benefits compared with multimode transmission. The most important points are the higher bandwidth and the lower attenuation. As long as the missile range is below 10 km, this is no decisive advantage, but it encourages the extension of the missile range to much more than 10 km. The comparison of costs gives no clear-cut statement, but the production costs for single-mode fibers tend to be below that of multimode fibers. If the hardness against nuclear radiation is compared, single-mode fibers give the better results. Author

N87-13304# Hughes Research Labs., Malibu, CA. LIGHTWAVE TECHNOLOGY IN FUTURE RADAR EQUIPMENT DESIGNS

C. M. GEE, A. E. POPA, and H. W. YEN *In* AGARD Guided Optical Structures in the Military Environment 8 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

Lightwave device technology can be implemented in future active aperture radar arrays. Transmitter and receiver components for a fiber optic antenna feed manifold in which the transceiver modules are connected to a central computer are reviewed. Present link signal to noise limitations imposed by the performance of these components are analyzed, and promising trends in component development are discussed. Author

N87-13305# Army Communications-Electronics Command, Fort Monmouth, N.J.

TACTICAL FIBER OPTIC ASSEMBLY REQUIREMENTS

V. E. KALOMIRIS *In* AGARD Guided Optical Structures in the Military Environment 9 p (SEE N87-13273 04-74) May 1986

(AGARD-CP-383) Avail: NTIS HC A14/MF A01

The unique features of militarized fiber optic assemblies are outlined. The stringent requirements that make tactical deployment a challenge to the fiber optic industry are summarized. The requirements are broken down to the component level: fiber, cable and connector. These demands on components are necessary to assure successful system operation. The compilation of specifications is presented in tabular form to serve as a reference for those interested in satisfying a host of ground systems needs. The significance of the performance of the cable assembly in the performance of the optical subsystem is also described. In addition, the requirements that the transceivers have to meet are reported and a comparison of the tactical and fixed plant is presented. E.R.

N87-13306# Bell Communications Research, Inc., Morristown, NJ. Exchange Network Research Div.

A HYBRID TRANSMISSION SCHEME ON SINGLE MODE FIBERS FOR TACTICAL COMMUNICATIONS

S. S. CHENG / In AGARD Guided Optical Structures in the Military Environment 6 p (SEE N87-13273 04-74) May 1986 (AGARD-CP-383) Avail: NTIS HC A14/MF A01

The availability of single-mode fibers and long wavelength devices enables the system designers to consider new link design with much improved performance not presently available in either the multimode fiber or the traditional metallic conductor systems. A hybrid transmission scheme is proposed on single-mode fibers in a star configuration. At the command post, a primary laser and its standby laser running at the cw mode are followed by an optical splitter. Each output port is then externally modulated for downstream transmission. At each remote site, a dedicated LED is used for upstream transmission where the bandwidth requirement and therefore the dispersion penalty is generally lower. The cost, reliability and flexibility of this hybrid transmission scheme are examined. The use of bidirectional WDM devices and remote external modulators with polarization control is described as two potential variations to enhance this basic hybrid scheme. The deployment of such a system will provide cost effective transmission links in a tactical environment suitable for high bandwidth analog and digital transmission. Author

N87-18747# Naval Weapons Center, China Lake, CA.

CONSIDERATIONS IN UTILIZING IR SIGNATURES Abstract Only

WAYNE H. TANAKA / In AGARD Multifunction Radar for Airborne Applications 1 p (SEE N87-18721 11-32) Jul. 1986 (AGARD-CP-381) Avail: NTIS HC A10/MF A01

The relationships of RF and IR systems, characteristics of both active and passive IR sensor data, and applications of laser radar sensors are discussed and illustrated with signature data. The radar equation and how it is used by both the RF and laser radar communities are shown including a carrier-to-noise budget analysis performed for both technologies for a proposed altimeter development. This leads to a consideration of the basic features that an active and passive IR sensor can exploit from a target. Issues of background rejection are raised. A general discussion of the types of uses the DOD is considering for laser radars follows. These include altimetry, Doppler navigation, obstacle avoidance for avionics, and remote sensing lidar. Examples of signatures included are forward-looking-infrared (FLIR) data of ships taken under Navy Target Signatures Program (TSP) auspices, active CO₂ laser radar signatures of ships, again taken under TSP auspices, within the last two years, and laser radar signatures of tanks and vehicles. Author

N87-21186# Sandia National Labs., Albuquerque, NM.

SAPPHIRE FIBER OPTIC TEMPERATURE PROBE

D. A. TICHENOR, K. R. HENCKEN, and R. W. BICKES, JR. / In AGARD Advanced Instrumentation for Aero Engine Components 5 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

A sapphire fiber optic pyrometer was developed for use in combustion environments. Two configurations of the device are described. One is designed to measure rapid gas temperature fluctuations and the other is designed to measure the rapid temperature rise in a confined pyrotechnic prior to ignition. The key element in the device is a high temperature optical fiber made of single-crystal alumina (sapphire) with a thin film of platinum deposited on one end. Temperature is derived from the intensity of thermal radiation emitted by the platinum and collected by the fiber. The device is capable of measuring rapid gas temperature fluctuations, in excess of 10kHz, in harsh environments where thermocouple life is severely limited by oxidation, corrosion, or erosion. A second configuration of the device collects infrared radiation directly from a solid object and operates in the mid-infrared to detect lower temperatures. The temperature of a confined pyrotechnic has been measured in the range from 370 to 1100 K at heating rates greater than 100 K per microsecond. Author

N87-29476# British Aerospace Public Ltd. Co., Bracknell (England). Electronic Systems and Equipment Div.

THE BAE (BRACKNELL) AUTOMATIC DETECTION, TRACKING AND CLASSIFICATION SYSTEM

C. J. SAMWELL and G. A. CAIN / In AGARD, Advances in Guidance and Control Systems and Technology 10 p (SEE N87-29474 24-04) Jul. 1987 (AGARD-CP-411) Avail: NTIS HC A07/MF A01

BAe Bracknell has designed and built real-time electro-optical digital tracking systems for 8 years. Tracking systems were purchased by the MOD and evaluated on MOD missile and target tracking trials. The BAe detection and tracking system uses images from infrared and TV sensors, mounted on a 2-axis platform, to detect and determine the angular position of an object with respect to the sensor boresight (boresight errors). These boresight errors are used to control the position of the platform such that the sensor tracks the object. The first and second generation centroid and correlation tracking systems have undergone several revisions. A third-generation system is described which provides the following facilities: image enhancement and segmentation, automatic detection of multiple objects, tracking of multiple objects, automatic acquisition of detected objects, automatic decoy/obscuration avoidance, and classification of objects. Author

N89-17707# Fondazione Ugo Bordoni, Rome (Italy).

COUPLED-MODE THEORY APPROACH TO DEPOLARIZATION ASSOCIATED WITH PROPAGATION IN TURBULENT MEDIA

B. CROSIGNANI and P. DIPORTO / In AGARD, Scattering and Propagation in Random Media 5 p (SEE N89-17706 10-31) Mar. 1988 Prepared in cooperation with Aquila Univ., Italy (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The problem of light depolarization in a turbulent atmosphere is revisited by means of the coupled-mode theory. This allows in particular the evaluation of the depolarization ratio for a plane wave and compares its expression with that obtained in the frame of two distinct approaches predicting different behaviors. Author

N89-17708# Washington Univ., Seattle. Dept. of Electrical Engineering.

EXPERIMENT AND THEORY FOR BACKSCATTERING ENHANCEMENT AND IMAGING IN RANDOM MEDIA

AKIRA ISHIMARU and YASUO KUGA / In AGARD, Scattering and Propagation in Random Media 10 p (SEE N89-17706 10-31) Mar. 1988 Sponsored in part by Army Research Office, Washington, DC and NSF, Washington, DC (AGARD-CP-419) Avail: NTIS HC A23/MF A01

When a wave is incident on a dense distribution of discrete scatterers, turbulent media, or rough surfaces, the backscattering is enhanced under certain conditions giving a sharp peak in the backward direction. It is shown experimentally and theoretically that the angular width of the peak is related to the transport coefficient and that the enhancement is caused by the constructive interference of two waves traveling through the same particles in opposite directions. This phenomenon is identified as the weak Anderson localization. The backscattering enhancement can occur from turbulence or rough surfaces which are caused by several mechanisms. A measure of the quality of the image transmission is expressed by the modulation transfer function (MTF). It is shown experimental and theoretical studies on MTF and speckle interferometry based on the fourth order and short-exposure MTF which can produce diffraction-limited images through random scatterers. Author

N89-17711# Rome Air Development Center, Hanscom AFB, MA. Electromagnetics Directorate.

REGIONS OF VALIDITY FOR SOME ROUGH SURFACE SCATTERING MODELS

ROBERT J. PAPA and JOHN F. LENNON / In AGARD, Scattering and Propagation in Random Media 16 p (SEE N89-17706 10-31) Mar. 1988 (AGARD-CP-419) Avail: NTIS HC A23/MF A01

The objective is to examine the regions of validity that apply to the use of various models for describing rough surface scattering. The first area to be examined is how a small slope condition allows an integral representation of the physical optics (PO) cross section to be formed that does not require the high frequency geometric optics (GO) restriction. Next, for forward scattering, the extension of the roughness dependence of the PO scattering cross

74 OPTICS

section from the case of Gaussian surface and correlation to a range of surfaces with different height statistics and correlation functions. This dependence is then examined for the small perturbation method (SPM) regime as well. Finally, the forward scattering PO results are extended to the case where the azimuthal angle θ sub s is not equal to 0 degrees. Author

N89-17716# Nebraska Univ., Lincoln. Dept. of Electrical Engineering.

MULTIPLE SCATTERING EFFECTS OF RANDOM DISTRIBUTIONS OF IRREGULARLY SHAPED PARTICLES ON INFRARED AND OPTICAL PROPAGATION

EZEKIEL BAHAR and MARY ANN FITZWATER. In AGARD, Scattering and Propagation in Random Media 15 p (SEE N89-17706 10-31) Mar. 1988

(Contract DAA029-82-K-0123; NSF ECS-85-15794) (AGARD-CP-419) Avail: NTIS HC A23/MF A01

Scattering and depolarization by layers of randomly distributed particles of irregular shape and finite conductivity are determined for infrared and optical electromagnetic excitations. The irregularly shaped particles considered here are spheres with random rough surfaces. The spheres are characterized by their two dimensional surface height spectral density functions or autocorrelation functions. Circularly and linearly polarized excitations at normal incidence as well as vertically and horizontally polarized excitations at oblique incidence are considered. The co-polarized and cross-polarized incoherent diffuse specific intensities (modified Stokes parameters) are determined by solving the vector form of the equations of radiative transfer. To this end the full wave approach which accounts for diffuse scattering as well as specular scattering in a self-consistent manner is used to evaluate the extinction cross sections as well as the scattering (phase) matrix for the irregularly shaped particles. Both single-scatter and multiple-scatter incoherent specific intensities are evaluated for particles with smooth as well as rough surfaces. It is shown that the particle surface roughness can have a significant effect on the diffuse specific intensities. The phenomenon of enhanced backscatter is also examined. Author

N89-17718# Royal Signals and Radar Establishment, Malvern (England).

GENERATION AND PROPERTIES OF SELF-SIMILAR STOCHASTIC PROCESSES WITH APPLICATION TO RAY PROPAGATION IN RANDOM MEDIA

J. H. JEFFERSON and J. D. ANDERSON. In AGARD, Scattering and Propagation in Random Media 19 p (SEE N89-17706 10-31) Mar. 1988

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

The importance of random media containing many length scales, and propagation of waves in such media is now widely recognized. Specific mathematical models to generate stochastic processes which have self-similar properties will be analyzed. Examples are presented graphically to illustrate similarities and differences between processes with various degrees of roughness and it is shown how they are related to fractional integration and fractal dimension. Such processes are non-Markovian, in general, and both causal and noncausal models are shown to be stochastically equivalent. Their use in modeling the scattering of waves from rough surfaces, particularly in the geometrical optics limit, will be discussed and the effects of inner and outer scales investigated. Finally, the generalization to two and three dimensions is considered together with application to ray propagation in extended random media. Author

N89-17721# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

OPTICAL IMAGERY ACROSS ATMOSPHERIC TURBULENCE [IMAGERIE OPTIQUE A TRAVERS LA TURBULENCE ATMOSPHERIQUE]

G. ROUSSET, J. C. FONTANELLA, J. PRIMOT, and A. SEVE. In AGARD, Scattering and Propagation in Random Media 13 p (SEE

N89-17706 10-31) Mar. 1988 In FRENCH Previously announced in IAA as A87-46754

(AGARD-CP-419) Avail: NTIS HC A23/MF A01

Three techniques for obtaining images with a resolution at the diffraction limit are compared to study the effects of atmospheric turbulence on the formation of optical images. The simplest method, the Knox and Thompson (1974) algorithm (based on a speckle interferometry method), requires the statistical properties of the turbulence to be stable, and involves the treatment of a large number of images. The deconvolution method, based on a wave front analysis, and the adaptive optic method, the most promising of the three candidates, require the presence of a highly luminescent source in the isoplanetary field in order to analyze the wave front. B.G.

N89-17722# British Aerospace Public Ltd. Co., Bristol (England). Naval and Electronic Systems Div.

INFRARED ATMOSPHERIC TRANSMISSION/EMISSION MEASUREMENT IN A MARITIME ENVIRONMENT

G. J. BISHOP and I. W. LARKIN. In AGARD, Scattering and Propagation in Random Media 12 p (SEE N89-17706 10-31) Mar. 1988 Sponsored by Ministry of Defence, United Kingdom (AGARD-CP-419) Avail: NTIS HC A23/MF A01

In 1985 a program of collaborative electro-optical research was agreed between the Admiralty Research Establishment (ARE) and British Aerospace, co-ordinated by the Naval and Electronic Systems Division at Bristol. The object of this research was to gather trials data on the performance of electro-optical systems in a maritime environment. In order to achieve this objective, it was important to measure the atmospheric transmission/emission close to the sea surface in a variety of weather conditions. During the course of the trial considerable experience was gained in the operation of various imaging sensors, especially in calibration and measurement techniques. The need to obtain calibrated measurements of atmospheric transmission/emission between the electro-optic sensor and any trial target is to be emphasized. How these measurements were made is described and the results compared to those predicted by the Lowtran 5 atmospheric model. How ozone absorption will affect the design of a passive surveillance system working in the ultraviolet band is also described. Author

75

PLASMA PHYSICS

Includes magnetohydrodynamics and plasma fusion.

N88-13222# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

PREPARATION OF QUALIFICATION TESTS OF A PLASMA GENERATOR FOR THE FEEDING OF A HYPERSONIC WIND TUNNEL [PREPARATION D'ESSAIS PROBATOIRES D'UN GENERATEUR DE PLASMA POUR L'ALIMENTATION D'UNE SOUFFLERIE HYPERSONIQUE]

H. CONSIGNY, C. PACOU, O. PAPIRNYK, PH. SAGNIER, and J. P. CHEVALLIER. In AGARD, Aerodynamics of Hypersonic Lifting Vehicles 14 p (SEE N88-13219 05-02) Nov. 1987

In FRENCH Previously announced in IAA as A87-44341

(AGARD-CP-428) Avail: NTIS HC A24/MF A01

Qualification tests have validated the use of a plasma generator as the feed for the R6 CH hypersonic wind tunnel that is to be employed for the Hermes project. In the first part of the study, a blast pipe using existing elements and fulfilling the conditions necessary for sounding (as determined by flow calculations), is developed. A gas flow rate of 0.26 kg/s and a gas power of 2,090,000 W are projected for an intake with a 1 sq cm cross section. Probe instrumentation for the measurement of dynamic pressure, local mass flow, and enthalpy were developed to verify the homogeneity of the flow. IAA

ADMINISTRATION AND MANAGEMENT

includes management planning and research.

N88-20173# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Flight Mechanics Panel.

FLIGHT VEHICLE DEVELOPMENT TIME AND COST REDUCTION

Sep. 1987 308 p In ENGLISH and FRENCH Conference held in Toulouse, France, 11-14 May 1987

(AGARD-CP-424; ISBN-92-835-0432-1; AD-A198663) Avail: NTIS HC A14/MF A01

These proceedings contain the papers presented at the AGARD Flight Mechanics Panel Symposium on Flight Vehicle Development Time and Cost Reduction held in Toulouse, France, from 11 to 14 May 1987. There is a current perception that time and especially the cost of new systems are increasing at an ever accelerating rate that is greater than the rate of improvement of the capabilities of the machines. The purpose of this symposium was to provide a forum to identify and discuss the elements contributing to increased time and cost development, and to decide what can be done to stop and reverse the trend. Another aim of the Symposium is to encourage others in the nontechnical area to join with the technical people in attacking those problems, showing what technologies can do to reduce development time and cost growth, and by highlighting key areas to be addressed to reverse the trend. For individual titles, see N88-20174 through N88-20201.

N88-20174# Army Aviation Systems Command, Saint Louis, MO.

RISK REDUCTION COST AVOIDANCE FOR FULL SCALE DEVELOPMENT BEGINS WITH CONCEPT FORMULATION

CHARLES C. CRAWFORD, JR. In AGARD, Flight Vehicle Development Time and Cost Reduction 7 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

Critical areas are considered, which must be addressed to reduce the technical risk early enough in the Concept Formulation process to avoid undue costs during the Full Scale Development (FSD) program. The context includes not only the definition of the traditional Required Operational Capability (ROC), Operational and Organizational Concepts, and the determination of the Best Technical Approach (BTA), but also a Preliminary Design Phase of the configuration(s) determined to be the BTA. Traditional cost drivers are first, requirements that may be more stringent than the minimum essential to perform the mission and secondly, design changes, after prototype fabrication, usually resulting in flight test delays, that stretch out the program. Design changes in the flight test phase are often made in a near panic environment to minimize the schedule impact. The problems tend to be typical even with a proactive government/industry development team effort. Suggested work efforts to avoid these types of problems in future developments are made to increase the potential of a new Weapons System flying off the drawing board within cost and on schedule. Author

N88-20175# Textron Bell Helicopter, Fort Worth, TX. Cost Analysis Engineering.

DEVELOPMENT SAVINGS THROUGH PARAMETRIC MODELING OF PROGRAM COSTS

PATRICIA J. LESLIE and ERIC G. LILLEY In AGARD, Flight Vehicle Development Time and Cost Reduction 3 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

Parametric modeling has been applied successfully to most facets of the weapon system preliminary design process. In the area of cost estimating, many parametric techniques are available to project production cost from system characteristics. However, development cost is usually estimated using grass roots techniques, a time-consuming and expensive approach. This paper proposes the application of parametric cost estimating to the derivation of development cost. Historical data from the individual contractor's experience is used as a basis for the model. Both system

characteristics and program requirements are analyzed as potential cost drivers. Program alternatives can be evaluated based on a quantitative assessment of financial risk, using equations sensitive to changes in requirements. The development cost model provides the opportunity to base decisions on sound information and to avoid the expensive iteration of grass roots estimating early in the concept formulation stage. The result is a significant savings in development cost. Author

N88-20176# Ministry of Defence, London (England).

PICKING WINNERS: PARAMETRIC COST ESTIMATING AND PROJECT MANAGEMENT

P. G. PUGH In AGARD, Flight Vehicle Development Time and Cost Reduction 21 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

Project managers and development engineers might well be excused for thinking that they have more than enough cost estimates already. After all the content of any major development program is always broken down into numerous work packages and the cost of these individually estimated in fine detail. Then, as the work proceeds, these very detailed bottom-up estimates are continually refined and have a large claim on the attention of project managers. However, there is another form of cost estimating which can be used from the very inception of a project and which brings large returns from modest effort. Traditional methods assist attempts to control the costs of an on-going project towards some pre-set target. The methods described here are directed more at the initial selection of projects and the setting of feasible cost targets for them. In brief, their role is to pick winners from the range of competing alternatives which present themselves before a major project is begun. At the least, these methods give greater assurance that the chosen solution will be viable in terms of its being attempted within realistic cost restraints. Author

N88-20177# Service Techniques des Programmes Aeronautiques, Paris (France).

PARAMETRIC STUDY OF THE TOTAL COST OF AIRCRAFT MODERNIZATION IN TERMS OF DEVELOPMENT AND EQUIPMENT SERIES COSTS (ETUDE PARAMETRIQUE DU COUT TOTAL DE LA MODERNISATION D'UN AERONEF EN FONCTION DU COUT DE DEVELOPPEMENT ET DE SERIE DES EQUIPEMENTS)

J. P. BAYLE In AGARD, Flight Vehicle Development Time and Cost Reduction 4 p (SEE N88-20173 12-81) Sep. 1987 In FRENCH

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

An aircraft is reconfigured once or twice in the course of its modernization in order to adapt to the evolving technology and threat environment, and more often than not to improve weapon systems and supply new detection equipment. A statistical study showed the total cost of a modernization program to be tied quasi-linearly to the development cost of new equipment and their series cost. Also, the values of certain ratios are practically constant. This global method intrinsically allows one to estimate the confidence level of a program budgetary evaluation. Author

N88-20178# Northrop Corp., Hawthorne, CA. Aircraft Div. **THE INCREASED TIME AND COST OF DEVELOPMENT: CAUSES AND (SOME) REMEDIES**

JOSEPH T. GALLAGHER In AGARD, Flight Vehicle Development Time and Cost Reduction 9 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

The increased time and cost of development of aircraft are discussed. Concurrently, methods of reducing time and cost are examined. The evolution of air vehicle production is presented to provide the background surrounding technological advances. The increased time and cost associated with these advances are discussed in relation to methods of gaining time and cost reductions. New military fighter aircraft have grown increasingly more sophisticated in response to new or anticipated enemy threats. Growth in aircraft capability has coincided with advancements in technologies, including propulsion, aerodynamic design, control systems, structural materials, and avionics. A full-scale development program, as a precursor to production, must not only evolve a design which meets the defined performance requirements, but one which is capable of being produced at acceptable cost using established production processes.

81 ADMINISTRATION AND MANAGEMENT

Recognition of the increased burden of operating and support costs for military aircraft has resulted in a concentration of focus on requirements for supportability in the aircraft design. The high cost of today's aircraft has caused the imposition of longer service life requirements with a resultant emphasis on structural integrity and fatigue life. Author

N88-20181# Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Villaroche (France). **WHAT CAN BE DONE TO FACE GROWING DEVELOPMENT COSTS [COMMENT FAIRE FACE A L'ACCROISSEMENT DES COUTS DE DEVELOPPEMENT]**

CLAUDE HENOCQUE *In* AGARD, Flight Vehicle Development Time and Cost Reduction 4 p (SEE N88-20173 12-81) Sep. 1987 *In* FRENCH (AGARD-CP-424) Avail: NTIS HC A14/MF A01

The growth of development costs, driven by the need for improved system capabilities, can be controlled by better program management and a reliance on modern methods of design, production, and testing. A major priority is to reduce volume and unitary costs of prototype fabrication and evaluation by: (1) controlling the design process so that simple verification techniques can be used for testing, (2) improving the efficiency of tests, and (3) reducing unitary costs of prototypes by analyzing the values of design concepts and reducing development time through the use of computer aided design and fabrication techniques. Author

N88-20184# Aeronautical Systems Div., Wright-Patterson AFB, OH. Directorate of Avionics Engineering. **AVIONICS ACQUISITION, TRENDS AND FUTURE APPROACHES**

RONALD B. LONGBRAKE *In* AGARD, Flight Vehicle Development Time and Cost Reduction 11 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

The current and future direction of the U.S. Air Force avionics is discussed. While the paper discusses primarily tactical aircraft avionics, the findings and conclusions are applicable across USAF systems. The paper covers the acquisition methodology, the background and trends of avionics and future approaches. The basic influences are operational needs, availability, survivability, available technology, cost and schedules. The challenge is to provide effective avionics in a budget constrained world. To accomplish this requires emphasis on providing performance to counter the threat, flexibility for diverse use and basing, cost and schedule realism, and systems capable of being upgraded through planned growth as the threat changes. It has been shown that the 5 to 10 percent improvements in performance can increase the cost 20 to 50 percent, therefore, sufficient and not best performance should be the goal. While initial acquisition cost is of concern, life cycle cost is even more important. To keep life cycle costs down and have an effective system during combat, maintenance concepts need serious attention. To accomplish these objectives, the discrete avionics systems of the past must be replaced with integrated avionics responsive to crew needs, increasing threats and fiscal constraints. Future needs will cause continued increases in avionics cost. The use of new technologies, new avionics system integration and architecture techniques, use of common hardware, modular and reusable software and improving the environment in which the avionics must operate, can control the life cycle cost of avionics while meeting needs of future systems. Author

N88-20185# British Aerospace Public Ltd. Co., Lancashire (England). **REDUCING TIME REQUIRED FOR THE DEVELOPMENT OF AVIONIC SYSTEMS**

W. D. SCARF and K. GRANTHAM *In* AGARD, Flight Vehicle Development Time and Cost Reduction 12 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

The current rapid increase in avionic complexity causes difficulties in both defining and implementing the system requirement. Errors in the requirement and in its implementation lead inevitably to an extension in the time necessary for system development and consequently to an increase in the cost of the developed system. This paper describes the avionic system onboard the Experimental Aircraft Programme (EAP) and the design

process used on that system. In particular the effectiveness of: (1) rapid prototyping as a means to arrive at a sensible requirement, and (2) implementation via the use of Semi-Automated Functional Requirement Analysis (SAFRA), is outlined. A resume of the results from the EAP is used to show that this structured approach to design using both rapid prototyping and SAFRA does reduce the time required for avionic system development. Author

N88-20187# Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).

SYSTEMS ANALYSIS AND SIMULATION TECHNIQUES: ESSENTIAL TOOLS FOR BALANCED COMPLEX WEAPON SYSTEM DESIGNS IN TERMS OF PERFORMANCE AND COST

KURT FETTELSCHOSS *In* AGARD, Flight Vehicle Development Time and Cost Reduction 12 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

In line with the speed of overall technical evolution, the requirements for weapon systems are steadily increasing. The required levels of performance lead to complex and expensive technical solutions. The resulting cost of the single weapon system, together with the demand for sufficient quantities, increasingly conflicts with budget limitations. For an effective cost control, the cost driving requirements have to be identified and analyzed before the weapon system design begins. The major tool for this task is an integrated analysis of technical parameters, operational aspects and life cycle cost based on mathematical simulation, tailored to the amount of available information. This integrated analysis leads to recommendations for the single weapon system and the necessary quantities for given scenarios. By involving the customer early enough, the staff requirements for the weapon system can then be influenced in such a way that the design can be balanced in terms of performance and cost. Author

N88-20188# Societe Nationale Industrielle Aerospatiale, Toulouse (France). Lab. d'Essais du Bureau d'Etudes.

THE USE OF SIMULATION IN THE DEVELOPMENT OF THE AIRBUS [LAPORT DE LA SIMULATION DANS LE DEVELOPPEMENT DES AIRBUS]

C. PEDESTARRES *In* AGARD, Flight Vehicle Development Time and Cost Reduction 6 p (SEE N88-20173 12-81) Sep. 1987 *In* FRENCH

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

The steady increase in the complexity of systems and their close integration in modern aircraft results in a continuous growth in the volume of tasks associated with the design study and the validation of systems integration on the aircraft. Simulation constitutes one response to this constraint in that it allows: (1) the detailed definition of the overall system architecture and principles without notable interruption in the development process; and (2) the validation and adjustment of systems designs resulting from these definitions early enough in the course of the program to permit necessary changes without adversely affecting development costs and schedules. For more than twenty years Aerospatiale has employed simulation techniques in various development tasks including prospective analysis to guide long-term studies, development simulation for detailed systems definition, and integration simulation for the validation, adjustment, and optimization of systems in their flight-ready form. Aerospatiale's use of simulation is discussed with particular reference to the A-320 Airbus development program. Author

N88-20189# Boeing Military Airplane Development, Wichita, KS Manufacturing Technology.

PROTOTYPE MANUFACTURING TECHNIQUES FOR REDUCING COST SCHEDULE, AND TECHNICAL RISK

M. SCOTT SCHUESSLER and JOSEPH C. WILLIAMS *In* AGARD, Flight Vehicle Development Time and Cost Reduction 14 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

Programs involving the manufacture of prototype hardware offer rewards to those companies willing to accept the challenge. Boeing Military Aircraft Company (BMAC) has excelled at meeting these challenges with a proven record of successful development programs. In addition, future programs will use newer technologies and disciplines such as Computer-Integrated Manufacturing (CIM) to direct and integrate all required fabrication

81 ADMINISTRATION AND MANAGEMENT

and assembly processes. Logic, innovation blended with tradition, and careful planning are the keys to BMAC's success. Author

N88-20192# Air Force Flight Test Center, Edwards AFB, CA. **MINIMIZING DEVELOPMENT FLIGHT TEST TIME AND COST IN THE US AIR FORCE**

CHARLES E. ADOLPH /in AGARD. Flight Vehicle Development Time and Cost Reduction 8 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

Flight testing has undergone some major changes in the past 20 years. The largest single technical change, the need to evaluate software-intensive systems, resulted from advances in computer technology. Test management concepts have changed as well. These changes were influenced in part by technology and in part by a need for the Air Force to become more involved early in the test process. Today's avionics systems present both a quantum leap in capability and a quantum jump in test requirements. With workload growing both in magnitude and complexity, the challenge is to meet the increased demands cost-effectively and safely. For software-intensive systems, a ground-based simulation dedicated to the support of the flight test program is essential. This paper summarizes today's methods of operation which are geared to minimizing development time and costs. The focus of this process is on productivity -- doing the right testing in the proper sequence in the most efficient and safest possible manner. Author

N88-20193# Boeing Vertol Co., Philadelphia, PA. **IMPROVED FLIGHT TEST PRODUCTIVITY USING ADVANCED ON LINE DATA SYSTEMS**

PHIL DUNFORD /in AGARD. Flight Vehicle Development Time and Cost Reduction 20 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

This paper highlights the improvement made over the last two decades in the methods used to gather, assimilate and process flight test data. It discusses the development cost reductions that can be realized from the use of real time data systems and real time analysis software and relates the use of today's powerful computing capabilities to the V-22 program requirements. The paper briefly discusses the increased emphasis on the role of simulation in real time analysis procedures. Author

N88-20194# Aeronautica Macchi S.p.A., Varese (Italy). Engineering.

USE OF DEMONSTRATION/VALIDATION PROTOTYPES: IMPACT ON TOTAL DEVELOPMENT COSTS AND TIMES

ALBERTO NOTARI /in AGARD. Flight Vehicle Development Time and Cost Reduction 4 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

The development of a new type of military aircraft involves technical risks and uncertainties that are the greater than more advanced the design solutions adopted. The recourse to a pre-development program envisaging the fabrication of demonstration/validation prototypes before proceeding to the full scale development phase is a known possibility, and a solution that was and is adopted both in the U.S. and Europe. Results obtained by use of the demonstration/validation prototypes have been, in some instances, the subject of thorough analyses, confirming the validity and convenience of these prototypes to the end of reducing the overall time span of the acquisition cycle and its costs, especially when the development was marked by significant technological advances. An attempt is made to identify the conditions that should determine the convenience and success of a pre-development program, and the advantages and disadvantages that resorting to such a program entail are reexamined in the present market situation and in a European industrial context. Author

N88-20195# Aeronautica Macchi S.p.A., Varese (Italy). **ENGINEERING MANAGEMENT FOR VALIDATION PROTOTYPE PHASE**

ALESSANDRO NEVIANI /in AGARD. Flight Vehicle Development Time and Cost Reduction 11 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

The success and effectiveness of a concept of demonstration-validation through the use of prototypes depend essentially on the contractor's engineering management activities,

which must be carefully tailored to the goals of the program. Special importance goes to the activities for the definition of the most cost-effective prototype configuration, of planning, coordination and integration of the different specialty areas, of reduction and simplification of the formal qualification documentation and decision processes. This requires that the customer include flexibility in his contract, and that the contractor adapt his organization by establishing an efficient task force led by a dedicated system engineering structure. Essential factors for success are also a correct choice of key people for the organizational structure, and the completeness of the conceptual studies representing a basis for realistic planning of the prototype definition, development and evaluation activities. The evaluation of the benefits obtainable in terms of complete development costs and time by using the suggested policies and techniques can be qualitative only, significant and homogeneous comparison data being scarce. Author

N88-20196# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Group.

SCHEDULE AND COST CONTROL OF DEVELOPMENT

KARL-HEINZ ENGLEITNER /in AGARD. Flight Vehicle Development Time and Cost Reduction 13 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

The increase in cost and time for the development of an aircraft is a fact in most of the aircraft production programs performed to date. This paper will demonstrate the various reasons for the increases and how to plan an aircraft development program to avoid them. Therefore, possibilities for program execution in terms of adapted program philosophy and management aspects are shown as well as the contractual and economic environment. Further, the tools available for the planning and control of program execution on the basis of the chosen program philosophy are presented. In normal development programs the increase in cost and time comes not from technical problems and risks, but result from contractual, economic, and management decisions which are set by the customer and the contractor even before the initiation of an aircraft development program. Author

N88-20197# Barry (Theodore) and Associates, Los Angeles, CA.

PEOPLE, PROCEDURES, PERFORMANCE: THE KEYS TO IMPROVING THE DEVELOPMENT ENVIRONMENT

CHARLES D. SCALES /in AGARD. Flight Vehicle Development Time and Cost Reduction 13 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

A growing management issue over the past 20 years in the U.S. Aerospace and Defense industry is the ever-increasing percentage of total product labor cost attributable to the professional work force. Therefore, the challenge of improving the performance and productivity of these workers, especially in a development environment, is now and will remain a most critical element in a firm's overall profitability. The paper begins with an overview of white collar productivity, its growing importance in the Aerospace and Defense industry, its resistance to the more traditional approaches to productivity improvement, and the challenges facing managers who try to attack it. The author explodes some of the popular myths surrounding the issue, and then sets forth a model to help managers understand and thus control the elements comprising white collar productivity. The paper then recounts a case study in which the model was used with great success by a major aerospace manufacturer. The paper concludes with a list of techniques for successful implementation of white collar productivity improvement programs. Author

N88-20198# Naval Air Systems Command, Washington, DC. **THE EFFECTS OF TWO CARLUCCI INITIATIVES CONCURRENCY AND STREAMLINING, ON THE TEST AND EVALUATION PHASE OF SYSTEM ACQUISITIONS**

R. PARKINSON /in AGARD. Flight Vehicle Development Time and Cost Reduction 12 p (SEE N88-20173 12-81) Sep. 1987

(AGARD-CP-424) Avail: NTIS HC A14/MF A01

History has swung through the arc of a pendulum with the post World War II concurrent test and production at one apex and the 1970s fly-before-buy at the other. As a result of two of the initiatives of the Secretary of Defense, manifested in

81 ADMINISTRATION AND MANAGEMENT

concurrency and streamlining, the pendulum is now moving back toward more concurrency, particularly in the attempt to have concurrent test and evaluation by the various testers. Streamlining is implemented in all programs, but there has not yet been a program that has gone through the full acquisition test and evaluation phase having been streamlined from its initiation. Both initiatives have brought savings but there is concern that the support infrastructure which required the execution of the initiatives may not be in place when the program does not meet its cost schedule or performance requirements. Author

N88-20199# Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France).

ACCELERATION OF PROTOTYPE DEVELOPMENT AND REDUCTION OF COST BY MULTIDISCIPLINARY INTEGRATION

J. Y. LAZARD *In* AGARD, Flight Vehicle Development Time and Cost Reduction 4 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

Since its creation Avions Marcel Dassault-Breguet Aviation (AMD/BA) has built 92 prototype aircraft, the last being the Rafale, a new technology demonstrator, forerunner of future combat aircraft. The industrial policy of the company, pursued with continuity and perseverance, has always involved a very fast development, followed by a rapid industrialization and the realization of high quality products. However, with the ever increasing complexity of modern aircraft, maintaining this orientation has required an adequate new organization and the development of several unique technical tools. Author

N88-20200# Societe Nationale Industrielle Aerospatiale, Marignane (France). Div. Helicopters.

ORGANIZATION OF HELICOPTER DEVELOPMENT ACTIVITIES WITH A VIEW TOWARD REDUCTION OF COSTS AND CYCLES [ORGANISATION DES ACTIVITES DE DEVELOPEMENT D'HELICOPTERES EN VUE DE REDUIRE LES COUTS ET LES CYCLES]

AUGUSTE DESMONCEAUX *In* AGARD Flight Vehicle Development Time and Cost Reduction 15 p (SEE N88-20173 12-81) Sep. 1987 *In* FRENCH (AGARD-CP-424) Avail: NTIS HC A14/MF A01

In recent years, helicopter development costs and cycles have increased greatly in relation to production costs. In fact, the increase in specification demands requires greater and greater efforts directed towards performance, materials, operational capabilities of components, and increasingly sophisticated systems. For these reasons, it is important to reduce the cycles and development costs in order to bring overall development efforts back into a reasonable balance. Such a reduction can be achieved through the proper definition of the tasks that should be performed in the course of a predevelopment phase, wherein the objectives are well specified and the determination of technical performance characteristics results from the best compromise between obtainable performance capabilities and the technical risks involved. This predevelopment phase is followed by a development program in which the design, fabrication and testing overlap in an attempt to limit the risks at each stage. Naturally, the flexibility should be sufficient so as to continually maintain the best compromise between design, product fabrication and testing. Author

N88-20201# Ministry of Defence, London (England). THE INFLUENCE OF INFRASTRUCTURE ON THE COSTS AND TIMESCALES OF COLLABORATIVE PROGRAMMES

R. GARRETT *In* AGARD, Flight Vehicle Development Time and Cost Reduction 7 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

International collaboration can give substantial financial advantages, particularly in development, but there are features of past programs which have also given rise to increased total costs. This has reduced the advantage in terms of whole life costs to a relatively small (but useful) percentage. No general assessment of the benefits is yet possible since there are insufficient, similar programs on which to conduct statistical analysis; each program proposal needs to be judged on its own merits. Although perfect collaboration, with no additional costs, is unlikely to be achieved there is room for a substantial additional saving to be made in comparison with those achieved to date. One possible means of

making these extra savings would be by setting up permanent collaborative institutions in industry and between governments. Author

N88-23803# Rockwell International Corp., Lakewood, CA. Aircraft Operations.

COHERENT FUNCTIONAL DEVELOPMENT: KEY TO SUCCESSFUL FUTURE SYSTEM INTEGRATION

BRUCE L. HOUSE *In* AGARD, The Design, Development and Testing of Complex Avionics Systems 22 p (SEE N88-23767 17-06) Dec. 1987

(AGARD-CP-417) Avail: NTIS HC A18/MF A01

An advanced, computer based engineering design methodology and tool set which enables and enhances complex system, subsystem and component design, analysis, integration and verification/validation testing in an operational context is described. When fully implemented, functional development by means of manipulation of coherently derived time-line state data, in a dynamic, high fidelity and operational context, will enable concurrent, fully integrated, rapid prototyping and subsequent detailed design synthesis of the avionics, vehicle, weapons and crew systems components of a total weapon system. Author

N88-30466# Glasgow Univ. (Scotland). Business School.

TECHNICAL CHANGE NEEDS ORGANIZATIONAL CHANGE

DAVID BODDY *In* AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 5 p (SEE N88-30458 24-82) Mar. 1988

(AGARD-CP-430) Avail: NTIS HC A06/MF A01

It is shown that effective performance cannot be assured simply by installing expensive, state of the art technology. The studies of many applications of computing and information technology have included both successful and unsuccessful examples. The clear practical lesson from this work is that the successful cases were usually those where technical change was accompanied by appropriate organizational change. The less successful ones were generally those where project were dominated by technical considerations, with little or no thought given to organizational ones. These lessons seem as relevant to defence installations as to the civilian ones in which the research was conducted. The common characteristic is that all organizations are confronted by technical developments, which are intended to help them meet their objectives. For them to succeed in that task, it appears that management needs to ensure that three big hurdles are successfully crossed. These are: managing the project, setting the right objectives; and changing the organization. Each of these hurdles will be outlined in turn, and some proposals on how they can be overcome are suggested. Author

N89-10666# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Aerospace Medical Panel.

PERFORMANCE ASSESSMENT REGISTER

1988 152 p.

(AGARD-R-763; AD-A200523) Avail: NTIS HC A08/MF A01

This Report presents the results of the first phase of AGARD Aerospace Medical Panel Working Group 12 on Human Performance Assessment Methods. The major goal of Working Group 12 is to develop a standardized test battery, satisfying conventional psychometric criteria such as reliability, validity, and sensitivity, for which an extensive data base may be compiled. Each member of the Working Group sent a simple questionnaire to researchers in his own country who are active in performance testing. The responses have been collated in the form of this Report, which, it is hoped, will facilitate the communication between laboratories necessary for the success of the subsequent standardization program. Author

82

DOCUMENTATION AND INFORMATION SCIENCE

Includes information management; information storage and retrieval technology; technical writing; graphic arts; and micrography.

N86-28793# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Technical Information Panel.

THE VALUE OF INFORMATION AS AN INTEGRAL PART OF AEROSPACE AND DEFENCE R AND D PROGRAMMES
Jan. 1986 96 p Meeting held in Cheltenham, England, 4-5 Sep. 1985

(AGARD-CP-385; ISBN-92-835-0389-9; AD-A166641) Avail: NTIS HC A05/MF A01

The management and use of scientific and technical information in the R and D process is examined from the perspective of policy makers, program managers, and researchers. Aspects considered at the meeting included the need to incorporate information as an integral part of the R and D process, the value of information in reducing the cost and preventing the duplication of research, improvements in the sharing of information resources among the NATO countries, and requirements for the future. For individual titles see N86-28794 through N86-28803.

N86-28794# British Aerospace Public Ltd. Co., Weybridge (England). Divisional Technical Directorate.

THE POLICY MAKER LOOKS AT INFORMATION

J. B. SCOTT-WILSON and J. P. HASINSKI *In its* The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 9 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

The policy making hierarchy within British Aerospace is described and the information routes to and from an intermediate level policy maker (Divisional Technical Director) are examined. The information paths for two typical research projects are considered as examples: the use of aluminum/lithium alloys as structural materials and the initiation and development of a new aircraft project. Information quality and the use of automated techniques by policy makers are also discussed. n. G.

N86-28795# NATO Integrated Communications System Management Agency, Brussels (Belgium).

A PROGRAMME MANAGER'S NEEDS FOR INFORMATION

I. MASON-SMITH *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 8 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

The underlying basis for the information need of the program manager within the NATO Integrated Communications System Agency (NICISMA) is examined in some detail, in terms of the role of that agency as exemplified by its current charter. The various specific needs of the program planner working within this framework are then identified and critically reviewed. Finally, the paper notes the expanding role of the remodelled agency (NACISA) to include the development of both communications and information systems for NATO; in this context, the urgent need to re-examine the basic information requirements of the Agency is encouraged and proposals sought. Author

N86-28796# Raitt (D. I.), Den Haag (Netherlands).

THE INFORMATION NEEDS OF SCIENTISTS AND ENGINEERS IN AEROSPACE

D. I. RAITT *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 5 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

A brief description of a recent research project to ascertain the communication and information-seeking and use habits of scientists and engineers working in aerospace research establishments and other organizations is given. Relevant organizations studied include DFVLR, NLR, CNES and ESA. Following an overview of the basic characteristics of scientists and engineers, a review of the project's major findings as they relate to the type of information required by scientists and

engineers, its availability, the sources - both oral and written - from which the information is obtained and the scientists and engineers awareness of them, how they keep up-to-date, the time spent seeking information, the use made of the library and the communication patterns of scientists and engineers, is then given. Some general suggestions for improving the communication and information flow within organizations to the satisfaction of practicing scientists and engineers are made. Author

N86-28797# Office of the Under Secretary of Defense for Research and Engineering, Washington, DC. Research and Laboratory Management.

INFORMATION SERVICES: PROS AND CONS

L. YOUNG *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 8 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

A strong science and technology base is a national necessity in a competitive world, and adequate communication is a prerequisite for it. An individual, be it a policy maker, program manager, a bench scientist or engineer resorts to the information system if he believes it will save him or her time to first consult the written record rather than to undertake a repetitious experiment or investigation. The three components to an effective information service are the sources (those who provide or produce information), the users (those who need the information) and the professional information specialists (those who bind the whole system together). The cooperation toward information exchange of all those connected with research and development must be enlisted in support of the system of which they are a part. Author

N86-28798# Engineering Sciences Data Unit, London (England).

THE COSTS OF NOT HAVING REFINED INFORMATION

A. J. BARRETT *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 9 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

The adequacy of the information resources, which are called upon for support at decision points in the research-design-production-marketing process, can in part be measured by their scope, the presence or absence of information within that scope and, increasingly, by the extent to which they offer refinement in terms of the timeliness and quality of the information which can be retrieved. Timeliness in the present context relates not so much to the response time of the information system as to the extent to which that system is tuned to the volatility of the information which it contains. Likewise, the quality of information is not to be judged only by its relevance and authenticity but also by the convenience of its form of presentation in the view of the decision maker who has need of it. The main focal points of the paper are the costs, disruption and other losses which arise from a lack of knowledge of previous work, the use of out-of-date technical information and, in particular, the extent to which the use of insufficiently refined numerical data leads to the under-, or over-, design of hardware. These are illustrated by a number of quantified examples. The transition from an industrially based to an information or service based society highlights the growing needs of the R&D decision maker and others for systems which will provide high quality numerical and factual data. However, substantiation of these needs may never be available in terms of evidence of direct future benefits as distinct from evidence of historic losses. More dynamic means of demonstrating the impact of information quality upon the interests of the decision maker must be devised and guidelines for two such projects are suggested. Author

N86-28799# King Research, Inc., Rockville, MD.

MEASURING THE VALUE OF INFORMATION AND INFORMATION SYSTEMS, SERVICES AND PRODUCTS

D. W. KING and J. M. GRIFFITHS *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 15 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

An approach for measuring the value of information and information systems, services and products is presented. Results of four research projects that have measured value of recorded information used by professional such as scientists, engineers,

managers, etc. are also discussed. Furthermore, data are given on the value of such systems and services as a bibliographic database of international publications, online search systems and libraries. The approach used to measure value includes several perspectives. The first perspective is what users are willing to pay for information in terms of money (if exchanged) and the price paid by users in terms of their time and effort to get and read the information. Once information is read and assimilated, there are many purposes for which it might be used such as in one's work, to educate oneself or others, to satisfy one's curiosity, etc. The consequential value resulting from information use is partially measured by the savings that are derived from information use. Higher order values are how the consequential value affects the user's organization and, in turn, society. Author

N86-28800# National Defence Headquarters, Ottawa (Ontario). Directorate of Industry and Univ. Programmes.

INTERNATIONAL INFORMATION EXCHANGE PROGRAMMES ARE NECESSARY

A. S. REEVES *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 5 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

The economic and cultural ties between Canada, the U.S. and European nations are enhanced by various means of information exchange between and among countries. The benefits of two different but interconnected processes of technology transfer are discussed: the alerting of allies to information available and the exchange of document literature. Since concern about national security and proprietary information may preclude defence research and development programs from publishing, as do other disciplines, in the open literature, special exchange agreements are necessary. The programs which have existed for some years among various NATO countries usually limit the subject areas of common interest to be discussed, and the organizations to be included. This process is illustrated using the Canadian situation. Some of the existing Canadian exchange agreements are examined, showing how they operate, the types of information which are included, the routes by which information is passed from one country to another. The ways in which information passes through the documentation centers to become a valuable service to the end users and thus enhance research and development productivity are detailed. Specific examples of the use of international information exchange programs to some major defence projects are shown. The release of information is beneficial to the releasing country as well as to the receiving country because of the increased visibility of the information and the resulting reciprocal transfer of related data. M.G.

N86-28801# Royal Library of Belgium, Brussels. THE IDEAL INFORMATION SYSTEM? WHAT DOES THE USER REALLY WANT?

G. M. VANAUTRYVE *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 4 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

In planning future information systems, it is of utmost importance to take into account the user who finally decides on the success of the systems. So far, system improvements have mainly been implemented with the experienced user in mind. Therefore, if the information systems want to get a better penetration, they will have to implement interfaces facilitating the accessibility of the information by the non-experienced user. Also, access to those idealized information systems could be improved through better cooperation between telecommunication authorities. Author

N86-28802# BULL, Louveciennes (France). NEW TECHNOLOGIES FOR IMPROVED INFORMATION SYSTEMS AND SERVICES

G. GAUTHIER-VILLARS *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 12 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

Information data bases are growing exponentially both because of the number of records and because of the type of data. The number of occurrences encompassed by a data base has an evident influence on its volume, but as one moves from coded data to textual data and to images the need for space grows as

well. Data is dear to the user. It is expensive to capture and it is important that it reaches all applications which needs it. So to keep the whole problem of data management under control storage, processing and transfer techniques evolve rapidly. This paper is focused on three important technological breakthroughs in each of these domains: a new storage technique, the optical disc; a new way to process data, the expert systems; and a new way to exchange data, with query languages. Author

N86-28803# Fachinformationszentrum fuer Energie, Physik, Mathematik G.m.b.H., Eggenstein-Leopoldshafen (Germany, F.R.). Energy and Technology Div.

INFORMATION RESOURCES MANAGEMENT IN THE R AND D ENVIRONMENT

K. BUERK *In* AGARD The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes 4 p (SEE N86-28793 19-82) Jan. 1986

(AGARD-CP-385) Avail: NTIS HC A05/MF A01

Efficient management of highly specialized information is a permanent task of optimization, whereby framework conditions may constantly change on account of various influencing factors. Owing to their special significance, the following has to be considered in particular: user needs, available resources, and information techniques. The task of optimization, due to its complexity, cannot be solved model-like, but only approximately and pragmatically. Illustrated by the example of the Federal Republic of Germany and the Fachinformationszentrum Energie Physik Mathematik (FIZ) the attempt to find a practical solution is demonstrated. In this context it is shown which role a National Information Center plays within international and national cooperation including worksharing, and how information supply and dissemination of information works in the case of central information services by FIZ, and decentral dissemination of information in research centers. Illustrated by the examples of database production, online services of bibliographic, numeric and full-text databases and the concept of the International Information Network for Science and Technology (STN International), the importance of the use of the most modern information techniques is demonstrated. Author

N87-19923# Logistics Management Inst., Bethesda, MD. BIBLIOGRAPHIC NETWORKS AND MICROCOMPUTER APPLICATIONS FOR AEROSPACE AND DEFENSE SCIENTIFIC AND TECHNICAL INFORMATION

RICHARD W. HARTT *In* AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work 16 p (SEE N87-19920 12-60) Oct. 1986

(AGARD-LS-149) Avail: NTIS HC A06/MF A01

Bibliographic networks provide the means for sharing information resources among geographically dispersed libraries. As part of a bibliographic network, a single library can access a wide variety of bibliographic information, participate in shared cataloging, and acquire holdings (purchase or loan). Described here are: (1) the functions and operations of libraries supporting aerospace and defense scientific and technical work; (2) the environment and characteristics of bibliographic networks; and (3) the automated system capabilities required for network participation. A discussion of the use of microcomputers as cost-effective, yet powerful tools for exploiting bibliographic network resources is included. An automated system being developed for U.S. Department of Defense technical libraries is described. This system integrates local library functions with capabilities for accessing bibliographic network resources, both government and commercial. Author

N87-19926# Atomic Energy Research Establishment, Harwell (England).

KNOWLEDGE BASED SYSTEMS IN INFORMATION WORK

L. F. CROALL *In* AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work 3 p (SEE N87-19920 12-60) Oct. 1986

(AGARD-LS-149) Avail: NTIS HC A06/MF A01

The impact of artificial intelligence on the use of computer based systems in information work is discussed. The background to artificial intelligence is briefly discussed, followed by examples of some of the possible applications. Particular consideration is given to the ACHILLES system developed at Harwell which provides corrosion information. Author

N87-19927# Gurnsey (J.), Wembley (England).

MICROCOMPUTERS IN INFORMATION RESOURCE SHARING: TWO FULL TEXT SYSTEMS

J. GURNSEY *In* AGARD The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work 12 p (SEE N87-19920 12-60) Oct. 1986 (AGARD-LS-149) Avail: NTIS HC A06/MF A01

Full text database use in Europe has been slow to develop, due in part to the narrow definition commonly adopted. In its widest sense, full text may be used to comprise all databases, textual or numeric, which are complete in themselves and do not merely refer the user onward to the primary literature. A range of factors - market structure, language, economics, copyright and others - influences the emergence of full text services in Europe, and the effect of these factors is often quite different from that on the bibliographic market, and indeed on North American full text developments. Technological changes in computers, storage technology and software, both within and outside the online industry affect the use of full text sources. In particular, since full text tends to emphasize the importance of decentralized information services, innovations in CD-ROM and magnetic media deserve consideration as they ease the creation of practical selections from large text sources for particular users, and also create opportunities and so influence the scope of data available in full text mode. Author

N87-21189# Naval Air Propulsion Test Center, Trenton, NJ.

HIGH RESPONSE DATA ACQUISITION SYSTEM

MARK K. FALL and HENRY P. DRESS *In* AGARD Advanced Instrumentation for Aero Engine Components 11 p (SEE N87-21170 14-31) Nov. 1986 (AGARD-CP-399) Avail: NTIS HC A24/MF A01

High response instrumentation is used frequently in gas turbine engine testing to determine the transient and dynamic behavior of various engine and component parameters. The Naval Air Propulsion Center (NAPC) enhanced its data acquisition and analysis capability in April 1983 with a new digital high response data acquisition system which eliminated many of the problems inherent with older analog data acquisition and analytical methods. This system has the capability of acquiring multiple parameters simultaneously at an aggregate sampling rate of up to 48,000 samples per second with on-line digitization and real time recording on a private data disk. The NAPC offline data analysis system provides same-day access to the data with the capability to display the data in various tabular and graphical formats. Analytical techniques available include time zero analysis, high pass, low pass, and band pass digital filtering, and power spectral density analysis using fast Fourier transformations. Author

N87-26675# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Technical Information Panel.

PLANNING AND DESIGNING EFFECTIVE DEFENCE AND RELATED INFORMATION SERVICES

Apr. 1987 116 p *In* ENGLISH and FRENCH Meeting held in Ankara, Turkey, 10-11 Sep. 1986 (AGARD-CP-416; ISBN-92-835-0417-8; AD-A184833) Avail: NTIS HC A06/MF A01

The planning and designing of effective defense and related information services are discussed. The information scene in Turkey, the benefits of scientific and technical information services, determining user needs, planning, security considerations, and sources of information for a defense information service are among the topics discussed. For individual titles, see N87-26676 through N87-26685.

N87-26676# Ministry of National Defence, Ankara (Turkey). Dept. of Research and Development.

THE INFORMATION SCENE IN TURKEY

O. KAYA, N. TUNCER, and E. URUNDUL (Scientific and Technical Research Council of Turkey, Ankara.) *In* Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 3 p (SEE N87-26675 20-82) Apr. 1987 (AGARD-CP-416) Avail: NTIS HC A06/MF A01

After a brief overview of the Turkish information scene and library system, the three most important information centers are described in detail. General problems and shortcomings in the

information process are discussed. Specifically, the lack of consciousness and appreciation of the importance of information is stressed. Author

N87-26677# American Inst. of Aeronautics and Astronautics, New York, NY. Technical Information Services.

BENEFITS OF SCIENTIFIC AND TECHNICAL INFORMATION SERVICES FOR AEROSPACE AND DEFENSE

BARBARA LAWRENCE *In* Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 4 p (SEE N87-26675 20-82) Apr. 1987 (AGARD-CP-416) Avail: NTIS HC A06/MF A01

The benefits of having an aerospace and defense scientific and technical information service are considered based on an understanding of the literature in the field. The functions of a centralized information center and the nature of the research and development process are discussed. Author

N87-26678# National Defence Headquarters, Ottawa (Ontario). Directorate Scientific Information Services.

A MODEL OF A DEFENCE INFORMATION SERVICE AS SEEN BY THE USER

BARBARA F. AUBREY *In* Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 5 p (SEE N87-26675 20-82) Apr. 1987 (AGARD-CP-416) Avail: NTIS HC A06/MF A01

The characteristics which make up a typical defense information service in the mid 1980's are described. In outlining its goals, organization, facilities and services, the differences between a defense information service and a traditional library are highlighted. As a systematic manager of information needed by a nation's defense community, this service has requirements over and above those of a library in the types of information collected, in furniture and equipment, and in the variety of services offered. Services provided by defense information agencies in identifying, acquiring, organizing, subject analyzing, announcing and disseminating recorded knowledge are illustrated through a number of mini-scenarios describing typical situations in which a potential user of a defense information service may find himself. Author

N87-26679# Technisch Documentatie en Informatie Centrum voor de Krijgsmacht, The Hague (Netherlands).

USER NEEDS AND HOW TO DETERMINE THEM

G. M. BREAS *In* Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 2 p (SEE N87-26675 20-82) Apr. 1987 (AGARD-CP-416) Avail: NTIS HC A06/MF A01

Three ways of studying user needs and the accompanying ways to determine them are discussed. Knowledge of the potential users, analysis of the information itself and analysis of the form in which the information will be disseminated are discussed. Author

N87-26680# National Technical Information Service, Springfield, VA.

STRATEGIC PLANNING PROCESS AT THE NATIONAL TECHNICAL INFORMATION SERVICE

JOSEPH F. CAPONIO and DONALD S. BUDOWSKY *In* Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 6 p (SEE N87-26675 20-82) Apr. 1987 (AGARD-CP-416) Avail: NTIS HC A06/MF A01

External trends such as the growth of the information society, the increasing economic value of information, the growth of research and development, funding, and advances in automation have dictated the need for information services to have a strong commitment to strategic planning. These trends are discussed and the strategic planning process at the National Technical Information Service (NTIS) is outlined. Author

82 DOCUMENTATION AND INFORMATION SCIENCE

N87-26681# Dokumentationszentrum der Bundeswehr, Bonn (Germany, F.R.).

SECURITY CONSIDERATIONS, DEFENCE-RELATED AND COMMERCIAL

HELMUT BRAUN In Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 12 p (SEE N87-26675 20-82) Apr. 1987 (AGARD-CP-416) Avail: NTIS HC A06/MF A01

A number of topics associated with the management and handling of classified documents and documents under commercial confidentiality in a defense information center are discussed. These questions are considered: Should one operate a classified data base or keep the data in it unclassified? How do you produce unclassified references to classified documents. The restrictions imposed upon documents with statements limiting their distribution are discussed, and the differences between unclassified and unlimited are explained. Author

N87-26682# Dokumentationszentrum der Bundeswehr, Bonn (Germany, F.R.).

THE RESOURCES REQUIRED TO RUN AN INFORMATION SERVICE

JAN MUELLER In Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 18 p (SEE N87-26675 20-82) Apr. 1987 (AGARD-CP-416) Avail: NTIS HC A06/MF A01

Conceptual, manpower, material and financial components are described and discussed as the resources of an information and documentation (I and D) service. The special role of infrastructure is also examined. Author

N87-26683# Centre de Documentation de l'Armement, Paris (France). Dept. Banques de Donnees-Methodes et Relations Externes

SOURCES OF INFORMATION FOR A DEFENSE INFORMATION SERVICE (LES SOURCES D'INFORMATION DANS UN SERVICE D'INFORMATION DE LA DEFENSE)

ALBERT YANEZ In Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 8 p (SEE N87-26675 20-82) Apr. 1987 In FRENCH (AGARD-CP-416) Avail: NTIS HC A06/MF A01

A topology of information sources of use to a defense information community is presented. Sources are classified and examined with regard to localization (internal defense sources, domestic, and foreign), level of organization, information content, type of utilization, and type of support. Author

N87-26684# Laborelec, Linkebeek (Belgium)

THE TREATMENT OF GREY LITERATURE (LE TRAITEMENT DE LA LITTERATURE GRIS)

CLAUDE J. SALMON In Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 7 p (SEE N87-26675 20-82) Apr. 1987 In FRENCH (AGARD-CP-416) Avail: NTIS HC A06/MF A01

Grey literature represents a vast quantity of documents in all fields including scientific and technical, sociological and economic. Although not all the documents comprising grey literature are of the same quality, their value is unquestionable, for many they represent the principle source of information. The characteristics of grey literature are outlined and the advantages of these documents as an information source are discussed. Problems concerning identification, acquisition and collection, and normalization and bibliographic control are defined. The processing of grey literature in Belgium and within the System for Information on Grey Literature in Europe (SIGLE) is described. Author

N87-26685# Defence Research Information Centre, Glasgow (Scotland).

TELLING THE USER WHAT IS AVAILABLE: ANNOUNCEMENT AND SEARCH

C. D. ADAMS In Advisory Group for Aerospace Research and Planning and Designing Effective Defence and Related Information Services 8 p (SEE N87-26675 20-82) Apr. 1987 (AGARD-CP-416) Avail: NTIS HC A06/MF A01

The various means by which an information service can make users aware of documents which are available are discussed.

Regular announcement of document holdings and searches of document holdings in response to specific inquiries are discussed. The various types of current awareness and search service are described and are illustrated by reference to the Defense Research Information Center (DRIC) which provides these services to the United Kingdom defense community. Author

N87-29511# International Business Machines Corp., Gaithersburg, MD.

STARS, POLYGONS AND CLUSTERS

ROBERT O. TUREK and JOEL S. GREENSTEIN (Clemson Univ., S.C.) In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 7 p (SEE N87-29503 24-06) Feb. 1987

(AGARD-CP-414) Avail: NTIS HC A14/MF A01
One technique for displaying a set of quantitative variables is to represent the values graphically in the form of a polygon or star, allowing the observer to visually handle complex information quickly, as a whole. Such displays have been used in various areas, for data exploration and presentation, and in status displays; they are also suited to categorization and identification tasks. For polygon displays to be reliably used, they should be capable of being interpreted consistently. An experimental investigation was undertaken to ascertain the effect of variation in certain visual features of the display on the consistency with which untrained subjects categorize information presented as polygons. Variables included background information, shading of figures, and form. Subjects performed a categorization task on several sets of data; the results were analyzed on the basis of consistency between individuals and consistency with certain standard clustering algorithms. Implications for display design include the effects of distinctive patterns on similarity judgements, of the nature of the data represented, and of the interaction of variables. Author

N87-29512# Aerospace Medical Research Labs., Wright-Patterson AFB, OH. Human Engineering Div.

AN ASSESSMENT OF VARIABLE FORMAT INFORMATION PRESENTATION

J. A. FORESTER In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 13 p (SEE N87-29503 24-06) Feb. 1987 (AGARD-CP-414) Avail: NTIS HC A14/MF A01

Three experiments testing the feasibility of varying information display formats as task demands change in complex multitask environments were conducted. A multiple resource model of human information processing was used as a guide for determining how best to represent task relevant information under changing conditions and the general validity of certain aspects of the model was assessed. Experiment 1 investigated the usefulness of a basic dual task environment for testing the variable format approach and Experiment 2 demonstrated that the technique was successful under simple task conditions. Experiment 3 increased the complexity of the base dual task by including a third task in an adaptive system context. The results from Experiment 3 supported the use of variable formats in complex adaptive systems and were consistent with the tenets of multiple resource theory. Experiment 3 also indicated the importance of considering individual differences in the design of adaptive systems. The overall approach attempts to improve human processing efficiency by capitalizing on current knowledge of human information processing characteristics and capabilities. Author

N87-29513# Naval Aerospace Medical Research Lab., Pensacola, FL.

PERCEPTUAL PROCESSING CAPABILITIES RELEVANT TO DESIGN OF VISUAL DISPLAYS FOR INFORMATION MANAGEMENT IN ADVANCED AIRBORNE WEAPON SYSTEMS

TOMMY R. MORRISON In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 9 p (SEE N87-29503 24-06) Feb. 1987 (AGARD-CP-414) Avail: NTIS HC A14/MF A01

A review of P-3C Tactical Coordinator task analytic data provided the basis for developing an experimental paradigm for investigating cognitive processing demands characteristic of Naval aviation displays. Stepwise regression analyses of the obtained data provided assessment of processing times associated with the various display demands and regression equations for predicting

performance. The results provide human performance data relevant to human factors and design engineers involved in developing visual displays to enhance information management in advance airborne weapon systems. Author

N87-29514# Royal Air Force Inst of Aviation Medicine, Farnborough (England).

PERCEPTUAL ORGANISATION AND INFORMATION MANAGEMENT

R. M. TAYLOR. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 28 p (SEE N87-29503 24-06) Feb 1987 (AGARD-CP-414) Avail: NTIS HC A14/MF A01

The changing requirements for information processing and control and the development of the information management function are reviewed through the history of the aircraft cockpit. Information management was once entirely carried out by the pilot but now this function seems likely to be shared between the pilot and adaptive automation. Human information management begins with perceptual organization. Gestalt thinking on perceptual organization is reviewed with reference to the information processing approach to human cognition and in particular to the operations of selective attention, working memory and the linking of perception and thought. Perception can be facilitated through the design of information displays. The influence of the principles of perceptual organization on the design of the dialogue across the human machine interface is reviewed with particular reference to the integration and differentiation of flight information. Three experiments are reported that are relevant to the use of color as an organizational factor in complex pictorial computer generated displays. Author

N87-29515# Royal Aircraft Establishment, Farnborough (England). Flight Systems Dept.

INFORMATION MANAGEMENT IN THE ARMY BATTLEFIELD HELICOPTER

C. P. GIBSON and D. WILLIAMS. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 13 p (SEE N87-29503 24-06) Feb 1987 (AGARD-CP-414) Avail: NTIS HC A14/MF A01

Considerable experience in the design of mission management systems has been gained in recent years. Flight trials have shown that careful design of these systems can result in considerable time savings in executing many of the tasks performed by the crew during tactical operations. In addition, flight trials were also conducted to evaluate the potential benefits of a simple tactical situation display presented on a color cathode ray tube. These trials have given valuable insight into the applications and requirements of this type of display. The experience gained was applied to the development of a complete system for installation in a helicopter with a MIL-STD-1553B databus avionics system to enable further flight trials addressing system integration and man machine interface optimization. A flexible ground station was also developed to allow investigation of optimizing methods for premission programming of the system and tactical situation display via a solid state data transfer device. Author

N87-29517# Mitre Corp., Bedford, MA.

ADVANCED INFORMATION MANAGEMENT AND DECISION MAKING IN AIRBORNE EARLY WARNING AND CONTROL (AEW&C) TRAINING SYSTEMS

L. M. ROSA, E. L. ESTOCHEN, J. L. BOTTOMLEY, and M. J. HEBERT. In AGARD, Information Management and Decision Making in Advanced Airborne Weapon Systems 12 p (SEE N87-29503 24-06) Feb 1987 (AGARD-CP-414) Avail: NTIS HC A14/MF A01

Fundamental concepts are developed for the application of information management and artificial intelligence-based decision making technology to current and future surveillance, command, control and communication training systems. Specific emphasis is placed upon Airborne Early Warning and Control (AEW and C) training systems using the E-3 Mission Simulator as the analysis example. Present Mission Simulator capabilities are discussed along with ongoing improvement programs. Training inadequacies and instructor workload problems are highlighted. Advanced information management and artificial intelligence techniques are proposed to overcome these and other training deficiencies and

to increase instructor efficiency. Extensions of these techniques for operational system use are also presented. Author

N88-30458# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Technical Information Panel.

BARRIERS TO INFORMATION TRANSFER AND APPROACHES TOWARD THEIR REDUCTION

Mar. 1988 110 p. In ENGLISH and FRENCH. Meeting held in Washington, D.C., 23-24 Sep. 1987 (AGARD-CP-430; ISBN-92-835-0449-6; AD-A194653) Avail: NTIS HC A06/MF A01

Topics addressed include: an overview of the barriers to the international transfer of information, particularly in aerospace and defence; linguistic, political, and economic barriers; the use of technology to overcome these and other barriers, e.g. machine translation, links between disparate databases and teleconferencing; the importance of standards; and the need to change organizations when introducing or changing technology to prevent internal barriers reducing the acceptance and the use of the new technology. For individual titles, see N88-30459 through N88-30467.

N88-30459# Commissariat a l'Energie Atomique, Gif-sur-Yvette (France).

LINGUISTIC AND CULTURAL BARRIERS TO THE TRANSFER OF INFORMATION

ROLAND LARUE. In AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 7 p (SEE N88-30458 24-82) Mar. 1988 (AGARD-CP-430) Avail: NTIS HC A06/MF A01

The relative importance of languages in the world in 1987 is described showing that the world population makes use of about ten languages, each of which covers an area of the globe. The trends are revealed by an analysis of population density and socio-economic balances. The use of language is studied in the field of science and technology, according to the type of communication (written or spoken) and the contents (from mathematics to technology) and the tendencies are shown. The attempts which were made to overcome the linguistic barrier - such as the introduction of a single common language (esperanto or English) or the development of the study of foreign languages are examined. The detailed analysis of the cultural barrier is carried out by several approaches (sociological, psychosociological, psychoanalytic, and psycholinguistic) in order to reveal the genuine individual and collective stakes. Future trends, such as the working of the Commission of the European Communities with its nine official languages are discussed, and some predictions are put forward on the linguistic state of the world at the beginning of the 21st century. Author

N88-30460# Congressional Research Service, Washington, DC. Science Policy Research Div.

POLITICAL AND ECONOMIC BARRIERS TO INFORMATION TRANSFER

JANE BORTNICK. In AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 4 p (SEE N88-30458 24-82) Mar. 1988 (AGARD-CP-430) Avail: NTIS HC A06/MF A01

As international computer/communications networks proliferate, the issue of limits to information transfer becomes more critical. Individual businesses and even entire industries depend upon the ability to transfer information on a global basis in a timely and cost-effective basis. Additionally, international cooperation in science and technology involves greater international collaboration and joint efforts. Barriers that threaten this capability ultimately reduce the growth of markets and limit innovation. For this reason, efforts are underway in bilateral and multinational negotiations to reduce barriers and establish consensus guidelines in areas ranging from privacy to trade. Some of the specific limitations to information transfer, including privacy, trade restrictions, national security, and telecommunications regulations are focused on. It also highlights international efforts to reduce these barriers and establish common approaches to facilitate information transfer. Author

82 DOCUMENTATION AND INFORMATION SCIENCE

N88-30461# Saarland Univ., Saarbrücken (Germany, F.R.).
LINGUISTIC-TECHNICAL ASPECTS OF MACHINE TRANSLATION

HARALD H. ZIMMERMANN In AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 7 p (SEE N88-30458 24-82) Mar. 1988
(AGARD-CP-430) Avail: NTIS HC A06/MF A01

To allow comparison of computer aided translation (CAT) and machine translation (MT) systems, essential criteria and typical exponents of the various concepts are presented. Among the most important criteria of differentiation are the following: translation of complete texts (including titles, abstracts) vs lexical aid for translation; all-round translation vs translation of specialized fields and texts; bilingual translation vs multilingual translation; user-oriented vs administrator-oriented expansion of dictionaries and systems; and portability. Included essential criteria for evaluation are: quality of the raw (also called informative) translation; advantages/disadvantages as opposed to human translation; embedding in a user environment (data bases, indexing and retrieval, word processing, electronic publishing); user friendliness; costs of development and installation; and running costs and effects of realization. Author

N88-30462# Defense Technical Information Center, Alexandria, VA.

INFORMATION RETRIEVAL SYSTEMS EVOLVE-ADVANCES FOR EASIER AND MORE SUCCESSFUL USE

GLADYS COTTER In AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 14 p (SEE N88-30458 24-82) Mar. 1988

(AGARD-CP-430) Avail: NTIS HC A06/MF A01

The advances which are being made in information retrieval systems to assist end-users and information specialists to overcome the critical barriers which make it difficult for them to exploit the power of these systems are described. Technology which is being applied to allow users to interact with information retrieval systems with greater ease and more successful results is identified. To illustrate this process, the efforts of the U.S. Defense Technical Information Center to develop and implement an integrated, functional scientific and technical information network are described. This network was purposefully designed to incorporate both end-users and their information management intermediaries in a complementary manner making them resolute partners in the work and its rewards. The uses of technology modules (artificial intelligence, expert systems, gateways, user-friendly interfaces) to overcome user barriers are described. Author

N88-30463# Atlantic Refining Co., Philadelphia, PA. ARCOvision Services.

INFORMATION TECHNOLOGY TO FACILITATE GROUP INTERACTION

CYNTHIA A. SAVAGE In AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 3 p (SEE N88-30458 24-82) Mar. 1988

(AGARD-CP-430) Avail: NTIS HC A06/MF A01

Atlantic Richfield has successfully operated an interactive, full-motion video teleconferencing system since September of 1983. The system, named ARCOvision, is for internal use only and consists of six locations in the United States including Alaska. The implementation, capabilities, equipment, and costs related to the ARCOvision system will be discussed. Author

N88-30464# Department of the Secretary of State, Ottawa (Ontario).

WORDS: KEYS OR BARRIERS TO INFORMATION TRANSFER

SUZANNE RICHER In AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 4 p (SEE N88-30458 24-82) Mar. 1988

(AGARD-CP-430) Avail: NTIS HC A06/MF A01

Terms can create or resolve barriers in the processes pertaining to the transfer of knowledge and the access to information. Selecting words to organize, process, and retrieve data leads to the establishment of hierarchies. The building of thesauri provides for tools enabling the organization of concepts. National and international guidelines were developed for the establishment of monolingual and multilingual thesauri. New words find their way in solid hierarchies. The introduction mechanisms for new words rely

on cross-referencing to already established and recognized terms. Manual and machine indexing provide the same basic tools, machine indexing being, in many cases, more feasible. Standardized terms are compiled in special listings such as the glossaries prepared and published by NATO. The linguistic quality norms of standardized terminologies are limited to the specialized objectives of such terminologies. Terminological barriers are costly and should therefore be reduced in order not to hinder the transfer of knowledge and access to information data. Author

N88-30465# National Scientific and Technical Documentation Center, Brussels (Belgium). Belgian Translation Centre.

LINGUISTIC BARRIERS: TRANSLATION PROBLEMS

I. CLEMENS In AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 6 p (SEE N88-30458 24-82) Mar. 1988

(AGARD-CP-430) Avail: NTIS HC A06/MF A01

Linguistic problems are in close connection with information problems. They therefore are examined jointly in order to solve the terminological problems and to reach the documentary mass. The problems of comprehension of the texts by the specialist are examined as well as the difficulty raised by the translator. Linguistic problems are examined according to characteristics of the unilingual and multilingual countries and according to the groups of languages. The existing means to reduce linguistic barrier and implied institutions are considered from the point of view of the user, and of the translator. The translator is the keyman to overcome linguistic barrier. The translator is confronted with the problems of scientific and technical text comprehension, of search for information and technical terms sources, of adaptation to the modern work methods. The use of data processing provides him some help and multiple possibilities of the translation process. Among the known method of translation, computer-assisted translation seems currently the most performing: use of a PC for translation processes as such, use of computerized dictionaries and bibliographical data bases as multilingual terminology sources reliable and up-to-date. The whole of raised measures makes it possible to reduce linguistic difficulties of the information user and to ensure an effective help to the transfer. Author

N88-30467# National Library of Canada, Ottawa (Ontario).

USING STANDARDS TO BREAK DOWN INFORMATION TRANSFER BARRIERS

CYNTHIA J. DURANCE In AGARD, Barriers to Information Transfer and Approaches Toward Their Reduction 5 p (SEE N88-30458 24-82) Mar. 1988

(AGARD-CP-430) Avail: NTIS HC A06/MF A01

Standards for representing and encoding data as well as standards for the interconnection of systems having different hardware and software are both essential for effective electronic information transfer. To date, although major strides were made internationally on standards in both the data and telecommunications areas, much remains to be done before effective electronic information transfer can take place either nationally or internationally. The difficulties in achieving approved standards internationally are addressed, and some new standard that potentially will have a positive impact on information transfer such as those pertaining to an electronic publishing. It also addresses the Open Systems Interconnection Reference Model, a suite of telecommunications standards which hold great promise for the interconnection of systems with different hardware and software. Finally, the work that was done to date to implement these standards for library and information applications and challenges for the future are discussed. Author

N89-11401# Boeing Computer Services Co., Seattle, WA

AN INFORMAL GLOSSARY OF TERMS USED IN SUPERCOMPUTING, APPENDIX A

K. NEVES In AGARD, Computational Fluid Dynamics: Algorithms and Super Computers 7 p (SEE N89-11395 02-60) Mar. 1988

(AGARD-AG-311) Avail: NTIS HC A09/MF A01

This informal glossary associated with supercomputers evolved casually. The primary draft was made in 1986 by the IEEE Subcommittee on Supercomputing. In addition, terms have been added and revised. Any rapidly advancing field generates its own new terminology. The new terms arise by applying new meanings to older terms as well as through the coining of new terminology. The process is dynamic and often results in dual meanings of

commonly used words and sometimes just plain fuzzy definitions. Nevertheless, it is believed that this tabulation will: (1) help both novices and experts to better communicate, and (2) provide input to more formal dictionary/definition writing processes. Author

N89-11625# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France). Technical Information Panel.

EVALUATING THE EFFECTIVENESS OF INFORMATION CENTRES AND SERVICES

Sep. 1988 93 p Lecture series held in Luxembourg, 5-6 Sep. 1988, in Athens, Greece, 8-9 Sep. 1988, and in Lisbon, Portugal, 12-13 Sep. 1988

(AGARD-LS-160; ISBN-92-835-0479-8; AD-A202498) Avail: NTIS HC A05/MF A01

The current state-of-the-art of evaluating information centers and services is presented in both theoretical and practical perspectives. Case studies are used to demonstrate successful evaluation projects from different countries and to focus on specific evaluation methods and measures. In addition to providing a thorough basis for determining the most appropriate evaluation methods and measures for a given situation and potential problems that can arise in using them, the presentations include discussions of what to do once the evaluation is done. Various strategies are proposed for altering the centers and services so that effectiveness is improved. Political, organizational and practical aspects of evaluation projects are covered so that evaluation is seen from a broader context. For individual titles, see N89-11626 through N89-11632.

N89-11626# King Research, Inc., Rockville, MD.

EVALUATING THE EFFECTIVENESS OF INFORMATION USE
DONALD W. KING and JOSE-MARIE GRIFFITHS In AGARD, Evaluating the Effectiveness of Information Centres and Services 5 p (SEE N89-11625 02-82) Sep. 1988

(AGARD-LS-160) Avail: NTIS HC A05/MF A01

An approach to evaluating the use, usefulness and value of published/recorded information on the work of its users is described. The reading patterns of professionals and the application of information derived from reading is discussed in detail. Several different indicators of productivity of professionals are developed and correlated with the amount of reading that is done. Finally, several different perspectives on the value of information centers to the professionals they serve are presented. Author

N89-11627# Loughborough Univ. of Technology (England).

MEASURES, METHODS AND MODELS EMPLOYED IN EVALUATING THE EFFECTIVENESS OF INFORMATION CENTERS AND SERVICES

A. J. MEADOWS In AGARD, Evaluating the Effectiveness of Information Centres and Services 16 p (SEE N89-11625 02-82) Sep. 1988

(AGARD-LS-160) Avail: NTIS HC A05/MF A01

Evaluating the effectiveness of organizations and of the services they offer always depends on assuming some kind of model. The main purpose of modeling is to abstract elements from real-life activities in such a way that these activities can be more readily understood, and so better organized and planned. Models may be used for a variety of purposes; for example, to pinpoint which parts of a system should be sampled to provide an adequate picture of the whole. The drawback of all models is that they reflect only a part of reality, and so can only be used in a limited context. In consequence, models must be explicitly formulated and their limitations understood before any evaluation exercise is attempted. The model helps decide what performance measures can usefully be made. For example, a qualitative model may not be appropriate for guiding assessment in terms of quantitative performance measures. Both model and measures therefore have been chosen in the light of the desired outcome from the evaluation. The methodology, is, in turn primarily determined by the model and measures chosen. Author

N89-11628# Polytechnic of Central London (England). Information Research Group.

EUROPEAN EXAMPLES OF EVALUATING THE EFFECTIVENESS OF INFORMATION CENTRES AND SERVICES

JOHN MARTYN In AGARD, Evaluating the Effectiveness of Information Centres and Services 15 p (SEE N89-11625 02-82) Sep. 1988

(AGARD-LS-160) Avail: NTIS HC A05/MF A01

There are usually three viewpoints from which an information system, service or product can be evaluated. The first is that of the system or service producers, who will generally be assessing the extent to which their product meets its assigned objectives, and who will be particularly concerned with the improvement of efficiency and effectiveness. Such evaluations do not usually involve comparisons with competing services. The second viewpoint is that of the actual or potential users, whose concern is with the extent to which a system or service meets their perceived needs, and its related cost. This assessment often involves comparisons between services. The third viewpoint, particularly in public-sector operations, is that of the system sponsors, who wish to assess how well a system or service succeeds in meeting policy objectives, some of which may not be explicit. Quantitative evaluative data are often hard to capture, and difficult to interpret. In some European work, a more subjective approach has been taken, using qualitative information supported by such numerical data as may be gathered, to arrive by a judgmental process to an assessment which takes account of the political factors inevitably affecting any evaluation other than the most basic. Author

N89-11629# King Research, Inc., Rockville, MD.

EVALUATING THE PERFORMANCE OF INFORMATION CENTRE STAFF

JOSE-MARIE GRIFFITHS and DONALD W. KING In AGARD, Evaluating the Effectiveness of Information Centres and Services 11 p (SEE N89-11625 02-82) Sep. 1988

(AGARD-LS-160) Avail: NTIS HC A05/MF A01

The framework for evaluation described in 'A Framework for Evaluating the Effectiveness of Information Centres and Services' for evaluating staff performance is used. Information center staff are a major resource affecting the overall performance and effectiveness of services provided. Various measures of staff performance are discussed (including quantities, quality and timeliness of staff outputs), and the relationship between staff performance and the effectiveness of services (from a user perspective) is demonstrated. Finally, alternative methods for measuring staff performance are described. Author

N89-11630# King Research, Inc., Rockville, MD.

EVALUATING PERFORMANCE OF INFORMATION CENTRE OPERATIONS AND SERVICES

JOSE-MARIE GRIFFITHS and DONALD W. KING In AGARD, Evaluating the Effectiveness of Information Centres and Services 8 p (SEE N89-11625 02-82) Sep. 1988

(AGARD-LS-160) Avail: NTIS HC A05/MF A01

Evaluation of information center resources (e.g., staff, equipment, facilities, etc.) is discussed in terms of input costs, output performance, and productivity. Examples of evaluation of information services (e.g., access to technical reports and other publications, online bibliographic searches, published searches, etc.) are presented in terms of their input costs and output performance. The linking of resource attributes or characteristics (e.g., staff competencies, equipment capabilities, facility layout, etc.) to service input costs and output performance (e.g., quality and timeliness of services) is demonstrated. Thus, Center managers can make decisions about resources or allocation of funds involving resources in terms of services involved. A management information system for center management is also described. Author

N89-11631# King Research, Inc., Rockville, MD.

A FRAMEWORK FOR EVALUATING THE EFFECTIVENESS OF INFORMATION CENTRES AND SERVICES

DONALD W. KING and JOSE-MARIE GRIFFITHS In AGARD, Evaluating the Effectiveness of Information Centres and Services 14 p (SEE N89-11625 02-82) Sep. 1988

(AGARD-LS-160) Avail: NTIS HC A05/MF A01

Evaluation is a subject of considerable attention at the current time. Three principal aspects of evaluation and information are

presented here. The first involves the evaluation of information workers and services. The second deals with evaluation from the perspective of users served, their organizations and higher levels of aggregation such as to industries, sectors, the entire nation and all nations. The third aspect is how information and information services affect users. Several levels within information service centers are described. One can perform evaluation at each of these levels (i.e. resource components, activities, services and products, functions and information units). That is, at each level one can measure input of resources (i.e. capital, labor, technology, information, etc.) and output quantities produced. Such output divided by input can provide estimates or indicators of productivity. The output of information services is one of several input resources to users. The extent to which this input affects output and productivity is of considerable interest. As shown in Figure 1 on the next page, the input resources (including information) affect user activities, their functions, their organizations, and so on, up to the point that aggregated information use and subsequent productivity affects national goals. Below we attempt to show how these interrelationships work. First, several definitions are given.

Author

N89-11632# Bell Telephone Labs., Inc., Murray Hill, NJ. Libraries and Information Systems.

EVALUATING FOR INFORMATION CENTER PLANNING

W. DAVID PENNIMAN / In AGARD, Evaluating the Effectiveness of Information Centres and Services 3 p (SEE N89-11625 02-82) Sep. 1988

(AGARD-LS-160) Avail: NTIS HC A05/MF A01

A business-oriented approach to information center planning and evaluation is presented. The need for output measures a quantitative expression of service value is described and a method of planning incorporating these concepts is provided. Both top-down and bottom-up planning responsibilities are identified and the specific steps involved in a business planning process are given. The competitive nature of information service is emphasized throughout.

Author

N89-18478# Software Sciences Ltd., Farnborough (England). **MULTI-LEVEL PARALLEL PROCESSING FOR VERY HIGH PERFORMANCE REAL-TIME DATABASE MANAGEMENT**

PETER R. TILLMAN, RAY GILES, and IAN WAKLEY / In AGARD, Software Engineering and Its Application to Avionics 11 p (SEE N89-18446 11-06) Nov. 1988

(AGARD-CP-439) Avail: NTIS HC A18/MF A01

During the period 1980 to 1984 the software sciences staff, together with the UK MOD research scientists, built and demonstrated a real-time relational database system named ADDAM, which ran up to 50 transactions per second on a network of 16 bit minicomputers. Since then, the company has embarked on a private venture development to scale up the throughput to over 1000 transactions per second. This development has required the adoption of a highly parallel processing architecture. The node software was completely redesigned so that the database can be partitioned in a single node, to enable multiple transactions to run in parallel, or one transaction to run against different parts of the database in parallel. The hardware design utilizes an array of Inmos Transputers which will deliver a nominal performance of 120 mips per node. The overall design of the system and the benefits available from adopting such a solution to the design of military real time systems is described. It also discusses the design issue which the Transputer architecture raises, the database management protocol design and the approach to maintaining database integrity in the face of concurrent parallel transactions.

Author

ECONOMICS AND COST ANALYSIS

Includes cost effectiveness studies.

N88-20179# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.). Helicopter and Military Aircraft Group.

REASONS FOR INCREASING DEVELOPMENT COST OF ROTARY WING AIRCRAFT AND IDEAS TO REVERSE THE TREND

VOLKER VONTEIN / In AGARD, Flight Vehicle Development Time and Cost Reduction 15 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

General cost trends of complex systems, such as helicopters, are described. Then, the influence of requirements and complexity on the cost of helicopters are discussed. After an analysis of cost trends and of negative effects relative to helicopter development cost ideas to reverse the trend are presented. In this context, besides the generally used classical methods of good engineering practice, other methods, such as cost engineering and international cooperation, are dealt with. In summary, good engineering judgment combined with proper planning and management still is the best method to keep costs under control.

Author

N88-20180# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.).

THE JUDGEMENT AND EVALUATION OF LONG-TERM INVESTMENTS DEMONSTRATED BY MEANS OF A CIVIL AIRCRAFT PROGRAM

W. ZABKA / In AGARD, Flight Vehicle Development Time and Cost Reduction 9 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

The economic characteristics of the civil aircraft industry are unique in terms of the magnitude of investment and the risks involved. Civil aircraft programs represent complex risk ventures accomplished in an environment of constantly changing market conditions, competitive actions, and technological alternatives. Economic aspects of the civil aircraft industry to be considered when preparing a decision for a new aircraft program are considered. Subjects discussed are organized under three major sections. The first provides a short overview of the economic realities of the civil aircraft business. The second major section focusses on how to comprehend adequately all these factors in one transparent calculation in order to describe the main criteria milestones in a civil aircraft program, with special emphasis on financial aspects. The third section deals with the separate discussion of the influencing factors and their changes. Special emphasis is placed on the impact of development costs and development lead time.

Author

N88-20183# General Electric Co., Lynn, MA. Turboshift Engine Products Dept.

OPTIMIZING POWERPLANT DESIGN AND DEVELOPMENT CYCLES

LOUIS A. BEVILACQUA and H. GERARD DONOHIE / In AGARD, Flight Vehicle Development Time and Cost Reduction 10 p (SEE N88-20173 12-81) Sep. 1987 (AGARD-CP-424) Avail: NTIS HC A14/MF A01

The cost of engine development programs has been increasing. The time required to complete these programs has also increased, but this is not so clear - nor so dramatic - because the added time has been placed at the front end with R and D and demonstrator programs. Since these tend to reduce the risk of Full Scale Developments the assessment is that the total time required for engine development has not increased significantly. While it is not sure that the increasing cost trend can be reversed - or even slowed down - views as to cause and recommendations are made to control the trend. Also identified are alternatives. In this regard the derivative engine approach is cited as having strong potential for significant reductions in both time and cost.

Author

SPACE RADIATION

Includes cosmic radiation; and inner and outer earth's radiation belts.

N89-17749# Cambridge Univ. (England).
REMOTE SENSING OF INTERPLANETARY SHOCKS USING A SCINTILLATION METHOD
 A. HEWISH In AGARD, Scattering and Propagation in Random Media 6 p (SEE N89-17706 10-31) Mar. 1988
 (AGARD-CP-419) Avail: NTIS HC A23/MF A01


Energetic interplanetary disturbances originating at the Sun cause geomagnetic storms when they reach the Earth. The disturbances affect radio communication, damage electrical power grid networks, increase the atmospheric density and drag on satellites, and are accompanied by showers of energetic particles which present radiation hazards to manned spacecraft. A ground-based method for locating and tracking transients in interplanetary space long before they reach the Earth is described. Continuous observations of transients during a two year period near sunspot maximum have demonstrated the potential of the technique for predicting geomagnetic storms and new information on the zones of the solar disk from which transients originate was given. The latter contradicts some widely held theories in solar-terrestrial physics and shows that a major revision of ideas is needed. Contrary to expectations, it was found that open-magnetic field regions known as coronal holes are the dormant sources of the most powerful interplanetary shocks. This result conflicts with the solar flare theory of geomagnetic storms.

Author

SUBJECT INDEX

AGARD INDEX OF PUBLICATIONS (1986-1988)

Typical Subject Index Listing



The subject heading is a key to the subject content of the document. A brief description of the document, e.g., title or title extension, is included for each subject entry to indicate the subject heading context; these descriptions are arranged under each subject heading in accession number order. The report number helps to indicate the type of document cited. It is given only for complete publications, not for individual papers. The page number identifies the page in the abstract section (Part 1) on which the citation appears. The NASA accession number denotes the number by which the citation is identified on that page.

A

- A-300 AIRCRAFT**
Simulation of fly-by-wire control for civil transport aircraft at the French Centre d'Essais en Vol p 81 N87-23847
Comparison of the results of tests on A300 aircraft in the RAE 5 metre and the ONERA F1 wind tunnels p 17 N89-18849
- A-310 AIRCRAFT**
The accurate measurement of drag in the 8 ft x 8 ft tunnel p 88 N89-18855
- A-320 AIRCRAFT**
Simulation of fly-by-wire control for civil transport aircraft at the French Centre d'Essais en Vol p 81 N87-23847
The use of simulation in the development of the Airbus p 244 N89-20188
The CFM 56-5 on the A-320 at Air France p 53 N89-16793
- ABNORMALITIES**
Aeromedical evaluation and disposition of electrocardiographic abnormalities p 193 N87-24071
Correlation between EEG abnormal activity and aircraft accidents: A long term observation p 208 N88-27719
Detection of latent epilepsy in aircrew candidates p 203 N88-27720
- ABSORPTIVITY**
The effect of particle properties on radiative heat transfer p 109 N88-29941
- ACCELERATED LIFE TESTS**
Composite repair of cocured J-stiffened panels: Design and test verification p 1 N87-20181
- ACCELERATION (PHYSICS)**
Fighter design for human load limits p 41 N88-19451
- ACCELERATION STRESSES (PHYSIOLOGY)**
Fighter design for human load limits p 41 N88-19451
Evoked potential analysis of impact acceleration experiments p 201 N88-27708
EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709
- ACCELERATION TOLERANCE**
Fighter design for human load limits p 41 N88-19451

- Detection of acceleration (+Gz) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710
- ACCELEROMETERS**
ACM: Accelerometer for precision-guided weapons p 93 N89-17607
Design and simulated-crash validation of a dynamic response recorder p 221 N89-18442
- ACCURACY**
Aerodynamic data accuracy and quality: Requirements and capabilities in wind tunnel testing [AGARD-AR-254] p 14 N88-28893
Aerodynamic Data Accuracy and Quality: Requirements and Capabilities in Wind Tunnel Testing [AGARD-CP-420] p 87 N89-16848
Hierarchy of uncertainty sources in transonic wind tunnel testing p 87 N89-16851
An overview of the application of standard measurement uncertainty methodology to propulsion testing p 12 N89-16854
On-line spectrum loading accuracy verification p 184 N89-17292
Numerical accuracy assessment p 166 N89-18613
Overview of CFD methods and comparison with flight aerothermal data p 21 N89-18663
- ACETYLENE**
Large ionic species in sooting acetylene and benzene flames p 107 N88-29932
- ACOUSTIC EMISSION**
Long term possibilities for nondestructive evaluation for US Navy aircraft p 181 N89-17259
- ACOUSTICS**
Acoustic effects on the dynamic of lightweight structures p 183 N87-20372
- ACOUSTO-OPTICS**
Acoustooptic spectrum analyzer using a planar Bragg-cell p 239 N87-13295
- ACQUISITION**
Avionics acquisition, trends and future approaches p 244 N88-20184
Inherent jitter effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A jitter-fighting scheme p 151 N88-18589
- ACTIVE CONTROL**
Active structural controllers emulating structural elements by ICUs p 96 N87-20367
Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674
Active control of helicopter vibration using multiloop self-adaptive control p 75 N88-11660
Minimisation of helicopter vibration through active control of structural response p 75 N88-11662
Structural design requirements for aircraft incorporating active control technology p 41 N88-19453
- ACTUATION**
Jet reaction control system for autonomous precision munition p 92 N87-29482
- ACTUATORS**
Active structural controllers emulating structural elements by ICUs p 96 N87-20367
Multi-axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373
Minimisation of helicopter vibration through active control of structural response p 75 N88-11662
Active and passive side stick controllers: Tracking task performance and pilot control behaviour p 220 N89-18028
- ADA (PROGRAMMING LANGUAGE)**
Application of Ada higher order language to guidance and control [AGARD-LS-146] p 72 N86-30740
Software productivity through Ada engines p 228 N89-18449
Conversion to Ada: Does it really make sense p 229 N89-18453
The state of practice in Ada-based program design languages p 229 N89-18457
Debugging distributed Ada avionics software p 229 N89-18458
Automated Ada code generation for military avionics p 230 N89-18459
Guidelines for evaluation of software engineering tools p 230 N89-18461
Tools for developing real-time embedded systems in Ada: Needs, portability and efficiency p 230 N89-18464

- An avionics software expert system design p 231 N89-18467
Can Ada (MIL-STD-1815A) fly missiles p 231 N89-18473
Ada in embedded avionics systems p 57 N89-18486
- ADAPTATION**
Preadaptation to the stimulus rearrangement of weightlessness: Preliminary studies and concepts for trainer designs p 207 N88-12188
- ADAPTIVE CONTROL**
Measurements of HF propagation parameters for Real-Time Channel Evaluation (RTCE) systems p 123 N86-27575
Adaptive systems in operation p 124 N86-27576
A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739
On a single step technique for adaptive array processing p 129 N87-18741
Adaptive antennas p 134 N87-22865
Minimisation of helicopter vibration through active control of structural response p 75 N88-11662
Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- ADAPTIVE OPTICS**
Optical imagery across atmospheric turbulence p 242 N89-17721
- ADDITIVES**
Modelling the behaviour of additives in gun barrels p 155 N86-29075
- ADHESIVE BONDING**
Thermomechanical testing of stratified materials p 179 N87-17064
Development of field level repairs for composite structures p 1 N87-20177
Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20192
Composite repair material and design development efforts p 3 N87-20188
British Airways experience with composite repairs p 3 N87-20192
- ADHESIVES**
Development of field level repairs for composite structures p 1 N87-20177
- ADJUSTING**
Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 66 N88-16764
- AERIAL RECONNAISSANCE**
MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
ECCH effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
Air-to-air radar flight testing [AGARD-AG-300-VOL-7] p 141 N88-27406
- AERODYNAMIC CHARACTERISTICS**
Shock-wave boundary layer interactions [AGARD-AG-280] p 155 N86-29173
Aerodynamics of aircraft afterbody: Report of the working group on aerodynamics of aircraft afterbody [AGARD-AR-226] p 5 N86-32408
Engine-airframe integration considerations for preliminary air vehicle performance analyses p 31 N87-10068
Computation of Three-Dimensional Boundary Layers Including Separation [AGARD-R-741] p 158 N87-22145
Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable fighter aircraft configurations p 35 N87-24446
The aerodynamics of parachutes [AGARD-AG-295] p 9 N87-26881
Technical evaluation report on the Fluid Dynamics Panel Symposium on aerodynamic and related hydrodynamic studies using water facilities [AGARD-AR-225] p 159 N88-11968
Aerodynamics of Hypersonic Lifting Vehicles [AGARD-CP-426] p 10 N88-13219
The drag of slender axisymmetric cones in rarefied hypersonic flow p 11 N88-13229
Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles p 11 N88-13230
Hypersonic airbreathing propulsion: Evolution and opportunities p 62 N88-13231

AERODYNAMIC COEFFICIENTS

- Hyperersonic aerodynamics Applications for HOTOL p 13 N88-13252
- Nonlinear lift control at high speed and high angle of attack using vortex flow technology p 76 N88-13319
- Aircraft dynamics Aerodynamic aspects and wind tunnel techniques p 39 N88-13320
- Aerodynamic data accuracy and quality Requirements and capabilities in wind tunnel testing p 14 N88-28893
- Aircraft dynamics Aerodynamic aspects and wind tunnel techniques p 14 N88-29731
- Survey on nonlinear effects p 15 N88-29757
- Semi-empirical methods for conventional and unconventional missiles p 15 N88-29758
- Air intake aerodynamics p 15 N88-29762
- Hoffe system model validation p 44 N88-10057
- Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
- Validation of Computational Fluid Dynamics Volume 2 Poster papers p 169 N89-18648
- ### AERODYNAMIC COEFFICIENTS
- Comparison of finite difference calculations of a large region of recirculating flow near an airfoil trailing edge p 6 N87-20218
- Calculations for a generic fighter at supersonic high-lift conditions p 33 N87-20226
- Numerical simulation of the flow field around a complete aircraft p 8 N87-20231
- Design criteria for multi-loop flight control systems p 72 N87-21901
- Accuracy criteria for evaluating supersonic aerodynamic coefficient predictions p 15 N88-29756
- ### AERODYNAMIC CONFIGURATIONS
- Aerodynamics of aircraft afterbody Report of the working group on aerodynamics of aircraft afterbody p 5 N88-32408
- [AGARD-AR-226] p 5 N88-32408
- High altitude, long endurance RPV design technology study p 32 N87-16011
- Applications of Computational Fluid Dynamics in Aerodynamics p 5 N87-20199
- [AGARD-CP-412] p 5 N87-20199
- New numerical techniques in the method of singularities for application to complex three-dimensional configurations p 233 N87-20205
- Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209
- The integration of computational fluid dynamics into the military aircraft design process p 33 N87-20210
- Application of the Navier-Stokes equations to solve aerodynamic problems p 7 N87-20225
- Transonic Navier-Stokes wing solution using a zonal approach Part I Solution methodology and code validation p 7 N87-20228
- Computation of unsteady flows using the point vortex method p 157 N87-22138
- X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
- Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674
- Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
- Lifting bodies An attractive aerodynamic configuration choice for hypersonic vehicles p 39 N88-13248
- General aerodynamic-aerothermodynamic concepts for Hermes p 13 N88-13251
- Fundamentals of fighter aircraft design p 39 N88-13316
- Qualification of a water tunnel for force measurements on aeronautical models p 85 N88-23128
- An experimental study to determine the flow and the subsonic static and dynamic stability characteristics of aircraft operating at high angles-of-attack p 42 N88-23129
- AGARD standard aeroelastic configurations for dynamic response I Wing 445 6 p 42 N88-27193
- [AGARD-R-765] p 42 N88-27193
- Delta wing configurations p 13 N88-28860
- Complex configurations p 86 N88-28861
- Transport-type configurations p 43 N88-28867
- Combat aircraft p 43 N88-28868
- Three dimensional grid generation for complex configurations Recent progress p 226 N88-29313
- [AGARD-AG-309] p 226 N88-29313
- Component adaptive grid generation for aircraft configurations p 226 N88-29316
- Experience with three dimensional composite grids p 227 N88-29324
- Specia Course on Missile Aerodynamics p 14 N88-29755
- [AGARD-R-754] p 14 N88-29755
- Prediction of dynamic derivatives p 15 N88-29761
- Next generation missile design p 16 N88-29766
- Efforts toward the validation of a computational fluid dynamics code for analysis of internal aerodynamics p 169 N89-18643

AERODYNAMIC DRAG

- Aircraft drag prediction and reduction Addendum 1 Computational drag analyses and minimization: mission impossible? p 5 N86-27187
- [AGARD-R-723-ADD-1] p 5 N86-27187
- Analytical and experimental methods used to resolve the aerodynamic results of tests conducted in three test facilities p 17 N89-16850
- Development of testing techniques in a large transonic wind tunnel to achieve a required drag accuracy and flow standards for modern civil transports p 88 N89-16857
- Precision improvement of transport aircraft drag measurements p 17 N89-16858
- ### AERODYNAMIC FORCES
- Measurements of aerodynamic forces on unsteadily moving bluff parachute canopies p 162 N88-21337
- Instantaneous force measurement on a model subjected to rapid control variations p 90 N89-16872
- ### AERODYNAMIC HEATING
- Aerodynamic heating of missiles p 16 N88-29764
- ### AERODYNAMIC INTERFERENCE
- Transonic wind tunnel boundary interference A correction procedure p 88 N89-16861
- ### AERODYNAMIC LOADS
- Combat loads on modern fighters p 30 N86-27276
- [AGARD-R-730] p 30 N86-27276
- Aircraft response to turbulence p 72 N86-30739
- [AGARD-R-738] p 72 N86-30739
- Gust load prediction and alleviation on a fighter aircraft p 72 N86-30741
- [AGARD-R-728] p 72 N86-30741
- The prediction of transonic loading on advancing helicopter rotors p 5 N87-20206
- Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209
- Comparison between 2D transonic flutter calculations in the time and frequency domain p 10 N87-28520
- Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245
- Aeroelastic analysis of modern transport aircraft p 76 N88-13352
- Wing divergence of trimmed aircraft p 76 N88-13354
- Measurement of model deformation in wind tunnels p 77 N88-13358
- Some aspects of aircraft dynamic loads due to flow separation p 40 N88-18588
- [AGARD-R-750] p 40 N88-18588
- Workshop on Design Loads for Advanced Fighters p 41 N88-19449
- [AGARD-R-748] p 41 N88-19449
- The development of maneuver load criteria for agile aircraft p 41 N88-19450
- Structural design requirements for aircraft incorporating active control technology p 41 N88-19453
- The relationship between operational flight maneuver parameters and design parameters p 41 N88-19454
- Manoeuvres by default, by demand and by design p 41 N88-19455
- Design loads for Swedish military aircraft in a twenty years' perspective p 42 N88-19456
- Matching P.S.D. Design loads p 43 N88-20720
- A summary of methods for establishing airframe design loads from continuous gust design criteria p 43 N88-29721
- Status review of atmosphere turbulence and aircraft response p 76 N88-29726
- A summary of atmospheric turbulence measurements with specially-equipped aircraft in the US p 189 N88-29727
- ### AERODYNAMIC STABILITY
- Technical evaluation report of AGARD Technical Evaluation Meeting on Unsteady Aerodynamics Fundamentals and Applications to Aircraft Dynamics [AGARD-AR-222] p 4 N86-27182
- Aircraft response to turbulence p 72 N88-30739
- [AGARD-R-738] p 72 N88-30739
- Identification of dynamic systems - applications to aircraft Part 1. The output error approach p 33 N87-21913
- [AGARD-AG-300-VOL-3-PT-1] p 33 N87-21913
- Analytical and experimental methods used to resolve the aerodynamic results of tests conducted in three test facilities p 17 N89-16850
- ### AERODYNAMIC STALLING
- Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674
- Stall flutter p 72 N87-24404
- ### AERODYNAMICS
- Utilization of Euler codes in nonlinear aerodynamics p 6 N87-20215
- Design criteria for multi-loop flight control systems p 72 N87-21901
- Vortex dynamics A report on work in Germany p 157 N87-22139
- Simulation of impinging shear layers using vortex dynamics p 157 N87-22140
- Vortex dynamics survey of the activity in Italy p 157 N87-22141

SUBJECT INDEX

- Modelling of time-variant flows using vortex dynamics-activities in the Netherlands p 157 N87-22142
- Evaluation of results of boundary-layer calculations with regard to design aerodynamics p 158 N87-22150
- An approach to practical aerodynamic calculations p 158 N87-22151
- Improvement of Combat Performance for Existing and Future Aircraft p 33 N87-22663
- [AGARD-CP-409] p 33 N87-22663
- Evolution of combat performance of the Hawk light combat aircraft p 34 N87-22668
- Aeroelasticity in axial-flow turbomachines Volume 1 Unsteady turbomachinery aerodynamics p 8 N87-24398
- [AGARD-AG-298-VOL-1] p 8 N87-24398
- Linearized unsteady aerodynamic theory p 8 N87-24399
- Classical two-dimensional methods p 8 N87-24400
- Numerical methods for unsteady transonic flow p 8 N87-24403
- Unsteady aerodynamic measurements in flutter research p 8 N87-24405
- Unsteady aerodynamic measurements in forced vibration research p 9 N87-24406
- Unsteady aerodynamic measurements on rotors p 9 N87-24408
- Modeling XV-15 tiltrotor aircraft dynamics by frequency and time-domain identification techniques p 37 N88-11657
- New aerodynamic design of the fenestron for improved performance p 37 N88-11664
- A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655
- Design and aerodynamic performance of a small mixed-flow gas generator turbine p 64 N88-17662
- Aerodynamic performance of a scale-model counter-rotating unducted fan p 65 N88-17666
- Numerical methods for propeller aerodynamics and acoustics at DFVLR p 65 N88-17668
- Analysis of highspeed propellers aerodynamics p 65 N88-17669
- Aerodynamic and Related Hydrodynamic Studies Using Water Facilities p 160 N88-23125
- [AGARD-CP-413] p 160 N88-23125
- Application of high speed holography to aerodynamic and hydrodynamic three-dimensional velocimetry p 163 N88-23144
- Use of water towing tanks for aerodynamics and hydrodynamics p 163 N88-23149
- A new laminar water tunnel to study the transition process in a boundary layer and in a separation bubble and a new tool for industrial aerodynamics and hydrodynamic research p 85 N88-23150
- Aerodynamics of Hypersonic Lifting Vehicles Fluid Dynamics Panel AGARD Symposium p 164 N88-27480
- [AGARD-AR-245] p 164 N88-27480
- Wind tunnel requirements for computational aerodynamics code verification p 90 N89-16860
- ### AEROELASTIC RESEARCH WINGS
- Prediction of wing aeroelastic effects on aircraft life and pitching moment characteristics p 77 N88-13356
- ### AEROELASTICITY
- Static aeroelasticity in combat aircraft p 182 N86-27678
- [AGARD-R-725] p 182 N86-27678
- Aircraft response to turbulence p 72 N86-30739
- [AGARD-R-738] p 72 N86-30739
- Aeroelasticity in axial-flow turbomachines Volume 1 Unsteady turbomachinery aerodynamics p 8 N87-24398
- [AGARD-AG-298-VOL-1] p 8 N87-24398
- Numerical methods for unsteady transonic flow p 8 N87-24403
- Understanding fan blade flutter through linear cascade aeroelastic testing p 9 N87-24407
- Aeroelasticity and optimization in fighter aircraft design p 40 N88-13324
- Static Aeroelastic Effects on High Performance Aircraft p 76 N88-13348
- [AGARD-CP-403] p 76 N88-13348
- Examples of static aeroelastic effects on present combat aircraft projects p 76 N88-13349
- Trends in aeroelastic analysis of combat aircraft p 76 N88-13350
- Static aeroelastic considerations in the definition of design loads for fighter airplanes p 76 N88-13351
- Static aeroelastic effects on the flutter of a supercritical wing p 76 N88-13353
- The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355
- Prediction of wing aeroelastic effects on aircraft life and pitching moment characteristics p 77 N88-13356
- Influence of the static deformation on a wing in the unsteady aerodynamic p 77 N88-13357
- Structural design requirements for aircraft incorporating active control technology p 41 N88-19453
- AGARD standard aeroelastic configurations for dynamic response I Wing 445 6 p 42 N88-27193
- [AGARD-R-765] p 42 N88-27193
- AGARD manual on aeroelasticity in axial-flow turbomachines Volume 2 Structural dynamics and aeroelasticity p 16 N89-10006
- [AGARD-AG-298-VOL-2] p 16 N89-10006

SUBJECT INDEX

- Aeroelastic coupling: An elementary approach p 68 N89-10012
- Aeroelastic formulation for tuned and mistuned rotors p 68 N89-10013
- Fan flutter test p 68 N89-10014
- Aeroelastic thermal effects p 68 N89-10015
- Forced vibration and flutter design methodology p 183 N89-10016
- Requirements and capabilities in unsteady windtunnel testing p 90 N89-16878
- AERONAUTICAL ENGINEERING**
- Technical evaluation report on the Fluid Dynamics Panel Symposium on Applications of Computational Fluid Dynamics in Aeronautics p 159 N87-27958
- [AD-A172209] p 159 N87-27958
- Fundamentals of lighter aircraft design p 39 N88-13316
- The use of the NRC/NAE water facilities in Canadian aeronautical research and development p 85 N88-23132
- The ONERA water tunnels: test possibilities for flow visualization in aeronautical and naval domains p 162 N88-23139
- AERONOMY**
- The high-latitude ionosphere: Geophysical basis p 188 N89-11933
- AEROSOLS**
- Non-linear effects on the atmospheric transmission of high flux electromagnetic beams p 147 N89-17746
- AEROSPACE ENGINEERING**
- The information needs of scientists and engineers in aerospace p 247 N88-28796
- Advanced joining of Aerospace Metallic Materials - conference proceedings p 175 N87-17051
- [AGARD-CP-398] p 175 N87-17051
- The application of diffusion bonding and laser welding in the fabrication of aerospace structures p 176 N87-17054
- Bibliographic networks and microcomputer applications for aerospace and defense scientific and technical information p 248 N87-19923
- [AGARD-CP-398] p 248 N87-19923
- AGARD guide to aerospace and defence technical report series in NATO countries p 197 N87-27391
- [AGARD-R-743] p 197 N87-27391
- Technology development program for twenty-first century aerospace vehicles p 47 N88-23768
- AEROSPACE INDUSTRY**
- Fundamentals of lighter aircraft design p 39 N88-13316
- Requirements and recommendations for the development of theoretical codes and experimental facilities in the near future p 40 N88-13327
- The judgement and evaluation of long-term investments demonstrated by means of a civil aircraft program p 254 N88-20180
- Time and cost reduction through computer integrated manufacture p 225 N88-20191
- Acceleration of prototype development and reduction of cost by multidisciplinary integration p 246 N88-20199
- Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Vehicle Development Time and Cost Reduction [AGARD-AR-244] p 4 N89-10001
- Industrial introduction of the modeling of aeronautical forging and foundry process simulation p 121 N88-15279
- Literature review on the design of mechanically fastened composite joints p 179 N89-17686
- AEROSPACE MEDICINE**
- Short Course on Cardiopulmonary Aspects of Aerospace Medicine p 193 N87-24070
- [AGARD-R-758] p 193 N87-24070
- Aeromedical evaluation and disposition of electrocardiographic abnormalities p 193 N87-24071
- Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072
- Valvular and congenital heart disease in the aviator p 194 N87-24073
- Aeromedical aspects of mitral valve prolapse p 194 N87-24074
- Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075
- Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax p 194 N87-24076
- Hypertension in the aviator p 194 N87-24077
- Coronary risk factors in aerospace medicine p 195 N87-24078
- Cardiopulmonary screening for high-performance flying: Selection and retention issues p 195 N87-24079
- Human respiratory responses during high performance flight p 197 N88-12923
- [AGARD-AG-312] p 197 N88-12923
- Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine [AGARD-CP-432] p 190 N88-27683

- AEROSPACE SYSTEMS**
- Processing science and materials development p 119 N89-15263
- CFD validation philosophy p 166 N89-18611
- AEROSPACE TECHNOLOGY TRANSFER**
- AGARD guide to aerospace and defence technical report series in NATO countries p 197 N87-27391
- [AGARD-R-743] p 197 N87-27391
- AEROSPACE VEHICLES**
- Practical Application of Finite Element Analysis to Aircraft Structural Design [AGARD-LS-147] p 182 N87-16376
- Application of the Navier-Stokes equations to solve aerodynamic problems p 7 N87-20225
- AEROSTATICS**
- Static Aeroelastic Effects on High Performance Aircraft [AGARD-CP-403] p 76 N88-13348
- AEROTHERMODYNAMICS**
- A 3-D Euler solution for hypersonic Mach numbers p 12 N88-13240
- Aerothermodynamics research at NASA Ames p 12 N88-13242
- The off-design performance of hypersonic waveriders p 36 N88-13244
- General aerodynamic-aerothermodynamic concepts for Hermes p 13 N88-13251
- Numerical models for analytical predictions of combustor aerothermal performance characteristics p 108 N88-29935
- Overview of CFD methods and comparison with flight aerothermal data p 21 N89-18663
- AFTERBODIES**
- Aerodynamics of aircraft afterbody: Report of the working group on aerodynamics of aircraft afterbody [AGARD-AR-226] p 5 N86-32408
- Accurate drag estimation using a single component drag model technique p 88 N89-16856
- AFTERBURNING**
- High performance turbofan afterburner systems p 105 N88-29922
- AGE FACTOR**
- Cardiopulmonary screening for high-performance flying: Selection and retention issues p 195 N87-24079
- AGGREGATES**
- Selective extinction of a dispersion of single and aggregated layered spheres p 147 N89-17743
- AH-64 HELICOPTER**
- Inertia welding of nitralloy Ni and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AH-64 military helicopter program p 177 N87-17067
- Apache for the battlefield of today and the 21st century p 38 N88-11670
- AILERONS**
- Development of field level repairs for composite structures p 1 N87-20177
- Damage repair of in-service composite structure: Application to the Mirage 2000 p 2 N87-20184
- AIR**
- Acoustic effects on the dynamic of lightweight structures p 183 N87-20372
- AIR BREATHING ENGINES**
- An overview of the application of standard measurement uncertainty methodology to propulsion testing p 72 N89-16854
- AIR DEFENSE**
- Tactical mission planning and management p 235 N87-16006
- Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21898
- Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations [AGARD-CP-404] p 235 N87-24940
- KRS: A knowledge-based mission planner p 235 N87-24943
- Integrated multisensor targeting p 236 N87-24947
- AIR DROP OPERATIONS**
- Developmental air drop testing techniques and devices [AGARD-AG-300-VOL-6] p 38 N88-12481
- AIR FLOW**
- Laser velocimetry study of stator/rotor interactions in a multi-stage gas turbine compressor p 173 N87-21181
- Nozzle airflow influences on fuel patterning p 105 N88-29916
- AIR INTAKES**
- Acquisition and processing of non-stationary pressure measurements in studies of air intake distortion p 178 N87-21191
- AIR NAVIGATION**
- Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users [AGARD-CP-410] p 25 N87-21881
- The selection of future civil air navigation systems p 25 N87-21882
- Air navigation services and aircraft around the year 2000 p 25 N87-21883
- GPS: Overview and present status p 26 N87-21884

AIR TRAFFIC CONTROLLERS (PERSONNEL)

- Inertial-GPS: A marriage of reason, an analysis p 26 N87-21885
- Communication, Navigation and Surveillance services for the aviation industry using satellite technology p 26 N87-21886
- Microwave Landing System (MLS) area navigation: Computed centerline experiments and system accuracy analysis in an RF environment p 26 N87-21891
- Some experiences in integrating avionics systems on the civil flight deck p 45 N87-21902
- An integrated aircraft navigation and display system utilizing an on-board composite data base p 236 N87-24955
- Generating diagnostic knowledge from a structural and functional description p 232 N88-10813
- A comparison of integrated and separate systems for flight control and navigation p 48 N88-23779
- AIR TO AIR MISSILES**
- Manned air to air combat simulation p 81 N87-23648
- Advances in Air-Launched Weapon Guidance and Control [AGARD-CP-431] p 92 N88-19553
- Effects of closing speed uncertainty on optimal guidance p 92 N88-19556
- Guidance and control of air-launched armaments: An aeroengineer's perspective p 92 N88-19557
- AIR TO SURFACE MISSILES**
- Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems [AGARD-CP-388] p 91 N87-16000
- Advances in Air-Launched Weapon Guidance and Control [AGARD-CP-431] p 92 N88-19553
- Guidance and control of air-launched armaments: An aeroengineer's perspective p 92 N88-19557
- The use of hardware in the loop techniques in the development of a modern air-to-surface missile system p 93 N88-19562
- AIR TRAFFIC CONTROL**
- Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users [AGARD-CP-410] p 25 N87-21881
- Air navigation services and aircraft around the year 2000 p 25 N87-21883
- Possible contributions from the SSR mode 5 data link to the conduct of efficient aircraft operations p 26 N87-21887
- Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21898
- Monopulse secondary radar: Practical realization and achievement: Mode S: The radar of tomorrow p 133 N87-21899
- A practical example of Moving Target Detection (MTD) processing for an air traffic control radar with weather channel p 133 N87-21899
- Microwave Landing System (MLS) area navigation: Computed centerline experiments and system accuracy analysis in an RF environment p 26 N87-21891
- MLS: Its technical features and operational capabilities p 26 N87-21892
- Advanced ATC: An aircraft perspective p 27 N87-21893
- Strategic control to improve efficiency of air traffic management p 27 N87-21894
- A time-based concept for terminal-area traffic management p 27 N87-21895
- Philosophy of applying automation to air traffic control p 27 N87-21896
- Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897
- Next generation of control techniques in advanced TMA p 27 N87-21898
- Exploiting the capabilities of flight management systems in solving the airport arrival problem p 28 N87-21899
- Some experiences in integrating avionics systems on the civil flight deck p 45 N87-21902
- Semi-automatic cross checking between different copies of the same flight plan p 28 N87-21903
- The application of intelligent knowledge based systems to air traffic control p 28 N87-21904
- Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military airspace users p 28 N87-23608
- [AGARD-AR-236] p 28 N87-23608
- Knowledge Based Concepts and Artificial Intelligence Applications to Guidance and Control [AGARD-LS-155] p 74 N88-10806
- An expert system for aircraft conflict resolution in dense airspace p 29 N88-10810
- A rule-based system for arrival sequencing and scheduling in air traffic control p 29 N88-10815
- AIR TRAFFIC CONTROLLERS (PERSONNEL)**
- Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users [AGARD-CP-410] p 25 N87-21881
- Air navigation services and aircraft around the year 2000 p 25 N87-21883
- GPS: Overview and present status p 26 N87-21884

AIR WATER INTERACTIONS

- Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897
- Next generation of control techniques in advanced TMA p 27 N87-21898
- Exploiting the capabilities of flight management systems in solving the airport arrival problem p 28 N87-21899
- The application of intelligent knowledge based systems to air traffic control p 28 N87-21904
- An expert system for aircraft conflict resolution in dense airspace p 29 N88-10810
- A rule based system for arrival sequencing and scheduling in air traffic control p 29 N88-10815

AIR WATER INTERACTIONS

- Wave tilt sounding of tropospheric ducts above the sea p 145 N81-17728
- AIRBORNE EQUIPMENT**
 - ELF/VLF/LF propagation and system design p 124 N87-18705
 - Three generations of software engineering for airborne systems p 230 N89-18465

AIRBORNE SURVEILLANCE RADAR

- Multifunction Radar for Airborne Applications ... conference p 125 N87-18721
- [AGARD-CP-381] p 125 N87-18721
- Multi-mode multistatic for passive/active airborne surveillance p 126 N87-18726
- MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
- ECCM effectiveness of a low side lobe antenna for SAR ground mapping p 127 N87-18730
- Synthetic aperture imaging airborne radar p 127 N87-18731
- High resolution MTI with SAR p 128 N87-18734
- High resolution signal processor for limited aperture multimode radar p 128 N87-18735
- Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739
- MMIC T/R modules for the next generation airborne surveillance platforms p 131 N87-18749
- Electronic scanning antenna for military aircraft of the 1990s p 131 N87-18751
- Air-to-air radar flight testing [AGARD-AG-300-VOL-7] p 141 N88-27406

AIRBORNE/SPACEBORNE COMPUTERS

- Exploiting the capabilities of flight management systems in solving the airport arrival problem p 28 N87-21899
- Microprocessor applications in airborne flight test instrumentation [AGARD-AG-160-VOL-18] p 45 N87-21920
- The impact of future avionics technology on the conduct of air warfare p 45 N87-22673
- An integrated aircraft navigation and display system utilizing an on-board composite data base p 236 N87-24955
- A129 advanced solutions for meeting today's combat helicopter requirement p 38 N88-11669
- Advances in Air-Launched Weapon Guidance and Control [AGARD-CP-411] p 92 N88-19553
- Computer aided tactics for air combat p 214 N88-19559
- The use of hardware-in-the-loop techniques in the development of a modern air-to-surface missile system p 93 N88-19562
- Architecture and role of the Sensor Subsystem in future aircraft weapon systems p 47 N88-23770
- Development of a generic architecture p 48 N88-23774
- Test philosophy of the EH101 integrated avionics p 48 N88-23775
- Modeling of functional specifications for onboard software: Experience with the Rafale avionics system p 48 N88-23777
- The avionics software architecture impact on system architecture p 48 N88-23778
- Design for interoperability (interchangeability) p 50 N88-23789
- Development of an airborne facility for advanced avionics research p 51 N88-23801
- Workshops for the design of avionics systems and the development of onboard software p 51 N88-23802
- A highly reliable computer for airborne applications p 222 N89-10833
- Control of on-board software p 55 N89-18452

AIRCRAFT ACCIDENTS

- Correlation between EEG abnormal activity and aircraft accidents: A long term observation p 208 N88-27719
- Visual related accidents/incidents p 216 N88-29293
- Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness [AGARD-UP-443] p 22 N89-18421
- Regulatory aspect of crashworthiness p 22 N89-18422
- Developments and perspectives at AMD-BA in the field of impact and crash sizing p 23 N89-18427
- Method and means for ground crash testing at the Centre d'Essais Aeronautiques de Toulouse: Application to the SA 341 and AS 332 helicopters p 24 N89-18432
- Design and simulated-crash validation of a dynamic response recorder p 221 N89-18442

AIRCRAFT ANTENNAS

- Determination of antennae patterns and radar reflection characteristics of aircraft [AGARD-AG-300-VOL-4] p 124 N86-30931
- Electronic scanning antenna for military aircraft of the 1990s p 131 N87-18751
- EHF multifunction phased array antenna p 131 N87-18752
- Basic parameters of antennas for aircraft, satellites and missiles p 134 N87-23860
- Aircraft radar antennas p 134 N87-23861
- Aircraft antennas/conformal antennas missile antennas p 134 N87-23862

AIRCRAFT COMMUNICATION

- Communication, Navigation and Surveillance services for the aviation industry using satellite technology p 26 N87-21886
- Possible contributions from the SSR mode S data link to the conduct of efficient aircraft operations p 26 N87-21887
- Operation and performance of an integrated helicopter communication system p 49 N88-23787

AIRCRAFT COMPARTMENTS

- Research simulators for helicopters p 84 N88-11656

AIRCRAFT CONFIGURATIONS

- Numerical grid generation around complete aircraft configurations p 224 N87-20202
- Geometry definition and grid generation for a complete fighter aircraft p 224 N87-20203
- An assessment of the use of low-order panel methods for the calculation of supersonic flows p 224 N87-20204
- Matrices, transonic potential flow calculations about transport aircraft p 5 N87-20208
- Euler solution for a complete fighter aircraft at sub- and supersonic speed p 33 N87-20216
- Calculations for a generic fighter at supersonic high-lift conditions p 33 N87-20226
- High speed viscous flow calculations about complex configurations p 7 N87-20227
- Transonic Navier-Stokes wing solutions using a zonal approach: Part 2 High angle-of-attack simulation p 7 N87-20229
- Numerical simulation of the flow field around a complete aircraft p 8 N87-20231
- X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
- The assessment and evaluation of combat performance improvements p 34 N87-22675
- Integrated Design of Advanced Fighters [AGARD-LS-153] p 35 N87-24445
- Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable fighter aircraft configurations p 35 N87-24446
- Carriage of external stores p 36 N87-24449
- Design optimization of lighter aircraft p 36 N87-24451
- Advances in Guidance and Control Systems and Technology [AGARD-CP-411] p 28 N87-29474
- An examination of the impact of potential advances in component technology for future military engines p 63 N88-17650
- Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
- Flow visualization study of vortex manipulation on fighter configurations at high angles of attack p 161 N88-23130
- Three dimensional grid generation for complex configurations: Recent progress [AGARD-AG-309] p 226 N88-29313
- Lessons learned in the mesh generation for PN/S calculations p 226 N88-29314
- Component adaptive grid generation for aircraft configurations p 226 N88-29316
- Generation of multiple block grids for arbitrary 3D geometries p 226 N88-29317
- Grid generation on and about a cranked-wing fighter aircraft configuration p 226 N88-29318
- Grid generation for an advanced fighter aircraft p 226 N88-29319
- Algebraic grid generation for fighter type aircraft p 227 N88-29320
- Composite grid generation for aircraft configurations with the EAGLE code p 227 N88-29321
- Analytical surfaces and grids p 227 N88-29322
- Mesh generation for industrial application of Euler and Navier Stokes solvers p 227 N88-29323
- Grid generation around transport aircraft configurations using a multi-block structured computational domain p 227 N88-29325
- Wind tunnel predicted air vehicle performance: A review of lessons learned p 87 N89-16852
- Validation of a multi-block Euler flow solver with propeller-streamline flows p 20 N89-18649

AIRCRAFT CONSTRUCTION MATERIALS

- Design for reparability of helicopter composite blades p 33 N87-20176

SUBJECT INDEX

- Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- Integrated design of structures p 34 N87-22669
- Diffusion bonding of metals p 179 N87-29646
- The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355
- AIRCRAFT CONTROL**
 - X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
 - Improved combat performance using relaxed static stability and a spin prevention system (FBIW Jaguar) p 72 N87-22674
 - Computer simulation studies on human control reliability in manual aircraft control: The origin of PIO p 211 N87-23644
 - Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable fighter aircraft configurations p 35 N87-24446
 - Advances in Guidance and Control Systems and Technology [AGARD-CP-411] p 28 N87-29474
 - Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MISA) p 171 N87-29479
 - Automation at the man-machine interface p 211 N87-29504
 - The application of emulation techniques in the analysis of highly reliable, guidance and control computer systems p 73 N88-10798
 - Knowledge Based Concepts and Artificial Intelligence Applications to Guidance and Control [AGARD-LS-155] p 74 N88-10806
 - Overview of AGARD Lecture Series No. 155: Knowledge-based concepts and artificial intelligence applications to guidance and control p 74 N88-10807
 - AI expert system technology issues for guidance and control applications p 74 N88-10808
 - Application of knowledge-based techniques to aircraft trajectory generation and control p 75 N88-10811
 - Towards the unmanned cockpit p 36 N88-10812
 - Mission-oriented flying qualities criteria for helicopter design via in-flight simulation p 37 N88-11652
 - Workshop on Design Loads for Advanced Fighters [AGARD-R-746] p 41 N88-19449
 - Structural design requirements for aircraft incorporating active control technology p 41 N88-19453
 - The relationship between operational flight manoeuvre parameters and design parameters p 41 N88-19454
 - Comparison of the influence of different gust models on structural design p 43 N88-29722
 - Pilot modeling p 217 N88-29736
 - Pilot modeling applications p 217 N88-29737
 - Advances in flying qualities: Concepts and criteria for a mission oriented flying qualities specification p 43 N88-29739
 - A second look at MIL prime flying qualities requirements p 44 N88-29740
 - The role of simulation in flying qualities and flight control system related development p 87 N88-29742
 - Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation [AGARD-AR-249] p 44 N89-12564
 - Instantaneous force measurement on a model subjected to rapid control variations p 90 N89-16872
 - Pilot control devices p 220 N89-18027
- AIRCRAFT DESIGN**
 - Static aeroelasticity in combat aircraft [AGARD-R-725] p 182 N86-27678
 - Aerodynamics of aircraft afterbody: Report of the working group on aerodynamics of aircraft afterbody [AGARD-AR-225] p 5 N86-32408
 - Engine-Airframe Integration for Rotocraft [AGARD-LS-148] p 31 N87-10067
 - Engine-transmission-structural airframe members compatibility p 31 N87-10069
 - High altitude, long endurance RPV design technology study p 32 N87-18011
 - Practical Application of Finite Element Analysis to Aircraft Structural Design [AGARD-LS-147] p 182 N87-16376
 - Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209
 - The integration of computational fluid dynamics into the military aircraft design process p 33 N87-20210
 - Application of the Navier Stokes equations to solve aerodynamic problems p 7 N87-20225
 - Improvement of Combat Performance for Existing and Future Aircraft [AGARD-CP-409] p 33 N87-22663
 - Some development trends in light ground attack aircraft p 34 N87-22666
 - Integrated design of structures p 34 N87-22669
 - Trends in ground-based and in flight simulators for development applications p 81 N87-23645
 - Pivotal simulation in the development of the XV-15 tilt rotor research aircraft p 81 N87-23646
 - Integrated Design of Advanced Fighters [AGARD-LS-153] p 35 N87-24445

SUBJECT INDEX

Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable fighter aircraft configurations p 35 N87-24446

Simulation as a fighter design tool p 35 N87-24447

Fight testing of fighter aircraft p 35 N87-24448

Carriage of external stores p 36 N87-24449

Design optimization for a family of multi-role combat aircraft p 36 N87-24450

Design optimization of fighter aircraft p 36 N87-24451

V/STOL and STOVL fighter design p 36 N87-24452

Advanced fighter design Operational experience and future requirements p 36 N87-24453

The integration and operational suitability of emerging technologies for future fighter aircraft: A pilot's perspective p 36 N87-24454

Rotorcraft Design for Operations [AGARD-CP-423] p 37 N88-11649

The influence of operational requirements on LHX concept formulation p 37 N88-11650

Design requirements for future commercial operations p 37 N88-11651

Mission-oriented flying qualities criteria for helicopter design via in-flight simulation p 37 N88-11652

MBB simulation facilities applied for rotorcraft research p 38 N88-11655

Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems p 37 N88-11663

New aerodynamic design of the fenestron for improved performance p 37 N88-11664

Rotorcraft designs for the year 2000 p 37 N88-11665

Apache for the battlefield of today and the 21st century p 38 N88-11670

The EH-101 integrated project A naval, utility and commercial helicopter system p 38 N88-11672

Special Course on Fundamentals of Fighter Aircraft Design [AGARD-R-740] p 39 N88-13315

Fundamentals of fighter aircraft design p 39 N88-13316

Mission requirements and aircraft sizing p 39 N88-13317

Design of wings and wing/body configurations for transonic and supersonic speeds p 39 N88-13318

Aircraft dynamics Aerodynamic aspects and wind tunnel techniques p 39 N88-13320

Fundamentals of fighter aircraft design Engine intake and afterbody p 40 N88-13322

Aeroelasticity and optimization in fighter aircraft design p 40 N88-13324

Materials for fighter aircraft p 40 N88-13325

Requirements and recommendations for the development of theoretical codes and experimental facilities in the near future p 40 N88-13327

Static Aeroelastic Effects on High Performance Aircraft [AGARD-CP-403] p 78 N88-13348

Static aeroelastic considerations in the definition of design loads for fighter airplanes p 76 N88-13351

The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355

Workshop on Design Loads for Advanced Fighters [AGARD-R-746] p 41 N88-19449

The development of manoeuvre load criteria for agile aircraft p 41 N88-19450

Changes in USAF structural loads requirements p 41 N88-19452

Structural design requirements for aircraft incorporating active control technology p 41 N88-19453

The relationship between operational flight manoeuvre parameters and design parameters p 41 N88-19454

Manoeuvres by demand and by design p 41 N88-19455

Design loads for Swedish military aircraft in a twenty years perspective p 42 N88-19456

Determination of design loads for modern combat aircraft p 42 N88-19457

Interaction between structural considerations and system design in advanced flight controls p 42 N88-19458

Manned simulation: Helpful means to determine and improve structural load criteria p 42 N88-19459

Use of demonstration/validation prototypes Impact on total development costs and times p 45 N88-20194

Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126

The use of wind tunnel data in the design of Canadian aeronautical research and development p 85 N88-23132

The specification and design of a future maritime reconnaissance aircraft p 41 N88-23772

A structured approach to weapon system design p 48 N88-23773

Flight Mechanics Panel Symposium on Rotorcraft Design for Operations Technical evaluation report [AGARD AR-243] p 42 N88-26362

Complex configurations p 86 N88-28861

Transport-type configurations p 43 N88-28867

Combat aircraft p 43 N88-28868

Vision through aircraft transparencies p 216 N88-29294

The Flight of Flexible Aircraft in Turbulence State-of-the-Art in the Description and Modelling of Atmospheric Turbulence [AGARD-R-734-ADD] p 4 N88-29717

Current and proposed gust criteria analysis methods p 78 N88-29718

An FAA overview p 43 N88-29720

Matching P.S.D. Design loads p 43 N88-29720

A summary of methods for establishing airframe design loads from continuous gust design criteria p 43 N88-29721

Comparison of the influence of different gust models on structural design p 43 N88-29722

Measured and predicted responses of the Nord 260 aircraft to the low altitude atmospheric turbulence p 78 N88-29723

A review of measured gust responses in the light of modern analysis methods p 78 N88-29724

Aircraft dynamics Aerodynamic aspects and wind tunnel techniques p 14 N88-29731

Advanced avionics architecture pave pillar p 51 N89-10834

Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation [AGARD-AR-249] p 44 N89-12564

Wind tunnel predicted air vehicle performance: A review of lessons learned p 87 N89-16852

Requirements and capabilities in unsteady wind tunnel testing p 90 N89-16878

Mission planning and proper design: The long range connection p 217 N89-18010

Human limitations in flight and possible remedies p 217 N89-18011

The pilot is not the limiting factor in high performance aircraft p 218 N89-18012

A model to predict visual performance at the man-display interface in the cockpit p 218 N89-18013

Considerations concerning the assessment of pilot workload for complex task conditions p 218 N89-18015

Advances in workload measurement for cockpit design evaluation p 218 N89-18016

Modeling strategy for cockpit data management in modern fighter aircraft p 218 N89-18017

A man-machine interface solution: The EAP glare shields p 219 N89-18018

Towards the next generation fighter cockpit: The EAP experience p 219 N89-18025

Pilot integration and the implications on the design of advanced cockpits p 220 N89-18026

Pilot control devices p 220 N89-18027

Active and passive side stick controllers: Tracking task performance and pilot control behaviour p 220 N89-18028

Matching crew system specifications to human performance capabilities p 220 N89-18031

Integrated control and avionics for air superiority p 221 N89-18032

Responsible requirements definition for combat aircraft in light of uncertainties linked to artificial intelligence and expert systems techniques p 55 N89-18448

CFD applications in design and analysis of the Fokker 50 and Fokker 100 p 19 N89-18629

AIRCRAFT DETECTION

Determination of antennae patterns and radar reflection characteristics of aircraft [AGARD AG-300-VOL 4] p 124 N86-30931

AIRCRAFT ENGINES

Aircraft and Bearing Tribological Systems [AGARD-CP-394] p 174 N86-29236

Aero-engine gears: Manufacturing cracks and their effect on operation p 174 N86-29239

Design and calculation of high speed engine bearings p 174 N86-29241

Requirements on lubrication oil from the view of a helicopter manufacturer p 112 N86-29244

Military aircraft propulsion lubricants: Current and future trends p 113 N86-29249

Aircraft engine oils and their behaviour at high temperatures p 113 N86-29251

Scoring tests of aircraft transmission lubricants at high speeds and high temperatures p 113 N86-29253

Engine-Airframe integration for Rotorcraft [AGARD LS-148] p 31 N87-10067

Engine-airframe integration considerations for preliminary air vehicle performance analysis p 31 N87-10068

Engine airframe integration for rotorcraft Component specifications and qualification p 31 N87-10071

Influence of engine variables on future helicopter systems p 32 N87-10072

Helicopter air intake protection systems p 32 N87-10073

Engine airframe integration for rotorcraft: System specifications and qualification p 32 N87-10074

Advanced instrumentation for Aero Engine Components [AGARD-CP-399] p 118 N87-21170

Acquisition and processing of non-stationary pressure measurements in studies of air intake distortion p 178 N87-21191

Propulsion system technologies for thrust vectoring p 60 N87-22670

Engine Response to Distorted Inflow Conditions conference proceedings [AGARD-CP-400] p 60 N87-24464

The flight evaluation of an advanced engine display and monitoring system p 45 N88-11659

A129 advanced solutions for meeting today's combat helicopter requirement p 38 N88-11669

Advanced Technology for Aero Gas Turbine Components [AGARD-CP-421] p 62 N88-17647

The coming revolution in turbine engine technology p 62 N88-17648

Optimisation of military compressors for weight and volume p 63 N88-17649

An examination of the impact of potential advances in component technology for future military engines p 65 N88-17650

Specification of an engine and its components starting from a consideration of aircraft missions p 63 N88-17651

Application of highly loaded single-stage mixed-flow compressors in small jet engines p 63 N88-17652

A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655

Design and aerodynamic performance of a small mixed-flow gas generator turbine p 64 N88-17662

Development of a plenum chamber burner system for an advanced VTOL engine p 65 N88-17664

Aerodynamic performance of a scale-model counter-rotating unducted fan p 65 N88-17666

Gear systems for advanced turboprops p 65 N88-17667

Optimizing powerplant design and development cycles p 254 N88-20183

AGARD engine disc cooperative test programme [AGARD-R-766] p 67 N88-28926

Fuel effects on flame radiation and hot section durability p 106 N88-29925

Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781

An overview of US Navy engine monitoring system programs and user experience p 69 N89-16782

Engine usage condition and maintenance management systems in the UK armed forces p 69 N89-16783

Canadian forces aircraft condition/health monitoring: Policy, plans and experience p 69 N89-16784

On board life monitoring system Tornado (OLMOSS) p 52 N89-16785

Information management systems for on board monitoring systems p 52 N89-16786

CF-18 engine performance monitoring p 69 N89-16787

B-1B CITS engine monitoring p 52 N89-16788

Engine life consumption monitoring program for RB199 integrated in the on-board life monitoring system p 53 N89-16789

Commercial engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 54 N89-16793

Fault management in aircraft power plant controls p 71 N89-16803

Discrete operating conditions gas path analysis p 54 N89-16810

Need for common AGARD approach and actions p 181 N89-17260

State-of-the-art in non-destructive evaluation of turbine engine parts p 181 N89-17261

AIRCRAFT EQUIPMENT

Backache in aircrew p 193 N87-13958

Back pain in gazelle aircrew p 193 N87-13959

Seat isolation system p 193 N87-13960

About the future of airborne radar p 125 N87-19722

Multimission airborne radar for the 1990s p 126 N87-18724

Multifunction millimetre-wave radar for all-weather ground attack aircraft p 126 N87-18725

Multi-mode multistatic for passive/active airborne surveillance p 126 N87-18726

Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18727

Implementation of an airborne SAR motion compensation system p 127 N87-18728

MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729

Electronic scanning antenna for military aircraft of the 1990s p 131 N87-18751

EHF multifunction phased array antenna p 131 N87-18752

Dual frequency MM-wave radar for anti-air helicopter p 132 N87-18756

Requirements and applications for radar simulations: A standpoint of an airframe company p 133 N87-18759

The Flight of Flexible Aircraft in Turbulence State-of-the-Art in the Description and Modelling of Atmospheric Turbulence [AGARD-R-734] p 4 N88-29725

AIRCRAFT FUEL SYSTEMS

A summary of atmospheric turbulence measurements with specially-equipped aircraft in the US
p 189 N88-29727

AIRCRAFT FUEL SYSTEMS

Pumping systems and flow interfaces for rapid response electronic refuel controls
p 65 N88-17665

AIRCRAFT FUELS

Combustion and fuels in gas turbine engines
[AGARD-CP-422]
p 104 N88-29910

AIRCRAFT GUIDANCE

Improved guidance and control automation at the man-machine interface
[AGARD-AR-228]
p 211 N87-18987

Design criteria for multi-loop flight control systems
p 72 N87-21901

The application of emulation techniques in the analysis of highly reliable guidance and control computer systems
p 73 N88-10798

Knowledge Based Concepts and Artificial Intelligence Applications to Guidance and Control
[AGARD-LS-155]
p 74 N88-10806

Overview of AGARD Lecture Series No. 155 Knowledge-based concepts and artificial intelligence applications to guidance and control
p 75 N88-10807

Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation
[AGARD-AR-249]
p 44 N89-12564

Extreme gusts distribution
p 190 N88-29734

AIRCRAFT INDUSTRY

Cost analysis of aircraft projects
p 3 N87-22664

The use of simulation in the development of the Airbus
p 244 N88-20188

Prototype manufacturing techniques for reducing cost, schedule, and technical risk
p 244 N88-20189

Need for common AGARD approach and actions
p 181 N89-17260

AIRCRAFT LANDING

Aircraft Dynamic Response to Damaged and Repaired Runways
[AGARD-R-739]
p 34 N87-23609

Interpretation in terms of the response of a one degree-of-freedom oscillator to two successive disturbances
p 35 N87-23610

Simulation of aircraft behaviour on and close to the ground. Summary of AGARDograph AG-285
p 80 N87-23640

A rule-based system for arrival sequencing and scheduling in air traffic control
p 29 N88-10815

X-29 integrating advanced technologies for tomorrow's air combat
p 34 N87-22671

AIRCRAFT LAUNCHING DEVICES

Evaluation of DDH and weld repaired F100 turbine vanes under simulated service conditions
p 180 N87-17070

Repair techniques for gas turbine components
p 178 N87-17071

AIRCRAFT MAINTENANCE

The Repair of Aircraft Structures Involving Composite Materials
[AGARD-CP-402]
p 1 N87-20174

Repair procedures for composite parts on the alpha jet
p 1 N87-20175

Design for reparability of helicopter composite blades
p 33 N87-20176

Development of field level repairs for composite structures
p 1 N87-20177

A TR 42 carbon fibre flap repair design and inspection
p 102 N87-20178

Repair of helicopter composite structure techniques and substantiations
p 1 N87-20179

Composite repair of cocured J-stiffened panels. Design and test verification
p 1 N87-20181

Effect of adhesive bonding variables on the performance of bonded C-FRP patch repairs of metallic structures
p 2 N87-20182

Composite repair of cracked aluminum structure
p 2 N87-20183

Damage repair of in service composite structures. Application to the Mirage 2000
p 2 N87-20184

Composite structure repairs carried out according to aeronautical techniques
p 2 N87-20185

Composite repair techniques for J-stiffened composite fuselage structures
p 2 N87-20186

Fibre composite repair of cracked metallic aircraft components. Practical and basic aspects
p 2 N87-20187

Composite repair material and design development efforts
p 3 N87-20188

Battle damage repair of composite structures
p 3 N87-20189

Unconventional approaches to field repair
p 3 N87-20190

Patch repair of corroded aircraft skin areas
p 1 N87-20191

British Airways experience with composite repairs
p 3 N87-20192

AGARD corrosion handbook. Volume 2. Aircraft corrosion control documents. A descriptive catalogue
[AGARD AG-278 VOL 2]
p 110 N87-24553

Maintenance aid system for wide body aircraft
p 70 N89-16805

AIRCRAFT MANEUVERS

Combat loads on modern fighters
[AGARD-R-730]
p 30 N86-27276

Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar)
p 72 N87-22674

Utilization of simulation to support F-14A low altitude high angle of attack flight testing
p 81 N87-23649

The digital colour map simplifies ground attack operations
p 187 N87-24950

Study of anticipation mechanisms in the aeronautical environment
p 207 N87-29505

Developmental airdrop testing techniques and devices
[AGARD-AG-300-VOL-6]
p 38 N88-12481

Trends in aeroelastic analysis of combat aircraft
p 76 N88-13350

Workshop on Design Loads for Advanced Fighters
[AGARD-R-746]
p 41 N88-19449

The development of manoeuvre load criteria for agile aircraft
p 41 N88-19450

Fighter design for human load limits
p 41 N88-19451

The relationship between operational flight manoeuvre parameters and design parameters
p 41 N88-19454

Manoeuvres by default, by demand and by design
p 41 N88-19455

Design loads for Swedish military aircraft in a twenty years' perspective
p 42 N88-19456

Manned simulation. Helpful means to determine and improve structural load criteria
p 42 N88-19459

An interim comparison of operational CG records in turbulence on small and large civil aircraft
p 78 N88-29729

AIRCRAFT MODELS

Practical Application of Finite Element Analysis to Aircraft Structural Design
[AGARD-LS-147]
p 182 N87-16376

Measurement of model deformation in wind tunnels
p 77 N88-13358

AIRCRAFT PARTS

Technology in aircraft systems. Basic principles and applications
p 174 N86-29240

Practical Application of Finite Element Analysis to Aircraft Structural Design
[AGARD-LS-147]
p 182 N87-16376

Operational load measurements on service helicopters
p 37 N88-11658

AIRCRAFT PERFORMANCE

Improvement of Combat Performance for Existing and Future Aircraft
[AGARD-CP-409]
p 33 N87-22663

Evolution of combat performance of the Hawk light combat aircraft
p 34 N87-22668

Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar)
p 72 N87-22674

The assessment and evaluation of combat performance improvements
p 34 N87-22675

Integrated Design of Advanced Fighters
[AGARD-LS-153]
p 35 N87-24445

Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable fighter aircraft configurations
p 35 N87-24446

Design optimization for a family of multi-role combat aircraft
p 36 N87-24450

Advanced fighter design. Operational experience and future requirements
p 36 N87-24453

The integration and operational suitability of emerging technologies for future fighter aircraft. A pilot's perspective
p 36 N87-24454

Helicopter (performance) management
p 38 N88-11666

Aircraft dynamics. Aerodynamic aspects and wind tunnel techniques
p 39 N88-13320

Techniques for performance optimisation in cruise and manoeuvrability
p 39 N88-13321

Requirements and recommendations for the development of theoretical codes and experimental facilities in the near future
p 40 N88-13327

Aeroelastic analysis of modern transport aircraft
p 76 N88-13352

Measured and predicted responses of the Nord 260 aircraft to the low altitude atmospheric turbulence
p 78 N88-29723

Status review of atmosphere turbulence and aircraft response
p 78 N88-29726

Aircraft dynamics. Aerodynamic aspects and wind tunnel techniques
p 14 N88-29731

AIRCRAFT PILOTS

Backache and Back Discomfort - conference
[AGARD-CP-378]
p 190 N87-13932

Low back pain and narrowed disc spaces in fighter pilots
p 191 N87-13937

Relationship between backache and flying duty in jet and prop-pilots demonstrated by a flying wing
p 191 N87-13938

Postural fatigue and the backache of helicopter pilots
[DCIEM-85-R-30]
p 210 N87-13953

Muscle fatigue in static and vibrational seating environments
p 210 N87-13954

Lower back pain in helicopter pilots. Epidemiological factors
p 210 N87-13955

Vibration measurements on helicopter aircrew. A new approach
p 210 N87-13956

Backache in aircrew
p 193 N87-13958

Back pain in gazelle aircrew
p 193 N87-13959

Some experiences in integrating avionic systems on the civil flight deck
p 194 N87-24072

Aeromedical evaluation and disposition of electrocardiographic abnormalities
p 193 N87-24071

Noninvasive methods for the detection of coronary artery disease in aviators. A stratified Bayesian approach
p 194 N87-24072

Valvular and congenital heart disease in the aviator
p 194 N87-24073

Aeromedical aspects of mitral valve prolapse
p 194 N87-24074

Pulmonary physiology and pulmonary function testing in aerospace medicine
p 194 N87-24075

Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax
p 194 N87-24076

Hypertension in the aviator
p 194 N87-24077

Coronary risk factors in aerospace medicine
p 195 N87-24078

Cardiopulmonary screening for high performance flying. Selection and retention issues
p 195 N87-24079

Application of knowledge-based techniques to aircraft trajectory generation and control
p 75 N88-10811

Human respiratory responses during high performance flight
[AGARD-AG-312]
p 197 N88-12923

AIRCRAFT POWER SUPPLIES

Multifunctional requirements for a gearbox secondary power system in a modern fighter aircraft and its components and interface requirements
p 174 N86-29243

AIRCRAFT PRODUCTION

Economical manufacturing and inspection of the electron-beam-welded Tornado wing box
p 176 N87-17055

Diffusion bonding in the manufacture of aircraft structure
p 176 N87-17057

Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program
p 177 N87-17067

Flight Vehicle Development Time and Cost Reduction
[AGARD-CP-424]
p 243 N88-20173

Risk reduction cost avoidance for full scale development begins with concept formulation
p 243 N88-20174

Development savings through parametric modeling of program costs
p 243 N88-20175

Picking winners. Parametric cost estimating and project management
p 243 N88-20176

Parametric study of the total cost of aircraft modernization in terms of development and equipment series costs
p 243 N88-20177

The increased time and cost of development. Causes and (some) remedies
p 243 N88-20178

The judgement and evaluation of long term investments demonstrated by means of a civil aircraft program
p 254 N88-20180

Development cost reduction using integrated CAE-CAD-CAM techniques
p 225 N88-20162

Structural materials. The changing scene
p 102 N88-20190

Schedule and cost control of development
p 245 N88-20196

People, procedures, performance. The keys to improving the development environment
p 245 N88-20197

The effects of two Carucci initiatives: concurrency and streamlining, on the test and evaluation phase of system acquisitions
p 245 N88-20198

Acceleration of prototype development and reduction of cost by multidisciplinary integration
p 246 N88-20199

Organization of helicopter development activities with a view toward reduction of costs and cycles
p 246 N88-20200

The influence of infrastructure on the costs and timescales of collaborative programmes
p 246 N88-20201

Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Vehicle Development Time and Cost Reduction
[AGARD-AR-244]
p 4 N89-10001

AIRCRAFT RELIABILITY

Reliability of finite element methods in North America
[AGARD-R-748]
p 183 N88-11139

The development of manoeuvre load criteria for agile aircraft
p 41 N88-19450

The Flight of Flexible Aircraft in Turbulence. State-of-the-Art in the Description and Modeling of Atmospheric Turbulence
[AGARD R-734 ADD]
p 4 N88-29717

Current and proposed gust criteria and analysis methods. An FAA overview
p 78 N88-29718

SUBJECT INDEX

- Re-assessment of gust statistics using CAADRP data p 78 N88-29732
- Acquisition of gust statistics from AIDS-recorded data p 190 N88-29733
- Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness [AGARD-CP-443] p 22 N89-18421
- Evolving crashworthiness design criteria p 22 N89-18423
- Crashworthiness design methods applicable at concept stage p 22 N89-18424
- Crashworthiness activities on MBB helicopters p 23 N89-18425
- The design of helicopter crashworthiness p 23 N89-18426
- Developments and perspectives at AMD-BA in the field of impact and crash sizing p 23 N89-18427
- Full scale helicopter crash testing p 23 N89-18428
- Crushing behaviour of helicopter subfloor structures p 23 N89-18429
- Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430
- Crashworthy design of aircraft subfloor structural components p 24 N89-18431
- Crashworthiness of aircraft structures p 24 N89-18436
- Predicting crash performance p 25 N89-18438
- AIRCRAFT SAFETY**
- Semi-automatic cross checking between different copies of the same flight plan p 28 N87-21903
- Some approaches to the design of high integrity software p 73 N88-10799
- Reliability of finite element methods in North America [AGARD-R-748] p 183 N88-11139
- Corrosion in avionics and associated equipment, cause, effect and prevention p 47 N88-13335
- The development of manoeuvre load criteria for agile aircraft p 41 N88-19450
- The Flight of Flexible Aircraft in Turbulence State-of-the-Art in the Description and Modeling of Atmospheric Turbulence [AGARD-R-734-ADD] p 4 N88-29717
- Regulatory aspect of crashworthiness p 22 N89-18422
- Design and simulated-crash validation of a dynamic response recorder p 221 N89-18442
- AIRCRAFT SPIN**
- Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674
- Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
- AIRCRAFT STABILITY**
- Technical evaluation report of AGARD Technical Evaluation Meeting on Unsteady Aerodynamics Fundamentals and Applications to Aircraft Dynamics [AGARD-AR-222] p 4 N86-27182
- Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674
- Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable fighter aircraft configurations p 35 N87-24446
- Examples of static aeroelastic effects on present combat aircraft projects p 76 N88-13349
- Some aspects of aircraft dynamic loads due to flow separation p 40 N88-18588
- A second look at MIL prime flying qualities requirements p 44 N88-29740
- AIRCRAFT STRUCTURES**
- AGARD Corrosion Handbook Volume 1 Corrosion, causes and case histories [AGARD-AG-278-VOL-1] p 110 N86-18374
- The influence of large-scale computing on aircraft structural design p 31 N86-30726
- Economical manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055
- Diffusion bonding in the manufacture of aircraft structure p 176 N87-17057
- The Repair of Aircraft Structures Involving Composite Materials [AGARD-CP-402] p 1 N87-20174
- Composite repair of cracked aluminum structure p 2 N87-20183
- Damage repair of in-service composite structures Application to the Mirage 2000 p 7 N87-20184
- Composite structure repairs carried out according to aeronautical techniques p 2 N87-20185
- Fibre composite repair of cracked metallic aircraft components. Practical and basic aspects p 2 N87-20187
- Battle damage repair of composite structures p 3 N87-20189
- Cost analysis of aircraft projects p 3 N87-22664
- Integrated design of structures p 34 N87-22669

- Design optimization for a family of multi-role combat aircraft p 36 N87-24450
- Materials for lighter aircraft p 40 N88-13325
- Changes in USAF structural loads requirements p 41 N88-19452
- Manoeuvres by default, by demand and by design p 41 N88-19455
- Structural materials The changing scene p 102 N86-20190
- Design manual for impact damage tolerant aircraft structure, addendum [AGARD-AG-238-ADD] p 42 N88-27185
- Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687
- Joining of carbon fiber composite with fasteners p 103 N89-17701
- Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433
- Crashworthiness of aircraft structures p 24 N89-18436
- Crash simulation and verification for metallic sandwich and laminate structures p 25 N89-18437
- Predicting crash performance p 25 N89-18438
- AIRCRAFT SURVIVABILITY**
- Navy technology requirements for unmanned airborne vehicles p 32 N87-16002
- Some development trends in light ground attack aircraft p 34 N87-22666
- Simulation of an integrated flight/line control system during air-to-ground gunnery attack p 34 N87-22672
- Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness [AGARD-CP-443] p 22 N89-18421
- Evolving crashworthiness design criteria p 22 N89-18423
- Crashworthiness activities on MBB helicopters p 23 N89-18425
- The design of helicopter crashworthiness p 23 N89-18426
- AIRFOIL PROFILES**
- Short duration flow establishment on a profile in a water-Ludwig Tunnel p 161 N88-23134
- Reynolds number effects in transonic flow [AGARD-AG-303] p 17 N89-16760
- A critical assessment of wind tunnel results for the NACA 0012 airfoil p 17 N89-16847
- Precision improvement of transport aircraft drag measurements p 17 N89-16848
- Wind tunnel experiments on airfoil models for the assessment of computational flow methods p 16 N89-18614
- Parametric study of grid size, time step and turbulence modeling on Navier-Stokes computations over airfoils p 18 N89-18615
- Comparative study of calculation procedures for viscous flows around airfoils in the transonic regime p 166 N89-18617
- Accuracy study of transonic flow computations for three dimensional wings p 19 N89-18628
- AIRFOILS**
- Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20200
- Comparison of finite difference calculations of a large region of recirculating flow near an airfoil trailing edge p 6 N87-20218
- Zonal solutions for airfoils using Euler boundary-layer and Navier-Stokes equations p 6 N87-20219
- Numerical viscous-inviscid interaction method for internal separated flows and shock wave-boundary layer interaction p 156 N87-21939
- Computational tools for simulation methodologies p 88 N88-28865
- Aeroelastic thermal effects p 88 N89-10015
- Wind tunnel-sidewall boundary-layer effects in transonic airfoil testing-some correctable, but some not p 89 N89-16864
- Computerized thermographic technique for the detection of boundary layer separation p 18 N89-16876
- AIRFRAMES**
- Combat loads on modern fighters [AGARD-R-730] p 30 N86-27276
- Crashworthiness of airframes p 22 N86-30709
- [AGARD-R-737] The influence of large-scale computing on aircraft structural design p 31 N86-30726
- [AGARD-R-726] Engine Airframe Integration for Rotorcraft [AGARD-LS-148] p 31 N87-10067
- Engine airframe integration for rotorcraft Component specifications and qualification p 31 N87-10071
- Influence of engine variables on future helicopter systems p 32 N87-10072
- Engine airframe integration for rotorcraft System specifications and qualification p 32 N87-10074
- Rotorcraft wing Progress and potential [AGARD-AR-223] p 32 N87-15966
- Carriage of external stores p 36 N87-24449
- Fundamentals of lighter aircraft design Engine intake and afterbody p 40 N88-13322

- Design manual for impact damage tolerant aircraft structure, addendum [AGARD-AG-238-ADD] p 42 N88-27185
- A summary of methods for establishing airframe design loads from continuous gust design criteria p 43 N88-29721
- AIRSPACE**
- Advanced ATC An aircraft perspective p 27 N87-21893
- ALERTNESS**
- Enhancement of performance Operational considerations p 195 N87-25710
- The evaluation of vigilance in studies of aeronautical pharmacology p 196 N87-25716
- Homeostatic, entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25718
- Side effects of hypnotic benzodiazepines on the vigilance and efficiency of personnel after awakening p 196 N87-25719
- Sedating and non-sedating sleeping aids in air operation p 197 N87-25720
- FB-111A aircrew use of temazepam during surge operations p 197 N87-25721
- The application of non-stationary data analysis techniques in the identification of changes in the electroencephalogram associated with the onset of drowsiness p 198 N88-27688
- ALGEBRA**
- Algebraic grid generation for lighter type aircraft p 227 N88-29320
- Composite grid generation for aircraft configurations with the EAGLE code p 227 N88-29321
- Restructuring of basic linear algebraic algorithms chapter 5 p 228 N89-11399
- ALGORITHMS**
- Internal ballistics of small arms Particular problems Part 2 Thermodynamic model, powder parameters, initiation p 154 N86-29022
- Dynamics and signal processing algorithms for high frequency of recurrence radar modes p 129 N87-18738
- Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739
- On a single step technique for adaptive array processing p 129 N87-18741
- A general solution for the synthesis of binary sequences with desired correlation sequence p 130 N87-18743
- Using the boundary layer equations in three-dimensional viscous flow simulation p 155 N87-20222
- Transonic Navier-Stokes wing solution using a zonal approach Part 1 Solution methodology and code validation p 7 N87-20228
- Integrated multisensor targeting p 236 N87-24947
- Advances in Guidance and Control Systems and Technology [AGARD-CP-411] p 28 N87-29474
- A graphical aid to IKSBS program development p 224 N87-29521
- Driving mechanism of unsteady separation-shock motion in hypersonic interactive flow p 10 N88-13226
- Identification of microwave line-of-sight multipath components p 139 N88-19665
- Computational Fluid Dynamics Algorithms and Supercomputers [AGARD-AG-311] p 223 N89-11395
- Algorithm and general software considerations p 228 N89-11397
- Vectorization of FORTRAN programs at do-loop level p 228 N89-11398
- Computational fluid dynamics and supercomputers chapter 6 p 165 N89-11400
- Robust algorithm synchronizes mode changes in fault tolerant asynchronous architectures p 231 N89-18475
- ALIGNMENT**
- Alignment verification procedures p 184 N89-17201
- ALL-WEATHER AIR NAVIGATION**
- Multifunction millimetre wave radar for all-weather ground attack aircraft p 126 N87-18724
- ALLOYS**
- Superplasticity [AGARD-LS-154] p 111 N87-29641
- Superplasticity An overview p 111 N87-29642
- Superplastic sheet forming NATO AGARD lecture series on superplasticity p 111 N87-29643
- Bulk forming of superplastic alloys p 111 N87-29644
- Cavitation and superplasticity p 111 N87-29645
- ALPHA JET AIRCRAFT**
- Repair procedures for composite parts on the alpha jet p 1 N87-20175
- ALTITUDE**
- Collision probability of cruise missiles flown in formation p 91 N87-16007
- ALTITUDE CONTROL**
- Strategic control to improve efficiency of air traffic management p 27 N87-21894
- ALTITUDE TESTS**
- Rocket altitude test facilities register [AGARD-AG-291] p 91 N87-24489

ALUMINUM

ALUMINUM

Composite repair of cracked aluminum structure p 2 N87-20183

ALUMINUM ALLOYS

The application of diffusion bonding and laser welding in the fabrication of aerospace structures p 176 N87-17054

The welding of aluminum alloys: A new technology in space applications p 176 N87-17056

Diffusion bonding in the manufacture of aircraft structure p 176 N87-17057

Diffusion bonding of Al alloys in the solid state p 177 N87-17058

Welding of aluminum castings p 177 N87-17068

Patch repair of corroded aircraft skin areas p 3 N87-20191

Diffusion bonding of metals p 179 N87-29646

The manufacture of superplastic alloys p 119 N87-29649

Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270

Short-Crack Growth Behaviour in an Aluminum Alloy An AGARD Cooperative Test Programme p 184 N89-17287

Short-crack growth behaviour in an aluminum alloy. An AGARD cooperative test program p 184 N89-17288

Microstructure examination of core-programme material p 184 N89-17289

Long-crack growth rate data: Constant amplitude and FALSTAFF loading p 185 N89-17295

Long-crack growth rate data: Gaussian loading p 185 N89-17296

A study to optimize the CFRP-Al mechanical joint in order to reduce electrical resistance p 154 N89-17697

Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 132 N89-17696

AMMONIUM NITRATES p 115 N86-29064

AMMUNITION p 115 N86-29064

Experimental study of the ignition of explosive charges using visualization of the phenomena p 116 N86-29073

Ignition of high-performance gun ammunition p 116 N86-29077

AMPLIFICATION p 140 N86-19671

AMPLITUDE MODULATION p 140 N86-19671

Fiber optic device for temperature remote sensing p 237 N87-13280

AMPLITUDES p 140 N86-19672

Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N86-19672

ANALOG CIRCUITS p 153 N88-10652

OCALUS: An expert system for analog circuit maintenance p 153 N88-10652

ANALOG DATA p 153 N88-10652

Analog signal conditioning for flight test instrumentation (AGARD AG-160 VOL-17) p 45 N86-29816

ANGIOGRAPHY p 194 N87-24072

Noninvasive methods for the detection of coronary artery disease in animals: A stratified Bayesian approach p 194 N87-24072

ANGLE OF ATTACK p 42 N88-23129

Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649

An experimental study to determine the flow and the subsonic static and dynamic stability characteristics of aircraft operating at high angles-of-attack p 42 N88-23129

Flow visualization study of vortex manipulation on higher configurations at high angles of attack p 161 N88-23130

Investigation on the movement of vortex burst position with dynamically changing angle of attack for a schematic delta wing in a watertunnel with correlation to similar studies in windtunnel p 163 N88-23152

Experiments to investigate the vortices shed from a submarine-like body of revolution p 164 N88-23156

ANIK SATELLITES p 99 N87-26938

The effects of electrostatic discharge phenomena on Telestar's domestic communications satellite p 99 N87-26938

ANISOTROPIC MEDIA p 147 N89-17739

Modeling electromagnetic wave propagation through a strongly-fluctuating ionized medium by the phase screen method p 147 N89-17739

ANISOTROPIC PLATES p 186 N89-17690

Struts in pin-loaded anisotropic plates p 186 N89-17690

ANNULAR DUCTS p 20 N89-18644

Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18644

ANNULAR FLOW p 20 N89-18644

Application of Doppler and transit laser anemometry in small turbomachines p 172 N87-21180

Three dimensional flow p 8 N87-24402

Unsteady aerodynamic measurements in flutter research p 8 N87-24405

Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18644

ANOMALIES p 189 N89-17750

Magnetic storm effects on F layer irregularities near the auroral oval p 189 N89-17750

Specular scatter: A new mechanism for ionospheric backscatter p 189 N89-17751

Ionospheric scintillations and in-situ measurements at an auroral location in the European sector p 189 N89-17752

ANTENNA ARRAYS p 131 N87-18752

Angular super-resolution with array antennas p 131 N87-18752

Application to seeker heads p 131 N87-18752

On a single step technique for adaptive array processing p 129 N87-18741

Basic parameters of antennas for aircraft, satellites and missiles p 134 N87-23860

Adaptive antennas p 134 N87-23865

MIC technology for phased arrays p 135 N87-23866

ANTENNA DESIGN p 131 N87-18752

EHF multifunction phased array antenna p 131 N87-18752

Microwave Antennas for Avionics (AGARD-15-151) p 134 N87-23859

Aircraft radar antennas p 134 N87-23861

Antennas/conformal antennas p 134 N87-23862

Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863

Millimeter wave antennas for avionics p 134 N87-23864

Adaptive antennas p 134 N87-23865

MIC technology for phased arrays p 135 N87-23866

Printed circuit antenna technology p 153 N87-23867

ANTENNA FEEDS p 131 N87-18752

EHF multifunction phased array antenna p 131 N87-18752

ANTENNA RADIATION PATTERNS p 123 N86-27572

Equipment: Antenna systems p 123 N86-27572

Determination of antenna patterns and radar reflection characteristics of aircraft p 124 N86-30931

Basic parameters of antennas for aircraft, satellites and missiles p 134 N87-23861

Aircraft radar antennas p 134 N87-23861

Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863

Millimeter wave antennas for avionics p 134 N87-23864

Adaptive antennas p 134 N87-23865

ANTENNAS p 123 N86-27572

Equipment: Antenna systems p 123 N86-27572

Numerical modeling: Integral equation method p 137 N88-11919

Experiments: Test range facilities: part 2 p 138 N88-11921

ANTHROPOMETRY p 191 N87-13442

Automatic research on optimal posture p 191 N87-13442

Anthropometric study of the outward curve of the spine for various reference positions p 191 N87-13443

Measurements of change of stature in the assessment of static and dynamic spinal loading p 193 N87-13957

Design and simulated-crash validation of a dynamic response recorder p 221 N89-12442

ANTISHIP MISSILES p 44 N89-10056

Simulation with real elements of Exocet anti-ship missiles p 44 N89-10056

ANTITANK MISSILES p 92 N88-19555

An investigation of steep descent guidance for terrainally-guided submunitions p 92 N88-19555

APPLICATIONS PROGRAMS (COMPUTERS) p 223 N89-10837

Simulation of multistatic and backscattering cross-sections for airborne radar p 132 N87-18757

A numerical study of the 3D flowfield in a transonic compressor rotor with a modeling of the tip clearance flow p 59 N87-21943

Comparison between inverse designed (PVD) airfoils and standard series airfoils for high loaded axial turbine nozzle application p 60 N87-21951

Interpretation in terms of the response of a one degree-of-freedom oscillator to two successive disturbances p 35 N87-23610

QARPA's Airland Battle Management Program and USAF's Tactical Expert Mission PLAnner (TEMPAR) p 235 N87-24942

Experiences using the Mark IV supersonic hypersonic arbitrary body program p 13 N88-13249

Testing complex avionics software: A practical experience p 50 N88-23794

Accuracy requirements and benchmark experiments for CFD validation p 166 N89-18612

Reliability and validity of CFD codes: Flight and wind tunnel comparison p 167 N89-18626

Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639

APPROACH p 26 N87-21892

MLS: Its technical features and operational capabilities p 26 N87-21892

APPROACH CONTROL p 25 N87-21881

Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users (AGARD-CP-410) p 25 N87-21881

MLS: Its technical features and operational capabilities p 25 N87-21892

Advanced ATC: An aircraft perspective p 27 N87-21893

Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897

Next generation of control techniques in advanced TMA p 27 N87-21896

Exploiting the capabilities of flight management systems in solving the airport arrival problem p 28 N87-21899

APPROXIMATION p 109 N88-29944

Numerical modeling of premixed flames in gaseous media p 109 N88-29944

Approximate stress-intensity factors for a surface crack and through crack at a semi-circular notch p 185 N89-17294

On functional approach to random wave propagation problems p 231 N89-17471

Accelerated convergence for synchronous approximate agreement p 231 N89-18474

ARABSAT p 99 N87-26956

Spacecraft protection against electrostatic discharge application to the ARABSAT spacecraft p 99 N87-26956

ARC DISCHARGES p 99 N87-26956

Polar-auroral charging of the space shuttle and EVA astronaut p 94 N87-26962

ARC WELDING p 179 N87-17062

Weld quality monitor and control system p 179 N87-17062

A real time vision system for robotic arc welding p 177 N87-17066

ARCHITECTURE p 51 N89-10834

Advanced avionics architecture pave pillar p 51 N89-10834

ARCHITECTURE (COMPUTERS) p 129 N87-18739

Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739

Design criteria for multi-loop flight control systems p 12 N87-21901

The impact of future avionics technology on the conduct of air warfare p 45 N87-27673

Radar simulators p 82 N87-23671

Machine architectures for artificial intelligence computing p 222 N87-24348

New technology impacts on future avionics architectures p 45 N87-24949

Fault tolerant considerations and methods for guidance and control systems p 73 N88-10796

(AGARD AG-283) p 73 N88-10796

An expert system for aircraft conflict resolution in dense airspaces p 29 N88-10810

Architecture and role of the Sensor Subsystem in future aircraft weapon systems p 47 N88-23770

Rapid prototyping of complex avionics architectures p 47 N88-23771

Development of a generic architecture p 48 N88-23774

Test philosophy of the E1101 integrated avionics p 48 N88-23775

The avionics software architecture impact on system architecture p 48 N88-23778

A software life cycle support environment p 225 N88-23800

Computing system configuration for fighter aircraft flight control systems p 79 N89-10832

Data and signal processing architectures for future avionics p 52 N89-10835

Hq's speed parallel processing networks for advanced architectures p 223 N89-10837

Hardware architecture: chapter 2 p 223 N89-11396

Algorithm and general software considerations p 228 N89-11397

Software Engineering and its Application to Avionics (AGARD-CP-439) p 55 N89-18446

On the conditions and limits of user intervention in delivered software manufacturers viewpoint p 229 N89-18451

Robust algorithm synchronizes mode changes in fault tolerant asynchronous architectures p 231 N89-18475

Functional programming languages and modern multiprocessor architectures: The EMSP example p 231 N89-18480

ARCTIC REGIONS p 148 N89-18569

VLF radio noise p 148 N89-18569

ARMED FORCES (FOREIGN) p 47 N88-13335

Corrosion in avionics and associated equipment: cause, effect and prevention p 47 N88-13335

SUBJECT INDEX

ARTIFICIAL INTELLIGENCE

- Guided stand-off weapons and the evaluation of means for launch calculation. The application of new techniques p 235 N87-16009
- Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations [AGARD-CP-404] p 235 N87-24940
- The use of knowledge-based systems techniques in ESM processing p 235 N87-24941
- DARPA's AirLand Battle Management Program and USAF's Tactical Expert Mission Planner (TEMPLAR) p 235 N87-24942
- KRS: A knowledge-based mission planner p 235 N87-24943
- Decision aid for threat penetration analysis p 235 N87-24944
- Artificial intelligence and its impact on combat aircraft p 232 N87-24945
- Machine architectures for artificial intelligence computing p 222 N87-24946
- Advanced information management and decision making in Airborne Early Warning and Control (AEW&C) training systems p 251 N89-18456
- Application of knowledge-based techniques to aircraft trajectory generation and control p 75 N88-10811
- Information retrieval systems evolve: advances for easier and more successful use p 252 N88-30462
- Responsible requirements definition for combat aircraft in light of uncertainties linked to artificial intelligence and expert systems techniques p 55 N89-18448
- Formalizing a theory of real-time software specification p 229 N89-18456
- Three generations of software engineering for airborne systems p 230 N89-18465
- Avionics expert systems p 56 N89-18469
- Real time expert system for onboard radar identification p 56 N89-18481
- Artificial intelligence in HF communication systems p 150 N89-19380

ARTIFICIAL SATELLITES

- Low frequency vibration testing on satellites p 96 N87-20054
- Satellite in-situ probing p 142 N89-11939

ASSEMBLING

- Improvement of specific fastening elements for assembling composite structures p 186 N89-17694

ASSESSMENTS

- Measuring the value of information and information systems, services and products p 247 N86-28799
- The practical assessment of pilot workload [AGARD-AG-282] p 212 N87-30054
- Investigation of workload measuring techniques: A theoretical and practical framework p 214 N87-30069

ASTHMA

- Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax p 194 N87-24076

ASTRONOMICAL PHOTOGRAPHY

- Qualification of the faint object camera p 170 N87-20359

ATELECTASIS

- Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075

ATMOSPHERIC ATTENUATION

- MM-wave propagation and application in military communication systems p 140 N88-19669
- Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722
- A precipitation scatter experiment at 30 GHz p 144 N89-17723

ATMOSPHERIC CIRCULATION

- The high-latitude ionosphere: Dynamical aspects, and models p 188 N89-11938

ATMOSPHERIC EFFECTS

- Observed phase delay through rain at 96 GHz p 144 N89-17724
- FM CW radar remote sensing of hydrometeors p 144 N89-17725
- Random propagation through the longwave channel p 145 N89-17723
- Non-linear effects on the atmospheric transmission of high-flux electro-optical beams p 147 N89-17746
- Magnetic storm effects on F layer irregularities near the auroral oval p 189 N89-17750

ATMOSPHERIC ELECTRICITY

- The high-latitude ionosphere: Geophysical basis p 188 N89-11933
- HF radar probing (including modification) p 142 N89-11937
- The high-latitude ionosphere: Dynamical aspects, and models p 188 N89-11938

ATMOSPHERIC MODELS

- The high-latitude ionosphere: Dynamical aspects, and models p 188 N89-11938
- Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722

ATMOSPHERIC OPTICS

- Optical imagery across atmospheric turbulence p 242 N89-17721

ATMOSPHERIC PHYSICS

- The high-latitude ionosphere: Geophysical basis p 188 N89-11933

ATMOSPHERIC REFRACTION

- Propagation in longitudinally varying ducts, with emphasis on guiding to antigrading transitions p 139 N88-19658
- The correlation between methodological and low-level angle-of-arrival measurements p 140 N88-19668

ATMOSPHERIC SOUNDING

- Incoherent/coherent scatter p 142 N89-11940

ATMOSPHERIC TURBULENCE

- Atmospheric turbulence research at DFVLR [AGARD-R-752] p 189 N88-27669
- The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modeling of Atmospheric Turbulence [AGARD-R-734-ADD1] p 4 N89-29717
- Current and proposed gust criteria and analysis methods: An FAA overview p 78 N88-29718
- Flight test equipment for the on-board measurement of wind turbulence p 51 N88-29719
- Measured and predicted responses of the Nord 260 aircraft to the low altitude atmospheric turbulence p 78 N88-29723
- The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modeling of Atmospheric Turbulence [AGARD-R-734] p 4 N88-29725
- Status review of atmospheric turbulence and aircraft response p 78 N88-29726
- A summary of atmospheric turbulence measurements with specially equipped aircraft in the US p 189 N88-29727
- The NAE atmospheric research aircraft p 51 N88-29730
- Extreme gusts distribution and Propagation in Random Media [AGARD-CP-419] p 122 N89-17706
- Coupled model theory approach to depolarization associated with propagation in turbulent media p 241 N89-17707
- Line-of-sight millimeter wave propagation characteristics p 144 N89-17720
- Optical imagery across atmospheric turbulence p 242 N89-17721

ATMOSPHERICS

- Media Effects on Electronic Systems in the High Latitude Region [AGARD-LS-162] p 141 N89-11931
- Balloon measurement of low frequency TE and TM atmospheric noise p 148 N89-18567
- Lightning generation of low-frequency TE atmospheric noise p 148 N89-18568
- Noise measurement systems/techniques p 149 N89-18574

ATOMIZERS

- Analysis of the flow through double swirl airblast atomizers p 110 N88-29943

ATS 6

- Automatic charge control system for geosynchronous satellites p 99 N87-26960

ATTACK AIRCRAFT

- Multifunction millimeter wave radar for all-weather ground attack aircraft p 126 N87-18725
- Evolution of combat performance of the Hawk light combat aircraft p 34 N87-22668
- The impact of future avionics technology on the conduct of air warfare p 45 N87-22673
- Responsible requirements definition for combat aircraft in light of uncertainties linked to artificial intelligence and expert systems techniques p 55 N89-18448

ATTACKING (ASSAULTING)

- Computer aided tactics for air combat p 214 N88-19559

ATTENUATION

- Line-of-sight millimeter wave propagation characteristics p 144 N89-17720

ATTITUDE CONTROL

- A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560

AUDITORY PERCEPTION

- The role of asymmetric transfer in the evaluation of voice generation and recognition systems p 136 N87-29525

AUDITORY STIMULI

- The interaction of thalamo-cortical systems in the 40 Hz following response p 199 N88-27694

AUDITORY TASKS

- Effect of audio bandwidth and bit error rate on PCM A-PCM and LPC speech coding algorithm intelligibility p 136 N87-29525

AUGMENTATION

- Head mounted spatial instruments: Synthetic reality or impossible dream p 206 N89-12184
- The enhancement effect of the backscattered intensity in a random medium p 143 N89-17715

AURORAL ARCS

- A model for an electromotive force generator in the magnetosphere: A source of discrete auroral arcs p 188 N87-26949

AUTOREGRESSIVE PROCESSES

AURORAL IRRADIATION

- Spacecraft charging in the auroral plasma: Progress toward understanding the physical effects involved p 98 N87-26949

AURORAL ZONES

- Spacecraft charging in the auroral plasma: Progress toward understanding the physical effects involved p 98 N87-26949

AURORAS

- Polar-auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
- Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems p 146 N89-17735
- Magnetic storm effects on F layer irregularities near the auroral oval p 189 N89-17750
- Specular scatter: A new mechanism for ionospheric backscatter p 189 N89-17751
- Ionospheric scintillations and in-situ measurements at an auroral location in the European sector p 189 N89-17752

AUTOCORRELATION

- A general solution for the synthesis of binary sequences with desired correlation sequence p 130 N87-18743
- Propagation medium adaptive techniques for adverse communications and for remote sensing p 142 N89-11941

AUTOMATIC CONTROL

- Weld quality monitor and control system p 179 N87-17062
- Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military airspace users [AGARD-AR-256] p 28 N87-23608
- Automation at the man-machine interface p 211 N87-29504
- Operation and performance of an integrated helicopter communication system p 49 N88-23787
- Development of an airborne facility for advanced avionics research p 51 N88-23801
- Automated measurement of crack length and load line displacement at elevated temperature [AGARD-R-751] p 183 N88-26695
- Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation [AGARD-AR-249] p 44 N89-12564
- Pilots as supervisors and managers of automatic systems: A risky new factor in man-machine systems reliability p 219 N89-18021
- AFTI/F-16 impact of cockpit automation on pilot acceptance p 221 N89-18033
- Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18574
- Improved coding and control of HF systems in a non-Gaussian noise environment p 150 N89-18582
- Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593
- Automating the deconfliction of jamming and spectrum management p 152 N89-18596

AUTOMATIC FLIGHT CONTROL

- Design criteria for multi-loop flight control systems p 72 N87-21401
- Assessment of software quality for the AIRBUS A310 automatic pilot p 74 N88-10804
- Automatic flight control system for modern helicopters p 77 N88-19558
- Advances in workload measurement for cockpit design evaluation p 218 N89-18016
- Advanced flight control system for napco the earth flight p 220 N89-18030

AUTOMATIC FREQUENCY CONTROL

- Artificial intelligence in HF communication systems p 150 N89-18580

AUTOMATIC LANDING CONTROL

- MLS: its technical features and operational capabilities p 26 N87-21892
- A time-based concept for terminal area traffic management p 27 N87-21893
- Philosophy of applying automation to air traffic control p 27 N87-21896
- Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897
- Next generation of control techniques in advanced TMA p 27 N87-21897

AUTOMATIC PILOTS

- Assessment of software quality for the AIRBUS A310 automatic pilot p 74 N88-10804
- Towards the unmanned cockpit p 76 N88-10812

AUTOMATIC TEST EQUIPMENT

- Systems for the 21st century p 47 N88-23769

AUTOMOBILES

- Commuter structure repairs carried out according to aeronautical techniques p 2 N87-20185
- Requirements and criteria for the passive safety of automobiles p 221 N89-18440

AUTOREGRESSIVE PROCESSES

- Identification of microwave line of sight multipath components p 139 N88-19666

AUXILIARY POWER SOURCES

AUXILIARY POWER SOURCES

Design and testing of a small radial turbine for auxiliary power units p 64 N88 17661

AVIONICS

Interaction between EMP (Electromagnetic Pulse) lightning and static electricity with aircraft and missile avionics systems p 22 N88 20708

Some experiences in integrating avionics systems on the civil flight deck p 45 N87 21902

Microprocessor applications in airborne flight test instrumentation p 45 N87 21920

The potential impact of developments in electronic technology on the future conduct of air warfare, volume 3 p 153 N87 22094

Improvement of Combat Performance for Existing and Future Aircraft p 33 N87 22663

The impact of future avionics technology on the conduct of air warfare p 45 N87 22673

The assessment and evaluation of combat performance improvements p 34 N87 22675

Millimeter wave antennas for avionics p 134 N87 23864

Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations p 235 N87 24940

Artificial intelligence and its impact on combat aircraft p 232 N87 24945

Integrated multisensor targeting p 236 N87 24947

New technology impacts on future avionics architectures p 45 N87 24949

The digital colour map simplifies ground attack operations p 187 N87 24950

An integrated aircraft navigation and display system utilizing an on-board composite data base p 236 N87 24955

Advances in Guidance and Control Systems and Technology p 28 N87 29474

Joint development of the Multi-Function Integrated Initial Sensor Assembly (MIIASA) p 171 N87 29479

Configuration design of a helicopter integrated navigation system p 29 N87 29480

Navigation systems for the new generation of combat and transport helicopters and associated flight tests p 29 N87 29481

Integrating avionics sensor signals for tactical aircraft p 46 N87 29519

An expert system technology issues for guidance and control applications p 74 N88 10808

The flight evaluation of an advanced engine display and monitoring system p 46 N88 11659

Helicopter performance management p 38 N88 11666

Workshop on Avionics Corrosion Control p 41 N88 13031

Avionics corrosion p 46 N88 13032

Corrosion of electronic components p 46 N88 13033

US Naval Air Force avionics and electrical system corrosion prevention and control maintenance p 47 N88 13034

Avionics and corrosion p 47 N88 13036

Avionics architecture trends and future approaches p 244 N88 20194

Reducing time required for the development of avionics systems p 244 N88 20195

The Design, Development and Testing of Complex Avionics Systems p 47 N88 1767

Technology development program for twenty-first century air space vehicles p 47 N88 23766

Systems for the 21st century p 47 N88 23763

Rapid prototyping of complex avionics system architectures p 47 N88 23771

The specification and design of a future military reconnaissance aircraft p 37 N88 23772

A structured approach to weapon system design p 48 N88 23774

Development of a generic architecture p 48 N88 23774

Test philosophy of the EX-100 integrated avionics p 48 N88 23776

Systems engineering techniques p 48 N88 23776

Modeling of functional specifications for on-board software: Experience with the Falate avionics system p 48 N88 23777

The avionics software architecture impact on system architecture p 48 N88 23778

A comparison of integrated and separate systems for navigation and navigation p 48 N88 23779

Development and testing of a predictive methodology for optimization of man-machine interaction future avionics systems p 48 N88 23780

Real-time information architecture development system p 48 N88 23781

Managing advanced avionics system design p 48 N88 23781

Psychosensory cockpit ergonomics: advantages of intelligent information systems p 49 N88 23784

Advanced development of a cockpit automation design support system p 49 N88 23785

Design and development of an avionics system adapted to helicopter missions p 49 N88 23786

Operation and performance of an integrated helicopter communication system p 49 N88 23787

Designing for design effectiveness of complex avionics systems p 50 N88 23788

Design for inter-availability interchangeability p 50 N88 23789

The electromagnetic threat to future avionics systems p 50 N88 23790

The integration, characterization and trialing of a modern complex airborne radar p 50 N88 23791

Experience in the integration of human engineering effort with avionics systems development p 50 N88 23792

Testing complex avionics software: A practical experience p 50 N88 23794

A look toward the future of complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88 23797

Software engineering for the British Aerospace Experimental Aircraft Programme (EAP) p 225 N88 23798

Avionics systems: Development method and computer tools p 51 N88 23799

Development of an airborne facility for advanced avionics research p 51 N88 23801

Workshops for the design of avionics systems and the development of onboard software p 51 N88 23802

Coherent functional development: Key to successful future system integration p 246 N88 23803

Development of complex avionics systems: Experience from French military programs p 51 N88 23804

A highly reliable computer for airborne applications p 222 N88 10833

Advanced avionics architecture pave pillar p 51 N88 10834

Data and signal processing architectures for future avionics p 52 N88 10835

Fiber optic buses and networks for advanced avionics architectures p 52 N88 10836

Integrated control and avionics for air superiority p 221 N87 18032

Software Engineering and Its Application to Avionics (AGARD-CP-429) p 55 N89 18448

Measurements of merit for advanced military avionics: A user's perspective on software utility p 55 N89 18447

Responsible requirements definition for combat aircraft in light of uncertainties linked to artificial intelligence and expert systems techniques p 55 N89 18448

Software development guidelines p 228 N89 18449

On the conditions and limits of user intervention in delivered software manufacturer's viewpoint p 229 N89 18451

Control of on-board software p 55 N89 18452

Conversion to Ada: Does it really make sense p 49 N89 18453

Avionics systems engineering and its relationship to mission software development p 55 N89 18454

Embedding formal methods in SAFRA p 229 N89 18455

The state of practice in Ada based program design languages p 214 N89 18457

Debugging distributed Ada avionics software p 229 N89 18458

Automated Ada code generation for military avionics p 230 N89 18459

Verification and validation of flight critical software p 230 N89 18460

The MBB test strategy and tool set for software and system integration p 230 N89 18461

Software readiness planning p 230 N89 18466

An avionics software expert system design p 231 N89 18467

Avionics expert systems p 56 N89 18468

Contribution of expert systems to avionics advanced application on AS37000 weapon system p 56 N89 18470

Accelerated convergence with synchronous approximate agreement p 231 N89 18474

Ada embedded avionics systems p 57 N89 18486

AWACS AIRCRAFT p 135 N87 29518

Improving the reliability of AWACS: downlink transmission by satellite communication p 135 N87 29518

AXES (REFERENCE LINES) p 47 N87 20371

Multi-axis vibration tests in spaceflight using hydraulic excitors p 47 N87 20371

AXES OF ROTATION p 47 N87 20371

Influence of system axes and body posture on visually induced self rotation and tilt p 47 N87 20371

AXIAL FLOW p 47 N87 20371

Application of modified Bessel function correlations to transonic axial compressors p 47 N87 20371

AGARD-19-14 p 47 N87 20371

Computation of secondary flows in an axial multistage compressor p 47 N87 20371

SUBJECT INDEX

AXIAL FLOW TURBINES

Comparison between inverse designed (IPVD) airfoils and standard series airfoils for high loaded axial turbine nozzle application p 60 N87 21951

Aeroelasticity in axial-flow turbomachines, volume 1: Unsteady turbomachinery aerodynamics (AGARD-AG-248-VOL 1) p 8 N87 24396

Linearized unsteady aerodynamic theory p 8 N87 24399

Stall flutter p 72 N87 24404

AXIAL LOZES p 72 N87 24404

Accurate drag estimation using a single force-moment drag model technique p 88 N89 12136

AXISYMMETRIC BODIES p 11 N88 13229

The drag of slender axisymmetric cones in rarefied hypersonic flow p 11 N88 13229

Hypersonic static and dynamic stability of axisymmetric shapes: A comparison of prediction methods and experiment p 13 N88 13246

AXISYMMETRIC FLOW p 161 N88 23136

An investigation of ducted propellers in axisymmetric shear flow p 161 N88 23136

AZIMUTH p 153 N89 18597

Determining the azimuthal distribution of noise and interference across the HF spectrum at the RAF Receiving Station, Cobbett Hill, Surrey, England p 153 N89 18597

B-1 AIRCRAFT p 191 N87 13937

Unsteady inlet distortion characteristics with the B-1B p 191 N87 13937

B-1B CTS engine monitoring p 191 N87 13937

BACK INJURIES p 209 N87 13936

Backache and Back Discomfort (conference) p 209 N87 13936

AGARD-CP-3781 p 190 N87 13937

Epidemiology of the driver's back p 191 N87 13937

Relationships between whole body vibration and disorders of the backbone diagnosed on operators of earth moving machinery p 208 N87 13934

Back pain and discomfort resulting from exposure to vibration in tracked armoured vehicles p 209 N87 13936

Low back pain and narrowed disc spaces in fighter pilots p 191 N87 13937

Relationship between backache and flying duty in jet-and-propellers demonstrated by a flying wing p 191 N87 13938

Back discomfort in US Army helicopter aircrew members p 209 N87 13939

Vehicle vibration and back pain p 209 N87 13945

In vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87 13946

In vivo measurements of vibration transmission in the human spine p 210 N87 13947

Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87 13948

Evaluation and prediction of back pain during military field service p 192 N87 13949

Individual predictability of back trouble in 16 year old men: A prospective study during military service p 192 N87 13951

A review of the NDMC back care education programme p 192 N87 13952

Muscular fatigue and the backache of helicopter pilots (DCIEM-R-1301) p 210 N87 13953

Muscle fatigue in static and vibrational seating environments p 210 N87 13954

Lower back pain in helicopter pilots: Epidemiological factors p 210 N87 13955

Vibration measurements on helicopter aircrew: A new approach p 193 N87 13956

Backache in aircrew p 193 N87 13956

Back pain in gazelle aircrew p 193 N87 13956

BACKGROUND NOISE p 142 N89 18441

Processing techniques for radio communications in non-Gaussian noise environments p 150 N89 18447

BACKSCATTERING p 132 N87 18767

Simulation of multistatic and backscattering cross sections for airborne radar p 132 N87 18767

HF radar probing (including modifications) p 42 N89 11937

Propagation medium adaptive techniques for advanced communications and for remote sensing p 142 N89 11941

Experiment and theory for backscattering enhancement and imaging in a random media p 241 N89 11938

The enhancement effect of the backscattered intensity in a random medium p 143 N89 11935

Multiple scattering effects of random distributions of irregularly shaped particles in integrated and diffraction propagation p 242 N89 11935

Rough surface propagation and scatter with applications to ground wave remote sensing in an urban environment p 145 N89 11932

Spectral surface: A new mechanism for ionospheric backscatter p 143 N89 11935

SUBJECT INDEX

BACKWARD FACING STEPS

- Modeling the stability of a turbulent premixed flame, downstream from a step by a Lagrangian method p 109 N88-29943
- Time-dependent numerical simulation of the starting flow of an incompressible fluid past a downstream-facing step p 169 N89-18646

BALANCE

- Balance accuracy and repeatability as a limiting parameter in aircraft development force measurements in conventional and cryogenic wind tunnels p 90 N89-16873

BALLISTICS

- Smokeless propellants of improved performance p 113 N86-26469
- Impact damage to composite structures [AGARD-R-729] p 102 N86-27425
- Interior Ballistics of Guns [AGARD-CP-392] p 117 N86-29063
- Mechanical behaviour of propellant grains under heavy dynamic load p 115 N86-29066
- Field artillery gun performances related to triple-base powder quality p 115 N86-29067
- Pressure wave Gun barrel interactions p 154 N86-29068
- Experimental study of the ignition of explosive charges using visualization of the phenomena p 116 N86-29073
- Measurement of important ballistic flow properties by spectroscopic techniques p 154 N86-29074
- Precision delivery of unguided submunitions from a tactical stand-off missile p 91 N87-16010
- Jet retraction control system for autonomous precision munition p 92 N87-29482
- An ultra-high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13228

BALLOON-BORNE INSTRUMENTS

- Balloon measurement of low frequency TE and TM atmospheric noise p 148 N89-18567

BANDWIDTH

- Effect of audio bandwidth and bit error rate on PCM ADPCM and LPC speech coding algorithm intelligibility p 136 N87-29529

BARRIERS

- A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles p 139 N88-19662

BARS

- A numerical model of directional solidification of cast turbine blades p 121 N89-15277

BAYES THEOREM

- Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072

BEAM CURRENTS

- Electron beam experiments at high altitudes p 97 N87-26946

BEAM INTERACTIONS

- Non-linear effects on the atmospheric transmission of high flux electromagnetic beams p 147 N89-17746

BEAMS (RADIATION)

- Beam-modulation methods in quantitative and flow-visualization holographic interferometry p 119 N87-21204

- Correcting ray field failures caused by focusing in an inhomogeneous duct: A critical look at the Gaussian beam method p 139 N88-19663

BEAMS (SUPPORTS)

- Structural dynamic characteristics of bladed assemblies p 68 N89-10009

BEARINGS

- Effects of unfavorable environmental conditions on the service life of jet engine and helicopter bearings p 174 N86-29238

BELL AIRCRAFT

- Airborne simulation at the National Aeronautical Establishment of Canada p 83 N87-23659

RENDING MOMENTS

- Mechanism of single shear fastened joints p 187 N89-17700

BENZENE

- Large ionic species in sooting acetylene and benzene flames p 107 N88-29932

BIBLIOGRAPHIES

- Bibliographic networks and microcomputer application for aerospace and defense scientific and technical information p 248 N87-19923
- Microcomputers in information resource sharing: Two full text systems p 249 N87-19927
- Security considerations, defence-related and commercial p 250 N87-26681
- The treatment of grey literature p 250 N87-26684
- AGARD guide to aerospace and defence technical report series in NATO countries [AGARD-R-743] p 197 N87-27391
- The anatomy of the gyroscope [AGARD-AG-373] p 172 N88-28287

BIHARMONIC EQUATIONS

- Grid generation for an advanced fighter aircraft p 226 N88-29319

BINARY DATA

- A general solution for the synthesis of binary sequences with desired correlation sequence p 130 N87-18743

BIOCHEMISTRY

- Biochemical Enhancement of Performance [AGARD-CP-415] p 195 N87-25709
- Multivariate and psycho-physiological functions of DSP p 196 N87-25713

BIODYNAMICS

- The biomechanical characteristics of the spinal column: Bibliographic review p 191 N87-13941
- Automatic research on optimal posture p 191 N87-13942
- In-vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 202 N87-13946
- Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948

BIOELECTRICITY

- Studies of the intact human brain: Implications for performance p 198 N88-27684
- CeEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685
- Fourth generation neurocognitive pattern analysis system p 198 N88-27686
- The application of non-stationary data analysis techniques in the identification of changes in the electroencephalogram associated with the onset of drowsiness p 198 N88-27688
- Neurophysiological patterns of operational fatigue: Preliminary results p 201 N88-27703
- Fighter pilot performance during airborne and simulator missions: Physiological comparisons p 215 N88-27704

- Event-related and steady potential changes in the brain related to workload during tracking p 201 N88-27705
- Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706
- The neuroelectric selection of Naval aviation personnel: An evaluation p 208 N88-27707
- Evoked potential analysis of impact acceleration experiments p 201 N88-27708
- EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709
- Detection of acceleration (+Gz) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710
- Electroencephalographic correlates of pilot performance: Simulation and in-flight studies p 208 N88-27711

- Motion evoked vestibular potentials p 202 N88-27712

- Measurement and classification of the mode of action of antidepressant drugs p 202 N88-27714
- Measurement of electrical activity in the CNS with cortical evoked potentials and EEG: Efficacy profiles of drugs using factor analysis p 202 N88-27715
- An approach to studying the effects of psychostimulants on cerebral electrical activity in the non-human primate p 203 N88-27716
- Spontaneous cerebral electrical activity during prolonged hypoglycemia: A quantitative study in humans p 203 N88-27717
- Correlation between EEG abnormal activity and aircraft accidents: A long term observation p 208 N88-27719

- Vehicle vibration and back pain p 209 N87-13945

- Human respiratory responses during high performance flight [AGARD-AG-312] p 197 N88-12923

- Nonlinear ellipse rotation in a low-birefringence optical fiber p 238 N87-13282

- Effect of audio bandwidth and bit error rate on PCM ADPCM and LPC speech coding algorithm intelligibility p 136 N87-29529

- Detection of acceleration (+Gz) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710

- Compressor blade clearance measurement using capacitance and phase lock techniques p 133 N87-21200

- Blade tips p 133 N87-21200

- Blasius flow p 133 N87-21200

- A new laminar water tunnel to study the transition process in a Blasius layer and in a separation bubble and a new tool for industrial aerodynamics and hydrodynamic research p 85 N88-23150

- Cortical evoked response and eyeblink measures in the workload evaluation of alternative landing system displays p 213 N87-30061

- Use of tyrosine and other nutrients to enhance and sustain performance p 195 N87-25711

- Experimental investigations on blunt bodies and corner configurations in hypersonic flow p 10 N88-13225

BOUNDARY INTEGRAL METHOD

BLUFF BODIES

- Occluding flow over bluff bodies in a U-shaped water tunnel p 161 N88-23131
- Measurements of aerodynamic forces on unsteadily moving bluff parachute canopies p 162 N88-23137

BLUNT BODIES

- Experimental investigations on blunt bodies and corner configurations in hypersonic flow p 10 N88-13225
- The effects of sweep and bluntness on a glancing shock wave turbulent boundary layer interaction p 10 N88-13227
- A spatial marching technique for the inviscid blunt body problem p 12 N88-13239

BO-105 HELICOPTER

- DFVLR in-flight simulators ATTAS and ATTHES for flight qualities and flight control research p 83 N87-23657

BOATS

- Composite structure repairs carried out according to aeronautical techniques p 2 N87-20185

BODIES OF REVOLUTION

- Experiments to investigate the vortices shed from a submarine-like body of revolution p 164 N88-23156

BODY KINEMATICS

- Influence of vector axis and body posture on visually-induced self-rotation and tilt p 206 N89-12185

BODY MEASUREMENT (BIOLOGY)

- Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13349

BODY-WING AND TAIL CONFIGURATIONS

- Design of wings and wing/body configurations for transonic and supersonic speeds p 39 N88-13318

BODY-WING CONFIGURATIONS

- Prediction of wing-body-store aerodynamics using a small perturbation method and a grid embedding technique p 5 N87-20207

- Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234

- Vortex formation over delta, double-delta and waverider configurations at supersonic speeds p 12 N88-13243

- The RAE experimental data base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250

- Analytical surfaces and grids p 227 N88-29322

- Experiments on the DFVLR-F4 wing body configuration: in several European windtunnels p 87 N89-16848

- A theoretical and experimental evaluation of a numerical method for calculating supersonic flows over wing/body configurations p 19 N89-18622

BOEING AIRCRAFT

- Prototype manufacturing techniques for reducing cost, schedule, and technical risk p 244 N88-20189

BOLTED JOINTS

- Design of bolted joints in composites [AGARD-R-727] p 175 N86-31064

- Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures p 121 N89-17685

- Recent studies on bolted joints in composite structures p 185 N89-17688

- Damage growth in composite bolted joints p 186 N89-17689

- An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691

- Strength analysis of mechanically fastened composite structures p 186 N89-17692

- Bearing-bypass loading on bolted composite joints p 186 N89-17697

- Bolted joints in composites: primary structures p 186 N89-17696

- Bolted scarf joints in carbon composite materials: Comparison between assemblies with an interference fit and those with play p 103 N89-17702

- Effect of environment and improvement measures on static and fatigue strength of bolted CFRP joints p 187 N89-17703

BOLTS

- Design of bolted joints in composites [AGARD-R-727] p 175 N86-31064

- Composite repair material and design development efforts p 3 N87-20188

- Mechanism of single shear fastened joints p 187 N89-17700

BOMBER AIRCRAFT

- Some development trends in light ground attack aircraft p 54 N87-22963

- Use of demonstration/validation prototypes: Impact on total development costs and times p 245 N88-20194

- Precision delivery of unguided submunitions from a tactical stand-off missile p 91 N87-16010

BOMB (ORDNANCE)

- Precision delivery of unguided submunitions from a tactical stand-off missile p 91 N87-16010

BOMBS (ORDNANCE)

- Precision delivery of unguided submunitions from a tactical stand-off missile p 91 N87-16010

BORON FIBERS

- Composite repair of cracked aluminum structure p 2 N87-20183

- Damage repair of in service composite structures: Application to the Mirage 3 p 30 N87-20184

- Free composite repair of cracked metallic aircraft components: Practical and basic aspects p 2 N87-20187

BOUNDARY INTEGRAL METHOD

- Numerical modeling: Finite methods p 137 N88-11818

BOUNDARY LAYER CONTROL

BOUNDARY LAYER CONTROL

- Boundary layer simulation and control in wind tunnels [AGARD-AR-224] p 3 N88-28857
- High-aspect-ratio wings p 85 N88-28859
- Techniques for boundary layer tripping and control p 86 N88-28863
- Environmental effects on transition and boundary layer characteristics p 165 N88-28876
- Experiments on boundary layer transition tripping at low Reynolds numbers p 18 N89-16868
- Numerical and experimental investigation of engine inlet flow with the Donor EM2 supersonic inlet model p 20 N89-18642

BOUNDARY LAYER EQUATIONS

- Zonal solutions for airfoils using Euler boundary-layer and Navier-Stokes equations p 8 N87-20219
- Theoretical analysis of flows around helicopter fuselages: Application to design and development p 7 N87-20221
- Using the boundary-layer equations in three-dimensional viscous flow simulation p 155 N87-20222
- High speed viscous flow calculations about complex configurations p 7 N87-20227

BOUNDARY LAYER FLOW

- Shock-wave boundary layer interactions [AGARD-AG-280] p 155 N86-29173
- Transonic wind tunnel boundary interference: A correction procedure p 88 N89-18861
- Wind tunnel sidewall boundary-layer effects in transonic airfoil testing: some correctable, but some not p 89 N89-18864

BOUNDARY LAYER SEPARATION

- Theoretical analysis of flows around helicopter fuselages: Application to design and development p 7 N87-20221
- Applications of RAE viscous flow methods near separation boundaries for three-dimensional wings in transonic flow p 7 N87-20224
- Simulation of three-dimensional transonic flow with separation past a hemisphere cylinder configuration p 8 N87-20230
- The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21931
- Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
- Computation of Three-Dimensional Boundary Layers including Separation [AGARD-R-741] p 158 N87-22145
- Missiles, fuselage and similar bodies p 85 N88-28858
- Empirical tools for simulation methodologies p 86 N88-28866
- Physical aspects of viscous simulation and associated research: requirements p 89 N89-18865
- Computerized thermographic technique for the detection of boundary layer separation p 18 N89-16876
- Separation around ellipsoid-type obstacles: Modeling and validation experiences p 167 N89-18627

BOUNDARY LAYER TRANSITION

- Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245
- Hypersonic static and dynamic stability of axisymmetric shapes: A comparison of prediction methods and experiment p 13 N88-13246
- Empirical tools for simulation methodologies p 86 N88-28866
- Missiles, fuselages and similar bodies p 14 N88-28869
- Introduction and critical flow phenomena p 14 N88-28870
- Boundary layer development and transition p 14 N88-28871
- Classical separation, trailing-edge flows and buffeting p 14 N88-28874
- Environmental effects on transition and boundary layer characteristics p 165 N88-28876
- Boundary layer manipulation p 165 N88-28877
- Physical aspects of viscous simulation and associated research requirements p 89 N89-18865
- On Reynolds number effects and simulation p 17 N89-18866
- Experiments on boundary layer transition tripping at low Reynolds numbers p 18 N89-16868
- CFD validation experiments for internal flows p 168 N89-18635

BOUNDARY LAYERS

- Aircraft drag prediction and reduction: Addendum 1. Computational drag analyses and minimization, mission impossible? [AGARD-R-721 AOD-1] p 5 N86-27187
- Numerical viscous-inviscid interaction method for internal separated flows and shock wave boundary layer interaction p 158 N87-21939
- Progress in Viscous-Inviscid Solvers (VIS) p 150 N87-22152
- Shock boundary layer interaction p 165 N88-28873
- A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-16869

BOUNDARY VALUE PROBLEMS

- Numerical grid generation around complete aircraft configurations p 224 N87-20202
- Numerical modeling: Finite methods p 137 N88-11918
- Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 11 N88-13235
- Numerical experiments with hypersonic flows beneath a cone-delta-wing combination p 12 N88-13238
- Numerical accuracy assessment p 166 N89-18613
- BOW WAVES**
 - On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
 - The off design performance of hypersonic waveriders p 38 N88-13244

BRAGG CELLS

- Acousto-optic spectrum analyzer using a planar Bragg cell p 239 N87-13295

BRAIN

- Studies of the intact human brain: Implications for performance p 198 N88-27684
- CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685
- Fourth generation neurocognitive pattern analysis system p 198 N88-27686
- Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27687
- Squid instrumentation for neuromagnetic study of complex brain activity p 199 N88-27691
- Electric and magnetic brain activity related to cognitive performance p 199 N88-27692
- Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N88-27693
- A study of sources in the human brain associated with stereopsis p 200 N88-27695
- Event-related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696
- Using ERPS to study human information processing p 203 N88-27698
- Cognitive task demands as reflected in physiological measures p 200 N88-27699
- The effect of endogenous alpha on hemispheric asymmetries and the relationship of frontal theta to sustained attention p 208 N88-27701
- Fighter pilot performance during airborne and simulator missions: Physiological comparisons p 215 N88-27704
- Event-related and steady potential changes in the brain related to workload during tracking p 201 N88-27705
- EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709
- Motion evoked vestibular potentials p 202 N88-27712
- The effect of mild hypoxia on the vestibular evoked response p 202 N88-27713
- An approach to studying the effects of psychostimulants on cerebral electrical activity in the non-human primate p 203 N88-27716
- Spontaneous cerebral electrical activity during prolonged hypoglycemia: A quantitative study in humans p 203 N88-27717
- Correlation between EEG abnormal activity and aircraft accidents: A long term observation p 208 N88-27719
- BRAKES (FOR ARRESTING MOTION)**
 - Repair procedures for composite parts on the alpha jet p 1 N87-20175
- BRAZING**
 - Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059
 - The application of the RBD process to the deposition of anti-wear alloys p 177 N87-17069
 - Repair techniques for gas turbine components p 178 N87-17071
- BROADBAND**
 - Experiments: Test range facilities, part 2 p 138 N88-11921
 - Modeling of wideband HF channels p 146 N89-17732
 - Impulse response measurements and characterization of wideband VHF radio lines p 146 N89-17736
- BROADCASTING**
 - Random propagation through the longwave channel p 145 N89-17731
- BUBBLES**
 - A new laminar water tunnel to study the transition process in a blasus layer and in a separation bubble and a new tool for industrial aerodynamics and hydrodynamic research p 15 N88-23150
 - Some visualization studies on turbulent boundary layers using multire hydrogen bubble generation p 164 N88-23153
- BUFFETING**
 - Some aspects of aircraft dynamic loads due to flow separation [AGARD-R-750] p 40 N88-18588
 - Classical separation, trailing-edge flows and buffeting p 14 N88-28874

SUBJECT INDEX

- Some difficulties in the wind tunnel prediction of modern civil aircraft buffeting: Proposed remedies p 18 N89-18689
- BULGING**
 - Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270
- BURNERS**
 - Development of a plenum chamber burner system for an advanced VTOL engine p 65 N88-17664
 - Flame stabilization in a reheated combustor p 105 N88-29921
- BURNING RATE**
 - Smokeless propellants of improved performance p 113 N86-26469
 - Perpergol combustion based on octer-gasis p 114 N86-26470
 - Burning stability of double base propellants p 114 N86-26472
 - The chemical interaction of ballistic modifiers in CDB propellant: its effect upon ballistics and stability p 114 N86-26475
 - Direct erosive burning measurements of a reduced-smoke solid propellant rocket by flash X-rays p 114 N86-26476
 - Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- BUS CONDUCTORS**
 - Fiber optic buses and networks for advanced avionics architectures p 52 N89-10836

C

- C-130 AIRCRAFT**
 - Simulator induced sickness among Hercules crew p 204 N89-12176
- CALCULATORS**
 - Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
- CALIBRATING**
 - Engine simulator tests: Comparison of calibration and wind tunnel results p 89 N89-16871
- CANADA**
 - Corrosion in avionics and associated equipment: cause effect and prevention p 47 N88-13335
- CANARD CONFIGURATIONS**
 - X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
 - Examples of static aeroelastic effects on present combat aircraft: a review p 76 N88-13349
 - Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of light vehicles p 45 N89-18654
 - Documentation of separated flows for computational fluid dynamics validation p 170 N89-18662
- CANCELLATION CIRCUITS**
 - A sequential adaptation technique and its application to the Mark-12 IFF system p 128 N87-18735
- CANOPIES**
 - Measurements of aerodynamic forces on unsteady moving bluff parachute canopies p 162 N88-23137
 - Vision through aircraft transparencies p 216 N88-29294
- CAPACITANCE**
 - Compressor blade clearance measurement using capacitance and phase lock techniques p 133 N87-21200
- CARBON DIOXIDE LASERS**
 - CO₂ laser radar systems for target acquisition and guidance p 173 N89-17606
- CARBON FIBER REINFORCED PLASTICS**
 - A T-R 42 carbon fibre flap repair: design and inspection p 102 N87-20178
 - Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
 - Damage repair of in-service composite structures: Application to the Mirage 2000 p 2 N87-20184
 - Composite repair techniques for J stiffened composite fuselage structures p 2 N87-20186
 - Typical joints in a wing structure p 44 N89-17693
 - A study to optimize the CFRP-Al mechanical joint in order to reduce electrical resistance p 154 N89-17695
 - Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17696
 - Mechanism of single shear fastened joints p 187 N89-17700
 - Joining of carbon fiber composite with fasteners p 103 N89-17701
 - Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading p 187 N89-17704
- CARBON FIBERS**
 - British Airways experience with composite repairs p 3 N87-20192
 - The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355

SUBJECT INDEX

CARBON MONOXIDE

Modeling of CO oxidation in dilution jet flows p 109 N88-29947

CARBON STEELS

The role of residual stress in the performance of gears and bearings p 175 N86-29246

CARBON-CARBON COMPOSITES

Bolted scarf joints in carbon composite materials: Comparison between assemblies with an interference fit and those with play p 103 N89-17702

CARDIOGRAPHY

Short Course on Cardiopulmonary Aspects of Aerospace Medicine [AGARD-R-758] p 193 N87-24070

Valvular and congenital heart disease in the aviator p 194 N87-24073

Aeromedical aspects of mitral valve prolapse p 194 N87-24074

CARDIOLOGY

Aeromedical evaluation and disposition of electrocardiographic abnormalities p 193 N87-24071

Valvular and congenital heart disease in the aviator p 194 N87-24073

CARGO

Developmental airdrop testing techniques and devices [AGARD-AG-300 VOL 6] p 38 N88-12481

CARRIER TO NOISE RATIOS

Considerations in utilizing IR signatures p 241 N87-18747

CARTESIAN COORDINATES

Fundamentals of turbulence for turbulence modeling and simulation p 159 N88-11971

CARTRIDGES

Modeling the behaviour of additives in gun barrels p 155 N86-29075

Ignition of high-performance gun ammunition p 116 N86-29077

CASCADE FLOW

Combined fringe and Fabry Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility p 118 N87-21183

A study of passage flow through a cascade of turbine blades using image plane holographic interferometry p 118 N87-21203

The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21931

Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935

Experimental investigations on shock losses of transonic and supersonic compressor cascades p 58 N87-21937

Computation of transonic 2D cascade flow and comparison with experiments p 59 N87-21943

A numerical study of unsteady flow effects in a supersonic compressor cascade p 59 N87-21944

Determination of the supersonic cascade entrance zone p 157 N87-21948

Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949

Three-dimensional flows p 8 N87-24401

Three-dimensional flow p 8 N87-24402

Understanding fan blade flutter through linear cascade aerodynamic testing p 9 N87-24407

Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472

The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660

Transonic blade design on rotational stream surfaces p 66 N88-17671

Investigation of dihedral effects in compressor cascades p 66 N88-17672

Computation of transonic 3D cascade flow and comparison with experiments p 20 N89-18641

CASTING

Aerospace Materials Process Modeling [AGARD-CP-426] p 119 N89-15262

Generic casting modeling p 121 N89-15276

Industrial introduction of the modeling of aeronautical forging and foundry process simulation p 121 N89-15279

CASTINGS

Welding of aluminum castings p 177 N87-17068

CATALOGS (PUBLICATIONS)

Microcomputer based catalog creation software options for small libraries p 223 N87-19922

AGARD corrosion handbook Volume 2: Aircraft common control documents: A descriptive catalogue [AGARD-AG-278 VOL 2] p 110 N87-24553

CATALYTIC ACTIVITY

Arget validation of surface catalytic using a viscous shock layer approach p 168 N89-18634

CATECHOLAMINE

Development of a paradigm to assess nutritive and biochemical substances in humans: a preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25172

CATHODE RAY TUBES

OASIS: A modern tool for real-time simulation p 80 N87-23638

Display system image quality p 216 N88-29298

CAUCHY PROBLEM

Computation of flow past conical hypersonic wings using a second order Godunov method p 12 N88-13241

Accuracy of various wall-correction methods for 3D subsonic wind-tunnel testing p 89 N89-16863

CAVITATION FLOW

Superplasticity [AGARD-LS-154] p 111 N87-29641

Superplastic sheet forming NATO/AGARD lecture series on superplasticity p 111 N87-29643

Cavitation and superplasticity p 111 N87-29645

The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87-29647

CAVITIES

Patch repair of corroded aircraft skin areas p 3 N87-20191

Cavitation and superplasticity p 111 N87-29645

Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687

CELLULOSE NITRATE

Stability of nitrocellulose propellants assessed via thermal decomposition and alteration of the stabilizer composition p 114 N86-26471

CENTRAL NERVOUS SYSTEM

Measurement and classification of the mode of action of antidepressant drugs p 202 N88-27714

Measurement of electrical activity in the CNS with cortical evoked potentials and EEG: Efficacy profiles of drugs using factor analysis p 202 N88-27715

CENTRIFUGAL COMPRESSORS

Experimental investigation on small turboprop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476

The advantage of variable geometry for turbine engines at low power p 63 N88-17653

Secondary flow measurements with L2F technique in centrifugal compressors p 66 N88-17676

Method for predicting performance limits of centrifugal compressors p 65 N88-17677

CENTROIDS

Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949

CEREBRAL VASCULAR ACCIDENTS

Hypertension in the aviator p 194 N87-24077

CHALCOGENIDES

Glass fibres for transmission in the 8-12 micrometers waveband p 239 N87-13297

CHANNELS (DATA TRANSMISSION)

Embedded real-time channel evaluation techniques p 122 N86-27569

Design for interoperability interchangeability p 50 N88-23789

The design and performance of an adaptive packet-switched HF data terminal p 149 N88-16577

Narrative compression coding for a channel with errors p 150 N89-18584

ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N89-18587

CHAOS

Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modeling [AGARD-R-755] p 159 N88-11970

Dynamics and routes to chaos from quasiperiodicity p 160 N88-11974

A deterministic approach to turbulence: Chaos in Rayleigh-Bénard convection p 160 N88-11975

Determination of fractal dimension, connection of space and temporal chaos and application to experimental results p 160 N88-11977

CHARACTERIZATION

The integration, characterisation and trialing of a modern complex airborne radar p 50 N88-23791

Characterization of hypersonic wind tunnel flow fields for improved data accuracy p 90 N89-16874

CHECKOUT

Debugging distributed Ada avionics software p 229 N89-18458

CHEMICAL COMPOSITION

The chemical interaction of ballistic modifiers in CDB propellant: Its effect upon ballistics and stability p 114 N86-26475

Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-26477

Field artillery gun performances related to triple base powder quality p 116 N86-29067

Accurate measurements of combustion species concentrations using CARS p 103 N87-21173

The characterization of combustion by fuel composition: Measurements in a small conventional combustor p 105 N88-28920

The performance of a surrogate blend in simulating JP-4 in a spray fueled combustor p 106 N88-28926

The effect of particle properties on radiative heat transfer p 109 N88-28941

CHEMICAL REACTIONS

The chemical interaction of ballistic modifiers in CDB propellant: Its effect upon ballistics and stability p 114 N86-26475

Hypersonic laminar boundary layer: Parametric study for the representation of real gas effects p 11 N88-13236

CHEMOTHERAPY

Hypertension in the aviator p 194 N87-24077

CHIRP

Experimental robust HF modems incorporating adaptive erosion p 150 N89-18579

CHOKES

Parametric study of choke flutter with a linear theory p 66 N88-17673

CHOLESTEROL

Coronary risk factors in aerospace medicine p 195 N87-24078

CINEMATOGRAPHY

Flow measurements in a water tunnel using a holocinematographic velocimeter p 162 N88-23141

CIRCADIAN RHYTHMS

Homeostatic, entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25718

Sleep and wakefulness: Handbook for flight medical officers, second edition p 197 N88-11366

Sleep and wakefulness: Handbook for flight medical officers, 2nd edition [AGARD-AG-270(F)] p 207 N89-17399

CIRCUIT PROTECTION

Electrostatic immunity of geostationary satellites p 99 N87-26957

CIRCUIT RELIABILITY

The mixture of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18748

DEDALE: An expert system for analog circuit maintenance p 153 N88-10809

CIRCULAR CYLINDERS

The hybrid wavefront resonance method p 137 N88-11913

Oscillating flow over bluff bodies in a U shaped water tunnel p 161 N88-23131

CIRCULAR POLARIZATION

Observed phase delay through rain at 96 GHz p 144 N89-17724

CIRCULAR WAVEGUIDES

A spherical waveguide multiplexer/demultiplexer p 238 N87-13295

CIRCULATION CONTROL AIRFOILS

On the validation of a code and a turbulence model: appropriate to circular control airfoils p 18 N89-18616

CITIES

A diffraction based theoretical model for prediction of UHF path loss in cities p 139 N88-19641

CIVIL AVIATION

The selection of future civil air navigation systems p 25 N87-21882

Communication, Navigation and Surveillance services for the aviation industry using satellite technology p 26 N87-21886

Some experiences in integrating avionic systems on the civil flight deck p 45 N87-21902

Design requirements for future commercial operations p 37 N88-11661

The EH-101 integrated project: A civil utility and commercial helicopter system p 38 N88-11672

The judgement and evaluation of long term investments demonstrated by means of a civil aircraft program p 254 N88-20186

An interim comparison of operational CG records in turbulence on small and large civil aircraft p 78 N88-29729

Re-assessment of gust statistics using CAADRP data p 78 N88-29732

CLAMPS

Effect of environment and improvement measures on static and fatigue strength of bolted CFRP joints p 187 N89-17703

CLASSIFICATIONS

Microcomputer based catalog creation software options for small libraries p 223 N87-19922

The use of knowledge based systems techniques in ESM processing p 235 N87-24941

Theoretical Aspects of Target Classification [AGARD-LS-152] p 136 N88-11909

Theoretical target classification: Physical optics methods p 137 N88-11915

Physical scattering models p 137 N88-11916

Input signal shaping: K-pulse p 137 N88-11917

CLEARANCES

Store separation flight testing [AGARD-AG-300 VOL 5] p 31 N86-30727

Tip clearance measurement in modern compressor components p 179 N87-21139

CLIMATE

Compressor blade clearance measurement using capacitance and phase lock techniques p 133 N87-21200

CLIMATE

An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave lines p 138 N88-19654
Refractive index, meteorology and fading in line-of-sight transmission paths p 140 N88-19666

CLINICAL MEDICINE

Aetiological factors in simulator sickness p 204 N89-12174

CLOSURE LAW

Homogeneous turbulence two point closures and applications to one-point closures p 160 N88-11973

CLUTCHES

Multifunctional requirements for a gearbox secondary power system in a modern fighter aircraft and its components and interface requirements p 174 N86-29243

CLUTTER

A CFAR design concept for operation in heterogeneous clutter p 128 N87-18733
Markov random fields: A strategy for clutter modeling p 143 N89-17712
Coherent scattering from random media p 174 N89-17714
Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems p 146 N89-17735

CMOS

Microelectronics the next fifteen years p 154 N88-23792

COASTS

A propagation campaign in a marine environment utilizing a digital system at 36 GHz p 141 N88-19675

COATING

The application of the RBF process to the deposition of anti-wear alloys p 177 N87-17069

COCKPITS

Improved guidance and control automation at the man-machine interface p 211 N87-18987
[AGARD-AR-229] p 80 N87-23634
Visual and motion cueing in helicopter simulation p 80 N87-23634

OASIS

A ground tool for real time simulation p 80 N87-23638

Trends in modern-based and in-flight simulators for development applications p 81 N87-23645

Impact of future developments in electronic technology on cockpit engineering p 211 N87-25769

[AGARD-R-757] p 251 N87-29514
Perceptual organisation and information management p 251 N87-29514

Organization of displays in the visual space of the combat aircraft pilot p 212 N87-29516

Voice control of cockpit systems p 73 N87-29526

The flight evaluation of a speech recognition and a speech output system in an advanced cockpit display and flight management system for helicopters p 46 N87-29527

MBB simulation facilities applied for rotorcraft research p 84 N88-11655

Helicopter (performance) management p 38 N88-11666

Psychosensory cockpit ergonomics advantages of intelligent information systems p 49 N88-23784

Advanced development of a cockpit automation design support system p 49 N88-23785

Software engineering for the British Aerospace Experimental Aircraft Programme (EAP) p 225 N88-23798

Visual related accidents/incidents p 216 N88-29293

General operational and training visual concerns p 216 N88-29293

Night lighting and night vision goggle compatibility p 216 N88-29293

Future visual environment and concerns p 217 N88-29299

COMPASS (Trademark): A generalized ground-based monitoring system p 55 N89-15819

The Man-Machine Interface in Tactical Aircraft Design and Combat Automation p 217 N89-18009

[AGARD-CP-425] p 217 N89-18009

Mission planning and proper design: The long range connection p 217 N89-18010

A model to predict visual performance at the man-display interface in the cockpit p 218 N89-18013

Advances in workload measurement for cockpit design evaluation p 218 N89-18016

Modeling strategy for cockpit data management in modern fighter aircraft p 218 N89-18017

Panoramic Cockpit Control and Display System (PCCADS) p 219 N89-18019

Expert system man-machine interface for a combat aircraft cockpit p 219 N89-18022

Lessons learned from the use of new command systems p 219 N89-18023

Design considerations for Virtual Panoramic Display (VPD) helmet systems p 219 N89-18024

Towards the next generation fighter cockpit: The EAP experience p 219 N89-18025

Pilot integration and the implications on the design of advanced cockpits p 220 N89-18026

Pilot control devices p 220 N89-18027

AFTI/F-16 impact of cockpit automation on pilot acceptance p 221 N89-18033

Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034

COGNITION

Review of modulation, coding and speech digitization techniques p 124 N87-18704

A method for aircraft simulation verification and validation developed at the United States Air Force Flight Simulation Facility p 82 N87-23654

Speech is more than just an audible version of text p 135 N87-29522

Wind tunnel requirements for computational fluid dynamics code verification p 90 N89-16880

Radio noise characteristics and their system performance implications p 148 N89-18566

Improved coding and control of HF systems in a non-Gaussian noise environment p 150 N89-18582

Narrative compression coding for a channel with errors p 150 N89-18584

Accuracy requirements and benchmark experiments for CFD validation p 166 N89-18612

COGNITION

Sophisticated integral control methods for use in flight p 212 N87-29510

Perceptual organisation and information management p 251 N87-29514

Electric and magnetic brain activity related to cognitive performance p 199 N88-27692

The effects of hypoxia on P300 and reaction time [DCIEM-87-RR-12] p 200 N88-27697

Cognitive task demands as reflected in physiological measures p 200 N88-27699

Event-related and steady potential changes in the brain related to workload during tracking p 201 N88-27705

COHERENT RADAR

Incoherent/coherent scatter p 142 N89-11940

COHERENT RADIATION

Coherent scattering from random media p 174 N89-17714

The enhancement effect of the backscattered intensity in a random medium p 143 N89-17715

COLD TOLERANCE

Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25712

COLD WEATHER TESTS

Flight testing under extreme environmental conditions [AGARD-AG-300-VOL-8] p 172 N88-27525

COLLISION AVOIDANCE

Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654

COLLISIONS

Collision probability of cruise missiles flying in formation p 91 N87-16007

COMBAT

Improvement of Combat Performance for Existing and Future Aircraft [AGARD-CP-409] p 33 N87-22663

Weapon systems polyvalence: An economic and operational challenge p 34 N87-22667

Manned air to air combat simulation p 81 N87-23648

The use of Aerialia flight simulator for the development of the AMX weapon system p 82 N87-23650

Operational training Application and experience p 82 N87-23653

Artificial intelligence and its impact on combat aircraft p 232 N87-24945

Integrated multisensor targeting p 236 N87-24947

Apache for the battlespace of today and the 21st century p 38 N88-11670

Manned simulation: Helpful means to determine and improve structural load criteria p 42 N88-19459

Computer aided tactics for air combat p 214 N88-19559

Simulator sickness in the Royal Air Force: A survey p 204 N89-12177

Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation [AGARD-AR-249] p 44 N89-12564

The Man-Machine Interface in Tactical Aircraft Design and Combat Automation [AGARD-CP-425] p 217 N89-18009

Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034

Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593

COMBUSTIBLE FLOW

Modeling and experimental study of a reactive flow confined with wall injection p 109 N88-29946

SUBJECT INDEX

COMBUSTION

Interior Ballistics of Guns [AGARD-CP-392] p 117 N86-29063

Combustion related shear flow dynamics in elliptic supersonic jets p 11 N88-12322

Accuracy and efficiency of a time marching approach for combustor modeling p 170 N89-18659

COMBUSTION CHAMBERS

CARS thermometry for low and high pressure combustion systems p 103 N87-21172

Velocity and temperature measurements in a can-type gas turbine combustor p 57 N87-21184

Developments in data acquisition and processing using an advanced combustion research facility p 79 N87-21192

Processing techniques for correlation of LDA and thermocouple signals p 171 N87-21194

Numerical simulation of diffuser/combustor flow interaction p 65 N88-17663

Water flow visualization of a ramjet combustor chamber p 162 N88-23138

Combustion and fuels in gas turbine engines [AGARD-CP-422] p 104 N88-29910

Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 106 N88-29923

Flow characteristics of a model annular combustor p 106 N88-29924

Particle size measurements in sooting combustion systems p 107 N88-29931

Numerical models for analytical predictions of combustor aerothermal performance characteristics p 108 N88-29935

Gas turbine combustion modeling p 108 N88-29936

Three-dimensional gas turbine combustor modeling p 108 N88-29937

Numerical modeling of combustion processes in gas turbines p 108 N88-29939

Three-dimensional combustor predictors: A comparison of equilibrium and laminar flamelet chemistry models p 108 N88-29940

The effect of particle properties on radiative heat transfer p 109 N88-29941

Analysis of the flow through double swirl airblast atomizers p 110 N88-29949

The behaviour of synthetic fuels in a small transparent combustor p 110 N88-29950

A small annular combustor of high power density, wide operating range and low manufacturing cost p 110 N88-29951

COMBUSTION EFFICIENCY

Atomization of alternative fuels p 104 N88-29913

Spray performance of a vaporizing fuel injector p 105 N88-29919

The characterization of combustion by fuel composition Measurements in a small conventional combustor p 105 N88-29920

High performance turbulent afterburner systems p 105 N88-29922

Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 106 N88-29923

COMBUSTION PHYSICS

Direct erosive burning measurements of a reduced smoke solid propellant rocket by flash x-rays p 114 N86-26476

Developments in data acquisition and processing using an advanced combustion research facility p 79 N87-21192

The study of combustion by means of diode laser spectroscopy p 173 N87-21201

Numerical modeling of combustion processes in gas turbines p 108 N88-29939

Modeling the stability of a turbulent premixed flame downstream from a step by a Lagrangian method p 109 N88-29943

Modeling and experimental study of a reactive flow confined with wall injection p 109 N88-29946

COMBUSTION PRODUCTS

Gas analysis for the investigation of the combustion of double-base propellants and HMX p 115 N86-26478

Measurements of distributed combustion p 115 N86-26479

High-pressure combustion: Comparison of theoretical and actual results p 118 N86-29078

Gas turbine smoke measurement: A smoke generator for the assessment of current and future techniques p 107 N88-29930

Rates of formation of soot from hydrocarbon flames and its destruction p 107 N88-29933

The influence of pressure on soot formation p 107 N88-29934

COMBUSTION STABILITY

Burning stability of double base propellants p 114 N86-26472

The chemical interaction of ballistic modifiers in CDB propellant: Its effect upon ballistics and stability p 114 N86-26475

Measurements of distributed combustion p 115 N86-26479

SUBJECT INDEX

High performance turbofan afterburner systems p 105 N88-29822

COMBUSTION TEMPERATURE
Flow characteristics of a model annular combustor p 106 N88-29924

COMMAND AND CONTROL
Automation strategy and results for an airbase command and control information system (ABCCIS) p 236 N87-24952
Current state of an expert system ... military information systems p 236 N87-24953

COMMAND GUIDANCE
Single-mode fibers for fiberoptic-guided missiles: A comparison with graded-index multimode fibers p 240 N87-13303

COMMERCIAL AIRCRAFT
Design requirements for future commercial operations p 37 N88-11651

COMMUNICATION
Barriers to Information Transfer and Approaches Toward Their Reduction [AGARD-CP-430] p 251 N88-30458
Linguistic and cultural barriers to the transfer of information p 251 N88-30459
Political and economic barriers to information transfer p 251 N88-30460

COMMUNICATION CABLES
Fiber optics: A survivable and cost-effective transmission medium for terrestrial networks p 240 N87-13302

COMMUNICATION EQUIPMENT
Developments in HF equipment and systems mobile and portable terminals p 123 N86-27573
Event-related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696

COMMUNICATION NETWORKS
Modern HF communications, modulation and coding p 123 N86-27571
Equipment: Antenna systems p 123 N86-27572
Fiber optics: A survivable and cost-effective transmission medium for terrestrial networks p 240 N87-13302
Communication, Navigation and Surveillance services for the aviation industry using satellite technology p 26 N87-21886
Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control [AGARD-CP-407] p 138 N88-19653
MM-wave propagation and application in military communication systems p 140 N88-19669
Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems [AGARD-CP-420] p 147 N89-18565
Radio noise characteristics and their system performance implications p 148 N89-18566
Man-made radio noise and interference p 148 N89-18571
Transhorizon cochannel interference path measurements in Europe p 149 N89-18572
Effects of noise and interference on system performance p 149 N89-18576
The design and performance of an adaptive packet-switched HF data terminal p 149 N89-18577
Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18578
Artificial intelligence in HF communication systems p 150 N89-18580
Processing techniques for radio communications in non-Gaussian noise environments p 150 N89-18581
Improved coding and control of HF systems in a non-Gaussian noise environment p 150 N89-18582
Narrative compression coding for a channel with errors p 150 N89-18584
Inherent jitter effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A jitter-lighting scheme p 151 N88-18589
Coding of radio terminals p 152 N89-18594

COMMUNICATION SATELLITES
Dynamic analysis of direct television satellite TV SAT/TDF-1 p 95 N87-20360
Modal testing of the Olympus development model stowed solar array p 96 N87-20366
Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863
On the possibility of a several-kilovolt differential charge in the day sector of a geosynchronous orbit p 99 N87-26953
Media effects on electronic systems in the high latitude region p 141 N89-11932

COMMUNICATION THEORY
Speech is more than just an audible version of text p 135 N87-29522

COMMUTER AIRCRAFT
ATR 42 carbide fiber flap repair design and inspection p 102 N87-20178

COMPARISON
Qualification of a water tunnel for force measurements on aeromagnetic models p 85 N88-23128
A comparative study of vortex flows in wind and water tunnels p 163 N88-23151

Investigation on the movement of vortex burst position with dynamically changing angle of attack for a schematic delta-wing in a watertunnel with correlation to similar studies in windtunnel p 163 N88-23152
Comparison of theory and experiment for four supercritical, low drag airfoils p 21 N89-18655
Experiments and code validation for junction flows p 21 N89-18658
Overview of CFD methods and comparison with flight aerothermal data p 21 N89-18663

COMPATIBILITY
Problems of spectrum management and system compatibility p 125 N87-18711

COMPILEERS
Application of Ada higher order language to guidance and control [AGARD-LS-146] p 72 N86-30740

COMPLEX SYSTEMS
Matched index laser anemometry systems for flow studies in complex geometries p 171 N88-23145
Systems engineering technique p 48 N88-23776
EMP-induced transients and their impact on system performance p 152 N89-18591

COMPONENT RELIABILITY
Engine-transmission-structural airframe members compatibility p 31 N87-19069
Engine-airframe integration for rotorcraft Component specifications and qualification p 31 N87-10071
Forced vibration and flutter design methodology p 163 N89-10016
AGARD/SMP Review: Damage Tolerance for Engine Structures. I. Non-Destructive Evaluation [AGARD-R-768] p 180 N89-17253
The impact of engineering assumptions on NDE requirements p 180 N89-17254
Relationships of nondestructive evaluation needs and component design p 180 N89-17256
Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430
Crashworthy design of aircraft subfloor structural components p 24 N89-18431

COMPOSITE MATERIALS
Design of bolted joints in composites [AGARD-R-727] p 175 N86-31064
The Repair of Aircraft Structures Involving Composite Materials [AGARD-CP-402] p 1 N87-20174
Design for reparability of helicopter composite blades p 33 N87-20176
TV-holography: A promising inspection tool for analysis of composite materials p 170 N87-20180
British Airways experience with composite repairs p 170 N87-20192
Materials for lighter aircraft p 40 N88-13325
Design of filament-wound rocket cases p 101 N89-16910
Behaviour of mechanically fastened joints in advanced composites p 103 N89-17705

COMPOSITE STRUCTURES
Impact damage to composite structures [AGARD-R-729] p 102 N86-27425
The Repair of Aircraft Structures Involving Composite Materials [AGARD-CP-402] p 1 N87-20174
Development of field level repairs for composite structures p 1 N87-20177
ATR 42 carbon fibre flap repair design and inspection p 102 N87-20178
Repair of helicopter composite structure techniques and substantiations p 1 N87-20179
Composite repair of cocured J-stiffened panels: Design and test verification p 1 N87-20181
Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
Damage repair of in-service composite structures: Application to the Mirage 2000 p 2 N87-20184
Composite structure repairs carried out according to aeronautical techniques p 2 N87-20185
Composite repair techniques for J-stiffened composite fuselage structures p 2 N87-20186
Fibre composite repair of cracked metallic aircraft components: Practical and basic aspects p 2 N87-20187
Composite repair material and design development efforts p 3 N87-20188
Battle damage repair of composite structures p 3 N87-20189
Composite motor case design p 100 N87-28592
Design of filament-wound rocket cases p 100 N87-28593
Considerations for designers of cases for small solid propellant rocket motors p 100 N87-28594
Composite motor case design p 101 N89-16909
Considerations for designers of cases for small solid propellant rocket motors p 101 N89-16911
Literature review on the design of mechanically fastened composite joints p 179 N89-17686
Recent studies on bolted joints in composite structures p 185 N89-17688

COMPRESSORS

An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691
Improvement of specific fastening elements for assembling composite structures p 186 N89-17694
Bolted joints in composites: primary structures p 186 N89-17698
Joining of carbon fiber composite with fasteners p 103 N89-17701
Study of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18434
Crash simulation and verification for metallic sandwich and laminate structures p 25 N89-18437

COMPOUND MATERIALS
Rotorcraft designs for the year 2000 p 37 N88-11665

COMPRESSIBILITY
Survey on nonlinear effects p 1 N89-29757

COMPRESSIBILITY EFFECTS
Investigation of dihedral effects in compressor cascades p 66 N88-17672

COMPRESSIBLE BOUNDARY LAYER
Numerical solution of compressible Navier-Stokes flows p 166 N89-18618

COMPRESSIBLE FLOW
Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
Numerical solution of compressible Navier-Stokes flows p 166 N89-18618
Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640
Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N89-18654

COMPRESSION LOADS
Measurements of change of stature in the assessment of static and dynamic spinal loading p 193 N87-13957

COMPRESSION TESTS
Modeling of deformation and microstructural changes in P/M Rene 95 under isothermal forging conditions p 119 N89-15264
Microstructures, flow properties and processing of Ti6242 alloy p 112 N89-15268

COMPRESSOR BLADES
Vibration analysis by speckle interferometry p 183 N87-21197
Tip clearance measurement in modern compressor components p 179 N87-21199
Vortex shedding in compressor blade wakes p 58 N87-21932
Understanding fan blade flutter through linear cascade aerodynamic testing p 59 N87-24407
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473
Operation of gas turbine engines in dust-laden environments p 63 N88-17654
Radial compressor design using an Euler solver p 66 N88-17675
Secondary flow measurements with L2F technique in centrifugal compressors p 66 N88-17676
Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17679
Experimental investigation of a supercritical compressor rotor blade section p 67 N88-17680
Computation of secondary flows in an axial multistage compressor p 67 N88-17681
The effects of a compressor rebuild on gas turbine engine performance p 70 N89-16803

COMPRESSOR EFFICIENCY
Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473
Method for predicting performance limits of centrifugal compressors p 66 N88-17677

COMPRESSOR ROTORS
Laser velocimetry study of stator/rotor interactions in a multi-stage gas turbine compressor p 173 N87-21181

COMPRESSORS
Laser velocimetry study of stator/rotor interactions in a multi-stage gas turbine compressor p 173 N87-21181
Tip clearance measurement in modern compressor components p 179 N87-21199
Compressor blade clearance measurement using capacitance and phase lock techniques p 133 N87-21200

COMPUTATION

- Application of modified loss and deviation correlations to transonic axial compressors p 62 N88-13344
[AGARD-R-745]
Computation of secondary flows in an axial multistage compressor p 67 N88-17681

COMPUTATION

- The influence of large scale computing on aircraft structural design p 31 N86-30726
[AGARD-R-726]
Computational weld mechanics p 175 N87-17052
Evaluation of results of boundary-layer calculations with regard to design aerodynamics p 158 N87-22150
An approach to practical aerodynamic calculations p 158 N87-22151
Computation of tip and corner region flows p 159 N87-22153
Algorithm and general software considerations p 228 N89-11397

COMPUTATIONAL FLUID DYNAMICS

- Applications of Computational Fluid Dynamics in Aeronautics
[AGARD-CP-412] p 5 N87-20199
Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20200
New numerical techniques in the method of singularities for application to complex three-dimensional configurations p 233 N87-20205
The integration of computational fluid dynamics into the military aircraft design process p 33 N87-20210
Utilization of Euler codes in nonlinear aerodynamics p 6 N87-20215
Using the boundary-layer equations in three-dimensional viscous flow simulation p 155 N87-20222
Applications of RAE viscous flow methods near separation boundaries for three-dimensional wings in transonic flow p 7 N87-20224
Transonic Navier-Stokes wing solutions using a zonal approach Part 2 High angle-of-attack simulation p 7 N87-20229
Transonic and Supersonic Phenomena in Turbomachines
[AGARD-CP-401] p 57 N87-21927
Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
Numerical viscous-inviscid interaction method for internally separated flows and shock-wave-boundary layer interaction p 156 N87-21939
Three-dimensional computation around turbomachine blades with fins p 59 N87-21940
A quasi three dimensional method for the calculation of transonic flows in turbomachines p 59 N87-21941
Transonic three-dimensional inviscid calculations in turbomachines p 59 N87-21942
Computation of transonic 2D cascade flow and comparison with experiments p 55 N87-21943
A numerical study of unsteady flow effects in a supersonic compressor cascade p 59 N87-21944
A numerical study of the 3D flowfield in a transonic compressor rotor with a modelling of the tip clearance flow p 59 N87-21945
Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946
Some turbomachinery blade passage analysis methods: Retrospect and prospect p 59 N87-21947
Determination of the supersonic cascade entrance zone p 157 N87-21948
Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949
A shock loss model for supercritical subsonic flows in transonic axial flow compressors p 60 N87-21950
Comparison between inverse designed (PVD) airfoils and standard series airfoils for high loaded axial turbine nozzle application p 60 N87-21951
Computation of unsteady flows using the point vortex method p 157 N87-22138
Computation of Three-Dimensional Boundary Layers Including Separation
[AGARD-R-741] p 158 N87-22145
Three-dimensional boundary layers: Introduction to calculation methods p 158 N87-22146
Physics and modelling of three-dimensional boundary layers p 158 N87-22147
Three-dimensional shear layer experiments and their use as test cases for calculation methods p 158 N87-22148
Viscous analyses for flow through subsonic and supersonic intakes p 61 N87-24469
Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473

- Technical evaluation report on the Fluid Dynamics Panel Symposium on Applications of Computational Fluid Dynamics in Aeronautics p 159 N87-27958
[AD-A172209]
Future Research on Transonic Unsteady Aerodynamics and its Aeroelastic Applications p 9 N87-28519
[AGARD-R-749]
Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center (NAS 115 89133) p 9 N87-28519
Turbulence modelling through one point closures-applications-enlightening by large eddy simulation p 159 N88-11972
Aerodynamics of Hypersonic Lifting Vehicles
[AGARD-CP-428] p 10 N88-13219
Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
Aerothermodynamics research at NASA Ames p 12 N88-13242
The RAE experimental data-base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250
The role of experimental investigation and computational fluid dynamics during fighter aircraft design p 40 N88-13326
Transonic blade design on rotational stream surfaces p 60 N88-17671
Computation of secondary flows in an axial flowstage compressor p 57 N88-17681
Aerodynamics of Hypersonic Lifting Vehicles: Fluid Dynamics Panel AGARD Symposium
[AGARD-AR-246] p 164 N88-27480
Boundary layer simulation and control in wind tunnels
[AGARD-AR-224] p 3 N88-28657
Complex configurations p 86 N88-28661
Computational tools for simulation methodologies p 86 N88-28665
Empirical tools for simulation methodologies p 86 N88-28666
Transport type configurations p 43 N88-28667
Combat aircraft p 43 N88-28668
Missiles, fuselages and similar bodies p 14 N88-28669
Introduction and critical flow phenomena p 14 N88-28670
Boundary layer manipulation p 15 N88-28677
Three dimensional grid generation for complex configurations: Recent progress p 226 N88-29313
[AGARD-AG-309]
Experience with three dimensional composite grids p 108 N88-29324
Gas turbine combustion modeling p 108 N88-29336
Numerical modeling of combustion processes in gas turbines p 108 N88-29339
Computational Fluid Dynamics Algorithms and Supercomputers p 223 N89-11395
[AGARD-AG-311]
Vectorization of FORTRAN programs at do-loop level p 228 N89-11398
Computational fluid dynamics and supercomputers, chapter 6 p 165 N89-11400
Aerodynamic Data Accuracy and Quality Requirements and Capabilities in Wind Tunnel Testing
[AGARD-CP-429] p 87 N89-16846
The accurate measurement of drag in the 8 ft x 8 ft tunnel p 88 N89-16855
The use of computational fluid dynamic methods to assess the effects of model support systems and working section modifications on the flow around wind tunnel models p 88 N89-16862
Physical aspects of viscous simulation and associated research requirements p 89 N89-16865
On Reynolds number effects and simulation p 17 N89-16866
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-16867
Wind tunnel requirements for computational fluid dynamics code verification p 90 N89-16880
Validation of Computational Fluid Dynamics: Volume 1 Symposium papers and round table discussion
[AGARD-CP-437-VOL-1] p 165 N89-18610
CFD validation philosophy p 166 N89-18611
Accuracy requirements and benchmark experiments for CFD validation p 166 N89-18612
Wind tunnel experiments on airfoil models for the assessment of computational flow methods p 18 N89-18614
Parametric study of grid size, time step and turbulence modeling on Navier Stokes computations over airfoils p 18 N89-18615
Comparative study of calculation procedures for viscous flows around airfoils in the transonic regime p 186 N89-18617
Status of CFD validation on the vortex flow experiment p 167 N89-18620
A theoretical and experimental evaluation of a numerical method for calculating supersonic flows over wing-body configurations p 19 N89-18622

SUBJECT INDEX

- Accurate solutions, parameter studies and comparisons for the Euler and potential flow equations p 167 N89-18624
Reliability and validity of CFD codes: Flight and wind tunnel comparison p 167 N89-18626
CFD applications in design and analysis of the Fokker 50 and Fokker 100 p 19 N89-18629
Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630
CFD validation experiments for internal flows p 168 N89-18635
Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
Validation of Computational Fluid Dynamics: Volume 2 Poster papers p 169 N89-18640
[AGARD-CP-437-VOL-2]
Validation of a multi-block Euler flow solver with propeller slipstream flows p 20 N89-18649
Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650
The design of the GARTEUR low aspect ratio wing for use in the validation of shear layer and overall flow prediction methods p 45 N89-18652
Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653
Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N89-18654
Comparison of theory and experiment for four supercritical low drag airfoils p 21 N89-18655
Detailed flowfield measurements over a 75 deg swept delta wing for code validation p 21 N89-18657
Experiments and code validation for junction flows p 21 N89-18658
Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660
Documentation of separated flows for computational fluid dynamics validation p 170 N89-18662
Overview of CFD methods and comparison with flight aerothermal data p 21 N89-18663
- COMPUTATIONAL GRIDS**
Modelling for the finite element method p 162 N87-16379
Applications of Computational Fluid Dynamics in Aeronautics
[AGARD-CP-412] p 5 N87-20199
Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20200
A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
Numerical grid generation around complete aircraft configurations p 224 N87-20202
Geometry definition and grid generation for a complete fighter aircraft p 224 N87-20203
New numerical techniques in the method of singularities for application to complex three-dimensional configurations p 233 N87-20205
Prediction of wing-body-store aerodynamics using a small perturbation method and a grid embedding technique p 15 N87-20207
A second order Godunov method for tactical missiles p 233 N87-20211
Analysis of the F-16 flow field by a block grid Euler approach p 6 N87-20217
Transonic three-dimensional inviscid calculations in turbomachines p 59 N87-21942
Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
Three dimensional grid generation for complex configurations: Recent progress p 226 N88-29313
[AGARD-AG-309]
Lessons learned in the mesh generation for PN/S calculations p 226 N88-29314
Three-dimensional elliptic grid generation for an F-16 p 226 N88-29315
Component adaptive grid generation for aircraft configurations p 226 N88-29316
Generation of multiple block grids for arbitrary 3D geometries p 226 N88-29317
Grid generation on and about a cranked-wing fighter aircraft configuration p 226 N88-29318
Grid generation for an advanced fighter aircraft p 226 N88-29319
Algebraic grid generation for fighter type aircraft p 227 N88-29320
Composite grid generation for aircraft configurations with the EAGLE code p 227 N88-29321
Analytical surfaces and grids p 227 N88-29322
Experience with three dimensional composite grids p 227 N88-29324
Grid generation around transport aircraft configurations using a multi-block structured computational domain p 227 N88-29325
The Forge 2 isotherm air forging model p 112 N89-15271
Parametric study of grid size, time step and turbulence modeling on Navier Stokes computations over airfoils p 18 N89-18615

SUBJECT INDEX

- Numerical solution of compressible Navier-Stokes flows p 166 N89-18618
A theoretical and experimental evaluation of a numerical method for calculating supersonic flows over wing-body configurations p 19 N89-18622
 Solution on unstructured grids for the Euler and Navier-Stokes equations p 169 N89-18636
 Efforts toward the validation of a computational fluid dynamics code for analysis of internal aerodynamics p 169 N89-18643
 Validation of a multi-block Euler flow solver with propeller slipstream flows p 20 N89-18649
 Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656
 Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows p 170 N89-18661
- COMPUTER AIDED DESIGN**
 Geometry definition and grid generation for a complete lighter aircraft p 224 N87-20203
 OASIS: A modern tool for real-time simulation p 80 N87-23638
 Pivoted simulation in the development of the XV-15 tilt rotor research aircraft p 81 N87-23646
 Integrated Design of Advanced Fighters [AGARD-LS-153] p 35 N87-24445
 Rapid prototyping of user-computer interfaces during system design p 222 N87-29520
 An EHF telecommunication system engineering model p 141 N88-19674
 Development cost reduction using integrated CAE-CAD-CAM techniques p 225 N88-20182
 Time and cost reduction through computer integrated manufacture p 225 N88-20191
 The Design, Development and Testing of Complex Avionics Systems [AGARD-CP-417] p 47 N88-23767
 Rapid prototyping of complex avionics system architectures p 47 N88-23771
 The avionics software architecture impact on system architecture p 48 N88-23778
 Managing advanced avionics system design p 49 N88-23783
 Advanced development of a cockpit automation design support system p 49 N88-23785
 Design and development of an avionics system adapted to helicopter missions p 49 N88-23788
 Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795
 Interfacing and integrating hardware and software design systems p 50 N88-23796
 Avionics systems Development method and computer tools p 51 N88-23799
 A software life cycle support environment p 225 N88-23800
 Coherent functional development: Key to successful future system integration p 246 N88-23803
 Special Course on Missile Aerodynamics [AGARD-R-754] p 14 N88-29755
 Semiempirical methods for airbreathing missiles p 16 N88-29763
 Aerospace Materials Process Modeling [AGARD-CP-426] p 119 N89-15262
 Metallurgical modeling of superalloy disc isothermal forgings p 120 N89-15266
 Use of vendor consultations for implementation of process simulation technology p 121 N89-15278
 Overall optimization of solid rocket motor p 102 N89-16916
 CFD applications in design and analysis of the Fokker 50 and Fokker 100 p 19 N89-18629
- COMPUTER AIDED MANUFACTURING**
 Geometry definition and grid generation for a complete lighter aircraft p 224 N87-20203
 Development cost reduction using integrated CAE-CAD-CAM techniques p 225 N88-20182
 Prototype manufacturing techniques for reducing cost, schedule, and technical risk p 244 N88-20189
 Time and cost reduction through computer integrated manufacture p 225 N88-20191
 Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795
 Aerospace Materials Process Modeling [AGARD-CP-426] p 119 N89-15262
 Processing science and materials development p 119 N89-15263
 Prediction of temperature distribution in axisymmetric extrusion p 120 N89-15265
 An application of computer modeling to isothermal forging p 121 N89-15280
- COMPUTER GRAPHICS**
 The Application of Microcomputers to Aerospace and Defense Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19920
 Microcomputers in information resource sharing: Part 1. Data and graphics systems p 223 N87-19925
 Applications of Computational Fluid Dynamics in Aeronautics [AGARD-CP-412] p 5 N87-20199
 Geometry definition and grid generation for a complete lighter aircraft p 224 N87-20203

- OASIS: A modern tool for real-time simulation p 80 N87-23638
 Design optimization of lighter aircraft p 36 N87-24451
 Digital simulation techniques for end game phenomena p 228 N89-10051
 Panoramic Cockpit Control and Display System (PCCADS) p 219 N89-18019
- COMPUTER NETWORKS**
 The Application of Microcomputers to Aerospace and Defense Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19920
 Bibliographic networks and microcomputer applications for aerospace and defense scientific and technical information p 248 N87-19923
 Application of LAN's and electronic office techniques in the library p 232 N87-19924
 Layered protocols in voice interaction with computers p 136 N87-29524
 Fiber optic buses and networks for advanced avionics architectures p 52 N89-10836
 High speed parallel processing networks for advanced architectures p 223 N89-10837
- COMPUTER PROGRAM INTEGRITY**
 Computing systems dependability and fault tolerance: Basic concepts and terminology p 222 N88-10797
 Some approaches to the design of high integrity software p 73 N88-10799
 ISASURE: Integration of security and fault tolerance in the REALITE 2000 system p 74 N88-10802
- COMPUTER PROGRAMMING**
 An introduction to error-control coding with application to HF communications p 122 N88-27570
 Knowledge Based Concepts and Artificial Intelligence Applications to Guidance and Control [AGARD-LS-155] p 74 N88-10806
 How to use PROLOG for expert system programming p 225 N88-10816
 Guidelines for evaluation of software engineering tools p 230 N89-18461
 Three generations of software engineering for airborne systems p 230 N89-18465
- COMPUTER PROGRAMS**
 Liquid propellant gun technology p 115 N86-29064
 The influence of large-scale computing on aircraft structural design [AGARD-R-726] p 31 N86-30726
 Modeling for the finite element method p 182 N87-16379
 Trends in software and system development p 223 N87-19928
 Computer models of the spacecraft wake p 98 N87-26948
 Rapid prototyping of user-computer interfaces during system design p 222 N87-29520
 A graphical aid to IKBS program development p 224 N87-29521
 Structural design requirements for aircraft incorporating active control technology p 41 N88-19453
 Modeling of functional specifications for onboard software: Experience with the Rafale avionics system p 48 N88-23777
 The avionics software architecture impact on system architecture p 48 N88-23778
 Workshops for the design of avionics systems and the development of onboard software p 51 N88-23802
 Composite grid generation for aircraft configurations with the EAGLE code p 227 N88-29321
 Space marching Euler solvers p 15 N88-29759
 Prediction of dynamic derivatives p 15 N88-29761
 Prediction of base flows p 16 N88-29765
 Linguistic-technical aspects of machine translation p 252 N88-30461
 A generic seeker simulation for the evaluation of active RF guidance systems p 227 N89-10050
 Computing Systems Configuration for Highly Integrated Guidance and Control Systems [AGARD-LS-156] p 4 N89-10831
 Computing system configuration for lighter aircraft flight control systems p 79 N89-10832
 Restructuring of basic linear algebraic algorithms: chapter 5 p 228 N89-11399
 Physical modeling and viscoplasticity studies of the forging process p 120 N89-15269
 Generic casting modeling p 121 N89-15276
 A numerical model of directional solidification of cast turbine blades p 121 N89-15277
 The application of process modelling to heat treatment of superalloys p 112 N89-15281
 A joint study on the compensation of in-field aero engine vibration diagnosis p 71 N89-16808
 The use of computational fluid dynamic methods to assess the effects of model support systems and working section modifications on the flow around wind tunnel models p 88 N89-16862
 Accuracy of various wall correction methods for 3D subsonic wind-tunnel testing p 89 N89-16863
 Computerized thermographic technique for the detection of boundary layer separation p 18 N89-16876
 Design and analysis of solid rocket motor nozzle p 101 N89-16908

COMPUTER TECHNIQUES

- Overall optimization of solid rocket motor p 102 N89-16916
 Strength analysis of mechanically fastened composite structures p 186 N89-17692
 Crushing behaviour of helicopter subfloor structures p 23 N89-18428
 Transport airplane crash simulation: validation and application to crash design criteria p 24 N89-18435
 Crash simulation and verification for metallic sandwich and laminate structures p 25 N89-18437
 Control of on-board software p 55 N89-18452
 Can Ada (MIL-STD-1815A) fly missiles p 231 N89-18473
 Signal noise/interference combiner unit programmable (SINCUP) p 149 N89-18575
 Electromagnetic code for naval applications p 150 N89-18583
 Narrative compression coding for a channel with errors p 150 N89-18584
 Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593
 CFD validation philosophy p 166 N89-18611
 On the validation of a code and a turbulence model appropriate to circular control airfoils p 18 N89-18616
 CFD applications in design and analysis of the Fokker 50 and Fokker 100 p 19 N89-18629
 Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630
 Development and application of a weapons multiblock suite p 168 N89-18633
 Arcjet validation of surface catalysis using a viscous shock-layer approach p 168 N89-18634
 CFD validation experiments for internal flows p 168 N89-18635
 Validation of an Euler code for hydraulic turbines p 168 N89-18637
 Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 168 N89-18638
 Efforts toward the validation of a computational fluid dynamics code for analysis of internal aerodynamics p 169 N89-18643
 A comparative study and validation of upwind and central-difference Navier-Stokes codes for high-speed flows p 169 N89-18647
 Validation of Computational Fluid Dynamics: Volume 2: Poster papers [AGARD-CP-437-VOL 2] p 163 N89-18648
 Validation of a multi-block Euler flow solver with propeller slipstream flows p 20 N89-18649
 Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N89-18654
 Comparison of theory and experiment for four supercritical, low drag airfoils p 21 N89-18655
 Detailed flowfield measurements over a 75 deg swept delta wing for code validation p 21 N89-18657
 Experiments and code validation for junction flows p 21 N89-18658
- COMPUTER STORAGE DEVICES**
 The application of multi-dimensional access memories to radar signal processing systems p 129 N87-18740
- COMPUTER SYSTEMS DESIGN**
 Flexible and high quality software on a multiprocessor computer system controlling a research flight simulator p 81 N87-23643
 Rapid prototyping of user-computer interfaces during system design p 222 N87-29520
 The application of emulation techniques in the analysis of highly reliable guidance and control computer systems p 73 N88-10798
 ISASURE: Integration of security and fault tolerance in the REALITE 2000 system p 74 N88-10802
 The state of practice in Ada-based program design languages p 229 N88-18457
 Use of Markov probability and reliability model generation methods in the analysis of reliability of a fault tolerant hardware and software based system with flexible repair policies p 181 N89-18477
- COMPUTER SYSTEMS PERFORMANCE**
 Flexible and high quality software on a multiprocessor computer system controlling a research flight simulator p 81 N87-23643
- COMPUTER SYSTEMS PROGRAMS**
 Application of Ada higher order language to guidance and control [AGARD-LS-146] p 72 N86-30740
 OASIS: A modern tool for real-time simulation p 80 N87-23638
- COMPUTER TECHNIQUES**
 Introduction to finite element basics p 233 N87-16377
 Closing the man-machine loop: On the use of physiological measures to affect computer-controlled devices p 211 N87-29507
 CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685

COMPUTER VISION

- Fourth generation neurocognitive pattern analysis system p 198 N88-27666
- A statistical procedure for the evaluation of presence/non-presence of stimulus-related EEG activity p 199 N88-27669

COMPUTER VISION

- A real time vision system for robotic arc welding p 177 N87-17066

COMPUTERIZED SIMULATION

- Pressure wave Gun barrel interactions p 154 N86-29068
- Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation (ISBN-92-835-0399-6) p 79 N87-15985
- The use of simulated synthetic aperture radar Signals of ships in the development of an automatic ship classification system p 132 N87-18758
- Requirements and applications for radar simulations A standpoint of an airframe company p 133 N87-18759
- Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
- Numerical simulation of internal and external inviscid and viscous 3-D flow fields p 155 N87-20213
- Application of the Navier-Stokes equations to solve aerodynamic problems p 7 N87-20225
- Transonic Navier-Stokes wing solution using a zonal approach Part 1: Solution methodology and code validation p 7 N87-20228
- Simulation of three dimensional transonic flow with separation past a hemisphere cylinder configuration p 8 N87-20230
- Numerical simulation of the flow field around a complete aircraft p 8 N87-20231
- Recent activity in vortex methods in the United States p 157 N87-22144
- The assessment and evaluation of combat performance improvements p 34 N87-22675
- Computer simulation studies on human control reliability in manual aircraft control The origin of PIO p 211 N87-23644
- Piloted simulation in the development of the XV-15 tilt rotor research aircraft p 81 N87-23646
- Manned air to air combat simulation p 81 N87-23648
- Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
- Simulation as a fighter design tool p 35 N87-24447
- Jet reaction control system for autonomous precision munition p 92 N87-29482
- The role of experimental investigation and computational fluid dynamics during fighter aircraft design p 40 N88-13326
- Numerical simulation of diffuser/compressor dome interaction p 65 N88-17663
- The use of hardware-in-the-loop techniques in the development of a modern air-to-surface missile system p 82 N88-19562
- Systems analysis and simulation techniques Essential tools for balanced complex weapon system designs in terms of performance and cost p 244 N88-20187
- Coherent functional development Key to successful future system integration p 246 N88-23803
- Three-dimensional elliptic grid generation for an F-16 p 226 N88-29315
- Numerical methods Euler time dependent solver p 15 N88-29760
- A generic seeker simulation for the evaluation of active RF guidance systems p 227 N89-10050
- Range delay techniques for radar target simulators p 87 N89-10054
- Simulation validation experience PATRIOT guidance system p 79 N89-10055
- Heuristic system model validation p 44 N89-10057
- Aerospace Materials Process Modeling (AGARD-CP-426) p 119 N89-15262
- A computer program simulating the hot forging of metal powder p 111 N89-15267
- Simulation and design of high precision unit processes via numerical methods p 120 N89-15273
- A mixed Eulerian-Lagrangian finite element method for simulation of thermo-mechanical forming processes p 120 N89-15274
- Finite element simulation of metal-forming processes p 120 N89-15275
- Use of vendor consortiums for implementation of process simulation technology p 121 N89-15278
- Industrial introduction of the modeling of aeronautical forging and foundry process simulation p 121 N89-15279
- An application of computer modelling to isothermal forging p 121 N89-15280
- Wind tunnel predicted air vehicle performance A review of lessons learned p 87 N89-18852
- On Reynolds number effects and simulation p 17 N89-18866
- A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-18867
- Space-time statistics of waves propagating through a deep phase screen p 144 N89-17719
- Measurement, modeling and simulation of LOS microwave channels p 146 N89-17734

- Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a bistatic radar p 147 N89-17748
- Crashworthiness activities on MBB helicopters p 23 N89-18425
- Developments and perspectives at AMD-BA in the field of impact and crash sizing p 23 N89-18427
- Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430
- Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433
- Study of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18434
- Transport airplane crash simulation, validation and application to crash design criteria p 24 N89-18435
- Crashworthiness of aircraft structures p 24 N89-18436
- Crash simulation and verification for metallic, sandwich and laminate structures p 25 N89-18437
- MADYMO crash victim simulations A flight safety application p 122 N89-18441
- Accelerated convergence for synchronous approximate agreement p 231 N89-18474
- Numerical accuracy assessment p 166 N89-18613
- The DFVLR-F5 wing experiment Towards the validation of the numerical simulation of transonic viscous wing flows p 19 N89-18623
- Numerical simulation of separated supersonic flows around tactical missile bodies p 19 N89-18632
- On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N89-18645
- Time-dependent numerical simulation of the starting flow of an incompressible fluid past a downstream-facing step p 169 N89-18646

CONCENTRATION (COMPOSITION)

- Accurate measurements of combustion species concentrations using CARS p 103 N87-21173
- An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-18618

CONCURRENT PROCESSING

- The effects of two Carlucci initiatives concurrency and streamlining, on the test and evaluation phase of system acquisitions p 245 N88-20198

CONDUCTORS

- Experiments Test range facilities, part 2 p 138 N88-11921

CONFERENCES

- The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes (AGARD-CP-385) p 247 N86-28793
- Interior Ballistics of Guns p 117 N86-29063
- Aircraft and Bearing Biological Systems (AGARD-CP-394) p 174 N86-29200
- Backache and Back Discomfort ... conference (AGARD-CP-378) p 190 N87-13932
- Advanced Joining of Aerospace Metallic Materials ... conference proceedings (AGARD-CP-398) p 175 N87-17051
- Multifunction Radar for Airborne Applications ... conference (AGARD-CP-381) p 125 N87-18721
- The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work (AGARD-LS-149) p 221 N87-19920
- The Repair of Aircraft Structures Involving Composite Materials p 1 N87-20174
- Mechanical Qualification of Large Flexible Spacecraft Structures (AD-A175529) p 94 N87-20355
- Advanced Instrumentation for Aero Engine Components (AGARD-CP-399) p 118 N87-21170
- Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users (AGARD-CP-410) p 25 N87-21081
- Transonic and Supersonic Phenomena in Turbomachines (AGARD-CP-401) p 57 N87-21927
- Round Table Discussion on Modeling of Time-Variant Flows Using Vortex Dynamics (AGARD-AR-239) p 157 N87-22137
- Improvement of Combat Performance for Existing and Future Aircraft (AGARD-CP-409) p 33 N87-22663
- Flight Simulation (AGARD-CP-408) p 80 N87-23633
- Short Course on Cardiopulmonary Aspects of Aerospace Medicine (AGARD-R-758) p 193 N87-24070
- Aeroelasticity in axial flow turbomachines Volume 1 Unsteady turbomachinery aerodynamics p 8 N87-24398
- Engine Response to Distorted Inflow Conditions conference proceedings (AGARD-CP-400) p 60 N87-24464

- The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications (AGARD-CP-406) p 97 N87-26937
- Design Methods in Solid Rocket Motors (AGARD-LS-150) p 100 N87-28589
- Advances in Guidance and Control Systems and Technology (AGARD-CP-411) p 28 N87-29474
- Superplasticity (AGARD-LS-154) p 111 N87-29641
- Knowledge Based Concepts and Artificial Intelligence Applications to Guidance and Control (AGARD-LS-155) p 74 N88-10806
- Rotorcraft Design for Operations (AGARD-CP-423) p 37 N88-11649
- Technical evaluation report on the Fluid Dynamics Panel Symposium on aerodynamic and related hydrodynamic studies using water facilities (AGARD-AR-225) p 159 N88-11968
- Aerodynamics of Hypersonic Lifting Vehicles (AGARD-CP-428) p 10 N88-13219
- Special Course on Fundamentals of Fighter Aircraft Design (AGARD-R-740) p 39 N88-13315
- Workshop on Avionics Corrosion Control (AGARD-R-733) p 46 N88-13331
- Static Aeroelastic Effects on High Performance Aircraft (AGARD-CP-403) p 76 N88-13348
- Advanced Technology for Aero Gas Turbine Components (AGARD-CP-421) p 62 N88-17647
- Workshop on Design Loads for Advanced Fighters (AGARD-R-746) p 41 N88-19449
- Advances in Air-Launched Weapon Guidance and Control (AGARD-CP-431) p 92 N88-19553
- Terrestrial Propagation Characteristics of Modern Systems of Communications Surveillance Guidance and Control (AGARD-CP-407) p 138 N88-19653
- A review of the NATO special group of experts on Naval hydrodynamics and related problems p 164 N88-23157
- The Design, Development and Testing of Complex Avionics Systems (AGARD-CP-417) p 47 N88-23767
- Flight Mechanics Panel Symposium on Rotorcraft Design for Operations Technical evaluation report (AGARD-AR-243) p 42 N88-26262
- Aerodynamics of Hypersonic Lifting Vehicles Fluid Dynamics Panel AGARD Symposium (AGARD-AR-246) p 164 N88-27485
- Electric and Magnetic Activity of the Central Nervous System Research and Clinical Applications in Aerospace Medicine (AGARD-CP-432) p 190 N88-27683
- Visual Effects in the High Performance Aircraft Cockpit (AGARD-LS-156) p 216 N88-29291
- Barriers to Information Transfer and Approaches Toward Their Reduction (AGARD-CP-430) p 251 N89-30456
- Information technology to facilitate group interaction p 252 N88-30463
- Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Vehicle Development Time and Cost Reduction (AGARD-AR-244) p 4 N89-10001
- Media Effects on Electronic Systems in the High Latitude Region (AGARD-LS-162) p 141 N89-11931
- Aerospace Materials Process Modeling (AGARD-CP-426) p 119 N89-15262
- AGARD-SMP Review Damage Tolerance for Engine Structures 1 Non-Destructive Evaluation (AGARD-R-768) p 180 N89-17253
- Guidance and Control of Precision Guided Weapons (AGARD-CP-435) p 93 N89-17605
- Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures (AGARD-CP-427) p 121 N89-17685
- Scattering and Propagation in Random Media (AGARD-CP-419) p 122 N89-17706
- Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness (AGARD-CP-443) p 22 N89-18421
- Software Engineering and Its Application to Avionics (AGARD-CP-439) p 55 N89-18446
- Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems (AGARD-CP-420) p 147 N89-18565
- Validation of Computational Fluid Dynamics Volume 2 Poster papers (AGARD-CP-437 VOL 2) p 169 N89-18648

CONGENITAL ANOMALIES

- Valvular and congenital heart disease in the aviator p 194 N87-24073

SUBJECT INDEX

SUBJECT INDEX

CONICAL BODIES

- Dynamic stability of hypersonic conical lifting vehicles according to Newton-Busemann theory p 75 N88-13247
- Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650
- Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653

CONNECTORS

- Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18592

CONSCIOUSNESS

- Fighter design for human load limits p 41 N88-19451

CONSOLES

- Use of VDU's by flight simulator instructors p 80 N87-23641

CONTINUOUS WAVE RADAR

- Basic characteristics of FM-CW radar systems p 131 N87-18753

CONTROL BOARDS

- Panoramic Cockpit Control and Display System (PCCADS) p 219 N89-18019
- Lessons learned from the use of new command systems p 219 N89-18023

CONTROL EQUIPMENT

- Use of VDU's by flight simulator instructors p 80 N87-23641
- Jet reaction control system for autonomous precision munition p 92 N87-29482

CONTROL MOMENT GYROSCOPES

- A low cost gyroscope for guidance and stabilisation units p 171 N87-29478

CONTROL SIMULATION

- Simulation validation experience PATRIOT guidance system p 79 N89-10055

CONTROL STICKS

- The development of the T-46 next generation trainer manned engineering simulator at the US Air Force Flight Test Center p 82 N87-23652
- Demonstration of FOG-M (Fibre Optic Guided Missile) capabilities by means of simulation and effects of proprioceptive feedback on the control p 93 N89-17809
- Towards the next generation fighter cockpit: The EAP experience p 219 N89-18025
- Active and passive side stick controllers: Tracking task performance and pilot control behaviour p 220 N89-18028

- The use of integrated side-arm controllers in helicopters p 220 N89-18029
- Advanced flight control system for nap-of-the-earth flight p 220 N89-18030

CONTROL SURFACES

- Integrated design of structures p 34 N87-22669
- Effectiveness of various control surfaces in quasi-steady and unsteady conditions (AGARD-R-735) p 77 N88-17682
- Accuracy of lift and center of thrust measurements at missile control surfaces p 18 N89-16875

CONTROL SYSTEMS DESIGN

- Application of Ada higher order language to guidance and control (AGARD-LS-146) p 72 N88-30740
- Benefits of passive damping as applied to active control of large space structures p 96 N87-20371
- Multi-axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373
- Design criteria for multi-loop flight control systems p 72 N87-21901
- Fault tolerant considerations and methods for guidance and control systems (AGARD-AG-289) p 73 N88-10796
- Flight test of a resident backup software system p 74 N88-10805
- US Naval Air Force avionics and electrical system corrosion prevention and control maintenance p 47 N88-13334
- Interaction between structural considerations and system design in advanced flight controls p 77 N88-19458
- Advances in Air-Launched Weapon Guidance and Control (AGARD-CP-431) p 92 N88-19553
- Automatic flight control system for modern helicopters p 77 N88-19558
- Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- The use of hardware in the loop techniques in the development of a modern air to surface missile system p 93 N88-19562
- Computing Systems Configuration for Highly Integrated Guidance and Control Systems (AGARD-LS-158) p 4 N89-10831
- Control system configuration for fighter aircraft flight control systems p 79 N89-10832
- Advanced avionics architecture pave pillar p 51 N89-10834

- The advantage of a thrust rating concept used on the RB199 engine p 70 N89-16800
- The Man-Machine Interface in Tactical Aircraft Design and Combat Automation p 217 N89-18009

- Pilot control devices p 220 N89-18027
- Active and passive side stick controllers: Tracking task performance and pilot control behaviour p 220 N89-18028

- The use of integrated side-arm controllers in helicopters p 220 N89-18029
- Advanced flight control system for nap-of-the-earth flight p 220 N89-18030
- Integrated control and avionics for air superiority p 221 N89-18032

- AFTI/F-16 impact of cockpit automation on pilot acceptance p 221 N89-18033
- Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034

- Definitions and requirements for distributed real-time systems p 232 N89-18476
- Three-dimensional calculations of lateral jet interaction with an external supersonic flow p 19 N89-18631

CONTROL THEORY

- Improved guidance and control automation at the man-machine interface p 211 N87-19987
- Benefits of passive damping as applied to active control of large space structures p 96 N87-20371
- Development of in-flight simulation aircraft for research and training applications in UK p 83 N87-23658
- Application of optimal estimation and control concepts to a bank-to-turn missile p 92 N87-29483

CONTROLABILITY

- Visual and motion cueing in helicopter simulation p 80 N87-23634
- Computer simulation studies on human control reliability in manual aircraft control: The origin of PIO p 211 N87-23644
- Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
- Assessing workload for minimum crew certification: Part 1. Static workload analysis and performance analysis p 214 N87-30067

- Advances in Flying Qualities (AGARD-LS-157) p 4 N88-29735
- Advances in flying qualities: Concepts and criteria for a mission oriented flying qualities specification p 43 N88-29739

- A second look at MIL prime flying qualities requirements p 44 N88-29740
- The optimal control pilot model and applications p 217 N88-29741

- The role of simulation in flying qualities and flight control system related development p 87 N88-29742

CONTROLLERS

- Active structural controllers emulating structural elements by ICUs p 96 N87-20367
- Multi-axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373
- A time-based concept for terminal-area traffic management p 27 N87-21895
- Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897
- The application of optimal control techniques to the UTIAS research simulator p 80 N87-23637
- Minimisation of helicopter vibration through active control of structural response p 75 N88-11562
- Pumping systems and flow interfaces for rapid response electronic reheat controls p 65 N88-17665
- Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 66 N88-17674

- Advances in Air-Launched Weapon Guidance and Control (AGARD-CP-431) p 92 N88-19553
- Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561

CONVECTION

- Influence of the convection on evaporation and combustion of a fuel droplet p 110 N88-26948

CONVERGENCE

- Accelerated convergence for synchronous approximate agreement p 231 N89-18474

COOLING

- The mixture of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18748

COOLING SYSTEMS

- Advanced techniques employed in blade cooling research p 64 N88-17659

COOPERATION

- Short-Crack Growth Behaviour in an Aluminum Alloy An AGARD Cooperative Test Programme (AGARD-R-732) p 184 N89-17287
- Database program for crack propagation data acquired in the AGARD short cracks collaborative effort p 185 N89-17297

COST REDUCTION

COORDINATE TRANSFORMATIONS

- Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20200

CORES

- Microstructural examination of core-programme material p 184 N89-17289

CORNER FLOW

- Computation of tip and corner region flows p 159 N87-22153

CORONARY ARTERY DISEASE

- Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072
- Coronary risk factors in aerospace medicine p 195 N87-24078

CORRECTION

- Wind tunnel sidewall-boundary-layer effects in transonic air: Is testing some correctable, but some not p 89 N89-16864

CORRELATION

- The correlation between methodological and low-level angle-of-arrival measurements p 140 N88-19668
- Bolted joints in composites primary structures p 186 N89-17698

CORROSION

- Knowledge based systems in information work p 218 N87-19926
- Patch repair of corroded aircraft skin areas p 3 N87-20191

CORROSION PREVENTION

- AGARD Corrosion Handbook Volume 1 Corrosion causes and case histories p 110 N88-16374
- AGARD corrosion handbook Volume 2 Aircraft corrosion control documents A descriptive catalogue (AGARD-AG-278-VOL-2) p 110 N87-24553
- Workshop on Avionics Corrosion Control (AGARD-R-733) p 46 N88-13331
- Avionic corrosion p 46 N88-13332
- Corrosion of electronic components p 46 N88-13333
- US Naval Air Force avionics and electrical system corrosion prevention and control maintenance p 47 N88-13334
- Corrosion in avionics and associated equipment: cause effect and prevention p 47 N88-13335
- Avionics and corrosion p 47 N88-13336

CORROSION RESISTANCE

- AGARD corrosion handbook Volume 2 Aircraft corrosion control documents A descriptive catalogue (AGARD-AG-278-VOL-2) p 110 N87-24553

CORROSION TESTS

- AGARD Corrosion Handbook Volume 1 Corrosion causes and case histories p 110 N88-16374

COST ANALYSIS

- Cost analysis of aircraft projects p 3 N87-22664
- Advanced fighter design: Operational experience and future requirements p 36 N87-24453
- Hypersonic aerodynamics: Applications for HOTOL p 13 N88-13252
- Flight Vehicle Development Time and Cost Reduction (AGARD-CP-424) p 243 N88-20173
- Picking winners: Parametric cost estimating and project management p 243 N88-20176
- Parametric study of the total cost of aircraft modernization in terms of development and equipment sales costs p 243 N88-20177
- The increased time and cost of development: Causes and (some) remedies p 243 N88-20178
- Reasons for increasing development cost of rotary wing aircraft and ideas to reverse the trend p 254 N88-20179
- What can be done to face growing development costs p 244 N88-20181
- Schedule and cost control of development p 245 N88-20196

COST EFFECTIVENESS

- Influence of engine variables on future helicopter systems p 32 N87-10072
- Navy technology requirements for unmanned airborne vehicles p 32 N87-16002
- Design/development tradeoffs to achieve a mission effective SOW guidance system p 91 N87-16003
- Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20196
- Systems analysis and simulation techniques: Essential tools for balanced complex weapon system designs in terms of performance and cost p 244 N88-20187
- Minimizing development flight test time and cost in the US Air Force p 245 N88-20192
- Cost effective simulation for millimeter wave guidance systems p 79 N89-10053

COST REDUCTION

- Cost analysis of aircraft projects p 3 N87-22664
- Changes in USAF structural loads requirements p 41 N88-19452
- Flight Vehicle Development Time and Cost Reduction (AGARD-CP-424) p 243 N88-20173

COSTS

- Risk reduction cost avoidance for full scale development begins with concept formulation p 243 N88-20174
- Development savings through parametric modeling of program costs p 243 N88-20175
- What can be done to face growing development costs p 244 N88-20181
- Development cost reduction using integrated CAE-CAD-CAM techniques p 225 N88-20182
- Organization of helicopter development activities with a view toward reduction of costs and cycles p 246 N88-20200

COSTS

- The costs of not having refined information p 247 N88-28798
- Information technology to facilitate group interaction p 252 N88-30463

COUNTER ROTATION

- Secondary flow measurements with L2F-technique in centrifugal compressors p 66 N88-17676

COUNTERMEASURES

- KRS: A knowledge-based mission planner p 235 N87-24943
- Range delay techniques for radar target simulators p 87 N88-10054

COUPLING

- Modeling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N89-12182
- An investigation of simulator sickness and an electromyographic study p 206 N89-12183

COUPLINGS

- Aeroelastic coupling: An elementary approach p 68 N89-19012

CRACK INITIATION

- AGARD engine disc cooperative test programme (AGARD-R-766) p 67 N88-28926

CRACK PROPAGATION

- Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- Composite repair of cracked aluminum structure p 2 N87-20183
- Fibre composite repair of cracked metallic aircraft components: Practical and basic aspects p 2 N87-20187
- Automated measurement of crack length and load line displacement at elevated temperature (AGARD-R-751) p 183 N88-26695
- AGARD engine disc cooperative test programme (AGARD-R-766) p 67 N88-28926
- Fatigue and assessment methods of blade vibration p 68 N89-10010
- Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
- Short Crack Growth Behaviour in an Aluminum Alloy An AGARD Cooperative Test Programme p 184 N89-17288
- Microstructural examination of core programme material p 184 N89-17289
- Preliminary fatigue tests on short-crack specimens p 184 N89-17290
- Long crack growth rate data: Constant amplitude and FALSTAFF loading p 185 N89-17295
- Long crack growth rate data: Gaussian loading p 185 N89-17296
- Database program for crack propagation data acquired in the AGARD short cracks collaborative effort p 185 N89-17297

CRACKING (FRACTURING)

- Automated measurement of crack length and load line displacement at elevated temperature (AGARD-R-751) p 183 N88-26695
- AGARD engine disc cooperative test programme (AGARD-R-766) p 67 N88-28926

CRACKS

- Aero-engine: Manufacturing cracks and their effect on operation p 174 N86-29239
- Study of the electron beam weldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
- Fibre composite repair of cracked metallic aircraft components: Practical and basic aspects p 2 N87-20187

CRASH LANDING

- Developments and perspectives at AMD BA in the field of impact and crash sizing p 23 N89-18427
- Full scale helicopter crash testing p 23 N89-18428
- Crushing behaviour of helicopter subfloor structures p 23 N89-18429
- Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430
- Crashworthy design of aircraft subfloor structural components p 24 N89-18431
- Study of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18434
- Transport airplane crash simulation: validation and application to crash design criteria p 24 N89-18435

Crashworthiness of aircraft structures

- p 24 N89-18436
- Crash simulation and verification for metallic, sandwich and laminate structures p 24 N89-18437
- Predicting crash performance p 25 N89-18438
- Human crashworthiness and crash load limits p 25 N89-18439

CRASHES

- Method and means for ground crash testing at the Centre d'Essais Aeronautique de Toulouse: Application to the SA 341 and AS 332 helicopters p 24 N89-18432
- MADYMO crash victim simulations: A flight safety application p 122 N89-18441
- Design and simulated crash validation of a dynamic response recorder p 221 N89-18442

CRASHWORTHINESS

- Crashworthiness of airframes (AGARD-R-737) p 22 N86-30709
- Regulatory aspect of crashworthiness p 22 N89-18422
- Method and means for ground crash testing at the Centre d'Essais Aeronautique de Toulouse: Application to the SA 341 and AS 332 helicopters p 24 N89-18432
- Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433

CREEP PROPERTIES

- Life time prediction: Synthesis on ONERA's research in viscoplasticity and continuous damage mechanics, applied to engine materials and structures p 68 N89-10011

CREEP TESTS

- Automated measurement of crack length and load line displacement at elevated temperature (AGARD-R-751) p 183 N88-26695

CREW PROCEDURES (INFLIGHT)

- Use of task timeline analysis to assess crew workload p 210 N87-30056
- Flight test evaluation of crew workload Part 1: Aircraft certification for a minimum crew of two pilots p 213 N87-30063
- Measurement of aircrew workload during low-level flight Part 1: A comparison between in-flight and post flight assessment methods p 213 N87-30064
- Investigation of workload measuring techniques: A theoretical and practical framework p 214 N87-30069
- Matching crew system specifications to human performance capabilities p 220 N89-18031

CREW WORKSTATIONS

- Crewstation Information and Development System (CIOS) p 49 N88-23781

CRITERIA

- Systems for the 21st century p 47 N88-27763
- Accuracy criteria for evaluating supersonic aerodynamic coefficient predictions p 15 N88-29756
- Design criteria for hardware in the loop simulation facilities p 228 N89-10052
- Transport airplane crash simulation: validation and application to crash design criteria p 24 N89-18435
- Requirements and criteria for the passive safety of automobiles p 221 N89-18440

CRITICAL FLOW

- Introduction and critical flow phenomena p 14 N88-28870
- Boundary layer development and transition p 14 N88-28871

CROSS CORRELATION

- Cross-frequency correlation of intensity fluctuations in the phase-changing media p 146 N89-17738

CROSS FLOW

- On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N89-18645

CRUISE MISSILES

- Collision probability of cruise missiles flying in formation p 91 N87-16007

CRUISING FLIGHT

- Techniques for performance optimisation in cruise and manoeuvrability p 39 N88-13321

CRUSHING

- Crashworthy design of aircraft subfloor structural components p 24 N89-18431

CUES

- Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654
- Technology involved in the simulation of motion cues: The current trend p 204 N89-12173
- Motion cues in every day life p 205 N89-12180
- Modelling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N89-12182

CULTURE (SOCIAL SCIENCES)

- Linguistic and cultural barriers to the transfer of information p 251 N88-30459

CURING

- Composite repair material and design development effort p 3 N87-20188

CURRENT DISTRIBUTION

- The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955

SUBJECT INDEX

CURVATURE

- Biostereometric study of the outward curve of the spine for various reference positions p 191 N87-13943

CURVE FITTING

- Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead line responses p 151 N89-18590

CYCLIC LOADS

- On-line spectrum loading accuracy verification p 184 N89-17292
- Long crack growth rate data: Gaussian loading p 185 N89-17296
- Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading p 187 N89-17704

CYLINDRICAL BODIES

- Driving mechanism of unsteady separation shock motion in hypersonic interactive flow p 10 N88-13226

D

DAMAGE

- Arc propagation, emission and damage on spacecraft dielectrics p 98 N87-26942
- Cavitation and superelasticity p 111 N87-29645
- Life time prediction: Synthesis on ONERA's research in viscoplasticity and continuous damage mechanics, applied to engine materials and structures p 68 N89-10011
- AGARD/SMP Review: Damage Tolerance for Engine Structures: 1. Non-Destructive Evaluation (AGARD-R-768) p 180 N89-17253
- Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
- Improvement of specific fastening elements for assembling composite structures p 186 N89-17694
- Mechanism of single shear fastened joints p 187 N89-17700

DASSAULT AIRCRAFT

- Acceleration of prototype development and reduction of cost by multidisciplinary integration p 246 N88-20196

DATA ACQUISITION

- Performance modeling: A tool for lubricant development p 113 N86-29252
- Analogue signal conditioning for flight test instrumentation (AGARD-AG-160 VPL-17) p 45 N86-29816
- High response data acquisition system p 249 N87-21184
- Acquisition and analysis of dynamic rotating machinery data p 178 N87-21196
- Acquisition and processing of non-voluntary pressure measurements in studies of air intake distortion p 178 N87-21191
- Developments in data acquisition and processing using an advanced combustion research facility p 219 N87-21192
- Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
- Modeling of functional specifications for onboard software: Experience with the RALTE avionics system p 48 N88-23777
- Acquisition of gust statistics from AIDS recorded data p 190 N88-29733
- Database program for crack propagation data acquired in the AGARD short cracks collaborative effort p 185 N89-17297

DATA BASE MANAGEMENT SYSTEMS

- Applications in library management: requisitions, loans and stock control p 222 N87-15921
- Microcomputer-based catalog creation software options for small libraries p 223 N87-15922
- Application of LAN's and electronic office techniques in the library p 232 N87-15924
- Microcomputers in information resource sharing: Part 1: Data and graphics systems p 223 N87-15925
- Knowledge based systems in information work p 248 N87-15926
- Microcomputers in information resource sharing: Two full text systems p 249 N87-15927
- Trends in software and system development p 223 N87-15928
- Crewstation Information and Development System (CIOS) p 49 N88-23781
- Database program for crack propagation data acquired in the AGARD short cracks collaborative effort p 185 N89-17297
- Multi-level parallel processing for very high performance real-time database management p 254 N89-18478

DATA BASES

- Measuring the value of information and information systems, services and products p 247 N86-28799
- The real information system? What does the user really want? p 248 N86-28801
- New technologies for improved information systems and services p 248 N86-28802

SUBJECT INDEX

- Information resources management in the R and D environment p 248 N86-28803
- Microcomputers in information resource sharing Part 1 Data and graphics systems p 223 N87-19925
- Knowledge based systems in information work p 248 N87-19926
- Microcomputers in information resource sharing Two full text systems p 249 N87-19927
- Trends in software and system development p 223 N87-19928
- The RAE experimental data base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250
- Mono- and bistatic radar coverage diagrams including diffractive wave propagation p 139 N88-19660
- Operation and performance of an integrated helicopter communication system p 49 N88-23187
- Determining the azimuthal distribution of noise and interference across the HF spectrum at the RAE Receiving Station, Cobham Hill, Surrey, England p 153 N89-18597
- DATA COMPRESSION**
- The digital colour map simplifies ground attack operations p 187 N87-24950
- Increasing the usefulness of AWACS downlink transmissions by semantic compression p 135 N87-29518
- COMPASS (Trademark) A generalized ground-based monitoring system p 55 N89-16819
- Narrative compression coding for a channel with errors p 150 N89-18584
- DATA CORRELATION**
- Processing technique for correlation of LDA and thermocouple signals p 171 N87-21194
- DATA LINKS**
- Performance of RF fiber optic links p 240 N87-13301
- A hybrid transmission scheme on single mode fibers for tactical communications p 241 N87-13306
- Makecourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-19205
- Possible contributions from the SSR mode S data link to the conduct of efficient aircraft operations p 26 N87-21887
- Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18578
- Improved coding and control of HF systems in a non-Gaussian noise environment p 150 N89-18582
- DATA MANAGEMENT**
- Test philosophy of the EH101 integrated avionics p 49 N88-23775
- Moding strategy for cockpit data management in modern fighter aircraft p 218 N89-18017
- DATA PROCESSING**
- Microcomputers in information resource sharing Part 1 Data and graphics systems p 223 N87-19925
- Acquisition and analysis of dynamic rotating machinery data p 178 N87-21190
- Developments in data acquisition and processing using an advanced combustion research facility p 79 N87-21192
- A practical example of Moving Target Detection (MTD) processing for an air traffic control radar with weather channel p 133 N87-21890
- The impact of future avionics technology on the conduct of air warfare p 45 N87-22673
- Flight testing of fighter aircraft p 35 N87-24448
- Data and signal processing architectures for future avionics p 52 N89-10835
- CFD data network performance trending p 71 N89-16814
- Avionics expert systems p 56 N89-18469
- DATA RECORDING**
- COMPASS (Trademark) A generalized ground-based monitoring system p 55 N89-16819
- DATA REDUCTION**
- Particle imaging velocimetry in a low turbulent wind tunnel and other flow facilities p 79 N87-21205
- DATA SMOOTHING**
- COMPASS (Trademark) A generalized ground-based monitoring system p 55 N89-16819
- DATA STORAGE**
- New technologies for improved information systems and services p 248 N88-28802
- DATA TRANSMISSION**
- An introduction to error control coding with application to HF communications p 122 N86-27570
- Special Course on Interaction of Propagation and Digital Transmission Techniques p 124 N87-18703
- Review of modulation, coding and speech digitization techniques p 124 N87-18704
- Possible contributions from the SSR mode S data link to the conduct of efficient aircraft operations p 26 N87-21887
- Increasing the usefulness of AWACS downlink transmissions by semantic compression p 135 N87-29518
- The role of asymmetric transfer in the evaluation of voice generation and recognition systems p 136 N87-29525

- Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control (AGARD-CP-407) p 138 N88-19653
- Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672
- The design and performance of an adaptive packet-switched HF data terminal p 149 N89-18577
- Experimental robust HF modems incorporating adaptive excision p 150 N89-18579
- DEBRIS**
- Gas path condition monitoring using electrostatic techniques p 54 N89-16817
- An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818
- DECISION MAKING**
- The policy maker looks at information p 247 N86-28794
- Short Course on Cardiopulmonary Aspects of Aerospace Medicine (AGARD-R-758) p 193 N87-24070
- Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations (AGARD-CP-404) p 235 N87-24940
- JARPA's AirLand Battle Management Program and USAF's Tactical Expert Mission FLANNER (TEMPAR) p 235 N87-24942
- Decision aid for threat penetration analysis p 235 N87-24944
- Advanced sensor exploitation p 83 N87-24946
- Machine architectures for artificial intelligence computing p 222 N87-24948
- Current state of an expert system - military information systems p 236 N87-24953
- Computer aided sensor placement optimization p 236 N87-24954
- Closing the man-machine loop On the use of physiological measures to affect computer controlled devices p 211 N87-29507
- Advanced information management and decision making in Airborne Early Warning and Control (AEW&C) training systems p 251 N87-29517
- Integrating avionics sensor signals for tactical aircraft p 46 N87-29519
- A graphical aid to IRBS program development p 224 N87-29521
- Application of knowledge-based techniques to aircraft trajectory generation and control p 75 N88-10811
- Computer aided tactics for air combat p 214 N88-19559
- A change in system design emphasis From machine to man p 49 N88-23782
- Technical change needs organizational change p 246 N88-30466
- An avionics software expert system design p 237 N89-18465
- Multi-input decision aid procedure Application to multi-sensor target classification p 233 N89-18484
- DEFECTS**
- Study of the electron beam woldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti Al₆ V₄ p 182 N87-17065
- CF-18/F404 transient performance trending p 71 N89-16814
- Review of existing NDT technologies and their capabilities p 180 N89-17255
- DEFENSE INDUSTRY**
- Bibliographic works and microcomputer applications for aerospace defense scientific and technical information p 248 N87-19923
- The effects of two Carlucci initiatives concurrency and streamlining, on the test and evaluation phase of system acquisitions p 245 N88-20198
- DEFENSE PROGRAM**
- Planning and Designing Effective Defence and Related Information Services p 248 N87-26675
- A model of a defence information service as seen by the user p 249 N87-26678
- Sources of information for a defense information service p 250 N87-26683
- Telling the user what is available Announcement and search p 250 N87-26685
- DEFLECTION**
- Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
- DEFORMATION**
- Measurement of model deformation in wind tunnels p 77 N88-13358
- Modeling of deformation and microstructural changes in P/M Rene 95 under isothermal forging conditions p 119 N89-15264
- Microstructures, flow properties and processing of Ti-6242 alloy p 112 N89-15268
- Physical modeling and viscoplastic studies of the forging process p 120 N89-15269

DESIGN ANALYSIS

- DEGRADATION**
- Future trends in spacecraft design and qualification p 94 N87-20356
- Radiation charging and breakdown of insulators p 153 N87-26954
- Operation of gas turbine engines in dust-laden environments p 63 N88-17654
- DELAHMATING**
- The static strength of bolted joints in fibre reinforced plastics p 102 N89-17699
- Bolted scarf joints in carbon composite materials Comparison between assemblies with an interference fit and those with play p 103 N89-17702
- DELAY**
- Modeling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N89-12182
- DELAY LINES**
- Low cost, monolithic beamforming components for radar p 131 N87-18750
- DELIVERY**
- Developmental airdrop testing techniques and devices (AGARD-AG-300-VOL-6) p 18 N88-12481
- DELTA WINGS**
- Applications of Euler equations to sharp edge delta wings with leading edge vortices p 5 N87-20214
- Computation of flow past conical hypersonic wings using a second order Godunov method p 12 N88-13241
- Vortex formation over delta, double-delta and wave rider configurations at supersonic speeds p 12 N88-13243
- Examples of static aerodynamic effects on present combat aircraft projects p 76 N88-13349
- Design loads for Swedish military aircraft in a twenty years' perspective p 42 N88-19456
- Investigation on the movement of vortex burst position with dynamically changing angle of attack for a schematic delta-wing in a water tunnel with correlation to similar studies in wind tunnel p 153 N88-23152
- Delta wing configurations p 13 N88-28860
- The international vortex flow experiment p 166 N89-18619
- Flow field surveys of leading edge vortex flows p 167 N89-18621
- Validation of Computational Fluid Dynamics Volume 2 Poster papers p 189 N89-18648
- AGARD-CP-437-VOL 2 Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650
- Detailed flowfield measurements over a 75 deg swept delta wing for code validation p 21 N89-18657
- Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660
- Documentation of separated flows for computational fluid dynamics validation p 170 N89-18662
- DEMODULATION**
- Progress in optical fiber sensors p 237 N87-13274
- DEMULPLEXING**
- A spherical waveguide multiplexer/demultiplexer p 238 N87-13285
- DENSITY (NUMBER/VOLUME)**
- Large ionic species in sooting acetylene and benzene flames p 107 N88-29437
- DEPOLARIZATION**
- Scattering and depolarization by random rough terrain and vegetation covered terrain-uniform full wave approach p 138 N88-19667
- Coupled-mode theory approach to depolarization associated with propagation in turbulent media p 241 N89-17707
- DESCENT TRAJECTORIES**
- A time-based concept for terminal area traffic management p 77 N87-21804
- DESCRIPTIVE GEOMETRY**
- Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209
- DESIGN ANALYSIS**
- Static aerelasticity in combat aircraft p 182 N86-27678
- AGARD-R-7251 Design and calculation of high speed engine bearings p 174 N86-29241
- The unmanned aircraft as a force multiplier p 32 N87-18601
- Transonic and Supersonic Phenomena in Turbomachines p 57 N87-21927
- AGARD-CP-401 Vortex shedding in compressor blade wakes p 58 N87-21932
- Shock waves losses analysis p 58 N87-21936
- Optimisation of a transonic flow radial vaned diffuser p 58 N87-21938
- Evaluation of results of boundary layer calculations with regard to design aerodynamics p 158 N87-22150
- Microwave Antennas for Avionics p 134 N87-23859
- AGARD-LS-1511 Integrated Design of Advanced Fighters p 35 N87-24445
- AGARD-LS-1513 Design optimization for a family of multi-role combat aircraft p 36 N87-24450

DESTRUCTION

- Design optimization of fighter aircraft p 36 N87-24451
- Advanced fighter design: Operational experience and future requirements p 36 N87-24453
- The integration and operational suitability of emerging technologies for future fighter aircraft: A pilot's perspective p 36 N87-24454
- New technology impacts on future avionics architectures p 45 N87-24949
- Rotorcraft Design for Operations (AGARD-CP-423) p 37 N88-11649
- The influence of operational requirements on LHX concept formulation p 37 N88-11650
- Design requirements for future commercial operations p 37 N88-11651
- Aerodynamics of Hypersonic Lifting Vehicle (AGARD-CP-428) p 10 N88-13219
- Lifting bodies: An attractive aerodynamic configuration choice for hypersonic vehicles p 39 N88-13248
- Design of wings and wing/body configurations for transonic and supersonic speeds p 39 N88-13318
- An integrated aero-mechanical performance approach to high technology turbine design p 64 N88-17657
- Design and test of a high blade speed, high work capacity transonic turbine p 64 N88-17658
- Design and development of an advanced π -2 compressor p 67 N88-17676
- Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17679
- Development savings through parametric modeling of program costs p 243 N88-20175
- Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
- A structured approach to weapon system design p 48 N88-23773
- A change in system design emphasis from machine to man p 49 N88-23782
- Interfacing and integrating hardware and software design systems p 50 N88-23796
- Motion Cues in Flight Simulation and Simulator Induced Sickness (AGARD-CP-433) p 203 N89-12171
- Simulator sickness in US Army and Navy fixed and rotary wing flight simulators p 203 N89-12178
- The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179
- Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 101 N89-16907
- Design and analysis of solid rocket motor nozzle p 101 N89-16908
- The impact of engineering assumptions on NDE requirements p 180 N89-17254
- Crashworthiness design methods applicable at concept stage p 22 N89-18424
- Electromagnetic code for naval applications p 150 N89-18583
- CFD validation philosophy p 166 N89-18611
- CFD applications in design and analysis of the Fokker 40 and Fokker 100 p 19 N89-18629
- ### DESTRUCTION
- Virtual air defense suppression technology base definition p 234 N87-16004
- ### DETECTION
- Optimal detection of sensor failures in flight control systems using deterministic observers p 74 N88-10673
- Gas path modelling, diagnosis and sensor fault detection p 54 N89-16811
- Review of existing NDT technologies and their capabilities p 180 N89-17255
- ### DETERMINANTS
- Optimal detection of sensor failures in flight control systems using deterministic observers p 74 N88-10803
- ### DIAGNOSIS
- Short course on Cardiac Diagnostic Aspects of Aerospace Medicine (AGARD-CP-438) p 193 N87-24070
- Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072
- Valvular and congenital heart disease in the aviator p 194 N87-24073
- Aeromedical aspects of mitral valve prolapse p 194 N87-24074
- Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075
- Coronary risk factors in aerospace medicine p 195 N87-24078
- Cardiopulmonary screening for high-performance flying: Selection and retention issues p 135 N87-24079
- Getting more from vibration analysis p 54 N89-16807
- ### DIAMETERS
- Composite repair material and design development efforts p 3 N87-20188
- ### DICTIONARIES
- An informal glossary of terms used in supercomputing Appendix A p 252 N89-11401

A-22

SUBJECT INDEX

- ### DIELECTRICS
- Giotto-spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947
- Arc propagation, emission and damage on spacecraft dielectrics p 98 N87-26953
- Automatic charge control system for geosynchronous satellites p 99 N87-26960
- Thick dielectric charging on high altitude spacecraft p 99 N87-26961
- ### DIES
- A computer program simulating the hot forging of metal powder p 111 N89-15267
- ### DIFFERENTIAL EQUATIONS
- Numerical modeling: Finite methods p 137 N88-11918
- Differential operation of NAVSTAR GPS for enhanced accuracy p 30 N89-10883
- ### DIFFRACTION
- Uniform geometrical theory of diffraction p 136 N88-11911
- ### DIFFRACTION PATTERNS
- Multiple scattering effects in drop sizing of dense fuel sprays by laser diffraction p 105 N88-29917
- ### DIFFUSERS
- Determination of the supersonic cascade entrance zone p 157 N87-21948
- The advantage of variable geometry for turbine engines at low power p 63 N88-17653
- Numerical simulation of diffuser-combustor dome interaction p 65 N88-17663
- ### DIFFUSION
- Experiment and theory for backscattering enhancement and imaging in random media p 241 N89-17708
- ### DIFFUSION FLAMES
- Radiation from soot-containing flames p 106 N88-29927
- Flamelet chemistry modeling of soot formation for radiation p 106 N88-29928
- The influence of pressure on soot formation p 107 N88-29934
- Three-dimensional combustor predictors: A comparison of equilibrium and laminar flamelet chemistry models p 108 N88-29940
- ### DIFFUSION WELDING
- Advanced Joining of Aerospace Metallic Materials: conference proceedings p 175 N87-17051
- The application of diffusion bonding and laser welding in the fabrication of aerospace structures p 176 N87-17054
- Diffusion bonding in the manufacture of aircraft structure p 176 N87-17057
- Diffusion bonding of Al-alloys in the solid state p 177 N87-17058
- Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059
- Application of diffusion bonding combined with superplastic forming (SPF/DB) to the fabrication of TAGV metal sheet structures p 177 N87-17060
- Ultrasonic testing techniques for diffusion bonded titanium components p 179 N87-17061
- The application of the RRD process to the deposition of anti-wear alloys p 177 N87-17069
- Superplasticity (AGARD-CP-434) p 111 N87-29641
- Diffusion bonding of metals p 179 N87-29646
- Designing for superplastic alloys p 119 N87-29648
- ### DIGITAL COMPUTERS
- Application of Ada higher order language to guidance and control (AGARD-CP-446) p 72 N88-30740
- Digital and optical systolic architectures for airborne adaptive radars p 19 N87-18739
- Reliability modeling of fault tolerant computer based systems p 71 N88-10801
- Interfacing and integrating hardware and software design systems p 51 N88-23796
- COMPASS (Trademark): A generalized ground based monitoring system p 55 N89-16819
- ### DIGITAL DATA
- Digital image processing applied to fluid dynamic problems p 156 N87-21193
- Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672
- ### DIGITAL ELECTRONICS
- Military engine condition monitoring systems: The UK experience p 53 N89-16797
- ### DIGITAL SIMULATION
- Simulation of multistatic and backscattering cross sections for airborne radar p 132 N87-16757
- Turbulent engine cost-instability behavior: Computer simulations, test validation and application of simulations p 62 N87-24474
- Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
- Guidance and control systems simulation and validation techniques (AGARD AG-273) p 78 N89-10048
- Comparison of statistical digital simulation methods p 227 N89-10049
- Digital simulation techniques for end game phenomena p 228 N89-10051
- ### DIGITAL SYSTEMS
- HF system design p 125 N87-18707
- Reliability modeling of fault-tolerant computer based systems p 73 N88-10801
- Radar and radar holes and multipath zones: The global and local influences on atmospheric refractive structure and resulting adverse radar and radar performance p 140 N88-19667
- Space diversity effects on line of sight propagation paths p 140 N88-19670
- The 6 GHz propagation measurements over a 51 km path in the UK p 141 N88-19673
- The advantage of a thrust rating concept used on the RB199 engine p 70 N89-16800
- ### DIGITAL TECHNIQUES
- Special Course on Interaction of Propagation and Digital Transmission Techniques (AGARD-CP-429) p 124 N87-18703
- Review of modulation, coding and speech digitization techniques p 124 N87-18704
- The digital colour map simplifies ground attack operations p 187 N87-24950
- Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951
- Computer aided sensor placement optimization p 236 N87-24954
- The BAE (Bracknell) automatic detection, tracking and classification system p 241 N87-29476
- Techniques of flow visualization p 160 N88-16977
- AGARD-AG-302: GPS navigation processing and Kalman filtering p 30 N89-10884
- Avionics systems engineering and its relationship to mission software development p 55 N89-18454
- ### DIMENSIONAL MEASUREMENT
- Measurements of change of stature in the assessment of static and dynamic spinal loading p 193 N87-13957
- ### DIPLOLE MOMENTS
- Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead line responses p 151 N89-18590
- ### DIPLOLES
- The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
- ### DIRECTION FINDING
- New method for suppression of goniometer of errors by radio noise from overhead power lines p 151 N89-18585
- ### DISCRETE FUNCTIONS
- Discrete operator conditions gain path analysis p 54 N89-16810
- On the applicability of continuous scattering methods to discrete scattering problems p 237 N89-17740
- ### DISEASES
- Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13944
- ### DISKS (SHAPES)
- Metallurgical modelling of superalloy disc, cylindrical forgings p 120 N89-12656
- Review of existing NDT technologies and their capabilities p 180 N89-17255
- ### DISORDERS
- Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27687
- ### DISPERSING
- Particle size measurements in reacting combustion systems p 107 N88-29931
- Selective extinction of a dispersed phase of single and aggregated layered spheres p 147 N89-17743
- ### DISPLACEMENT
- Hypersonic laminar boundary layer: Parametric study for the representation of real gas effects p 11 N89-13236
- ### DISPLAY DEVICES
- Visual display research topics p 80 N87-23635
- Advanced visuals in mission simulators p 80 N87-23636
- Use of VDU's by flight simulator instructors p 80 N87-23641
- Collected flight and simulation comparisons and considerations p 83 N87-23661
- The digital colour map simplifies ground attack operations p 187 N87-24950
- An integrated aircraft navigation and display system utilising an on-board composite data base p 36 N87-24955
- The effects of display-control compatibility and integrality on dual-task performance and subjective workload p 211 N87-29508
- Stars, point sources and clusters p 250 N87-29511
- A class of variable format information presentation p 250 N87-29512
- Organization of displays in the visual scene of the combat aircraft pilot p 212 N87-29516

SUBJECT INDEX

integrating avionics sensor signals for tactical aircraft p 46 N87-29519

The flight evaluation of a speech recognition and a speech output system in an advanced cockpit display and flight management system for helicopters p 46 N87-29527

Cortical evoked response and eyetrack measures in the workload evaluation of alternative landing system displays p 213 N87-30061

MBB simulation facilities applied for rotorcraft research p 84 N88-11655

The flight evaluation of an advanced engine display and monitoring system p 46 N88-11659

Helicopter (performance) management p 38 N88-11666

Crewstation Information and Development System (ICDS) p 49 N88-23781

Future visual environment and concerns p 217 N88-29299

Head-mounted spatial instruments: Synthetic reality or impossible dream p 206 N89-12184

vection and the spatial disposition of competing moving displays p 206 N89-12186

A model to predict visual performance at the man-display interface in the cockpit p 218 N89-18013

A man-machine interface solution: The EAP glare shield p 217 N89-18018

Panoramic Cockpit Control and Display System (PCCADS) p 219 N89-18019

Expert system man-machine interface for a combat aircraft cockpit p 219 N89-18022

Towards the next generation fighter cockpit: The EAP experience p 219 N89-18025

DISTANCE

Target analysis through line distance discrimination p 130 N87-18746

DISTRIBUTED PROCESSING

New technology impacts on future avionics architectures p 45 N87-24349

Software productivity through Ada engines p 228 N89-18449

Definitions and requirements for distributed real time systems p 232 N89-18476

Task interactions in distributed machines of embedded computer systems p 232 N89-18479

DISTRIBUTION (PROPERTY)

Determining the azimuthal distribution of noise and interference across the HF spectrum at the RAE Receiving Station, Cobbold Hill, Surrey, England p 153 N89-18597

DIVERGENCE

Wing divergence of trimmed aircraft p 76 N88-13354

DOCUMENTATION

Engineering data compendium Human perception and performance: User's guide p 215 N88-27149

Engineering data compendium Human perception and performance: volume 1 p 215 N89-28630

Engineering data compendium Human perception and performance: volume 2 p 215 N88-28631

Engineering data compendium Human perception and performance: volume 3 p 215 N88-28632

DOCUMENTS

Security considerations: defence-related and commercial p 250 N87-26581

Evaluating the effectiveness of information use p 253 N89-11626

DOMAINS

Measurements of HF propagation parameters for real time Chunnel Evaluation (RTCE) systems p 123 N86-27575

Modeling Xv-15 tilt rotor aircraft dynamics by frequency and time domain identification techniques p 37 N88-11657

DOPPLER EFFECT

Application of Doppler and transit laser anemometry in small turbomachines p 172 N87-21180

GPS navigation processing and Kalman filtering p 30 N89-10884

DOPPLER RADAR

The NAE atmospheric research aircraft p 51 N88-29730

H F radar probing (including modification) p 142 N89-11937

DORSAL SECTIONS

Biostereometric study of the outward curve of the spine for various reference positions p 191 N87-13943

DOUBLE BASE PROPELLANTS

Smokeless Propellants p 113 N86-26468

Smokeless propellants of improved performance p 113 N86-26469

Burning stability of double base propellants p 114 N86-26472

Elastomer modified cast double base propellants p 114 N86-26473

The reduction of exhaust signature in solid propellant rocket motors p 114 N86-26474

The chemical interaction of ballistic modifiers in CDB propellant: Its effect upon ballistics and stability p 114 N86-26475

Gas analysis for the investigation of the combustion of double-base propellants and HMX p 115 N86-26478

DOWNLINKING

Increasing the usefulness of AWACS downlink transmissions by semantic compression p 135 N87-29518

DOWNRANGE

Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 30 N87-18744

DRAW

The drag of slender axisymmetric cones in rarefied hypersonic flow p 11 N88-13229

DRAW MEASUREMENT

The accurate measurement of drag in the 8 ft x 8 ft tunnel p 88 N89-16855

Accurate drag estimation using a single component drag model technique p 88 N89-16856

Precision improvement of transport aircraft drag measurements p 17 N89-16858

Balance accuracy and repeatability as a limiting parameter in aircraft development force measurements in conventional and cryogenic wind tunnels p 90 N89-16873

DRAW REDUCTION

The integration of computational fluid dynamics into the military aircraft design process p 33 N87-20210

Experiments and code validation for junction flows p 21 N89-18656

DRIFT (INSTRUMENTATION)

Packaged fiber optic gyros p 172 N89-17508

DRIFT RATE

Closed loop fiber optic gyro p 237 N87-13277

DRONE AIRCRAFT

Towards the unmanned cockpit p 36 N88-10812

DROP SIZE

A propagation campaign via a man-machine environment utilizing a digital system at 36 GHz p 141 N88-19675

Alternative fuel spray behavior p 104 N88-29912

Simulation study of spraying, streaming and vaporization phenomena associated with fuel injection p 104 N88-29914

Multiple scattering effects in drop sizing of dense fuel sprays by laser diffraction p 105 N88-29917

Influence of operating conditions on the atomization and distribution of fuel by air blast atomizers p 105 N88-29918

DROP TESTS

Method and means for ground crash testing at the Centre d'Essais Aeronautiques de Toulouse: Application to the JA 341 and AS 332 helicopters p 24 N88-18432

Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N88-18433

Crashworthiness of aircraft structures p 24 N89-18436

DROPS (LIQUIDS)

Influence of the convection on evaporation and combustion of a fuel droplet p 110 N88-29948

DRUGS

Biochemical Enhancement of Performance (AGARD CP-415) p 195 N87-25709

Enhancement of performance: Operational considerations p 195 N87-25710

Multivariate and psycho-physiological functions of DSP p 196 N87-25713

Pharmacological approaches to performance enhancement in animals p 190 N87-25715

The effect of acetylcholine on the vestibulo-ocular reflex in humans p 196 N87-25717

Homeostatic, entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25718

Side effects of hypnotic benzodiazepines on the vigilance and efficiency of personnel after awakening p 196 N87-25719

Sedating and non-sedating sleeping aids in air operation p 197 N87-25720

FB 111A aircrew use of temazepam during surge operations p 197 N87-25721

Phobic manifestations among experienced pilots p 197 N87-25722

Measurement and classification of the mode of action of antidepressant drugs p 202 N88-27714

Measurement of electrical activity in the CNS with cortical evoked potentials and EEG: Efficacy profiles of drugs using factor analysis p 202 N88-27715

An approach to studying the effects of psychostimulants on cerebral electrical activity in the non-human primate p 203 N88-27716

DUCTED FANS

Aerodynamic performance of a scale model counter-rotating ducted fan p 65 N88-17866

DUCTED FLOW

An investigation of ducted propellers in asymmetric shear flow p 151 N88-23136

DYNAMIC STRUCTURAL ANALYSIS

DUCTED ROCKET ENGINES

Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561

DUCTS

Wave tilt sounding of tropospheric ducts above the sea p 145 N89-17728

DUST

Millimeter wave transmission through man-made obscurations in a battlefield environment p 127 N87-18732

Operation of gas turbine engines in dust laden environments p 63 N88-17654

DYNAMIC CHARACTERISTICS

Identification of dynamic characteristics for fault isolation purposes in a gas turbine using closed-loop measurements p 71 N89-16813

DYNAMIC CONTROL

Advanced ATC: An aircraft perspective p 27 N87-21893

DYNAMIC MODELS

Human crashworthiness and crash load limits p 25 N89-18439

DYNAMIC RESPONSE

Use of a video-photogrammetry system for the measurement of the dynamic response of the shuttle remote manipulator arm p 84 N87-20270

Acoustic effects on the dynamic of lightweight structures p 183 N87-20372

Aircraft Dynamic Response to Damaged and Repaired Runways p 34 N87-23609

Interpretation in terms of the response of a low degree-of-freedom oscillator to two successive disturbances p 35 N87-23610

An experimental-analytical routine for the dynamic qualification of aircraft operating on rough runway surfaces p 35 N87-23611

Aircraft dynamics: Aerodynamic aspects and wind tunnel techniques p 39 N88-13320

Investigation on the movement of vortex burst position with dynamically changing angle of attack for a schematic delta wing in a water tunnel with correlation to similar studies in wind tunnel p 163 N88-23152

ACARD standard aeroelastic configurations for dynamic response: 1. Wing 445 G p 42 N88-27193

AGARD-R-7651 p 42 N88-27193

The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modeling of Atmospheric Turbulence p 4 N88-29725

AGARD-R-7341 p 4 N88-29725

Status review of atmospheric turbulence and aircraft response p 78 N88-29726

Aircraft dynamics: Aerodynamic aspects and wind tunnel techniques p 14 N88-29731

Acquisition of dust statistics from ALOS recorded data p 190 N88-29733

Study of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18434

Design and simulated-crash validation of a dynamic response recorder p 221 N89-18442

DYNAMIC STABILITY

Hypersonic static and dynamic stability of axisymmetric shapes: A comparison of prediction methods and experiment p 12 N88-13248

Dynamic stability of hypersonic conical lifting vehicles according to Newton-Busemann theory p 75 N88-13247

An experimental study to determine the flow and the subsonic static and dynamic stability characteristics of aircraft operating at high angles of attack p 47 N88-23129

DYNAMIC STRUCTURAL ANALYSIS

Aircraft response to turbulence p 72 N86-10739

AGARD-R-7338 p 72 N86-10739

Design of bolted joints in composites p 175 N86-31064

AGARD-R-7271 p 175 N86-31064

Mechanical Qualification of Large Flexible Spacecraft Structures p 94 N87-20355

AD-A175529 p 94 N87-20355

Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357

Dynamic analysis of direct television satellite TV SAT/TDF 1 p 95 N87-20360

Structural qualification of large spacecraft p 95 N87-20361

Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363

Modal survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365

Modal testing of the Olympus development model stowed solar array p 96 N87-20366

AGARD manual on aerelasticity in axial flow turbomachines: Volume 2: Structural dynamics and aeroelasticity p 16 N89-10006

AGARD AG 298 VOL 21 p 16 N89-10007

Basic structural dynamics of individual blades p 68 N89-10008

DYNAMICAL SYSTEMS

- Structural dynamic characteristics of bladed assemblies p 68 N89-10009
- Aeroelastic coupling: An elementary approach p 68 N89-10012
- Aeroelastic formulation for tuned and mistuned rotors p 68 N89-10013

DYNAMICAL SYSTEMS

- Identification of dynamic systems: applications to aircraft: Part 1: The output error approach [AGARD-AG-300-VOL-3-PT-1] p 33 N87-21913
- A deterministic approach to turbulence: Chaos in Rayleigh-Benard convection p 160 N88-11975
- Transition to turbulence via spatio-temporal intermittency p 160 N88-11976

E

E REGION

- Incoherent/coherent scatter p 142 N89-11940

EARLY WARNING SYSTEMS

- Radio and radar holes and multipath zones: The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667

EARTH (PLANET)

- A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles p 139 N88-19662

EARTH ATMOSPHERE

- Review of recent developments in evaporation ducting assessment p 139 N88-19664
- Ground/lower atmospheric consideration p 142 N89-11935
- Incoherent/coherent scatter p 142 N89-11940

EARTH IONOSPHERE

- The design of static and mobile HF communication systems p 122 N86-27567
- Magnetospheric control of the bulk ionospheric plasma p 187 N87-26939
- Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations p 188 N87-26943
- The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
- Propagation in longitudinally varying ducts, with emphasis on guiding to anguishing transitions p 139 N88-19658
- Media Effects on Electronic Systems in the High Latitude Region p 141 N89-11931
- The high-latitude ionosphere: Geophysical basis p 188 N89-11933
- Transonospheric probing and propagation p 141 N89-11934
- H F radar probing (including modification) p 142 N89-11937
- Lightning generation of low-frequency ELF atmospheric noise p 148 N89-18568

EARTH MAGNETOSPHERE

- The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications [AGARD-CP-406] p 97 N87-26937
- Magnetospheric control of the bulk ionospheric plasma p 187 N87-26939
- A model for an electromotive force generator in the magnetosphere: A source of discrete auroral arcs p 188 N87-26940
- Hostile energetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941
- Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations p 188 N87-26943
- The high-latitude ionosphere: Geophysical basis p 188 N89-11933
- The high-latitude ionosphere: Dynamical aspects, and models p 188 N89-11938

EARTH ORBITS

- Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude p 97 N87-26945

EARTH SURFACE

- Terrestrial Propagation Characteristics in Modern Systems of Communications: Surveillance, Guidance and Control [AGARD-CP-407] p 138 N88-19653

ECHOCARDIOGRAPHY

- Cardiopulmonary screening for high-performance flying: Selection and retention issues p 191 N87-24079

ECONOMIC FACTORS

- Economical manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055

ECONOMICS

- The resources required to run an information service p 250 N87-26682
- Political and economic barriers to information transfer p 251 N88-30460

EDUCATION

- A review of the NDMC back care education programme p 182 N87-13952
- Special Course on Interaction of Propagation and Digital Transmission Techniques [AD-A175698] p 124 N87-18703
- Short Course on Cardiopulmonary Aspects of Aerospace Medicine [AGARD-R-758] p 193 N87-24070
- Special Course on Fundamentals of Fighter Aircraft Design [AGARD-R-740] p 39 N88-13315
- Can CNV amplitude predict ability to accomplish a demanding task? p 214 N88-27700

EFFICIENCY

- Memoring development flight test time and cost in the US Air Force p 245 N88-20192
- Engineering management for validation prototype phase p 245 N88-20195
- Accuracy and efficiency of a time marching approach for combustor modeling p 170 N89-18659

ELASTIC DEFORMATION

- Bolted scarf joints in carbon composite materials: Comparison between assemblies with an interference fit and those with play p 103 N89-17702

ELASTIC WAVES

- Pressure wave: Gun barrel interactions p 154 N86-29068

ELASTODYNAMICS

- Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363
- Modal-survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365

ELASTOMERS

- Elastomer-modified cast double base propellants p 114 N86-26473

ELECTRIC ARCS

- Arc propagation, emission and damage on spacecraft dielectrics p 98 N87-26952
- Automatic charge control system for geosynchronous satellites p 99 N87-26960

ELECTRIC CONTROL

- The development of the T-46 next generation trainer managed engineering simulator at the US Air Force Flight Test Center p 82 N87-23652

ELECTRIC CURRENT

- Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281

ELECTRIC DISCHARGES

- Arc propagation, emission and damage on spacecraft dielectrics p 98 N87-26952
- The effects of electrostatic discharge phenomena on Telesat's domestic communications satellites p 99 N87-26958

ELECTRIC EQUIPMENT

- US Naval Air Force avionics and electrical system corrosion prevention and control maintenance p 47 N88-13334

ELECTRIC FIELD STRENGTH

- Development of a ground-conductivity map for the area of the Federal Republic of Germany from measured field strength contours p 138 N88-19656
- Mono- and bistatic radar coverage diagrams including diffractive wave propagation p 139 N88-19660

ELECTRIC FIELDS

- High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944
- The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
- Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine [AGARD-CP-432] p 190 N88-27683
- Electric and magnetic brain activity related to cognitive performance p 199 N88-27692

ELECTRIC IGNITION

- Novel ignition systems for heavy calibre guns p 118 N86-29076

ELECTRIC POTENTIAL

- High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944
- Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude p 97 N87-26945
- Studies of the intact human brain: Implications for performance p 198 N88-27684
- Dissecting the visual and auditory pathways by means of the two-input technique p 199 N88-27690
- Event-related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696
- Using ERPs to study human information processing p 208 N88-27698

ELECTRIC PULSES

- Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281

ELECTRICAL FAULTS

- Thick dielectric charging on high altitude spacecraft p 99 N87-26961

ELECTRICAL IMPEDANCE

- Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-15592

ELECTRICAL RESISTANCE

- A study to optimize the CFRP-AI mechanical joint in order to reduce electrical resistance p 154 N89-17695

ELECTRICAL RESISTIVITY

- Development of a ground-conductivity map for the area of the Federal Republic of Germany from measured field strength contours p 138 N88-19656

ELECTRO-OPTICS

- Optoelectronic broadband switching for communications and signal processing p 124 N87-13294
- The BAe (Bracknell) automatic detection, tracking and classification system p 241 N87-29476
- Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722

ELECTROCARDIOGRAPHY

- Aeromedical evaluation and disposition of electrocardiographic abnormalities p 193 N87-24071
- Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072
- Cardiopulmonary screening for high-performance flying: Selection and retention issues p 195 N87-24079

ELECTROCHEMISTRY

- Water tunnel measurements by an electrochemical method p 163 N88-23146

ELECTROENCEPHALOGRAPHY

- Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27687
- The application of non-stationary data analysis techniques in the identification of changes in the electroencephalogram associated with the onset of drowsiness p 198 N88-27688
- A statistical procedure for the evaluation of presence/non-presence of stimulus-related EEG activity p 199 N88-27689
- The effect of endogenous alpha on hemispheric asymmetries and the relationship of frontal theta to sustained attention p 208 N88-27701
- Evoked potential analysis of impact acceleration experiments p 201 N88-27708
- EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709
- Electroencephalographic correlates of pilot performance: Simulation and in-flight studies p 208 N88-27711
- Measurement of electrical activity in the CNS with cortical evoked potentials and EEG: Efficacy profiles of drugs using factor analysis p 202 N88-27715
- An approach to studying the effects of psychostimulants on cerebral electrical activity in the non-human primate p 203 N88-27716
- Correlation between EEG abnormal activity and aircraft accidents: A long term observation p 208 N88-27719
- Detection of latent epilepsy in aircrew candidates p 203 N88-27720

ELECTROMAGNETIC COMPATIBILITY

- The electromagnetic threat to future avionics systems p 50 N88-23790
- Electromagnetic code for naval applications p 150 N89-18583
- Automating the deconfliction of jamming and spectrum management p 152 N89-18596
- Electromagnetic fields: Numerical modeling: Integral equation method p 137 N88-19919
- Electromagnetic interactions: Numerical modeling: Finite methods p 137 N88-19918
- Electromagnetic interference: Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281
- A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
- Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672
- The electromagnetic threat to future avionics systems p 50 N88-23790
- Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18578
- Artificial intelligence in HF communication systems p 150 N89-18580
- Processing techniques for radio communications in non-Gaussian noise environments p 150 N89-18581
- Inherent-jitter effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A jitter-lighting scheme p 151 N89-18589
- Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593
- Costing of radio terminals p 152 N89-18594

SUBJECT INDEX

SUBJECT INDEX

ELECTROMAGNETIC NOISE

- A study of methods of phase noise reduction of semiconductor lasers for sensor applications p 172 N87-13286
- Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672
- Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems [AGARD-CP-420] p 147 N89-18565
- Radio noise characteristics and their system performance implications p 148 N89-18566
- VLF radio noise p 148 N89-18569
- A new global survey of ELF/VLF radio noise p 148 N89-18570

- Man-made radio noise and interference p 148 N89-18571
- Signal noise/interferer combiner unit programmable (SINCUPI) p 149 N89-18575
- Effects of noise and interference on system performance p 149 N89-18576
- Experimental robust HF modems incorporating adaptive excision p 150 N89-18579
- New method for suppression of goniometer of errors by radio noise from overhead power lines p 151 N89-18585
- Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18592

ELECTROMAGNETIC NOISE MEASUREMENT

- Balloon measurement of low frequency TE and TM atmospheric noise p 148 N89-18567
- Man-made radio noise and interference p 148 N89-18571
- Noise measurement systems/techniques p 149 N89-18574

ELECTROMAGNETIC PULSES

- Developments in HF equipment and systems mobile and portable terminals p 123 N86-27573
- Interaction between EMP (Electromagnetic Pulse), lightning and static electricity with aircraft and missile avionics systems p 22 N86-30708
- Singularity expansion method Target Resonances p 137 N88-11912
- The electromagnetic threat to future avionic systems p 50 N88-23790
- Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead line responses p 151 N89-18590
- EMP-induced transients and their impact on system performance p 152 N89-18591

ELECTROMAGNETIC RADIATION

- Ground/low atmospheric consideration p 142 N89-11935
- Scattering and Propagation in Random Media [AGARD-CP-419] p 122 N89-17706
- Modeling of electromagnetic wave and sea surface interaction p 145 N89-17726
- Measurement and modeling of 36 GHz sea reflection phenomena p 145 N89-17730
- On the applicability of continuous scattering methods to discrete scattering problems p 237 N89-17740
- Selective extinction of a dispersion of single and aggregated layered spheres p 147 N89-17743
- Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745
- Non-linear effects on the atmospheric transmission of high-flux electromagnetic beams p 147 N89-17746

ELECTROMAGNETIC SCATTERING

- Input signal shaping K-pulse p 137 N88-11917
- Experiments Test range facilities, part 1 p 138 N88-11920

ELECTROMAGNETIC SHIELDING

- Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems [AGARD-CP-420] p 147 N89-18565
- EMP-induced transients and their impact on system performance p 152 N89-18591
- Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18592

ELECTROMAGNETIC SPECTRA

- The reduction of exhaust signature in solid propellant rocket motors p 114 N86-26474

ELECTROMAGNETIC WAVE TRANSMISSION

- Propagation Impact on Modern HF Communications System Design [AGARD-LS-145] p 122 N86-27566
- Special Course on Interaction of Propagation and Digital Transmission Techniques [AD-A175696] p 124 N87-18703
- Modeling electromagnetic wave propagation through a strongly fluctuating ionized medium by the phase screen method p 147 N89-17739
- Electromagnetic reflectivity in non-homogeneous continuous random media with cylindrical symmetry p 147 N89-17744

ELECTROMOTIVE FORCES

- A model for an electromotive force generator in the magnetosphere A source of discrete auroral arcs p 188 N87-26940

ELECTRON BEAM WELDING

- Advanced Joining of Aerospace Metallic Materials ... conference proceedings p 175 N87-17051
- [AGARD-CP-398] p 175 N87-17051
- Study of the electron beam weldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
- Economical manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055
- NDT of electron beam welded joints (micro-focus and real time X-ray) p 179 N87-17063
- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-Al6V4 p 182 N87-17065

ELECTRON BOMBARDMENT

- On the possibility of a several-kilovolt differential charge in the day sector of a geosynchronous orbit p 99 N87-26953

ELECTRON DENSITY (CONCENTRATION)

- Specular scatter A new mechanism for ionospheric backscatter p 189 N89-17751

ELECTRON EMISSION

- Secondary electron generation, emission and transport Effects on spacecraft charging and NASCAP models p 98 N87-26950

ELECTRON GUNS

- Electron beam experiments at high altitudes p 97 N87-26946

ELECTRON IRRADIATION

- Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959

ELECTRON SPECTROSCOPY

- Spacecraft charging Meteorol experience p 98 N87-26951

ELECTRONIC CONTROL

- Pumping systems and flow interfaces for rapid response electronic reheat controls p 65 N88-17665

ELECTRONIC COUNTERMEASURES

- ECM effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
- The use of knowledge based systems techniques in ESM processing p 235 N87-24941
- Jamming and electronic countermeasures p 151 N89-18586

- ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N89-18587

ELECTRONIC EQUIPMENT

- Developments in HF equipment and systems mobile and portable terminals p 123 N86-27573
- The potential impact of developments in electronic technology on the future conduct of air warfare, volume 3 p 153 N87-22094

[AGARD-AR-232-VOL-3]

- Corrosion of electronic components p 46 N88-13333
- Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795

ELECTRONIC MODULES

- The mixture of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18748

ELECTRONIC WARFARE

- Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations [AGARD-CP-404] p 235 N87-24940
- The use of knowledge based systems techniques in ESM processing p 235 N87-24941
- Decision aid for threat penetration analysis p 235 N87-24944

- The electromagnetic threat to future avionic systems p 50 N88-23790

- Avionics systems engineering and its relationship to mission software development p 55 N89-18454

- Automating the deconfliction of jamming and spectrum management p 152 N89-18596

ELECTRONS

- Secondary electron generation, emission and transport Effects on spacecraft charging and NASCAP models p 98 N87-26950

ELECTROPHYSIOLOGY

- Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine [AGARD-CP-432] p 190 N88-27683
- Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27687
- The application of non-stationary data analysis techniques in the identification of changes in the electroencephalogram associated with the onset of drowsiness p 198 N88-27688
- A statistical procedure for the evaluation of presence/non-presence of stimulus-related EEG activity p 199 N88-27689

ENGINE AIRFRAME INTEGRATION

- Electric and magnetic brain activity related to cognitive performance p 199 N88-27692
- Cognitive task demands as reflected in physiological measures p 200 N88-27696

- The effect of endogenous alpha on hemispheric asymmetries and the relationship of frontal theta to sustained attention p 208 N88-27701
- Psychophysiological measures of drowsiness as estimators of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702
- Fighter pilot performance during airborne and simulator missions: Physiological comparisons p 215 N88-27704

- Event-related and steady potential changes in the brain related to workload during tracking p 201 N88-27705
- The neuroelectric selection of Naval aviation personnel: An evaluation p 208 N88-27707
- An approach to studying the effects of psychostimulants on cerebral electrical activity in the non-human primate p 203 N88-27716

- Relation between VEP and visual function in lesions of the optic nerve and visual pathway p 203 N88-27718
- The auditory evoked response in military pilots p 203 N88-27721

ELECTROSTATIC CHARGE

- High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944
- Spacecraft protection against electrostatic discharge application to the ARABSAT spacecraft p 99 N87-26956
- Electrostatic immunity of geostationary satellites p 99 N87-26957

- The effects of electrostatic discharge phenomena on Telesat's domestic communications satellites p 99 N87-26958

- Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959

- Automatic charge control system for geosynchronous satellites p 99 N87-26960

- Polar-auroral charging of the space shuttle and EVA astronaut p 94 N87-26962

- Gas path condition monitoring using electrostatic techniques p 54 N89-18617

ELECTROSTATICS

- Electron beam experiments at high altitudes p 97 N87-26946

ELLIPSOIDS

- Separation around ellipsoid-type obstacles: Modeling and validation experiences p 167 N89-18627

ELLIPTIC DIFFERENTIAL EQUATIONS

- Numerical grid generation around complete aircraft configurations p 224 N87-20202
- Composite grid generation for aircraft configurations with the EAGLE code p 227 N88-29321

ELONGATION

- Superplasticity: An overview p 111 N87-29642

EMBEDDED COMPUTER SYSTEMS

- Avionics systems engineering and its relationship to mission software development p 55 N89-18454
- Embedding formal methods in SAFRA p 229 N89-18455
- Formalizing a theory of real-time software specification p 229 N89-18456
- Verification and validation of flight critical software p 230 N89-18460
- Tools for developing real time embedded systems in Ada: Needs, portability and efficiency p 230 N89-18464

- Task interactions in distributed machines of embedded computer systems p 232 N89-18479

- Functional programming languages and modern multiprocessor architectures: The EMSP example p 231 N89-18480

- Ada in embedded avionic systems p 57 N89-18486

EMBEDDING

- Numerical solution of compressible Navier-Stokes flows p 156 N89-18618

EMITTERS

- The use of knowledge based systems techniques in ESM processing p 235 N87-24941

EMPHYSEMA

- Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax p 194 N87-24076

ENERGETIC PARTICLES

- Hostile energetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941
- The high-latitude ionosphere: Geophysical basis p 188 N89-11933

ENERGY ABSORPTION

- Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness [AGARD-CP-443] p 22 N89-18421
- Crashworthiness design methods applicable at concept stage p 22 N89-18424
- Crushing behaviour of helicopter floor structures p 23 N89-18429

ENGINE AIRFRAME INTEGRATION

- Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478

ENGINE ANALYZERS

ENGINE ANALYZERS

High response data acquisition system p 249 N87-21189

ENGINE CONTROL

Some considerations relating to aero engine pyrometry p 171 N87-21187
The flight evaluation of an advanced engine display and monitoring system p 46 N88-11659
Pumping systems and flow interfaces for rapid response electronic reheat controls p 65 N88-17665
Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 86 N88-17674

Engine condition monitoring State-of-the-art civil application p 53 N89-16792

F100-PW-220 engine monitoring system p 53 N89-16795

Military engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 53 N89-16796

Commercial engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 54 N89-16799

The advantage of a thrust rating concept used on the RB199 engine p 70 N89-16800

Fault management in aircraft power plant controls p 71 N89-16809

ENGINE DESIGN

Design and calculation of high speed engine bearings p 174 N86-29241

Transonic and Supersonic Phenomena in Turbomachines p 57 N87-21927

Wake and shock interactions in a transonic turbine stage p 57 N87-21930

The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21931

Propulsion system technologies for thrust vectoring p 60 N87-22670

Composite motor case design p 100 N87-28592

Advanced Technology for Aero Gas Turbine Components p 62 N88-17647

AGARD-CP-421 p 62 N88-17647

The coming revolution in turbine engine technology p 62 N88-17648

An examination of the impact of potential advances in component technology for future military engines p 63 N88-17650

Specification of an engine and its components starting from a consideration of aircraft missions p 63 N88-17651

Experimental evaluation of a translating nozzle sidewall radial turbine p 64 N88-17656

An integrated aero/mechanical performance approach to high technology turbine design p 64 N88-17657

Design and testing of a small radial turbine for auxiliary power units p 64 N88-17661

Design and aerodynamic performance of a small mixed-flow gas generator turbine p 64 N88-17662

Development of a plenum chamber burner system for an advanced VTOL engine p 65 N81-17664

Analysis of possible transmission arrangements applicable for driving single or twin counterrotating propellers p 66 N88-17670

Optimizing powerplant design and development cycles p 254 N86-20183

Combustion and fuels in gas turbine engines p 104 N88-29910

AGARD-CP-422 p 104 N88-29910

Recent UK trials in engine health monitoring Feedback and feedforward p 69 N89-16790

Implication of engine performance monitoring for the aircraft manufacturer p 53 N89-16794

Military engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 53 N89-16796

Commercial engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 54 N89-16799

The advantage of a thrust rating concept used on the RB199 engine p 70 N89-16800

Trend monitoring of a turboprop engine at low and mean power p 54 N89-16801

Gas path analysis and engine performance monitoring in a Chinook helicopter p 70 N89-16802

System considerations for integrated machinery health monitoring p 70 N89-16804

Maintenance aid system for wide body aircraft p 70 N89-16805

Getting more from vibration analysis p 54 N89-16807

A joint study on the compensation of in-field aero engine vibration diagnosis p 71 N89-16808

Discrete operating conditions gas path analysis p 54 N89-16810

Gas path modelling, diagnosis and sensor fault detection p 54 N89-16811

System theoretical method for dynamic on-condition monitoring of gas turbines p 54 N89-16812

Identification of dynamic characteristics for fault isolation purposes in a gas turbine using closed-loop measurements p 71 N89-16813

Space shuttle main engine monitoring experience and advanced monitoring systems development p 100 N89-16815

Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816

Gas path condition monitoring using electrostatic techniques p 54 N89-16817

An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818

COMPASS (Trademark): A generalized ground-based monitoring system p 55 N89-16819

F100-PW-220 engine monitoring system p 53 N89-16795

Military engine condition monitoring systems The UK experience p 53 N89-16797

Military engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 53 N89-16796

AGARD-CP-400 p 60 N87-24464

Air inlet/engine compatibility Impact of theoretical and experimental methods p 60 N87-24466

New trends in intake/engine compatibility assessment p 60 N87-24467

Viscous analyses for flow through subsonic and supersonic intakes p 61 N87-24469

Experimental determination of the transfer function of an axial compressor to distorted inlet flow p 9 N87-24479

Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model p 20 N89-18642

ENGINE MONITORING INSTRUMENTS

Engine Condition Monitoring Technology and Experience p 52 N89-16780

AGARD-CP-448 p 52 N89-16780

Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781

An overview of US Navy engine monitoring system programs and user experience p 69 N89-16782

Engine usage condition and maintenance management systems in the UK armed forces p 69 N89-16783

Canadian forces aircraft condition/health monitoring Policy plans and experience p 69 N89-16784

On board life monitoring system Tornado (OLMDS) p 52 N89-16785

Information management systems for on-board monitoring systems p 52 N89-16786

CF-18 engine performance monitoring p 69 N89-16787

B-1B CITS engine monitoring p 52 N89-16788

Engine life consumption monitoring program for RB199 integrated in the on-board life monitoring system p 53 N89-16789

Recent UK trials in engine health monitoring Feedback and feedforward p 69 N89-16790

F110 engine monitoring and maintenance management systems for F-16 C/D p 70 N89-16791

Engine condition monitoring State-of-the-art civil application p 53 N89-16792

Implication of engine performance monitoring for the aircraft manufacturer p 53 N89-16794

SUBJECT INDEX

ENGINE NOISE

Experimental investigation on small turboprop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476

ENGINE PARTS

Aero-engine gears Manufacturing cracks and their effect on operation p 174 N86-29239

Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059

NDT of electron beam welded joints (micro-focus and real time X-ray) p 179 N87-17063

Evaluation of DDH and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070

Repair techniques for gas turbine components p 178 N87-17071

Advanced instrumentation for Aero Engine Components p 118 N87-21170

AGARD-CP-399 p 118 N87-21170

Interferometric measurement of strains and displacements in engine components p 178 N87-21196

Design and sizing of internal thermal insulators for solid propellant rocket engines p 116 N87-28598

An examination of the impact of potential advances in component technology for future military engines p 63 N88-17650

Specification of an engine and its components starting from a consideration of aircraft missions p 63 N88-17651

F100-PW-220 engine monitoring system p 53 N89-16795

An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818

Design Methods in Solid Rocket Motors p 101 N89-16906

AGARD-LS-150 REV1 p 101 N89-16906

Design and analysis of solid rocket motor internal insulation p 101 N89-16915

Overall optimization of solid rocket motor p 102 N89-16916

The impact of engineering assumptions on NDE requirements p 180 N89-17254

Relationships of nondestructive evaluation needs and component design p 180 N89-17256

Short term developments in non-destructive evaluation applicable to turbine engine parts p 181 N89-17258

State-of-the-art in non-destructive evaluation of turbine engine parts p 181 N89-17261

ENGINE TESTING LABORATORIES

Developments in data acquisition and processing using an advanced combustion research facility p 79 N87-21182

ENGINE TESTS

Developments in data acquisition and processing using an advanced combustion research facility p 79 N87-21182

Rocket altitude test facilities register p 91 N87-24489

AGARD-AG-297 p 91 N87-24489

Design and testing of a small radial turbine for auxiliary power units p 64 N88-17661

Design and development of an advanced F100 compressor p 67 N88-17678

Fuel property effects on the US Navy's TF30 engine p 67 N88-29911

Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 106 N88-29923

Fuel effects on flame radiation and hot-section durability p 106 N88-29925

Aeroelastic thermal effects p 68 N88-10015

Recent UK trials in engine health monitoring Feedback and feedforward p 69 N89-16790

Implication of engine performance monitoring for the aircraft manufacturer p 53 N89-16794

System considerations for integrated machinery health monitoring p 70 N89-16804

Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816

Measurement uncertainty of the AGARD/PEP uniform engine test program p 71 N89-16853

An overview of the application of standard measurement uncertainty methodology to propulsion testing p 72 N89-16854

Accuracy requirements for high-speed test with engine simulation on transport aircraft models in the NLR-HST p 89 N89-16870

Engine simulator tests Comparison of calibration and wind tunnel results p 89 N89-16871

State of the art of solid propellant rocket motor grain design in the United States p 117 N89-16914

ENGINEERING

A review of the knowledge engineering process p 233 N88-10814

ENGINEERING MANAGEMENT

Picking winners Parametric cost estimating and project management p 243 N88-20176

Reasons for increasing development cost of rotary wing aircraft and ideas to reverse the trend p 254 N88-20179

Engineering management for validation prototype phase p 245 N88-20195

SUBJECT INDEX

Schedule and cost control of development p 245 N88-20196
Engineering data compendium Human perception and performance User's guide p 215 N88-27749 [LC-87-19560]
Engineering data compendium Human perception and performance, volume 1 p 215 N88-28630 [LC-87-19560]
Engineering data compendium Human perception and performance, volume 2 p 215 N88-28631 [LC-87-19560]
Engineering data compendium Human perception and performance, volume 3 p 215 N88-28632 [LC-87-19560]
ENVIRONMENT PROTECTION
Impact of IPS and IRS configurations on engine installation design p 31 N87-10070
ENVIRONMENTAL TESTS
Flight testing under extreme environmental conditions [AGARD-AG-300-VOL-8] p 172 N88-27525
ENVIRONMENTS
Avionics and corrosion p 47 N88-13336
Effect of environment and improvement measures on static and fatigue strength of bolted CFRP joints p 187 N89-17703
ENZYMATIC ACTIVITY
Use of lysine and other nutrients to enhance and sustain performance p 195 N87-25711
EPIDEMOLOGY
Epidemiology of the driver's back p 191 N87-13933
Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 134 N87-24072
EPILEPSY
Detection of latent epilepsy in airline candidates p 203 N88-27720
EPOXY RESINS
Composite repair of cracked aluminum structure p 2 N87-20183
Composite repair material and design development efforts p 3 N87-20188
Unconventional approaches to field repair p 3 N87-20190
EQUIPMENT SPECIFICATIONS
Engine-airframe integration for rotorcraft Component specifications and qualification p 31 N87-10071
A low cost gyroscope for guidance and stabilization units p 171 N87-29478
User equipment overview p 30 N89-10879
EROSION
Operation of gas turbine engines in dust-laden environments p 63 N88-17654
EROSIVE BURNING
Direct erosive burning measurements of a reduced-smoke solid propellant rocket by flash X-rays p 114 N88-26476
ERROR ANALYSIS
Velocity accuracy measurement of GPS user equipment p 28 N87-29477
A study of pilot flight information crossmonitoring performance p 211 N87-29509
Some approaches to the design of high integrity software p 73 N88-10799
Helifire system model validation p 44 N89-10057
The Global Positioning System (GPS) accuracy, system error budget, space and control segment overview p 29 N89-10877
GPS/aircraft navigation system integration for enhanced navigation performance and robustness p 30 N89-10880
B-1B CITS engine monitoring p 52 N89-18786
A critical assessment of wind tunnel results for the NACA 0012 airfoil p 17 N89-15847
Measurement uncertainty of the AGARD/PEP uniform engine test program p 71 N89-16653
An overview of the application of standard measurement uncertainty methodology to propulsion testing p 72 N89-16854
ERROR CORRECTING CODES
The design and performance of an adaptive packet-switched HF data terminal p 149 N89-18577
ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N89-18587
Predicting the effects of noise and interference on fast frequency-hopped M-ary NCSFS systems p 151 N89-18588
ERROR DETECTION CODES
Jamming and electronic countermeasures p 151 N89-18586
ERRORS
Radar display Conversion of scanning Errors and correction techniques p 132 N87-18754
Narrative compression coding for a channel with errors p 150 N89-18584
Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656
ESTIMATES
Identification of dynamic systems: applications to aircraft Part 1: The output error approach [AGARD-AG-300-VOL-3-PT-1] p 33 N87-21913

Picking winners Parametric cost estimating and project management p 243 N88-20176
Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656
ETCHING
Microelectronics the next fifteen years p 154 N88-23792
Suggested plastic replica method p 185 N89-17293
ETIOLOGY
Beckache and Back Discomfort --- conference [AGARD-CP-378] p 190 N87-13932
Epidemiology of the driver's back p 191 N87-13933
Relationships between whole-body vibration and disorders of the backbone diagnosed on operators of earth-moving machinery p 208 N87-13934
Relationship between backache and flying duty in jet- and prop-pilots demonstrated by a flying wing p 191 N87-13938
Back discomfort in US Army helicopter crew members p 209 N87-13939
Musculo-skeletal illnesses among workers exposed to low intensity work load of long duration p 191 N87-13940
Vehicle vibration and back pain p 209 N87-13945
In vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
Lower back pain in helicopter pilots: Etiopathological factors p 210 N87-13955
Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956
Coronary risk factors in aerospace medicine p 195 N87-24078
Etiological significance of equipment features and pilot history in simulator sickness p 203 N89-12172
Aetiological factors in simulator sickness p 203 N89-12174
EULER EQUATIONS OF MOTION
Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20200
A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
Numerical simulation of internal and external inviscid and viscous 3-D flow fields p 155 N87-20213
Applications of Euler equations to sharp edge delta wings with leading edge vortices p 6 N87-20214
Utilization of Euler codes in nonlinear aerodynamics p 6 N87-20215
Euler solution for a complete fighter aircraft at sub- and supersonic speed p 33 N87-20216
Analysis of the F-15 flow field by a block grid Euler approach p 6 N87-20217
Zonal solutions for airfoils using Euler boundary-layer and Navier-Stokes equations p 6 N87-20219
Three-dimensional computation around turbomachine blades with fins p 59 N87-21940
Transonic three-dimensional inviscid calculations in turbomachines p 59 N87-21942
Some turbomachinery blade passage analysis methods: Retrospect and prospect p 59 N87-21947
Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949
Numerical analysis of flow through scramjet engine inlets p 11 N88-13233
A 3-D Euler solution for hypersonic Mach numbers p 12 N88-13240
The off-design performance of hypersonic waveriders p 38 N88-13244
Radial compressor design using an Euler solver p 66 N88-17675
Generation of multiple block grids for arbitrary 3D geometries p 226 N88-29317
Mesh generation for industrial application of Euler and Navier-Stokes solvers p 227 N88-29323
Space marching Euler solvers p 15 N88-29759
Numerical methods Euler time dependent solver p 15 N88-29760
Status of CFD validation on the vortex flow experiment p 167 N89-18620
Accurate solutions, parameter studies and comparisons for the Euler and potential flow equations p 167 N89-18624
Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems p 167 N89-18625
Development and application of a weapons multiblock suite p 168 N89-18633
Solution on unstructured grids for the Euler and Navier-Stokes equations p 168 N89-18636
Validation of an Euler code for hydraulic turbines p 168 N89-18637
Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640
Computation of transonic 3D cascade flow and comparison with experiments p 20 N89-18641

EXPERT SYSTEMS

EUROPE
An investigation of terrain-related variables for predicting the multipath fade depth distribution on terrestrial microwave links p 138 N88-19654
European examples of evaluating the effectiveness of information centres and services p 253 N89-11628
Transhorizon cochannel interference path measurements in Europe p 149 N89-18572
EUROPEAN AIRBUS
Assessment of software quality for the AIRBUS A310 automatic pilot p 74 N88-10804
EVACUATING (TRANSPORTATION)
Regulatory aspect of crashworthiness p 22 N89-18422
EVALUATION
Evaluation of results of boundary layer calculations with regard to design aerodynamics p 158 N87-22150
Assessment of software quality for the AIRBUS A310 automatic pilot p 74 N88-10804
Standard fatigue test specimens for fastener evaluation [AGARD-AG-304] p 183 N88-12818
The judgement and evaluation of long term investments demonstrated by means of a civil aircraft program p 254 N88-20180
The effects of two Carucci initiatives concurrency and streamlining, on the test and evaluation phase of system acquisition p 245 N88-20186
Performance assessment register [AGARD-R-763] p 246 N89-10666
Measures, methods and models employed in evaluating the effectiveness of information centers and services p 253 N89-11627
Evaluating for information center planning p 254 N89-11632
Simulator sickness in US Army and Navy fixed- and rotary-wing flight simulators p 205 N89-12178
The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179
EVAPORATION
Review of recent developments in evaporation-boiling assessment p 139 N88-13644
Influence of the convection on evaporation and combustion of a fuel droplet p 110 N88-29948
EVOLED RESPONSE (PSYCHOPHYSIOLOGY)
Cortical evoked response and eyeblink measures in the workload evaluation of alternative landing system displays p 213 N87-30061
A statistical procedure for the evaluation of presence/non-presence of stimulus-related EEG activity p 199 N88-27689
Dissecting the visual and auditory pathways by means of the two-input technique p 199 N88-27690
Squid instrumentation for neuromagnetic study of complex brain activity p 199 N88-27691
Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N88-27693
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706
The effect of mild hypoxia on the vestibular evoked response p 202 N88-27713
Measurement of electrical activity in the CNS with cortical evoked potentials and EEG: Efficacy profiles of drugs using factor analysis p 207 N88-27715
The auditory evoked response in military pilots p 203 N88-27721
EVOLUTION (DEVELOPMENT)
The Global Positioning System (GPS) constellation and coverage p 29 N89-10876
EXHAUST EMISSION
The reduction of exhaust signature in solid propellant rocket motors p 114 N88-26474
EXHAUST NOZZLES
Advanced Technology for Aero Gas Turbine Components [AGARD-CP-421] p 62 N88-17647
Experimental evaluation of a translating nozzle sidewall p 64 N88-17656
The expansion method Target Resonances p 137 N88-11912
EXTRINSICATION
Channel requirements for computational fluid dynamics code verification p 90 N89-16880
EXPERT SYSTEMS
New technologies for improved information systems and services p 248 N86-28802
Knowledge based systems in information work p 248 N87-19926
A time-based concept for terminal-area traffic management p 27 N87-21895
The application of intelligent knowledge based systems to air traffic control p 26 N87-21904
Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations [AGARD-CP-404] p 235 N87-24940
The use of knowledge based systems techniques in ESM processing p 235 N87-24941

EXTERNAL STORE SEPARATION

- DARPA's Airland Battle Management Program and USAF's Tactical Expert Mission PLANNING (TEMPLAR) p 235 N87-24942
- KRS: A knowledge-based mission planner p 235 N87-24943
- Integrated multisensor targeting p 236 N87-24947
- Machine architectures for artificial intelligence computing p 222 N87-24948
- Current state of an expert system ... military information systems p 236 N87-24953
- An intelligent multi-target tracking system p 119 N87-29484
- The task taxonomy method: A basis for an expert system on human reliability p 207 N87-29506
- Rapid prototyping of user-computer interfaces during system design p 222 N87-29520
- A graphical aid to the KRS program development p 224 N87-29521
- Knowledge-Based Concepts and Artificial Intelligence Applications to Guidance and Control (AGARD-LS-155) p 74 N88-10806
- Overview of AGARD Lecture Series No. 155
- Knowledge-based concepts and artificial intelligence applications to guidance and control p 74 N88-10807
- AI expert system technology issues for guidance and control applications p 74 N88-10808
- DEDALE: An expert system for analog circuit maintenance p 153 N88-10809
- An expert system for aircraft conflict resolution in dense airspace p 29 N88-10810
- Towards the unmanned cockpit p 38 N88-10812
- Generating diagnostic knowledge from a structural and functional description p 232 N88-10813
- A review of the knowledge engineering process p 231 N88-10814
- A rule-based system for arrival sequencing and scheduling in air traffic control p 29 N88-10815
- How to use PROLOG in expert system programming p 225 N88-10816
- Real-time expert systems: A status report p 225 N88-10817
- Architecture and role of the Sensor Subsystem in future aircraft weapon systems p 47 N88-10818
- Rapid prototyping of complex avionics system architectures p 47 N88-10819
- Psychosensory cockpit ergonomics: advantages of intelligent information systems p 49 N88-23784
- Information retrieval systems evolve: advances for easier and more successful use p 252 N88-30462
- Expert system man-machine interface for a combat aircraft cockpit p 219 N89-18022
- Responsive requirements definition for combat aircraft in light of uncertainties linked to artificial intelligence and expert systems techniques p 55 N89-18448
- Three generations of software engineering for airborne systems p 230 N89-18465
- An avionics software expert system design p 231 N89-18467
- Avionics expert systems p 56 N89-18469
- Contribution of expert systems to avionics advance application on AS30 laser weapon system p 56 N89-18470
- Real-time expert system for onboard radar identification p 56 N89-18481
- SPOCK: A tool for real-time artificial intelligence p 233 N89-18492
- Utilization of EMICAT for the development of aerospace expert systems p 56 N89-18483
- Multi-input decision aid procedure: Application to multi-sensor target classification p 233 N89-18484
- ### EXTERNAL STORE SEPARATION
- Store separation flight testing (AGARD AG-306 VOL 5) p 31 N86-30727
- Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209
- Airframe/store compatibility p 40 N88-13323
- ### EXTERNAL STORES
- Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
- Carriage of external stores p 36 N87-24449
- ### EXTINCTION
- Selective extinction of a dispersion of single and aggregated layered spheres p 147 N89-17743
- ### EXTRAPOLATION
- Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656
- ### EXTRAVERTEBRAL ACTIVITY
- Polar auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
- ### EXTREMELY HIGH FREQUENCIES
- EHF multifunction phased array antenna p 131 N87-18752
- Basic parameters of antennas for aircraft, satellites and missiles p 134 N87-23860
- An EHF telecommunication system engineering model p 141 N88-19674
- ### EXTREMELY LOW FREQUENCIES
- A new global survey of ELF/VLF radio noise p 148 N89-18570

A-28

SUBJECT INDEX

- ### EXTRUDING
- Prediction of temperature distribution in axisymmetric extrusion p 120 N89-15265
- ### EYE (ANATOMY)
- Eye safe Raman laser range finder for ground and airborne application p 173 N87-29475
- Future visual environment and concerns p 217 N88-29299
- ### EYE MOVEMENTS
- Fighter pilot performance during airborne and simulator missions: Physiological comparisons p 215 N88-27704
- ## F
- ### F REGION
- The high-latitude ionosphere: Dynamical aspects, and models p 188 N89-15338
- Satellite in-situ probing p 142 N89-11939
- Magnetic storm effects on F-layer irregularities near the auroral oval p 189 N89-17750
- ### F-14 AIRCRAFT
- Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
- ### F-15 AIRCRAFT
- Fighter design for human load limits p 41 N88-19451
- ### F-16 AIRCRAFT
- Fighter design for human load limits p 41 N88-19451
- Three-dimensional elliptic grid generation for an F-16 p 226 N88-29315
- AFTI/F-16 impact of cockpit automation on pilot acceptance p 221 N89-18033
- Integration of advanced safety enhancements for F-16 terrain following p 56 N89-18472
- ### F-4 AIRCRAFT
- Robust control system design p 73 N88-10809
- ### FABRICATION
- The application of diffusion bonding and laser welding in the fabrication of aerospace structures p 176 N87-17054
- Processing science and materials development p 119 N89-15263
- The effects of a compressor rebuild on gas turbine engine performance p 70 N89-16803
- Joining of carbon fiber composite with fasteners p 103 N89-17701
- ### FABRICS
- AIR 42 carbon fibre flap repair design and inspection p 102 N87-20178
- Damage repair of in-service composite structures: Application to the Mirage 2000 p 2 N87-20184
- A study to optimize the (CFRP-A) mechanical joint in order to reduce electrical resistance p 154 N89-17695
- The static strength of bolted joints in fibre reinforced plastics p 102 N89-17699
- ### FABRY-PEROT INTERFEROMETERS
- Combined fringe and Fabry-Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility p 116 N87-21183
- ### FADING
- Identification of microwave line-of-sight multipath components p 139 N88-19665
- Refractive index, meteorology and fading in line-of-sight transmission paths p 140 N88-19666
- Radio and radar holes and multipath zones: The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667
- MM-wave propagation and application in military communication systems p 140 N88-19669
- Space diversity effects on line-of-sight propagation paths p 140 N88-19670
- The 6 GHz propagation measurements over a 51 km path in the UK p 141 N88-19673
- ### FAILURE
- Bolted joints in composites primary structures p 186 N89-17698
- ### FAILURE ANALYSIS
- Optimal detection of sensor failures in flight control systems using deterministic observers p 74 N89-10803
- Corrosion of electronic components p 46 N88-13333
- Fatigue and assessment methods of blade vibration p 58 N89-10010
- Maintenance aid system for wide body aircraft p 70 N89-16805
- Getting more from vibration analysis p 54 N89-16807
- Fault management in aircraft power plant controls p 71 N89-16809
- Discrete operating conditions gas path analysis p 54 N89-16810
- Literature review on the design of mechanically fastened composite joints p 178 N89-17686
- Accelerated convergence for synchronous approximate agreement p 231 N89-18474
- ### FAILURE MODES
- The mixture of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18748
- Visual related accidents/incidents p 216 N88-29293
- Recent studies on bolted joints in composite structures p 185 N89-17684
- An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691
- Strength analysis of mechanically fastened composite structures p 186 N89-17692
- Bearing bypass loading on bolted composite joints p 186 N89-17697
- The static strength of bolted joints in fibre reinforced plastics p 102 N89-17699
- Robust algorithm synchronizes mode changes in fault-tolerant asynchronous architectures p 231 N89-18475
- ### FAINT OBJECT CAMERA
- Qualification of the faint object camera p 170 N87-20359
- ### FALSE ALARMS
- A CFAR design concept for operation in heterogeneous clutter p 128 N87-18733
- ### FAN BLADES
- Understanding fan blade flutter through linear cascade aerodynamic testing p 9 N87-24407
- Aerodynamic performance of a scale-model counter-rotating unducted fan p 65 N88-17666
- ### FANS
- Fan flutter test p 68 N89-10014
- ### FARADAY EFFECT
- Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281
- ### FAST FOURIER TRANSFORMATIONS
- The flow around a squared obstacle p 156 N87-21185
- Detection of acceleration (± 0.2) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710
- ### FASTENERS
- Patch repair of corroded aircraft skin areas p 3 N87-20191
- Standard tongue test specimens for fastener evaluation (AGARD AG-304) p 183 N88-12818
- Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures (AGARD-CP-427) p 121 N89-17685
- Literature review on the design of mechanically fastened composite joints p 179 N89-17686
- Recent studies on bolted joints in composite structures p 185 N89-17688
- Strength analysis of mechanically fastened composite structures p 186 N89-17692
- Joining of carbon fiber composite with fasteners p 103 N89-17701
- Effect of environment and improvement measures on static and fatigue strength of bolted CFRP-joints p 187 N89-17703
- Behaviour of mechanically fastened joints in advanced composites p 103 N89-17705
- ### FATIGUE (BIOLOGY)
- Postural fatigue and the backache of helicopter pilots (DCIEM-85-R-30) p 210 N87-13953
- Biochemical Enhancement of Performance (AGARD-CP-415) p 195 N87-25709
- Psychophysiological measures of drowsiness as estimators of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702
- Neurophysiological patterns of operational fatigue: Preliminary results p 201 N88-27703
- ### FATIGUE (MATERIALS)
- AGARD Corrosion Handbook, Volume 1: Corrosion, causes and case histories (AGARD-AG-278-VOL-1) p 110 N86-16374
- Technology in aircraft systems: Basic principles and applications p 174 N86-29240
- Operational load measurements on service helicopters p 37 N88-11658
- Forced vibration and flutter design methodology p 183 N89-10016
- On board life monitoring system Tornados (OLMOS) p 52 N88-16785
- Information management systems for on-board monitoring systems p 52 N89-16786
- Damage growth in composite bolted joints p 186 N89-17689
- Effect of environment and improvement measures on static and fatigue strength of bolted CFRP-joints p 187 N89-17703
- ### FATIGUE LIFE
- Effects of unfavorable environmental conditions on the service life of jet engine and helicopter bearings p 174 N88-29239
- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-Al6V4 p 182 N87-17065
- Operational load measurements on service helicopters p 37 N88-11658

SUBJECT INDEX

- Short-crack growth behaviour in an aluminum alloy. An AWARD cooperative test program p 184 N89-17288
- FATIGUE TESTS**
- Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels. Friction in the main rotor drive shaft for the AR-64 military helicopter program p 177 N87-17067
- Composite repair of corroded J-stiffened panels. Design and test verification p 11 N87-20181
- Standard fatigue test specimens for fastener evaluation p 183 N88-12918
- [AGARD-AG-289] Automated measurement of crack length and load line displacement at elevated temperature p 183 N88-26695
- AGARD engine disc cooperative test programme [AGARD-R-766] p 67 N88-28926
- Preliminary fatigue tests on short-crack specimens p 184 N89-17290
- Recent studies on bolted joints in composite structures p 185 N89-17688
- FAULT TOLERANCE**
- Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MISA) p 171 N87-29479
- Fault tolerant considerations and methods for guidance and control systems p 73 N88-10796
- [AGARD-AG-289] Computing systems dependability and fault tolerance. Basic concepts and terminology p 222 N88-10797
- Some approaches to the design of high integrity software p 73 N88-10799
- Robust control system design p 73 N88-10800
- Reliability modeling of fault-tolerant computer based systems p 73 N88-10801
- ISAURE. Integration of security and fault tolerance in the REALITE 2000 system p 74 N88-10802
- Fight test of a resident backup software system p 74 N88-10805
- Development of a generic architecture p 48 N88-23774
- F110 engine monitoring and maintenance management systems for F-16 C/D p 70 N89-16791
- Software Engineering and Its Application to Avionics [AGARD-CP-439] p 55 N89-18446
- Verification and validation of flight critical software p 230 N89-18460
- Built-in self test p 154 N89-18468
- Accelerated convergence for synchronous approximate agreement p 231 N89-18474
- Robust algorithm synchronizes mode changes in fault-tolerant asynchronous architectures p 231 N89-18475
- FEAR**
- Phobic manifestations among experienced pilots p 197 N87-25722
- FEEDBACK CONTROL**
- Closed loop fiber optic gyro p 237 N87-13277
- Wide bandwidth, long distance, fibre-optic communication systems p 240 N87-13300
- Autonomous simulation at the National Aeronautical Establishment of Canada p 83 N87-23659
- Collected flight and simulation comparisons and considerations p 83 N87-23660
- Active control of helicopter vibration using multi-loop self-adaptive control p 75 N88-11660
- Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- The use of hardware-in-the-loop techniques in the development of a modern air-to-surface missile system p 93 N88-19562
- Pilot modeling p 217 N88-29736
- Pilot modeling applications p 217 N88-29737
- FERROGRAPHY**
- Wear of high speed roller bearings p 175 N86-29248
- FERROMAGNETIC MATERIALS**
- An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-18618
- FIBER COMPOSITES**
- Unconventional approaches to field repair p 3 N87-20190
- Patch repair of corroded aircraft skin areas p 3 N87-20191
- Composite motor case design p 100 N87-28592
- Design of filament-wound rocket cases p 100 N87-28593
- Structural materials. The changing scene p 102 N88-20190
- Composite motor case design p 101 N89-18909
- FIBER OPTICS**
- Guided Optical Structures in the Military Environment [AGARD-CP-383] p 237 N87-13273
- Progress in optical fiber sensors p 237 N87-13274
- Fibre optic gyroscopes in inertial navigation p 25 N87-13275
- Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276
- Closed loop fiber optic gyro p 237 N87-13277

- Progress with multiplexed sensor arrays based on reflection at spliced joints between sensors p 237 N87-13278
- Magnetic and pressure sensors using the compensated polarimetric sensor configuration p 237 N87-13279
- Fiber optic device for temperature remote sensing p 237 N87-13280
- Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281
- Nonlinear ellipse rotation in a low-birefringence optical fiber p 238 N87-13282
- Progress in optical fiber gyroscopes using integrated optics p 238 N87-13283
- Wavelength division multiplexing at 1.5 microns for high capacity optical transmission p 238 N87-13284
- A spherical waveguide multiplexer-demultiplexer p 238 N87-13285
- A study of methods of phase noise reduction of semiconductor lasers for sensor applications p 172 N87-13286
- Effects of optical feedback on the performance of high data rate single-mode fiber systems p 238 N87-13288
- Performance of integrated optical frequency shifters pigtailed to high birefringence fibres using ion-milled grooves p 238 N87-13289
- Nonlinear planar guided wave interactions and devices p 238 N87-13290
- Ultrasonic broadband switching for communications and signal processing p 124 N87-13294
- Preparation and properties of infrared transmitting heavy metal fluoride glass optical fibers p 239 N87-13296
- Glass fibres for transmission in the 8-12 micrometers waveband p 239 N87-13297
- Fluoride glasses for infrared waveguides p 240 N87-13299
- Wide bandwidth, long distance, fibre-optic communication systems p 240 N87-13300
- Performance of RF fiber optic links p 240 N87-13301
- Fiber optics. A survivable and cost-effective transmission medium for terrestrial networks p 240 N87-13302
- Single-mode fibers for fiber-optic guided missiles. A comparison with graded-index multimode fibres p 240 N87-13303
- Lightwave technology in future radar equipment designs p 240 N87-13304
- Tactical fiber optic assembly requirements p 240 N87-13305
- A hybrid transmission scheme on single mode fibers for tactical communications p 241 N87-13306
- Midcourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-16005
- Unconventional approaches to held repair p 3 N87-20190
- Sapphire fiber optic temperature probe p 241 N87-21186
- New technology impacts on future avionics architectures p 45 N87-24949
- A prototype fibre optic gyroscope for missile guidance applications p 92 N88-19554
- A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- Fiber optic buses and networks for advanced avionics architectures p 52 N89-10636
- Guidance and Control of Precision Guided Weapons [AGARD-CP-435] p 93 N89-17605
- Packaged fiber optic gyros p 172 N89-17608
- Demonstration of FOG M (Fibre Optic Guided Missile) capabilities by means of simulation and effects of proprioceptive feedback on the control p 93 N89-17609
- FIELD EFFECT TRANSISTORS**
- PIN-FET preamplifier for high-speed optical transmission systems p 239 N87-13293
- FIELD OF VIEW**
- Advanced visuals in mission simulators p 80 N87-23636
- In-flight assessment of workload using instrument scan p 213 N87-30062
- Design considerations for Virtual Panoramic Display (VPD) helmet systems p 219 N89-18024
- FIELD STRENGTH**
- Some measurements of height gain at V.H.F. p 140 N88-19671
- FIGHTER AIRCRAFT**
- Combat loads on modern fighters p 30 N86-27276
- [AGARD-R-730] Static aeroelasticity in combat aircraft p 182 N86-27678
- [AGARD-R-725] Aircraft and Bearing Tribological Systems [AGARD-CP-394] p 174 N86-29236
- Multifunctional requirements for a gearbox secondary power system in a modern fighter aircraft and its components and interface requirements p 174 N86-29243
- Gust load prediction and alleviation on a fighter aircraft [AGARD-R-728] p 72 N86-30741
- Aerodynamics of aircraft afterbody. Report of the working group on aerodynamics of aircraft afterbody [AGARD-AR-226] p 5 N86-32408

FIGHTER AIRCRAFT

- Geometry definition and grid generation for a complete fighter aircraft p 224 N87-20203
- Euler solution for a complete fighter aircraft at sub- and supersonic speed p 33 N87-20216
- Calculations for a generic fighter at supersonic high-lift conditions p 33 N87-20226
- Improvement of Combat Performance for Existing and Future Aircraft [AGARD-CP-409] p 33 N87-22663
- Performance improvement of airborne weapon systems methods, scope and limitations p 33 N87-22665
- Weapon systems polyvalence. An economic and operational challenge p 34 N87-22667
- The assessment and evaluation of combat performance improvements p 34 N87-22675
- Manned air to air combat simulation p 81 N87-23648
- The use of Aerialist flight simulator for the development of the AM-X weapon system p 82 N87-23650
- Integrated Design of Advanced Fighters [AGARD-LS-151] p 35 N87-24445
- Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable fighter aircraft configurations p 35 N87-24446
- Simulation as a fighter design tool p 35 N87-24447
- Fight testing of fighter aircraft p 35 N87-24448
- Cannage of external stores p 36 N87-24449
- Design optimization for a family of multi-role combat aircraft p 36 N87-24450
- Design optimization of fighter aircraft p 36 N87-24451
- V/STOL and STOVL fighter design p 36 N87-24452
- Advanced fighter design. Operational experience and future requirements p 36 N87-24453
- The integration and operational suitability of emerging technologies for future fighter aircraft. A pilot's perspective p 36 N87-24454
- Artificial intelligence and its impact on combat aircraft p 36 N87-24945
- Application of knowledge-based techniques to aircraft trajectory generation and control p 75 N88-10811
- Special Course on Fundamentals of Fighter Aircraft Design [AGARD-R-740] p 39 N88-13315
- Fundamentals of fighter aircraft design p 39 N88-13316
- Mission requirements and aircraft sizing p 39 N88-13317
- Design of wings and wing/body configurations for transonic and supersonic speeds p 39 N87-13318
- Aircraft dynamics. Aerodynamic aspects and wind tunnel techniques p 39 N88-13320
- Techniques for performance optimization in cruise and manoeuvrability p 39 N88-13321
- Fundamentals of fighter aircraft design. Engine intake and afterbody p 40 N88-13322
- Airframe/store compatibility p 40 N88-13323
- Aeroelasticity and optimization in fighter aircraft design p 40 N88-13324
- Materials for fighter aircraft p 40 N88-13325
- Requirements and recommendations for the development of theoretical codes and experimental facilities in the near future p 40 N88-13327
- Examples of static aeroelastic effects on present combat aircraft projects p 76 N88-13349
- Trends in aeroelastic analysis of combat aircraft p 76 N88-13350
- An examination of the impact of potential advances in component technology for future military engines p 63 N88-17650
- Workshop on Design Loads for Advanced Fighters [AGARD-R-746] p 41 N88-19449
- Changes in USAF structural loads requirements p 41 N88-19452
- The relationship between operational flight manoeuvre parameters and design parameters p 41 N88-19454
- Design loads for Swedish military aircraft in a twenty years' perspective p 42 N88-19456
- Determination of design loads for modern combat aircraft p 42 N88-19457
- Manned simulation. Helpful means to determine and improve structural load criteria p 42 N88-19459
- Computer aided tactics for air combat p 214 N88-19559
- Avionics acquisition, trends and future approaches p 244 N88-20184
- Use of demonstration/validation prototypes. Impact on total development costs and times p 245 N88-20194
- Flow visualization study of vortex manipulation on fighter configurations at high angles of attack p 181 N88-23130
- Combat aircraft p 43 N88-28868
- General operational and training visual concerns p 216 N88-29295
- Grid generation and about a cranked-wing fighter aircraft configuration p 226 N88-29318
- Grid generation for an advanced fighter aircraft p 226 N88-29319

FILAMENT WINDING

- Algebraic grid generation for fighter type aircraft p 227 N88-29320
- Aircraft dynamics: Aerodynamic aspects and wind tunnel techniques p 14 N84-29731
- Computing system configuration for fighter aircraft flight control systems p 79 N88-10832
- A highly reliable computer for airborne applications p 222 N89-10833
- Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation (AGARD-AR-249) p 44 N89-12564
- Particular flight mechanics specifications related to wind tunnel test results p 90 N89-16879
- Mission planning and proper design: The long range connection p 217 N89-18010
- Pilot workload assessment: A flight test approach p 218 N89-18014
- Expert system man-machine interface for a combat aircraft cockpit p 219 N89-18022
- Towards the next generation fighter cockpit: The EAP experience p 219 N89-18025
- Pilot integration and the implications on the design of advanced cockpits p 220 N89-18026
- Integrated control and avionics for air superiority p 221 N89-18032
- Measures of merit for advanced military avionics: A user's perspective on software utility p 55 N89-18447
- Integration of vocal dialogue on-board a combat aircraft p 56 N89-18471
- Ada in embedded avionics systems p 57 N89-18486
- FILAMENT WINDING**
- Composite motor case design p 100 N87-28592
- Design of filament-wound rocket cases p 100 N87-28593
- Composite motor case design p 101 N89-16909
- Design of filament-wound rocket cases p 101 N89-16910
- FILE MAINTENANCE (COMPUTERS)**
- Role and design of a software engineering data base in the context of an advanced support environment p 231 N89-18485
- FINITE DIFFERENCE THEORY**
- Comparison of finite difference calculations of a large room of recirculating flow near an airfoil trailing edge p 6 N87-20218
- Numerical investigation of the laminar boundary layer on a 3-D body started impulsively from rest p 6 N87-20220
- Transonic Navier-Stokes wing solutions using a zonal approach: Part 2: High angle-of-attack simulation p 7 N87-20229
- Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center (NAS 1.15.89132) p 9 N87-28519
- Numerical modeling: Finite methods p 137 N88-11918
- Space marching Euler solvers p 15 N88-29759
- Three-dimensional gas turbine combustor modelling p 108 N88-29937
- On the application of finite-difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N88-29938
- Finite difference methods in recirculating flows p 169 N89-18651
- FINITE ELEMENT METHOD**
- The prospects for finite element analysis methods for structural qualification (AGARD-R-736) p 182 N86-31083
- Introduction to finite element basics p 233 N87-16377
- Stating the problem: The step before F.E. modelling p 182 N87-16378
- Modeling for the finite element method p 182 N87-16379
- The use of the finite element method p 182 N87-16380
- Modal survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365
- Reliability of finite element methods in North America (AGARD-R-748) p 183 N88-11139
- Numerical modeling: Finite methods p 137 N88-11918
- Trends in aeroelastic analysis of combat aircraft p 76 N88-13350
- Numerical modeling of premixed flames in gaseous media p 109 N88-29944
- Basic structural dynamics p 183 N89-10007
- Metallurgical modeling of superalloy disc isothermal forgings p 120 N89-15266
- A computer program simulating the hot forging of metal powder p 111 N89-15267
- Physical modeling and viscoplasticity studies of the forging process p 120 N89-15269
- Computer prediction of internal stresses during heat treatment p 112 N89-15272
- Simulation and design of high precision unit processes via numerical methods p 120 N89-15273

- A mixed Eulerian-Lagrangian finite element method for simulation of thermo-mechanical forming processes p 120 N89-15274
- Finite-element simulation of metal forming processes p 120 N89-15275
- A numerical model of directional solidification of cast turbine blades p 121 N89-15277
- An application of computer modelling to isothermal forging p 121 N89-15280
- The application of process modelling to heat treatment of superalloys p 112 N89-15281
- Damage growth in composite bolted joints p 186 N89-17689
- Strength analysis of mechanically fastened composite structures p 186 N89-17692
- Crashworthiness activities on MBB helicopters p 23 N89-18425
- The design of helicopter crashworthiness p 23 N89-18426
- Developments and perspectives at AMD-BA in the field of impact and crash sizing p 23 N89-18427
- Crash simulation and verification for metallic sandwich and laminate structures p 25 N89-18437
- FINITE VOLUME METHOD**
- A second order Godunov method for tactical missiles p 233 N87-20211
- Transonic three-dimensional inviscid calculations in turbomachines p 59 N87-21942
- Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 111 N88-13235
- Radial compressor design using an Euler solver p 66 N88-17675
- On the application of finite-difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N89-29938
- Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640
- Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656
- Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows p 170 N89-18661
- FINS**
- The effects of sweep and bluntness on a glancing shock wave turbulent boundary layer interaction p 10 N88-13227
- The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355
- FIRE CONTROL**
- Simulation of an integrated flight/fire control system during air-to-ground gunnery attack p 34 N87-22672
- Eye safe Raman laser range finder for ground and airborne application p 173 N87-29475
- Helicopter fire control: Advantages of an automatic target tracker p 84 N88-11667
- FITTINGS**
- Typical joints in a wing structure p 44 N89-17693
- FIXED WINGS**
- Simulator sickness in US Army and Navy fixed- and rotary-wing flight simulators p 205 N89-12178
- FLAME HOLDERS**
- Flame stabilization in a reheated combustor p 105 N88-29921
- FLAME PROPAGATION**
- Experimental study of the ignition of explosive charges using visualization of the phenomena p 116 N86-29073
- The study of combustion by means of diode laser spectroscopy p 173 N87-21201
- Numerical modelling of premixed flames in gaseous media p 109 N88-29944
- Gaseous premixed flames in non-uniform flows p 109 N88-29945
- FLAME RETARDANTS**
- The reduction of exhaust signature in solid propellant rocket motors p 114 N86-26474
- FLAME SPECTROSCOPY**
- Accurate measurements of combustion species concentrations using CARS p 103 N87-21173
- FLAME STABILITY**
- Combustion related shear-flow dynamics in elliptic supersonic jets p 111 N88-13232
- Flame stabilization in a reheated combustor p 105 N88-29921
- Modeling the stability of a turbulent premixed flame, downstream from a step by a Lagrangian method p 109 N88-29943
- FLAMES**
- Burning stability of double base propellants p 114 N86-26472
- Accurate measurements of combustion species concentrations using CARS p 103 N87-21173
- FLAPPING HINGES**
- Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems p 37 N88-11663
- FLAPS (CONTROL SURFACES)**
- A TR 42 carbon fibre flap repair design and inspection p 102 N87-20178

SUBJECT INDEX

- FLASH POINT**
- Direct erosive burning measurements of a reduced-smoke solid propellant rocket by flash X-rays p 114 N86-26476
- FLAT PLATES**
- Experimental observations on an unsteady, normal shock/boundary layer interaction p 156 N87-21933
- Experiments and code validation for junction flows p 21 N89-18658
- FLEXIBLE BODIES**
- Current and proposed gust criteria and analysis methods: An FAA overview p 78 N88-29716
- Measured and predicted responses of the Nord 260 aircraft to the low altitude atmospheric turbulence p 78 N88-29723
- FLEXIBLE SPACECRAFT**
- Mechanical Qualification of Large Flexible Spacecraft Structures (AD-A175529) p 94 N87-20355
- Future trends in spacecraft design and qualification p 94 N87-20356
- Recent developments and future trends in structural dynamic design: verification and qualification of large flexible spacecraft p 95 N87-20357
- Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358
- Structural qualification of large spacecraft p 95 N87-20361
- Spacecraft qualification using advanced vibration and modal testing techniques p 96 N87-20368
- FLEXING**
- Investigation of the lumbar flexion of office workers p 191 N87-13944
- FLIGHT CHARACTERISTICS**
- Combat loads on modern fighters (AGARD-R-730) p 30 N86-27276
- Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
- Flight Simulation (AGARD-CP-406) p 80 N87-23633
- Simulation of aircraft behaviour on and close to the ground: Summary of AGARDograph AG-285 p 80 N87-23640
- Unusual airborne simulator applications p 82 N87-23656
- DFVLR in-flight simulators ATTAS and ATTHES for flying qualities and flight control research p 83 N87-23657
- Airborne simulation at the National Aeronautical Establishment of Canada p 83 N87-23659
- Flight testing of fighter aircraft p 35 N87-24448
- Rotorcraft Design for Operations (AGARD-CP-423) p 37 N88-11649
- Mission-oriented flying qualities criteria for helicopter design via in-flight simulation p 37 N88-11652
- Investigation of vertical axis handling qualities for helicopter hover and NOE flight p 75 N86-11653
- Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654
- MBB simulation facilities applied for rotorcraft research p 84 N88-11655
- Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems p 37 N88-11663
- Workshop on Design Loads for Advanced Fighters (AGARD-R-746) p 41 N88-19449
- Manned simulation: Helpful means to determine and improve structural load criteria p 42 N88-19459
- Advances in Flying Qualities (AGARD-LS-157) p 4 N88-29735
- Advances in flying qualities: Concepts and criteria for a mission oriented flying qualities specification p 43 N88-29739
- A second look at MIL prime flying qualities requirements p 44 N88-29740
- The role of simulation in flying qualities and flight control system related development p 87 N88-29742
- FLIGHT CONTROL**
- Improved guidance and control automation at the man-machine interface p 211 N87-18987
- Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users (AGARD-CP-410) p 25 N87-21881
- Identification of dynamic systems - applications to aircraft: Part 1: The output error approach (AGARD-AG-300-VOL.3 PT-1) p 33 N87-21913
- Integrated design of structures p 34 N87-22669
- X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
- Simulation of an integrated flight/fire control system during air-to-ground gunnery attack p 34 N87-22672
- Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674
- Trends in ground-based and in-flight simulators for development applications p 81 N87-23645
- The use of Aerialia flight simulator for the development of the AM-X weapon system p 82 N87-23650
- The development of the T-46 next generation trainer: manned engineering simulator at the US Air Force Flight Test Center p 82 N87-23652

SUBJECT INDEX

- Unusual airborne simulator applications p 82 N87-23656
- DFVLR in-flight simulators ATTAS and ATTRES for flying qualities and flight control research p 83 N87-23657
- Sophisticated integral control methods for use in flight p 212 N87-29510
- Robust control system design p 73 N88-10800
- Optimal detection of sensor failures in flight control systems using deterministic observers p 74 N88-10803
- Flight test of a resident backup software system p 74 N88-10805
- The flight evaluation of an advanced engine display and monitoring system p 46 N88-11659
- Nonlinear lift control at high speed and high angle of attack using vortex flow technology p 76 N88-13319
- The development of manoeuvre load criteria for agile aircraft p 41 N88-19450
- Interaction between structural calculations and system design in advanced flight control p 77 N88-19458
- Manned simulation: Helpful means to determine and improve structural load criteria p 42 N88-19459
- A comparison of integrated and separate systems for flight control and navigation p 48 N88-23779
- Software engineering for the British Aerospace Experimental Aircraft Programme (EAP) p 225 N88-23798
- Development of an airborne facility for advanced avionics research p 51 N88-23801
- Advances in Flying Qualities (AGARD-LS-157) p 4 N88-29735
- Low speed longitudinal flying qualities of modern transport aircraft p 43 N88-29738
- Advances in flying qualities: Concepts and criteria for a mission oriented flying qualities specification p 43 N88-29739
- The role of simulation in flying qualities and flight control system related development p 87 N88-29741
- Computing Systems Configuration for Highly Integrated Guidance and Control Systems (AGARD-LS-158) p 4 N88-29735
- Computing system configuration for fighter aircraft flight control systems p 79 N88-10832
- Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N88-18034
- FLIGHT CREWS**
- Backache and Back Discomfort --- conference (AGARD-CP-378) p 190 N87-13932
- Back discomfort in US Army helicopter crew members p 209 N87-13939
- Vibration measurements on helicopter crew: A new approach p 210 N87-13958
- Backache in crew p 193 N87-13958
- Back pain in gazelle crew p 193 N87-13959
- Enhancement of performance Operational considerations p 195 N87-25710
- FB-111A: crew use of temazepam during surge operations p 197 N87-25721
- Measurement of crew workload during low level flight Part 1: A comparison between in-flight and post flight assessment methods p 213 N87-30064
- Detection of latent epilepsy in crew candidates p 203 N88-27720
- Simulator induced sickness among Hercules crew p 204 N88-12176
- FLIGHT ENVELOPES**
- Accuracy of lift and center-of-thrust measurements at missile control surfaces p 18 N88-16875
- FLIGHT FATIGUE**
- The pilot is not the limiting factor in high performance aircraft p 218 N88-18012
- FLIGHT INSTRUMENTS**
- In-flight assessment of workload using instrument scan p 213 N87-30062
- The NAE atmospheric research aircraft p 51 N88-29730
- FLIGHT MANAGEMENT SYSTEMS**
- Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users (AGARD-CP-410) p 25 N87-21881
- A time-based concept for terminal-area traffic management p 27 N87-21895
- Next generation of control techniques in advanced TMA p 27 N87-21898
- Exploiting the capabilities of flight management systems in solving the airport arrival problem p 28 N87-21899
- Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
- Design criteria for multi-loop flight control systems p 72 N87-21901
- Some experiences in integrating avionics systems on the civil flight deck p 45 N87-21902
- Semi-automatic cross-checking between different copies of the same flight plan p 28 N87-21903
- Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military airspace users (AGARD-AR-236) p 28 N87-23608

- The flight evaluation of a speech recognition and a speech output system in an advanced cockpit display and flight management system for helicopters p 46 N87-23657
- Optimal detection of sensor failures in flight control systems using deterministic observers p 74 N88-10803
- FLIGHT MECHANICS**
- Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation p 79 N87-15985
- The use of Aerialia flight simulator for the development of the AM-X weapon system p 82 N87-23650
- Aerodynamics of Hypersonic Lifting Vehicles (AGARD-CP-428) p 10 N88-13219
- Particular flight mechanics specifications related to wind tunnel test results p 90 N88-16879
- FLIGHT OPERATIONS**
- The task taxonomy method: A basis for an expert system on human reliability p 207 N87-29506
- A study of pilot flight information cross-monitoring performance p 211 N87-29509
- Sophisticated integral control methods for use in flight p 212 N87-29510
- Perceptual organisation and information management p 213 N87-29514
- Information management in the Army battlefield helicopter p 251 N87-29515
- In-flight workload assessment using embedded secondary radio communications tasks p 212 N87-30055
- The use of subjective workload assessment technique in a complex flight task p 213 N87-30058
- Workload methodology p 213 N87-30059
- Mental workload measurement in operational aircraft systems: Two promising approaches p 207 N87-30060
- Cortical evoked response and eyeblink measures in the workload evaluation of alternative landing system displays p 213 N87-30061
- In-flight assessment of workload using instrument scan p 213 N87-30062
- Measurement of crew workload during low level flight Part 1: A comparison between in-flight and post flight assessment methods p 213 N87-30064
- In-flight assessment of workload using pilot ratings and heart rate p 197 N87-30065
- The assessment of workload in helicopters p 214 N87-30066
- FLIGHT OPTIMIZATION**
- Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
- FLIGHT PATHS**
- A time-based concept for terminal-area traffic management p 27 N87-21895
- Computer assisted arrival sequencing and scheduling with the COMFAS system p 27 N87-21897
- Next generation of control techniques in advanced TMA p 27 N87-21898
- Exploiting the capabilities of flight management systems in solving the airport arrival problem p 28 N87-21899
- Design criteria for multi-loop flight control systems p 72 N87-21901
- Decision aid for threat penetration analysis p 235 N87-24944
- FLIGHT PLANS**
- Air navigation services and aircraft around the year 2000 p 25 N87-21883
- Strategic control to improve efficiency of air traffic management p 27 N87-21894
- Exploiting the capabilities of flight management systems in solving the airport arrival problem p 28 N87-21899
- Semi-automatic cross-checking between different copies of the same flight plan p 28 N87-21903
- FLIGHT SAFETY**
- System considerations for integrated machinery health monitoring p 70 N89-16804
- Integration of advanced safety enhancements for F-16 terrain following p 56 N89-18472
- FLIGHT SIMULATION**
- Requirements and applications for radar simulations: A standpoint of an airframe company p 133 N87-18759
- Flight Simulation (AGARD-CP-408) p 80 N87-23633
- Visual and motion cueing in helicopter simulation p 80 N87-23634
- Visual display research tool p 80 N87-23635
- The application of optimal control techniques to the UTIAS research simulator p 80 N87-23637
- OASIS: A modern tool for real-time simulation p 80 N87-23640
- Use of VDU's by flight simulator instructors p 80 N87-23641
- Progress in the implementation of AGARD-AR-144 in motion system assessment and monitoring p 81 N87-23642
- Flexible and high quality software on a multiprocessor computer system controlling a research flight simulator p 81 N87-23643
- Trends in ground-based and in-flight simulators for development applications p 81 N87-23645

FLIGHT SIMULATORS

- Piloted simulation in the development of the XV-15 tilt rotor research aircraft p 81 N87-23646
- Simulation of fly-by-wire control for civil transport aircraft at the French Centre d'Essais en Vol p 81 N87-23647
- Manned air to air combat simulation p 81 N87-23648
- The development of the T-46 next generation trainer manned engineering simulator at the US Air Force Flight Test Center p 82 N87-23652
- A method for aircraft simulation verification and validation developed at the United States Air Force Flight Simulation Facility p 82 N87-23654
- Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
- Unusual airborne simulator applications p 82 N87-23656
- DFVLR in-flight simulators ATTAS and ATTRES for flying qualities and flight control research p 83 N87-23657
- Development of in-flight simulation aircraft for research and training applications in UK p 83 N87-23658
- Airborne simulation at the National Aeronautical Establishment of Canada p 83 N87-23659
- Collected flight and simulation companions and considerations p 83 N87-23660
- Simulation as a lighter design tool p 35 N87-24447
- Design optimization of fighter aircraft p 36 N87-24451
- Rotorcraft Design for Operations (AGARD-CP-423) p 37 N88-11649
- Investigation of vertical axis handling qualities for helicopter hover and NOE flight p 75 N88-11653
- Shock tunnels for real gas hypersonics p 84 N88-13223
- Complex configurations p 86 N88-28861
- The role of simulation in flying qualities and flight control system related development p 87 N88-29742
- FLIGHT SIMULATORS**
- Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation (ISBN-92-835-0399-6) p 79 N87-15985
- Flight Simulation (AGARD-CP-408) p 80 N87-23633
- Visual and motion cueing in helicopter simulation p 80 N87-23634
- Visual display research tool p 80 N87-23635
- Advanced visuals in mission simulators p 80 N87-23636
- The application of optimal control techniques to the UTIAS research simulator p 80 N87-23637
- OASIS: A modern tool for real-time simulation p 80 N87-23638
- Simulation of aircraft behaviour on and close to the ground: Summary of AGARDograph AG-285 p 80 N87-23640
- Use of VDU's by flight simulator instructors p 80 N87-23641
- Progress in the implementation of AGARD-AR-144 in motion system assessment and monitoring p 81 N87-23642
- Flexible and high quality software on a multiprocessor computer system controlling a research flight simulator p 81 N87-23643
- Trends in ground-based and in-flight simulators for development applications p 81 N87-23645
- Piloted simulation in the development of the XV-15 tilt rotor research aircraft p 81 N87-23646
- Simulation of fly-by-wire control for civil transport aircraft at the French Centre d'Essais en Vol p 81 N87-23647
- Manned air to air combat simulation p 81 N87-23648
- Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
- The use of Aerialia flight simulator for the development of the AM-X weapon system p 82 N87-23650
- The development of the T-46 next generation trainer manned engineering simulator at the US Air Force Flight Test Center p 82 N87-23652
- Operational training: Application and experience p 82 N87-23653
- A method for aircraft simulation verification and validation developed at the United States Air Force Flight Simulation Facility p 82 N87-23654
- DFVLR in-flight simulators ATTAS and ATTRES for flying qualities and flight control research p 83 N87-23657
- Airborne simulation at the National Aeronautical Establishment of Canada p 83 N87-23659
- Collected flight and simulation companions and considerations p 83 N87-23660
- Mission-oriented flying qualities criteria for helicopter design via in-flight simulation p 37 N88-11652
- MBB simulation facilities applied for rotorcraft research p 84 N88-11655
- Research simulators for helicopters p 84 N88-11656
- A look toward the future of complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88-23797

FLIGHT STRESS (BIOLOGY)

- Motion Cues in Flight Simulation and Simulator Induced Sickness
[AGARD-CP 433] p 203 N89-12171
Ecological significance of equipment features and pilot history in simulator sickness p 203 N89-12172
Technology involved in the simulation of motion cues p 204 N89-12173
The current trend p 204 N89-12173
Aetiological factors in simulator sickness p 204 N89-12174
Horizontal study of the incidence of simulator induced sickness among French Air Force pilots p 204 N89-12175
Simulator induced sickness among Hercules aircrew p 204 N89-12176
Simulator sickness in the Royal Air Force A survey p 204 N89-12177
Simulator sickness in US Army and Navy fixed and rotary-wing flight simulators p 205 N89-12178
The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179
Manifestation of visual-vestibular disruption in simulators: Severity and empirical measurement of symptomatology p 205 N89-12181
An investigation of simulator sickness and an electrophysiological study p 206 N89-12183
Cues for training vertigo: providing suggestions for the management of simulator sickness p 206 N89-12187
Preadaptation to the stimulus rearrangement of weightlessness: Preliminary studies and concepts for trainer design p 207 N89-12188
- FLIGHT STRESS (BIOLOGY)**
Sleep and wakefulness: Handbook for flight medical officers, 2nd edition p 207 N89-17399
[AGARD-AG-270(F)] p 207 N89-17399
Human limitations in flight and some possible remedies p 217 N89-18011
- FLIGHT TEST INSTRUMENTS**
Microprocessor applications in airborne flight test instrumentation p 45 N87-21920
[AGARD-AG-160-VOL-18] p 45 N87-21920
Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
- FLIGHT TESTS**
Analogue signal conditioning for flight test instrumentation p 45 N86-29816
[AGARD-AG-160-VOL-17] p 45 N86-29816
Store separation flight testing p 31 N86-30727
[AGARD-AG-300-VOL-5] p 31 N86-30727
Determination of antennae patterns and radar reflection characteristics of aircraft p 124 N86-30931
[AGARD-AG-200-VOL-4] p 124 N86-30931
Use of a video-photogrammetry system for the measurement of the dynamic response of the shuttle remote manipulator arm p 94 N87-20370
Identification of dynamic systems - applications to aircraft: Part 1: The output error approach p 31 N87-21913
[AGARD-AG-300-VOL-3-PT-1] p 31 N87-21913
Microprocessor applications in airborne flight test instrumentation p 45 N87-21920
[AGARD-AG-160-VOL-18] p 45 N87-21920
Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
The development of the T-46 next generation trainer manned engineering simulator at the US Air Force Flight Test Center p 82 N87-23652
Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
Unusual airborne simulator applications p 82 N87-23656
[AGARD-AG-300-VOL-5] p 82 N87-23656
Considerations p 82 N87-23660
Flight testing of fighter aircraft p 35 N87-24448
Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478
Pilot subjective evaluation of workload during a flight test certification programme p 212 N87-30057
Flight test evaluation of crew workload: Part 1: Aircraft certification for a minimum crew of two pilots p 213 N87-30063
Flight test of a resident backup software system p 74 N88-10805
Handling quality: criteria for low and high visibility rotorcraft p 75 N88-11694
Developmental airdrop testing techniques and devices [AGARD-AG-300 VOL 6] p 38 N88-12481
Human respiratory responses during high performance flight p 197 N88-12923
[AGARD-AG-312] p 197 N88-12923
Minimizing development flight test time and cost in the US Air Force p 245 N88-20192
Improved flight test productivity using advanced on line data systems p 245 N88-20193
Experimental investigation of hover flowfields in water at the McDonnell Douglas Research Laboratories p 161 N88-23135
The integration, characterisation and trialling of a modern complex airborne radar p 50 N88-23791
[AGARD-AG-300 VOL 7] p 141 N88-27406

- Flight testing under extreme environmental conditions [AGARD-AG-300-VOL-8] p 172 N88-27525
Flight test equipment for the on board measurement of wind turbulence p 51 N88-29715
Pilot workload assessment: A flight test approach p 218 N89-18014
Reliability and validity of CFD codes: Flight and wind tunnel comparison p 167 N89-18626
- FLIGHT TRAINING**
Human limitations in flight and some possible remedies p 217 N89-18011
- FLOORS**
Crushing behaviour of helicopter subfloor structures p 23 N89-18429
Crashworthy design of aircraft subfloor structural components p 24 N89-18431
Transport airplane crash simulation: validation and application to crash design criteria p 24 N89-18435
- FLOW CHARACTERISTICS**
Optimisation of a transonic flow radial vane diffuser p 58 N87-21938
Numerical simulation of diffuser/compressor dome interaction p 65 N88-17663
Flow characteristics of a model annular combustor p 106 N88-29924
- FLOW DISTORTION**
Engine Response to Distorted Inflow Conditions - conference proceedings p 60 N87-24464
[AGARD-CP-400] p 60 N87-24464
Review of current knowledge on engine response to distorted inflow conditions p 60 N87-24465
Air inlet/engine compatibility: impact of theoretical and experimental methods p 60 N87-24466
New trends in intake/engine compatibility assessment p 60 N87-24467
Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
Viscous analysis for flow through subsonic and supersonic intakes p 61 N87-24469
Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473
Transmission of inlet distortion through a fan p 62 N87-24475
Experimental investigation on small turboprop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476
Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477
Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478
Experimental determination of the transfer function of an axial compressor to distorted inlet flow p 9 N87-24479
Development of intake swirl generators for turbo jet engine testing p 83 N87-24480
- FLOW DISTRIBUTION**
Shock wave boundary layer interactions p 155 N86-29173
[AGARD-AG-280] p 155 N86-29173
Applications of Computational Fluid Dynamics in Aerodynamics p 5 N87-20199
[AGARD-CP-412] p 5 N87-20199
A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
Geometry definition and grid generation for a complete fighter aircraft p 224 N87-20201
An assessment of the use of low order panel methods for the calculation of supersonic flows p 224 N87-20204
Prediction of wing-body-store aerodynamics using a small perturbation method and a grid embedding technique p 5 N87-20207
Matrix transonic potential flow calculations about transport aircraft p 5 N87-20208
Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209
The integration of computational fluid dynamics into the military aircraft design process p 33 N87-20210
Numerical simulation of internal and external inviscid and viscous 3-D flow fields p 155 N87-20213
Applications of Euler equations to sharp edge delta wings with leading edge vortices p 6 N87-20214
Analysis of the F-16 flow field by a block grid Euler approach p 6 N87-20217
Zonal solutions for airfoils using Euler boundary layer and Navier Stokes equations p 6 N87-20219
Numerical investigation of the laminar boundary layer on a 3-D body started impulsively from rest p 6 N87-20220
Computation of three dimensional flows by viscous-inviscid iteration using the MZM method p 155 N87-20223

SUBJECT INDEX

- Calculations for a generic fighter at supersonic high lift conditions p 33 N87-20226
High speed viscous flow calculations about complex configurations p 7 N87-20227
Numerical simulation of the flow field around a complete aircraft p 8 N87-20231
Laser fringe anemometry for aero engine components p 118 N87-21176
Laser 2 focus velocimetry p 172 N87-21177
Particle imaging velocimetry in a low turbulent windtunnel and other flow facilities p 19 N87-21205
A numerical study of the flow field in a transonic compressor rotor with a modelling of the tip clearance flow p 59 N87-21945
Computation of tip and corner region flows p 159 N87-22153
Unsteady aerodynamic measurements in forced vibration research p 9 N87-24406
Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
Homogeneous turbulence two-point closures and applications to one-point closures p 160 N88-11973
Experimental investigations on blunt bodies and corner configurations in hypersonic flow p 10 N88-13225
Driving mechanism of unsteady separation shock motion in hypersonic interactive flow p 10 N88-13226
Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 11 N88-13235
Numerical experiments with hypersonic flows beneath a cone-delta-wing combination p 12 N88-13238
A 3-D Euler solution for hypersonic Mach numbers p 12 N88-13240
Computation of flow past conical hypersonic wings using a second order Godunov method p 12 N88-13241
Aerothermodynamics research at NASA Ames p 12 N88-13242
Vortex formation over delta, double delta and wave rider configurations at supersonic speeds p 12 N88-13243
Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245
Techniques of flow visualization p 160 N88-16977
[AGARD-AG-302] p 160 N88-16977
Numerical methods for propeller aerodynamics and acoustics at DFVLR p 65 N88-17668
Investigation of dihedral effects in compressor cascades p 66 N88-17672
Parametric study of choke flutter with a linear theory p 66 N88-17673
Secondary flow measurements with LIF technique in centrifugal compressors p 66 N88-17676
Vortex breakdown and control experiments in the Ames-Dryden water tunnel p 161 N88-23127
Short duration flow establishment on a profile in a Water-Ludwig Tunnel p 161 N88-23134
Experimental investigation of hover flowfields in water at the McDonnell Douglas Research Laboratories p 161 N88-23135
Matched index laser anemometry systems for flow studies in complex geometries p 171 N88-23145
A comparative study of vortex flows in wind and water tunnels p 163 N88-23141
Experimental tools: The tunnel and the model p 86 N88-28864
Computational tools for simulation methodologies p 86 N88-28865
Transport-type configurations p 43 N88-28867
Combat aircraft p 43 N88-28868
Missiles, fuselages and similar bodies p 14 N88-28869
Introduction and critical flow phenomena p 14 N88-28870
Vortex flows p 155 N88-28875
Three-dimensional elliptic grid generation for an F-16 p 226 N88-29315
Component adaptive grid generation for aircraft configurations p 226 N88-29316
Generation of multiple block grids for arbitrary 3D geometries p 226 N88-29317
Grid generation for an advanced fighter aircraft p 226 N88-29319
Algebraic grid generation for fighter type aircraft p 227 N88-29320
Grid generation around transport aircraft configurations using a multi-block structured computational domain p 227 N88-29325
Space marching Euler solvers p 15 N88-29759
Prediction of base flows p 16 N88-29765
Alternative fuel spray behavior p 104 N88-29912
Flow characteristics of a model annular combustor p 106 N88-29924
Flamelet chemistry modelling of soot formation for radiation p 106 N88-29928
On the application of finite-difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N88-29938
Analysis of the flow through double swirl airblast atomizers p 110 N88-29949

SUBJECT INDEX

- Laser applications in flow diagnostics
AGARD AG 296 p 173 N89-12849
- Reynolds number effects in transonic flow
AGARD AG 303 p 17 N89-16762
- Flow unsteadiness in three low speed wind tunnels
p 88 N89-16859
- The use of computational fluid dynamic methods to assess the effects of model support systems and working section modifications on the flow around wind tunnel models
p 88 N89-16862
- Accuracy of various wall correction methods for 3D subsonic wind-tunnel testing
Physical aspects of viscous simulation and associated research requirements
p 89 N89-16863
- Characterization of hypersonic wind tunnel flow fields for improved data accuracy
p 90 N89-16874
- Wind tunnel requirements for computational fluid dynamics code verification
p 90 N89-16880
- Validation of Computational Fluid Dynamics Volume 1 Symposium papers and round table discussion
AGARD-CP-437-VOL.1 p 153 N89-18610
- Wind tunnel experiments on aeroloid models for the assessment of computational flow methods
p 18 N89-18614
- Parametric study of grid size, time step and turbulence modeling on Navier-Stokes computations over airfoils
p 18 N89-18615
- On the validation of a code and a turbulence model appropriate to circular control airfoils
p 18 N89-18616
- Comparative study of calculation procedures for viscous flows around airfoils in the transonic regime
p 156 N89-18617
- Numerical solution of compressible Navier-Stokes flows
p 166 N89-18618
- The international vortex flow experiment
p 166 N89-18619
- Status of CFD validation on the vortex flow experiment
p 167 N89-18620
- Flow field surveys of leading edge vortex flows
p 167 N89-18621
- A theoretical and experimental evaluation of a numerical method for calculating supersonic flows over wing-body configurations
The OFVLES wing experiment Towards the validation of the numerical simulation of transonic viscous wing flows
p 19 N89-18622
- Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems
p 167 N89-18625
- Separation around ellipsoid-type obstacles Modeling and validation experiences
p 167 N89-18627
- Accuracy study of transonic flow computations for three-dimensional wings
p 19 N89-18628
- Numerical simulation of separated supersonic flows around tactical missile bodies
p 19 N89-18632
- Development and application of a weapons multiblock suite
p 168 N89-18633
- CFD validation experiments for internal flows
p 158 N89-18635
- Validation of a 3D Euler-Navier-Stokes finite volume solver for a radial compressor
p 169 N89-18640
- Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model
p 20 N89-18642
- Efforts toward the validation of a computational fluid dynamics code for analysis of internal aerodynamics
p 169 N89-18643
- Measurements and computations of swirling flow in a cylindrical annulus
On the validation of 3-D numerical simulations of turbulent mixing jets through a crossflow
p 20 N89-18645
- Slender cone CFD and experimental data comparisons in hypersonic flow
Detailed flowfield measurements over a 75 deg swept delta wing for code validation
p 21 N89-18653
- FLOW EQUATIONS**
A discussion on a mesh generation technique applicable to complex geometries
p 224 N87-20201
- Computation of unsteady flows using the point vortex method
p 157 N87-22134
- Comparison between 2D transonic flutter calculations in the time and frequency domain
p 10 N87-28520
- Accurate solutions, parameter studies and comparisons for the Euler and potential flow equations
p 167 N89-18624
- FLOW GEOMETRY**
A discussion on a mesh generation technique applicable to complex geometries
p 224 N87-20201
- New numerical techniques in the method of singularities for application to complex three-dimensional configurations
p 233 N87-20205
- FLOW MEASUREMENT**
Advanced instrumentation for Aero Engine Components
AGARD-CP-399 p 118 N87-21170
- Laser fringe anemometry for aero engine components
p 118 N87-21176
- Laser-2 focus velocimetry
p 172 N87-21177

- How to select a laser velocimeter for a given application
p 118 N87-21179
- Application of Doppler and transit laser anemometry in small turbomachines
p 172 N87-21180
- Laser velocimetry study of stator-rotor interactions in a multi-stage gas turbine compressor
p 173 N87-21181
- Evaluation of LDF measurements in unsteady turbine flow
p 156 N87-21182
- Combined fringe and Fabry Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility
p 118 N87-21183
- The flow around a squared obstacle
p 156 N87-21184
- Developments in data acquisition and processing using an advanced combustion research facility
p 179 N87-21192
- Processing techniques for correlation of LDA and thermocouple signals
p 171 N87-21194
- The utilization of thin film sensors for measurements in turbomachinery
p 178 N87-21198
- The application of holography as a transonic flow diagnostic to rotating components in turbomachinery
p 171 N87-21202
- Beam modulation methods in quantitative and flow-visualization holographic interferometry
p 119 N87-21204
- Unsteady aerodynamic measurements on rotors
p 9 N87-24408
- Flow measurements in a water tunnel using a holocinematographic velocimeter
p 162 N88-23141
- Matched index laser anemometry systems for flow studies in complex geometries
p 171 N88-23145
- Flow velocity measurements by image processing of optically modulated traces
p 163 N88-23147
- A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields
p 163 N88-23148
- Reynolds number effects and the wind tunnel environment
p 86 N88-28862
- Measurements and computations of swirling flow in a cylindrical annulus
p 20 N89-18644
- FLOW STABILITY**
Calculations of inlet distortion induced compressor flowfield instability
p 61 N87-24470
- Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors
p 66 N88-17674
- Boundary layer development and transition
p 14 N88-28971
- Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model
p 20 N89-18642
- FLOW THEORY**
Aeroelasticity in axial-flow turbomachines Volume 1 Unsteady turbomachinery aerodynamics
AGARD AG 298-VOL.1 p 8 N87-24398
- Three-dimensional flows
p 8 N87-24401
- FLOW VELOCITY**
Combined fringe and Fabry Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility
p 118 N87-21183
- Parametric study of choke flutter with a linear theory
p 66 N88-17673
- Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors
p 66 N88-17674
- Flow velocity measurements by image processing of optically modulated traces
p 163 N88-23147
- Delta wing configurations
p 13 N88-28860
- Flow characteristics of a model annular combustor
p 106 N88-29924
- Flow unsteadiness in three low-speed wind tunnels
p 88 N89-16859
- A comparative study and validation of upwind and central-difference Navier-Stokes codes for high-speed flows
p 169 N89-18647
- FLOW VISUALIZATION**
Measurement of important ballistic flow properties by spectroscopic techniques
p 154 N86-29074
- Digital image processing applied to fluid dynamic problems
p 156 N87-21193
- The application of holography as a transonic flow diagnostic to rotating components in turbomachinery
p 171 N87-21202
- A study of passage flow through a cascade of turbine blades using image plane holographic interferometry
p 118 N87-21203
- Beam-modulation methods in quantitative and flow-visualization holographic interferometry
p 119 N87-21204
- Particle imaging velocimetry in a low turbulent wind tunnel and other flow facilities
p 79 N87-21205
- Fundamental studies on shock wave/boundary layer interactions in a 3-D channel
p 156 N87-21229
- Recent activity in vortex methods in the United States
p 157 N87-22144
- Unsteady aerodynamic measurements on rotors
p 9 N87-24408
- Experimental investigations on blunt bodies and corner configurations in hypersonic flow
p 10 N88-13225

FLUID FLOW

- An ultra high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges
p 173 N88-13274
- Techniques of flow visualization
AGARD AG 302 p 161 N88-16971
- Water facilities in retrospect and prospect An illuminating tool for vehicle design
p 84 N88-23126
- Qualification of a water tunnel for force measurements on aeronautical models
p 85 N88-23128
- Flow visualization study of vortex manipulation on lighter configurations at high angles of attack
p 161 N88-23130
- Description of a water tank facility Study of a missile at high incidence
p 85 N88-23133
- Experimental investigation of river flowfields in water at the McDonnell Douglas Research Laboratories
p 161 N88-23135
- Flow visualization of a ramjet inlet combustion chamber
p 162 N88-23138
- The ONERA water tunnels test possibilities for flow visualization in aeronautical and naval domains
p 162 N88-23139
- The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs
p 162 N88-23140
- Flow measurements in a water tunnel using a holocinematographic velocimeter
p 162 N88-23141
- Three dimensional flow visualization using laser sheet scanning
p 162 N88-23144
- Flow velocity measurements by image processing of optically modulated traces
p 163 N88-23147
- A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields
p 163 N88-23148
- Some visualization studies on turbulent boundary layers using multiwire hydrogen bubble generation
p 164 N88-23149
- Structure of unsteady flows at leading and trailing edges Flow visualization and its interpretation
p 164 N88-23154
- Experiments on boundary layer transition: tripping at low Reynolds numbers
p 18 N89-18669
- The international vortex flow experiment
p 166 N89-18619
- FLUID BOUNDARIES**
Numerical accuracy assessment
p 166 N89-18619
- FLUID DYNAMICS**
Advanced instrumentation for Aero Engine Components
AGARD-CP-399 p 118 N87-21170
- Digital image processing applied to fluid dynamic problems
p 156 N87-21193
- Round Table Discussion on Modeling of Time-Variant Flows Using Vortex Dynamics
AGARD AR-2381 p 157 N87-22137
- Flow models using vortex dynamics Work in the United Kingdom
p 157 N87-22143
- Technical evaluation report on the Fluid Dynamics Panel Symposium on Applications of Computational Fluid Dynamics in Aeronautics
p 159 N87-27958
- Technical evaluation report on the Fluid Dynamics Panel Symposium on aerodynamic and related hydrodynamic studies using water facilities
AGARD AR-2247 p 159 N88-17668
- Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modeling
AGARD R 755 p 159 N88-11970
- Homogeneous turbulence: two point closures and applications to one point closures
p 160 N88-11973
- Dynamics and routes to chaos from quasiperiodicity
p 160 N88-11974
- A deterministic approach to turbulence: Chaos in Rayleigh-Benard convection
p 160 N88-11975
- Transition to turbulence via spatio-temporal intermittency
p 160 N88-11976
- Determination of fractal dimension: connection of space and temporal chaos and application to experimental results
p 160 N88-11977
- European hypersonic wind tunnels
p 84 N88-13221
- Combustion related shear flow dynamics in high speed supersonic jets
p 11 N88-13232
- Application of modified loss and deviation correlations to turbomachinery losses
p 62 N88-13344
- AGARD R 745 p 62 N88-13344
- Static aerodynamic effects on the flutter of a supersonic wing
p 76 N88-13353
- Aerodynamic and Related Hydrodynamic Studies Using Water Facilities
AGARD CP 413 p 160 N88-23125
- Qualification of a water tunnel for force measurements on aeronautical models
p 85 N88-23128
- The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs
p 162 N88-23140
- FLUID FLOW**
Digital image processing applied to fluid dynamic problems
p 156 N87-21193
- Fundamentals of turbulence for turbulence modeling and simulation
p 159 N88-11971

FLUID MECHANICS

- Air flow measuring technique for the inviscid blunt body problem p 12 N88 13239
- Questions of flow visualization p 160 N88 16977
- AGARD AG 302 p 160 N88 16977
- Pumping systems and flow interferences for rapid response electronic reheat controls p 65 N88 17665
- Microstructures, flow properties and processing of Ti6242 alloy p 112 N89 15269
- Empirical modeling and viscoplasticity studies of the forging process p 120 N89 15269
- Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89 15271
- Ultrasonic casting modelling p 121 N89 15276
- An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89 16818
- The design of the GARTER low aspect ratio wing for use in the validation of shear layer and overall flow prediction methods p 45 N89 18650

FLUID MECHANICS

- Infinite Ballistics of Guns p 117 N86 20063
- AGARD AG 292 p 117 N86 20063
- A spatial marching technique for the inviscid blunt body problem p 12 N88 13239
- Techniques of flow visualization p 160 N88 16977
- AGARD AG 302 p 160 N88 16977

FLUOROSCOPY

- The application of radiation physics and photogrammetric techniques for the diagnosis and solution of mechanical engineering problems and performance improvements in the development of aero gas turbine engines at Rolls Royce p 178 N87 21198

FLUTTER

- Aeromechanics in axial flow turbomachines. Volume 1. Unsteady turbomachinery aerodynamics p 8 N87 24398
- AGARD AG 298 vol 1 p 8 N87 24398
- Three dimensional flow p 8 N87 24402
- Numerical methods for unsteady transonic flow p 8 N87 24403
- Star flutter p 12 N89 24404
- Unsteady aerodynamic measurements in flutter research p 8 N87 24405
- Unsteady aerodynamic measurements in forced vibration research p 9 N87 24406
- Understanding fan blade flutter through linear cascade aerobatic testing p 9 N87 24407
- Understanding aerodynamic measurements on rotors p 9 N87 24408
- Static aerodynamic effects on the flutter of a supercritical wing p 76 N88 13353
- Parametric study of blade flutter with a linear theory p 66 N88 17673
- AGARD manual on aeroelasticity in axial flow turbomachines. Volume 2. Structural dynamics and aeroelasticity p 16 N89 10006
- AGARD AG 298 vol 2 p 16 N89 10006
- Cast flutter test p 68 N89 10014
- Aeroelastic thermal effects p 68 N89 10015
- Forced vibration and flutter design methodology p 183 N89 10016

FLUTTER ANALYSIS

- Fluid Research on Transonic Unsteady Aerodynamics and its Aeronautical Applications p 9 N87 28518
- AGARD R 7491 p 9 N87 28518
- Comparison between 2D transonic flutter calculations in the time and frequency domain p 10 N87 28520
- Influence of the static deformation on a wing in the unsteady aerodynamic p 11 N88 13357

FLUX DENSITY

- Matching RSD design loads p 42 N88 29220

FLUX VECTOR SPLITTING

- Numerical simulation of the hypersonic flow around lifting surfaces p 11 N88 13234

FLY BY WIRE CONTROL

- Simulation of fly by wire control for civil transport aircraft at the French Centre d'Essais en vol p 81 N87 23617
- Development of in-flight simulation aircraft for research and training applications in UK p 83 N87 23658
- Autonomous simulation at the National Aeronautical Establishment of Canada p 83 N87 23659
- Flight test of a redundant backup software system p 74 N88 10805

FLYING SPOT SCANNERS

- A real time vision system for robotic arc welding p 111 N87 17066

FOKKER AIRCRAFT

- FL applications in design and analysis of the Fokker 40 and Fokker 100 p 19 N87 18629

FOLDING STRUCTURES

- Acoustic effects on the dynamic of lightweight structures p 193 N87 20112
- Development of precision structural joints for large space structures p 47 N87 20114

FORCE DISTRIBUTION

- Experiments on the effect of 2-D wing body configuration in several European windtunnels p 87 N89 16848

FORCED CONVECTION

- Dynamics and routes to chaos from quasiperiodicity p 190 N88 11194

FORCED VIBRATION

- Unsteady aerodynamic measurements in forced vibration research p 9 N87 24406
- Unsteady aerodynamic measurements on rotors p 9 N87 24408
- AGARD manual on aeroelasticity in axial flow turbomachines. Volume 2. Structural dynamics and aeroelasticity p 16 N89 10006
- AGARD AG 298 vol 2 p 16 N89 10006
- Structural dynamic characteristics of individual blades p 68 N89 10010
- Fatigue and assessment methods of blade vibration p 68 N89 10012
- Aeroelastic coupling: An elementary approach p 68 N89 10012
- Forced vibration and flutter design methodology p 183 N89 10016

FORESTS

- A scattering model for forested area p 143 N89 17713

FORGING

- Aerospace Materials Process Modelling p 119 N89 15262
- AGARD AG 426 p 119 N89 15262
- Modeling of deformation and microstructural changes in P-M-Ti-95 under isothermal forging conditions p 119 N89 15264
- Metallurgical modelling of superalloy disc isothermal forgings p 120 N89 15266
- A computer program simulating the hot forging of metal powder p 111 N89 15267
- Microstructures, flow properties and processing of Ti6242 alloy p 112 N89 15268
- Physical modeling and viscoplasticity studies of the forging process p 120 N89 15269
- Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89 15270
- The Forge 2 isothermal forging model p 112 N89 15271
- Simulation and design of high precision unit processes via numerical methods p 120 N89 15272
- Industrial introduction of the modeling of aeronautical forging and foundry process simulation p 121 N89 15273
- An application of computer modelling to isothermal forging p 121 N89 15281
- The application of process modelling to heat treatment of superalloys p 112 N89 15281

FORMAT

- An assessment of variable format information presentation p 250 N87 23512

FORMING TECHNIQUES

- Application of diffusion bonding combined with superplastic forming (SPF/DB) to the fabrication of Ti-6V metal sheet structures p 122 N87 17060
- Superplasticity: An overview p 111 N87 29642
- Superplastic sheet forming NATO AGARD lecture series on superplasticity p 111 N87 29643
- Bulk forming of superplastic alloys p 111 N87 29644
- Cavitation and superplasticity p 111 N87 29645
- The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87 29647
- A mixed 3-Dimensional Lagrangian finite element method for simulation of thermo-mechanical forming processes p 120 N89 15272
- Finite element simulation of metal forming processes p 120 N89 15274
- Use of vendor consortiums for implementation of process simulation technology p 121 N89 15276

FORTHAN

- Vectorization of FORTRAN programs at do loop level p 226 N88 11158

FOURIER TRANSFORMATION

- Homogeneous turbulence two point closures and applications to one point closures p 160 N88 11472

FRACTURE MECHANICS

- AGARD SMP Review: Damage Tolerance for Engine Structures. 1. Non-Destructive Evaluation p 180 N89 17253
- AGARD R 7681 p 180 N89 17253
- The impact of engineering assumptions on NDE requirements p 180 N89 17254
- Review of existing NDT technologies and their capabilities p 180 N89 17254
- Relationships of nondestructive evaluation needs and component design p 180 N89 17256
- Importance of symmetry and reliability of NDT techniques on damage tolerance based life prediction of turbine parts p 181 N89 17257
- Damage growth in composite bolted joints p 186 N89 17689
- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-6Al-4V p 182 N87 17065
- Welding of aluminum castings p 177 N87 17068
- The static strength of bolted joints in fibre reinforced plastics p 182 N89 17689

FRACTURE STRENGTH

- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-6Al-4V p 182 N87 17065
- Welding of aluminum castings p 177 N87 17068
- The static strength of bolted joints in fibre reinforced plastics p 182 N89 17689

SUBJECT INDEX

FRANCE

- SAURF: Integration of security and fault tolerance in the REALITE 2000 system p 74 N88 10862
- The use of simulation in the development of the Airbus p 244 N88 20168
- Acceleration of prototype development and reduction of cost by multidisciplinary integration p 246 N88 20169
- Horizontal study of the incidence of simulator induced sickness among French Air Force pilots p 204 N89 12175

FREE FLOW

- Applications of Euler equations to sharp edge delta wings with leading edge vortices p 6 N87 20214

FREE MOLECULAR FLOW

- Experiences using the Mark IV supersonic hypersonic arbitrary body program p 13 N88 13247

FREE-PISTON ENGINES

- Shock tunnels for real gas hypersonics p 84 N88 13229

FREQUENCIES

- Modeling XV-15 tilt rotor aircraft dynamics by frequency and time domain identification techniques p 37 N88 11657

FREQUENCY ANALYZERS

- Acousto-optic spectrum analyzer using a planar Bragg cell p 219 N87 13295

FREQUENCY ASSIGNMENT

- Problems of spectrum management and system compatibility p 25 N87 13711

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

FREQUENCY HOPPING

- Experimental robust HF modems incorporating adaptive excision p 150 N89 18579

SUBJECT INDEX

- High performance turbofan afterburner systems p 105 N88-29927
- Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 106 N88-29923
- Radiation transfer in gas turbine combustors p 107 N88-29929
- Gas turbine smoke measurement. A smoke generator for the assessment of current and future techniques p 107 N88-29930
- Rates of formation of soot from hydrocarbon flames and its destruction p 107 N88-29933
- Modeling the stability of a turbulent premixed flame downstream from a step by a Lagrangian method p 109 N88-29943
- Gaseous premixed flames in non-uniform flows p 109 N88-29945
- Modeling and experimental study of a reactive flow confined with wall reaction p 109 N88-29946
- Influence of the convection on evaporation and combustion of a fuel droplet p 110 N88-29948
- A small annular combustor of high power density, wide operating range and low manufacturing cost p 110 N88-29951
- FUEL CONSUMPTION**
 - Influence of engine variables on future helicopter systems p 32 N87-10072
 - The advantage of variable geometry for turbine engines at low power p 63 N88-17653
- FUEL CONTAMINATION**
 - Atomization of alternative fuels p 104 N88-29913
 - Fuel effects on flame radiation and hot-section durability p 106 N88-29925
- FUEL CONTROL**
 - Nozzle airflow influences on fuel patterning p 105 N88-29916
- FUEL INJECTION**
 - Combustion and fuels in gas turbine engines [AGARD-CP-422] p 104 N88-29910
 - Simulation study of spraying, streaming and vaporization phenomena associated with fuel injection p 104 N88-29914
 - Spray performance of a vaporizing fuel injector p 105 N88-29919
 - Modeling and experimental study of a reactive flow confined with wall reaction p 109 N88-29946
- FUEL PUMPS**
 - Pumping systems and flow interfaces for rapid response electronic remote controls p 65 N88-17665
- FUEL SPRAYS**
 - Alternative fuel spray behavior p 104 N88-29912
 - Atomization of alternative fuels p 104 N88-29913
 - Simulation study of spraying, streaming and vaporization phenomena associated with fuel injection p 104 N88-29914
 - Turbulence effects on the droplet distribution behind airblast atomizers p 104 N88-29915
 - Nozzle airflow influences on fuel patterning p 105 N88-29916
 - Multiple scattering effects in drop sizing of dense fuel sprays by laser diffraction p 105 N88-29917
 - Influence of operating conditions on the atomization and distribution of fuel by air blast atomizers p 105 N88-29918
 - Spray performance of a vaporizing fuel injector p 105 N88-29919
 - The characterization of combustion by fuel composition measurements in a small conventional combustor p 105 N88-29920
 - The performance of a surrogate blend in simulating JP-4 in a spray fueled combustor p 106 N88-29926
- FUEL SYSTEMS**
 - Evolving crashworthiness design criteria p 22 N89-18473
- FUEL TANKS**
 - Impact damage to composite structures [AGARD-R-729] p 102 N86-27425
- FUEL TESTS**
 - Fuel property effects on the US Navy's TF30 engine p 67 N88-29911
- FUEL-AIR RATIO**
 - Velocity and temperature measurements in a can type gas turbine combustor p 57 N87-21184
- FUSELAGES**
 - Repair of helicopter composite structure techniques and substantiations p 1 N87-20179
 - Composite repair of cocured J-stiffened panels. Design and test verification p 1 N87-20181
 - Composite repair techniques for J-stiffened composite fuselage structures p 2 N87-20186
 - Theoretical analysis of flows around helicopter fuselages. Application to design and development p 7 N87-20221
 - Controlling the dynamic environment during NOE flight p 75 N88-11661
 - Missiles, fuselages and similar bodies p 85 N86-28658
 - Missiles, fuselages and similar bodies p 14 N86-28669
 - Typical joints in a wing structure p 44 N89-17693

- Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N80-18430
- Study of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18434

G

- GAS ANALYSIS**
 - Gas analysis for the investigation of the combustion of double-base propellants and HMX p 115 N86-26478
 - The behaviour of synthetic fuels in a small transparent combustor p 110 N88-29950
- GAS DYNAMICS**
 - On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N86-29070
 - Dynamic stability of hypersonic conical lifting vehicles according to Newton-Busemann theory p 75 N88-13247
 - Gas path modeling, diagnosis and sensor fault detection p 54 N89-16811
- GAS FLOW**
 - Seeding gas flows for laser anemometry p 172 N87-21178
 - On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
 - Gas path modeling, diagnosis and sensor fault detection p 54 N89-16811
 - Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630
 - Accuracy and efficiency of a time matching approach for combustor modeling p 170 N89-18659
- GAS GENERATORS**
 - Experimental evaluation of a translating nozzle sidewall radial turbine p 64 N88-17656
 - Design and aerodynamic performance of a small mixed-flow gas generator turbine p 64 N88-17662
 - Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- GAS MIXTURES**
 - The study of combustion by means of diode laser spectroscopy p 173 N87-21201
- GAS PATH ANALYSIS**
 - Gas path analysis and engine performance monitoring in a Chinook helicopter p 70 N89-16802
 - Discrete operating conditions gas path analysis p 54 N89-16810
 - Gas path modeling, diagnosis and sensor fault detection p 54 N89-16811
 - Gas path condition monitoring using electrostatic techniques p 54 N89-16817
- GAS TEMPERATURE**
 - Sapphire fiber optic temperature probe p 241 N87-21186
- GAS TUNGSTEN ARC WELDING**
 - Advanced Joining of Aerospace Metallic Materials conference proceedings [AGARD-CP-398] p 175 N87-17051
 - The welding of aluminum alloys. A new technology in space application p 176 N87-17056
 - Welding of aluminum castings p 177 N87-17068
- GAS TURBINE ENGINES**
 - Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059
 - Repair techniques for gas turbine components p 179 N87-17071
 - Advanced instrumentation for Aero Engine Components [AGARD-CP-399] p 118 N87-21170
 - Laser velocimetry study of stator/rotor interactions in a multi-stage gas turbine compressor p 173 N87-21181
 - Turbine rotor blade measurements using infrared pyrometry p 171 N87-21188
 - High response data acquisition system p 249 N87-21193
 - Developments in data acquisition and processing using an advanced combustion research facility p 79 N87-21192
 - Processing techniques for correlation of LDA and thermocouple signals p 171 N87-21194
 - Tip clearance measurement in modern compressor components p 179 N87-21199
 - Unsteady aerodynamic measurements in flutter research p 8 N87-24405
 - Review of current knowledge on engine response to distorted inflow conditions p 60 N87-24465
 - Air inlet/engine compatibility. Impact of theoretical and experimental methods p 60 N87-24466
 - New trends in intake engine compatibility assessment p 60 N87-24467
 - Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477
 - Advanced Technology for Aero Gas Turbine Components [AGARD-JA-421] p 62 N88-17647
 - The advantage of variable geometry for turbine engines at low power p 63 N88-17653
 - A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655

GEARS

- Experimental evaluation of a translating nozzle sidewall radial turbine p 64 N88-17656
- An integrated aero/mechanical performance approach to high technology turbine design p 64 N88-17657
- Advanced techniques employed in blade cooling research p 64 N88-17659
- Design and aerodynamic performance of a small mixed-flow gas generator turbine p 64 N88-17662
- Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 66 N88-17674
- Radiation transfer in gas turbine combustors p 107 N88-29929
- Gas turbine smoke measurement. A smoke generator for the assessment of current and future techniques p 107 N88-29930
- The effects of a compressor rebuild on gas turbine engine performance p 70 N89-16803
- Getting more from vibration analysis p 54 N89-16807
- System theoretical method for dynamic on-condition monitoring of gas turbines p 54 N89-16812
- Identification of dynamic characteristics for fault detection purposes in a gas turbine using closed-loop measurements p 71 N89-16813
- Gas path condition monitoring using electrostatic techniques p 54 N89-16817
- An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818
- AGARD/SMP Review. Damage Tolerance for Engine Structures. 1. Non-Destructive Evaluation [AGARD-R-768] p 180 N89-17253
- The impact of engineering assumptions on NOE requirements p 180 N89-17254
- Relationships of nondestructive evaluation needs and component design p 180 N89-17256
- Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
- State-of-the-art in non-destructive evaluation of turbine engine parts p 181 N89-17261
- GAS TURBINES**
 - Velocity and temperature measurements in a can type gas turbine combustor p 57 N87-21184
 - The application of radiation physics and photogrammetric techniques for the diagnosis and solution of mechanical engineering problems and performance improvements in the development of aero gas turbine engines at Rolls Royce p 178 N87-21198
 - Transonic and Supersonic Phenomena in Turbomachines [AGARD-CP-401] p 57 N87-21927
 - The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21931
 - Measured and predicted loss generation in transonic turbine blading p 58 N87-21934
 - Gas turbine combustion modeling p 108 N88-29936
 - Three-dimensional gas turbine combustor modelling p 108 N88-29937
 - On the application of finite difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N88-29938
 - Numerical modeling of combustion processes in gas turbines p 108 N88-29939
 - Modeling of CO oxidation in dilution jet flows p 109 N88-29947
 - Engine Condition Monitoring Technology and Experience [AGARD-CP-448] p 52 N89-16780
- GASES**
 - Lattice gas hydrodynamics p 160 N88-11978
 - Numerical modelling of premixed flames in gaseous media p 109 N88-29944
- GAUSS EQUATION**
 - Long crack growth rate data. Gaussian loading p 185 N89-17296
- GEARS**
 - Aircraft and Bearing Tribological Systems [AGARD-CP-394] p 174 N86-29236
 - The value of laboratory simulation testing for predicting gearbox performance p 174 N86-29237
 - A study of the potential benefits associated with the development of a dedicated helicopter transmission lubricant p 112 N86-29242
 - Multifunctional requirements for a gearbox secondary power system in a medium lighter aircraft and its components and interface requirements p 174 N86-29243
 - Direction of R and D and current status of understanding of advanced gear steels p 110 N86-29245
 - The role of residual stress in the performance of gears and bearings p 175 N86-29246
 - Future trends in helicopter transmission lubricants p 113 N86-29250
 - Scoring tests of aircraft transmission lubricants at high speeds and high temperatures p 113 N86-29253
 - Critical analysis of achievements and missing links in gear and bearing tribology in relation to power envelopes p 175 N86-29254

GEOMAGNETIC MICROPULSATIONS

- Engine-Airframe integration for Rotorcraft [AGARD-LS-148] p 31 N87-10067
- Gear systems for advanced turboprops p 65 N88-17867
- Analysis of possible transmission arrangements applicable for driving single or twin counterrotating fans on propfan engines p 66 N88-17670
- An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16918

GEOMAGNETIC MICROPULSATIONS

- The use of P2 pulsations as indicators of substorm effects at geostationary orbit p 188 N87-26342

GEOMAGNETISM

- Media effects on electronic systems in the high latitude region p 141 N89-11932
- The high-latitude ionosphere: Geophysical basis p 188 N89-11933
- The high-latitude ionosphere: Dynamical aspects, and models p 188 N89-11938

GEOMETRIC DILUTION OF PRECISION

- The Global Positioning System (GPS) accuracy, system error budget, space and control segment overview p 29 N89-10877

GEOMETRICAL ACOUSTICS

- Correcting ray field failures caused by focusing in an inhomogeneous duct: A critical look at the Gaussian beam method p 139 N88-19663

GEOMETRICAL OPTICS

- Scattering and depolarization by random rough terrain and vegetation covered terrain under full wave approach p 138 N88-19657
- Regions of validity for some rough surface scattering models p 241 N89-17711

GEOMETRICAL THEORY OF DIFFRACTION

- Theoretical Aspects of Target Classification [AGARD-LS-152] p 136 N88-11909
- Target strength: An overview of some recent theoretical developments p 136 N88-11910
- Uniform geometrical theory of diffraction p 136 N88-11911

- Geometrical theory of diffraction for high-frequency coherence functions in weakly random medium with inhomogeneous background profile p 143 N89-17709

GEOMETRY

- Field artillery gun performances related to triple-base powder quality p 116 N86-29067
- Optimization of a transonic flow radial vane diffuser p 58 N87-21938
- Matched index laser anemometry systems for flow studies in complex geometries p 171 N88-23145
- Delta wing configurations p 13 N88-28860
- Numerical modeling of premixed flames in gaseous media p 109 N88-29944
- Head-mounted spatial instruments: Synthetic reality or impossible dream p 206 N89-12184

GEOSYNCHRONOUS ORBITS

- The use of P2 pulsations as indicators of substorm effects at geostationary orbit p 188 N87-26342

GIOTTO MISSION

- GiOTTO-spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947

GLARE

- A man-machine interface solution: The EAP glare shields p 219 N89-18018

GLASS FIBER REINFORCED PLASTICS

- The static strength of bolted joints in fibre reinforced plastics p 102 N89-17699

GLASS FIBERS

- Glass fibres for transmission in the 8-12 micrometers waveband p 239 N87-13297
- Single crystal fibers p 239 N87-13298
- Fluoride glasses for infrared waveguides p 240 N87-13299

GLOBAL POSITIONING SYSTEM

- GPS: Overview and present status p 26 N87-21884
- Inertial-GPS: A marriage of reason, an analysis p 26 N87-21885
- MLS: Its technical features and operational capabilities p 26 N87-21892
- Velocity accuracy measurement of GPS user equipment p 28 N87-29477
- Development of an airborne facility for advanced avionics research p 51 N88-23801
- The NAVSTAR GPS System [AGARD-LS-161] p 29 N89-10874
- The GPS overview and navigation system concept p 29 N89-10875
- The Global Positioning System (GPS) constellation and coverage p 29 N89-10876
- The Global Positioning System (GPS) accuracy, system error budget, space and control segment overview p 29 N89-10877
- GPS signal structure p 30 N89-10878
- User equipment overview p 30 N89-10879
- GPS/inertial navigation system integration for enhanced navigation performance and robustness p 30 N89-10880
- Aiding and integration of a GPS receiver p 30 N89-10881

Civil and military applications of GPS

- Differential operation of NAVSTAR GPS for enhanced accuracy p 30 N89-10882
- GPS navigation processing and Kalman filtering p 30 N89-10884

GOALS

- Lifting bodies: An attractive aerodynamic configuration choice for hypervelocity vehicles p 39 N88-13248

GOOGLES

- Development, testing and evaluation of a night vision goggle compatible EO-105 for night low level operation p 214 N88-11668

GONIOMETERS

- New method for suppression of goniometer of errors by radio noise from overhead power lines p 151 N89-18585

GOVERNMENT/INDUSTRY RELATIONS

- The effects of two Carlucci initiatives: concurrency and streamlining, on the test and evaluation phase of system acquisitions p 240 N88-20198
- The influence of infrastructure on the costs and timescales of collaborative programmes p 246 N88-20201

GRAIN BOUNDARIES

- Suggested plastic replica method p 185 N89-17293

GRAIN SIZE

- Solid propellant grain design p 117 N89-16913

GRAPHITE

- Unconventional approaches to field repair p 3 N87-20190

GRAPHITE-EPOXY COMPOSITES

- Fibre composite repair of cracked metallic aircraft components: Practical and basic aspects p 2 N87-20187
- Bearing-bypass loading on bolted composite joints p 10 N89-17697

GRAPHS (CHARTS)

- Stars, polygons and clusters p 250 N87-29511

GRAVITATIONAL EFFECTS

- EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709
- The auditory evoked response in military pilots p 203 N88-27721
- Human limitations in flight and some possible remedies p 217 N89-18011
- The pilot is not the limiting factor in high performance aircraft p 218 N89-18012

GREEN'S FUNCTIONS

- Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center [NAS 115 89133] p 9 N87-28519

GRID GENERATION (MATHEMATICS)

- Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20200
- A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
- Numerical grid generation around complete aircraft configurations p 224 N87-20202
- Geometry definition and grid generation for a complete fighter aircraft p 224 N87-20203
- Analysis of the F-16 flow field by a block grid Euler approach p 6 N87-20217
- Three dimensional grid generation for complex configurations: Recent progress [AGARD-AG-309] p 226 N88-29313
- Lessons learned in the mesh generation for PN/S calculations p 226 N88-29314
- Three-dimensional elliptic grid generation for an F-16 p 226 N88-29315
- Component adaptive grid generation for aircraft configurations p 226 N88-29316
- Generation of multiple block grids for arbitrary 3D geometries p 226 N88-29317
- Grid generation on and about a cranked-wing fighter aircraft configuration p 226 N88-29318
- Grid generation for an advanced fighter aircraft p 226 N88-29319
- Algebraic grid generation for fighter type aircraft p 227 N88-29320
- Composite grid generation for aircraft configurations with the EAGLE code p 227 N88-29321
- Analytical surfaces and grids p 227 N88-29322
- Mesh generation for industrial application of Euler and Navier Stokes solvers p 227 N88-29323
- Experience with three dimensional composite grids p 227 N88-29324
- Grid generation around transport aircraft configurations using a multi-block structured computational domain p 227 N88-29325

GROUND EFFECT (COMMUNICATIONS)

- An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave links p 138 N88-19654
- A review of the role of surface reflection in multipath propagation over terrestrial microwave links p 138 N88-19655
- Development of a ground-conductivity map for the area of the Federal Republic of Germany from measured field strength contours p 138 N88-19656

HF communications and remote sensing in the high latitude region

- p 142 N89-11936

GROUND TESTS

- Method and means for ground crash testing at the Centre d'Essais Aeronautique de Toulouse: Application to the SA 341 and As 332 helicopters p 24 N89-18432

GROUND WAVE PROPAGATION

- HF groundwave and skywave propagation p 124 N87-18706

- VHF/UHF/microwave LOS terrestrial propagation and system design p 125 N87-18709

GUIDANCE (MOTION)

- A low cost gyroscope for guidance and stabilisation units p 171 N87-29478
- Fault tolerant considerations and methods for guidance and control systems p 73 N88-10136
- [AGARD-AG-289] p 73 N88-10136
- Guidance and control of air-launched armaments: An aerodynamic perspective p 82 N88-19557
- Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control [AGARD-CP-407] p 138 N88-19653
- Guidance and Control of Precision Guided Weapons [AGARD-CP-435] p 93 N89-17605
- CO2 laser radar systems for target acquisition and guidance p 173 N89-17606
- Packaged fiber optic gyros p 172 N89-17608

GUIDANCE SENSORS

- Advances in Guidance and Control Systems and Technology [AGARD-CP-411] p 28 N87-29474

GUIDE VANES

- Comparison between inviscid designed (PVD) airfoils and standard series airfoils for high loaded axial turbine nozzle application p 50 N87-21951
- Possibilities for on line surge suppression by fast guide vane adjustment in axial compressors p 66 N88-17674

GUN LAUNCHERS

- Interior Ballistics of Guns [AGARD-CP-392] p 117 N86-29063
- Pressure wave Gun barrel interactions p 154 N86-29066

GUN PROPELLANTS

- Interior Ballistics of Guns [AGARD-CP-392] p 117 N86-29063
- Mechanical behaviour of propellant grains under heavy dynamic load p 115 N86-29066
- Field artillery gun performances related to triple-base powder quality p 116 N86-29067
- Bore temperature and heat flux in a 40 mm gun barrel p 117 N86-29068
- On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N86-29070
- Interior ballistics of small arms: Particular problems. Part 1: Heat transfer and cook-off phenomenon in a small caliber weapon p 154 N86-29071
- Measurement of important ballistic flow properties by spectroscopic techniques p 154 N86-29074
- Ignition of high-performance gun ammunition p 116 N86-29077
- High-pressure combustion: Comparison of theoretical and actual results p 118 N86-29078

GUNS (ORDNANCE)

- Liquid propellant gun technology p 115 N86-29064
- Ignition, combustion, and physical properties of liquid propellants at gun pressures p 115 N86-29065
- Mechanical behaviour of propellant grains under heavy dynamic load p 115 N86-29066
- Field artillery gun performances related to triple-base powder quality p 116 N86-29067
- Pressure wave Gun barrel interactions p 154 N86-29068
- Bore temperature and heat flux in a 40 mm gun barrel p 117 N86-29069
- On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N86-29070
- Interior ballistics of small arms: Particular problems. Part 1: Heat transfer and cook-off phenomenon in a small caliber weapon p 154 N86-29071
- Interior ballistics of small arms: Particular problems. Part 2: Thermodynamic model, powder parameters, initiation p 154 N86-29072
- Experimental study of the ignition of explosive charges using visualization of the phenomena p 116 N86-29073
- Modelling the behaviour of additives in gun barrels p 155 N86-29075
- Novel ignition systems for heavy calibre guns p 118 N86-29076
- Ignition of high-performance gun ammunition p 116 N86-29077

GUST ALLEVIATORS

- The Flight of Flexible Aircraft in Turbulence: State-of-the-Art in the Description and Modelling of Atmospheric Turbulence [AGARD-R-734-ADD] p 4 N88-29717
- A review of measured gust responses in the light of modern analysis methods p 78 N88-29724

SUBJECT INDEX

SUBJECT INDEX

- Measurement and analysis of low altitude atmospheric turbulence obtained using a specially instrumented Gnat aircraft p 190 N88-29728
- GUST LOADS**
- Current and proposed gust criteria and analysis methods. An FAA overview p 78 N88-29718
- Comparison of the influence of different gust models on structural design p 43 N88-29722
- A review of measured gust responses in the light of modern analysis methods p 78 N88-29724
- The Flight of Flexible Aircraft in Turbulence. State-of-the-Art in the Description and Modeling of Atmospheric Turbulence p 4 N88-29725
- [AGARD-R-734] An interim comparison of operational CG records in turbulence on small and large civil aircraft p 78 N88-29729
- Acquisition of gust statistics from AIDS-recorded data p 190 N88-29733
- Extreme gusts distribution p 190 N88-29734
- GUSTS**
- Aircraft response to turbulence [AGARD-R-738] p 72 N86-30739
- Gust load prediction and alleviation on a fighter aircraft [AGARD-R-728] p 72 N86-30741
- Matching P.S.D. Design loads p 43 N88-29720
- A summary of methods for establishing airframe design loads from continuous gust design criteria p 43 N88-29721
- An interim comparison of operational CG records in turbulence on small and large civil aircraft p 78 N88-29729
- Re-assessment of gust statistics using CAARDP data p 78 N88-29732
- GYROSCOPES**
- Strapdown inertial systems applications for tactical missiles (stand-off missiles) p 91 N87-18008
- Advances in Air-Launched Weapon Guidance and Control [AGARD-CP-431] p 92 N88-19553
- A prototype fibre optic gyroscope for missile guidance applications p 92 N88-19554
- A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- The anatomy of the gyroscope [AGARD-AG-313] p 172 N88-28287
- Packaged fiber optic gyros p 172 N89-17508
- GYROSCOPIC STABILITY**
- A low cost gyroscope for guidance and stabilisation units p 171 N87-29478
- GYROSTABILIZERS**
- A low cost gyroscope for guidance and stabilisation units p 171 N87-29478

H

- HARDENING (SYSTEMS)**
- The electromagnetic threat to future avionics systems p 50 N88-23790
- EMP-induced transients and their impact on system performance p 152 N89-18591
- HARDWARE**
- Hardware architecture, chapter 2 p 223 N89-11396
- HARMONICS**
- A deterministic approach to turbulence. Chaos in Rayleigh-Bernard convection p 160 N88-11975
- HARRIER AIRCRAFT**
- Propulsion system technologies for thrust vectoring p 60 N87-2267C
- Development of in-flight simulation aircraft for research and training applications in UK p 83 N87-23658
- Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951
- Manoeuvres by default, by demand and by design p 41 N88-19455
- HEAD-UP DISPLAYS**
- Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
- Operational training. Application and experience p 82 N87-23653
- Vision through aircraft transparencies p 216 N88-29294
- Maintenance of vision-related components p 216 N88-29296
- Display system image quality p 216 N88-29298
- HEARING**
- Dissecting the visual and auditory pathways by means of the two-point technique p 199 N88-27690
- Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N88-27693
- HEART DISEASES**
- Short Course on Cardiorespiratory Aspects of Aerospace Medicine [AGARD-R-758] p 193 N87-24070
- Valvular and congenital heart disease in the aviator p 194 N87-24073
- Aeromedical aspects of mitral valve prolapse p 194 N87-24074
- Hypertension in the aviator p 194 N87-24077
- Cardiorespiratory screening for high-performance flying. Selection and retention issues p 195 N87-24079
- HEART FUNCTION**
- Aeromedical evaluation and disposition of electrocardiographic abnormalities p 193 N87-24071
- HEART RATE**
- In-flight assessment of workload using pilot ratings and heart rate p 197 N87-30065
- Fighter pilot performance during airborne and simulator missions: Physiological comparisons p 215 N88-27704
- HEART VALVES**
- Valvular and congenital heart disease in the aviator p 194 N87-24073
- Aeromedical aspects of mitral valve prolapse p 194 N87-24074
- HEAT FLUX**
- Hypersonic laminar boundary layer. Parametric study for the representation of real gas effects p 11 N88-13236
- HEAT RESISTANT ALLOYS**
- Study of the electron beam weldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
- Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17058
- The application of the RBD process to the deposition of anti-wear alloys p 177 N87-17059
- Repair techniques for gas turbine components p 178 N87-17071
- Life time prediction. Synthesis on ONERA's research in viscoplasticity and continuous damage mechanics, applied to engine materials and structures p 68 N89-10011
- Metallurgical modelling of superalloy disc isothermal forgings p 120 N89-15266
- Industrial introduction of the modeling of aeronautical forging and foundry process simulation p 121 N89-15279
- The application of process modelling to heat treatment of superalloys p 112 N89-15281
- HEAT TRANSFER**
- Bore temperature and heat flux in a 40 mm gun barrel p 117 N86-29069
- Interior ballistics of small arms: Particular problems. Part 1: Heat transfer and cook-off phenomenon in a small caliber weapon p 154 N86-29071
- Experimental investigations on blunt bodies and corner configurations in hypersonic flow p 10 N88-13225
- Aerodynamic heating of missiles p 16 N88-29764
- Radiation from soot-containing flames p 106 N88-29927
- Genetic casting modeling p 121 N89-15278
- HEAT TRANSFER COEFFICIENTS**
- Digital image processing applied to fluid dynamic problems p 156 N87-21193
- The application of process modelling to heat treatment of superalloys p 112 N89-15281
- HEAT TREATMENT**
- Direction of R and D and current status of understanding of advanced gear steels p 110 N86-29245
- The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87-29647
- Aerospace Materials Process Modeling [AGARD-CP-426] p 119 N89-15262
- Metallurgical modelling of superalloy disc isothermal forgings p 120 N89-15266
- Computer prediction of internal stresses during heat treatment p 112 N89-15272
- The application of process modelling to heat treatment of superalloys p 112 N89-15281
- HEATING**
- Pumping systems and flow interfaces for rapid response electronic reheat controls p 65 N88-17665
- HEIGHT**
- Measurements of change of stature in the assessment of static and dynamic spinal loading p 193 N87-13957
- Some measurements of height gain at V.H.F. p 140 N88-19671
- HELICOPTER CONTROL**
- The flight evaluation of a speech recognition and a speech output system in an advanced cockpit display and flight management system for helicopters p 46 N87-29527
- Automatic flight control system for modern helicopters p 77 N88-19558
- The use of integrated side-arm controllers in helicopters p 220 N89-18029
- Advanced flight control system for nap-of-the-earth flight p 220 N89-18030
- HELICOPTER DESIGN**
- Impact of IPS and IRS configurations on engine installation design p 31 N87-10070
- Influence of engine variables on future helicopter systems p 32 N87-10072
- Helicopter air intake protection systems p 32 N87-10073
- Theoretical analysis of flows around helicopter fuselages. Application to design and development p 7 N87-20221
- Configuration design of a helicopter integrated navigation system p 29 N87-29480
- Navigation systems for the new generation of combat and transport helicopters and associated flight tests p 29 N87-29481
- Crashworthiness activities on MBB helicopters p 23 N89-18425
- The design of helicopter crashworthiness p 23 N89-18426
- HELICOPTER ENGINES**
- System-theoretical method for dynamic on-condition monitoring of gas turbines p 54 N89-18612
- HELICOPTER PERFORMANCE**
- Information management in the Army battlefield helicopter p 251 N87-29515
- The assessment of workload in helicopters p 214 N87-30066
- HELICOPTER PROPELLER DRIVE**
- Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program p 177 N87-17067
- HELICOPTER TAIL ROTORS**
- Design for reparability of helicopter composite blades p 33 N87-20176
- HELICOPTER WAKES**
- The prediction of transonic loading on advancing helicopter rotors p 5 N87-20206
- Theoretical analysis of flows around helicopter fuselages. Application to design and development p 7 N87-20221
- HELICOPTERS**
- Aircraft and Bearing Tribological Systems [AGARD-CP-394] p 174 N86-29236
- Effects of unfavorable environmental conditions on the service life of jet engine and helicopter bearings p 174 N86-29238
- A study of the potential benefits associated with the development of a dedicated helicopter transmission lubricant p 112 N86-29242
- Requirements on lubricant oil from the view of a helicopter manufacturer p 112 N86-29244
- Direction of R and D and current status of understanding of advanced gear steels p 110 N86-29245
- Future trends in helicopter transmission lubricants p 113 N86-29250
- Engine-Airframe Integration for Rotorcraft [AGARD-LS-148] p 31 N87-10067
- Engine-airframe integration considerations for preliminary air vehicle performance analysis p 31 N87-10068
- Engine-transmission-structural airframe members compatibility p 31 N87-10069
- Engine-airframe integration for rotorcraft. System specifications and qualification p 32 N87-10074
- Back discomfort in US Army helicopter aircrew members p 209 N87-13939
- Postural fatigue and the backache of helicopter pilots [OCIM-85-R-30] p 210 N87-13953
- Lower back pain in helicopter pilots: Epidemiological factors p 210 N87-13955
- Vibration measurements on helicopter aircrew. A new approach p 210 N87-13956
- Back pain in gazette aircrew p 193 N87-13959
- Seat isolation system p 193 N87-13960
- Rotorcraft wing. Progress and potential [AGARD-AR-223] p 32 N87-15966
- Dual frequency MM-wave radar for antitank helicopter p 132 N87-18756
- Design for reparability of helicopter composite blades p 33 N87-20176
- Repair of helicopter composite structure techniques and substantiations p 1 N87-20179
- Microwave Landing System (MLS) area navigation. Computed centerline experiments and system accuracy analysis in an RF environment p 26 N87-21891
- Visual and motion cueing in helicopter simulation p 80 N87-23634
- Airborne simulation at the National Aeronautical Establishment of Canada p 83 N87-23659
- Rotorcraft Design for Operations [AGARD-CP-423] p 37 N88-11649
- Design requirements for future commercial operations p 37 N88-11651
- Mission-oriented flying qualities criteria for helicopter design via in-flight simulation p 37 N88-11652
- Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654
- The flight evaluation of an advanced engine display and monitoring system p 46 N88-11659
- Active control of helicopter vibration using multiloop self-adaptive control p 75 N88-11660
- Controlling the dynamic environment during NOE flight p 75 N88-11661
- Minimisation of helicopter vibration through active control of structural response p 75 N88-11662
- New aerodynamic design of the fenestron for improved performance p 37 N88-11664

HELICOPTERS

HELMET MOUNTED DISPLAYS

- System for SAR missions p 46 N88-11671
- The EH-101 integrated project: A naval utility and commercial helicopter system p 38 N88-11672
- Automatic flight control system for modern helicopters p 77 N88-19558
- Organization of helicopter development activities with a view toward reduction of costs and cycles p 246 N88-20200
- Experimental investigation of hover flowfields in water at the McDonnell Douglas Research Laboratories p 161 N88-23135
- Design and development of an avionics system adapted to helicopter missions p 49 N88-23786
- Flight Mechanics Panel Symposium on Rotorcraft Design for Operations: Technical evaluation report (AGARD-AR-243) p 42 N88-26362
- Full scale helicopter crash testing p 23 N89-18428
- Crushing behaviour of helicopter subfloor structures p 23 N89-18429
- Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430
- Method and means for ground crash testing at the Centre d'Essais Aeronautique de Toulouse: Application to the SA 341 and AS 332 helicopters p 24 N89-18432
- Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433
- HELMET MOUNTED DISPLAYS**
- Display system image quality p 216 N88-29298
- Head-mounted spatial instruments: Synthetic reality or impossible dream p 206 N89-12184
- Design considerations for Virtual Panoramic Display (VPPD) helmet systems p 219 N89-18024
- HELMETS**
- Visual display research tool p 80 N87-23635
- HERMES MANDED SPACEPLANE**
- Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
- General aerodynamic-aerothermodynamic concepts for Hermes p 13 N88-13251
- HETEROGENEITY**
- A CFAR design concept for operation in heterogeneous clutter p 128 N87-18733
- HEURISTIC METHODS**
- An expert system for aircraft conflict resolution in dense airspace p 29 N88-10810
- A review of the knowledge engineering process p 233 N88-10814
- HIERARCHIES**
- Hierarchical scattering models p 144 N89-17717
- RISE: Requirements and Incremental Specification Environment p 230 N89-18462
- HIGH ALTITUDE**
- High altitude, long endurance RPV design technology study p 32 N87-16011
- Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead line responses p 151 N89-18590
- HIGH FREQUENCIES**
- Propagation Impact on Modern HF Communications System Design (AGARD-LS-145) p 122 N86-27566
- The design of static and mobile HF communication systems p 122 N86-27567
- Propagation 1: State of the art of modelling and prediction in HF propagation p 122 N86-27568
- An introduction to error control coding with application to HF communications p 122 N86-27570
- Modern HF communications, modulation and coding p 123 N86-27571
- Developments in HF equipment and systems mobile and portable terminals p 123 N86-27573
- Measurements of HF propagation parameters for Real-Time Channel Evaluation (RTCE) systems p 123 N86-27575
- Adaptive systems in operation p 124 N86-27576
- HF groundwave and skywave propagation p 124 N87-18706
- HF system design p 125 N87-18707
- Target strength: An overview of some recent theoretical developments p 136 N88-11910
- HF communications and remote sensing in the high latitude region p 142 N89-11936
- H F radar probing (including modification) p 142 N89-11937
- Modeling of wideband HF channels p 146 N89-17732
- Experimental observations of spectral occupancy at HF p 149 N89-18573
- The design and performance of an adaptive packet-switched HF data terminal p 149 N89-18577
- Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18578
- Experimental robust HF modems incorporating adaptive excision p 150 N89-18579
- Artificial intelligence in HF communication systems p 150 N89-18580
- Improved coding and control of HF systems in a non-Gaussian noise environment p 150 N89-18582

- ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N89-18587
- Determining the azimuthal distribution of noise and interference across the HF spectrum at the RAE Receiving Station, Cobble Hill, Surrey, England p 153 N89-18597
- HIGH LEVEL LANGUAGES**
- A software life cycle support environment p 225 N88-23800
- HIGH PRESSURE**
- High-pressure combustion: Comparison of theoretical and actual results p 118 N86-29078
- CARS: thermometry for low and high pressure combustion systems p 105 N87-21172
- Radial compressor design using an Euler solver p 66 N88-17675
- Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17679
- HIGH RESOLUTION**
- Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18727
- High-resolution MTI with SAR p 128 N87-18734
- High resolution signal processor for limited aperture multimode radar p 128 N87-18736
- Angular super-resolution with array antennas: Application to seeker heads p 128 N87-18737
- HIGH REYNOLDS NUMBER**
- Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946
- HIGH SPEED**
- Application of high speed holography to aerodynamic and hydrodynamic three-dimensional velocimetry p 163 N88-23144
- High speed parallel processing networks for advanced architectures p 223 N89-10837
- HIGH SPEED PHOTOGRAPHY**
- An ultra-high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13228
- HIGH STRENGTH ALLOYS**
- Welding of aluminum castings p 177 N87-17068
- Repair techniques for gas turbine components p 178 N87-17071
- HIGH TEMPERATURE**
- Aircraft engine oils and their behaviour at high temperatures p 113 N86-29251
- HIGH TEMPERATURE ENVIRONMENTS**
- An integrated aero/mechanical performance approach to high technology turbine design p 64 N88-17657
- HIGH TEMPERATURE GASES**
- High-pressure combustion: Comparison of theoretical and actual results p 118 N86-29078
- HISTORIES**
- Hypersonic airbreathing propulsion: Evolution and opportunities p 62 N88-13231
- The coming revolution in turbine engine technology p 62 N88-17648
- HMX**
- Propergol combustion based on octogenes b 114 N86-26470
- Gas analysis for the investigation of the combustion of double-base propellants and HMX p 115 N86-26478
- HOLOGRAPHIC INTERFEROMETRY**
- Thermoelastic testing of stratified materials b 179 N87-17064
- TV-holography: A promising inspection tool for analysis of composite materials p 170 N87-20180
- The application of holography as a transonic flow diagnostic to rotating components in turbomachinery p 171 N87-21202
- A study of passage flow through a cascade of turbine blades using image plane holographic interferometry p 118 N87-21203
- Beam-modulation methods in quantitative and flow-visualization holographic interferometry p 119 N87-21204
- HOLOGRAPHY**
- The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs p 162 N88-23140
- Flow measurements in a water tunnel using a holocinematographic velocimeter p 162 N88-23141
- Application of high speed holography to aerodynamic and hydrodynamic three-dimensional velocimetry p 163 N88-23144
- Laser applications in flow diagnostics (AGARD-AG-296) p 173 N89-12849
- HOMEOSTASIS**
- Homeostatic, entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25718
- HOMING**
- Effects of closing speed uncertainty on optimal guidance p 92 N88-19556
- Comparison of statistical digital simulation methods p 227 N89-10049
- A generic seeker simulation for the evaluation of active RF guidance systems p 227 N89-10050
- Cost effective simulation for millimeter wave guidance systems p 79 N89-10053

SUBJECT INDEX

- HOMING DEVICES**
- Angular super-resolution with array antennas: Application to seeker heads p 128 N87-18737
- HOMODYNE RECEPTION**
- Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13287
- HONEYCOMB STRUCTURES**
- Composite structure repairs carried out according to aeronautical techniques p 2 N87-20185
- Battle damage repair of composite structures p 3 N87-20189
- British Airways experience with composite repairs p 3 N87-20192
- HORIZONTAL FLIGHT**
- Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
- HORN ANTENNAS**
- EHF multifunction phased array antenna p 131 N87-18752
- HOT ISOSTATIC PRESSING**
- Evaluation of DDH and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
- HOT-WIRE ANEMOMETERS**
- Turbulence measurement in hypersonic flow p 10 N88-13224
- HOTOL LAUNCH VEHICLE**
- Hypersonic aerodynamics: Applications for HOTOL p 13 N88-13252
- HOUSINGS**
- The value of laboratory simulation testing for predicting gearbox performance p 174 N86-29237
- HOVERING**
- Investigation of vertical axis handling qualities for helicopter hover and NOE flight p 75 N88-11653
- Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654
- Modeling XV-15 tilt-rotor aircraft dynamics by frequency and time-domain identification techniques p 37 N88-11657
- Experimental investigation of hover flowfields in water at the McDonnell Douglas Research Laboratories p 161 N88-23135
- Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
- HUBBLE SPACE TELESCOPE**
- Qualification of the faint object camera p 170 N87-20359
- HUBS**
- Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems p 37 N88-11663
- A129 advanced solutions for meeting today's combat helicopter requirement p 38 N88-11669
- HUMAN BEHAVIOR**
- Study of anticipation mechanisms in the aeronautical environment p 207 N87-29505
- HUMAN BEINGS**
- The effect of acetyl-L-leucine on the vestibulo-ocular reflex in humans p 196 N87-25717
- Homeostatic, entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25718
- HUMAN BODY**
- Human crashworthiness and crash load limits p 25 N89-18439
- MADYMO crash victim simulations: A flight safety application p 122 N89-18441
- HUMAN FACTORS ENGINEERING**
- Backache and Back Discomfort ... conference (AGARD-CP-378) p 190 N87-13932
- Automatic research on optimal posture p 191 N87-13942
- Backache in aircrew p 193 N87-13958
- Back pain in gazelle aircrew p 193 N87-13959
- Seat isolation system p 193 N87-13960
- Improved guidance and control automation at the man-machine interface p 211 N87-18987
- (AGARD-AR-228) Use of VDU's by flight simulator instructors p 80 N87-23641
- Information Management and Decision Making in Advanced Airborne Weapon Systems (AGARD-CP-414) p 46 N87-29503
- Psychosensory cockpit ergonomics, advantages of intelligent information systems p 49 N88-23784
- Designing for design effectiveness of complex avionics systems p 50 N88-23788
- Experience in the integration of human engineering effort with avionics systems development p 50 N88-23793
- A look toward the future of complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88-23797
- Visual Effects in the High Performance Aircraft Cockpit (AGARD-LS-156) p 216 N88-29291
- Advances in Flying Qualities (AGARD-LS-157) p 217 N88-29735
- Pilot modeling p 217 N88-29736
- Lessons learned from the use of new command systems p 219 N89-18623

SUBJECT INDEX

Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness p 22 N89-18421
[AGARD-CP-443]
Evolving crashworthiness design criteria p 22 N89-18423
The design of helicopter crashworthiness p 23 N89-18426
Predicting crash performance p 25 N89-18438
Human crashworthiness and crash load limits p 25 N89-18439
MADYMO crash victim simulations: A light safety application p 122 N89-18441

HUMAN PERFORMANCE
Evaluation and prediction of back pain during military field service p 192 N87-13950
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25712
Multivariate and psycho-physiological functions of DSP p 196 N87-25713
Introduction of a new stimulant CRL 40476 p 196 N87-25714
The evaluation of vigilance in studies of aeronautical pharmacology p 196 N87-25716
Sedating and non-sedating sleeping aids in air operation p 197 N87-25720
The effects of display-control I/O, compatibility, and integrality on dual-task performance and subjective workload p 211 N87-29508
Sophisticated integral control methods for use in flight p 212 N87-29510
An assessment of variable format information presentation p 250 N87-29512
Voice command and the change of mental representation during task performance p 135 N87-29523
Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine [AGARD-CP-432] p 190 N88-27683
Studies of the intact human brain: Implications for performance p 198 N88-27684
The effects of hypoxia on P300 and reaction time [DCIEM-87-RR-12] p 200 N88-27697
Can CNV amplitude predict ability to accomplish a demanding task? p 214 N88-27700
Engineering data compendium: Human perception and performance, volume 2 p 215 N88-28631
Engineering data compendium: Human perception and performance, volume 3 [LC-87-19560] p 215 N88-28632
Performance assessment register [AGARD-7-763] p 246 N89-10666

HUMAN TOLERANCES
Human limitations in flight and some possible remedies p 217 N89-18011
The pilot is not the limiting factor in high performance aircraft p 218 N89-18012
Human crashworthiness and crash load limits p 25 N89-18439

HUMIDITY
Review of recent developments in evaporation ducting assessment p 139 N88-19664

HYBRID NAVIGATION SYSTEMS
Inertial-GPS: A marriage of reason, an analysis p 26 N87-21885

HYDRAULIC CONTROL
The development of the T-46 next generation trainer manned engineering simulator at the US Air Force Flight Test Center p 82 N87-23652

HYDRAULIC EQUIPMENT
Requirements on lubrication oil from the view of a helicopter manufacturer p 112 N86-29244
Performance modelling: A tool for lubricant development p 113 N86-29252
Multi-axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373
Integrated design of structures p 34 N87-22669
Validation of an Euler code for hydraulic turbines p 168 N89-18637

HYDRAULIC TEST TUNNELS
Aerodynamic and Related Hydrodynamic Studies Using Water Facilities [AGARD-CP-413] p 160 N88-23125
Vortex breakdown and control experiments in the Ames-Dryden water tunnel p 161 N88-23127
The use of the NRC/NAE water facilities in Canadian aeronautical research and development p 85 N88-23132
Description of a water tank facility: Study of a missile at high incidence p 85 N88-23133
The ONERA water tunnels test possibilities for flow visualization in aeronautical and Naval domains p 162 N88-23139
A new laminar water tunnel to study the transition process in a Blasius layer and in a separation bubble and a new tool for industrial aerodynamics and hydrodynamic research p 85 N88-23150

A comparative study of vortex flows in wind and water tunnels p 163 N88-23151

HYDROCARBONS
Rates of formation of soot from hydrocarbon flames and its destruction p 107 N88-29933

HYDRODYNAMIC EQUATIONS
Lattice gas hydrodynamics p 160 N88-11978

HYDRODYNAMICS
Technical evaluation report on the Fluid Dynamics Panel Symposium on aerodynamic and related hydrodynamic studies using water facilities [AGARD-AR-225] p 159 N88-11968
Lattice gas hydrodynamics p 160 N88-11978
Aerodynamic and Related Hydrodynamic Studies Using Water Facilities [AGARD-CP-413] p 160 N88-23125
Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
Application of high speed holography to aerodynamic and hydrodynamic three-dimensional velocimetry p 163 N88-23144
Use of water towing tanks for aerodynamics and hydrodynamics p 163 N88-23149
A new laminar water tunnel to study the transition process in a Blasius layer and in a separation bubble and a new tool for industrial aerodynamics and hydrodynamic research p 85 N88-23150
Gaseous premixed flames in non-uniform flows p 109 N88-29945
Modeling of electromagnetic wave and sea surface interaction p 145 N89-17726

HYDROGEN
Some visualization studies on turbulent boundary layers using multiwire hydrogen bubble generation p 164 N88-23153

HYDROMECHANICS
A review of the NATO special group of experts on Naval hydrodynamics and related problems p 164 N88-23157

HYDROMETEOROLOGY
Transhorizon cochannel interference path measurements in Europe p 149 N89-18572

HYDROPHONES
Progress with multiplexed sensor arrays based on reflection at spiked joints between sensors p 237 N87-13278

HYDROXYL COMPOUNDS
Liquid propellant gun technology p 115 N86-29064

HYPERSONIC AIRCRAFT
The off-design performance of hypersonic waveriders p 38 N88-13244
Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245
Dynamic stability of hypersonic conical lifting vehicles according to Newton-Busemann theory p 75 N88-13247
Lifting bodies: An attractive aerodynamic configuration choice for hypervelocity vehicles p 39 N88-13248

HYPERSONIC FLIGHT
Shock tunnels for real gas hypersonics p 84 N88-13223
Driving mechanism of unsteady separation shock motion in hypersonic interactive flow p 10 N88-13226
A comparative study and validation of upwind and central-difference Navier-Stokes codes for high-speed flows p 169 N89-18647

HYPERSONIC FLOW
Experimental investigations on blunt bodies and corner configurations in hypersonic flow p 10 N88-13225
An ultra-high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13228
Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
Hypersonic laminar boundary layer: Parametric study for the representation of real gas effects p 11 N88-13236
On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
Numerical experiments with hypersonic flows beneath a cone-delta-wing combination p 12 N88-13238
A spatial marching technique for the inviscid blunt body problem p 12 N88-13239
A 3-D Euler solution for hypersonic Mach numbers p 12 N88-13240
Computation of flow past conical hypersonic wings using a second order Godunov method p 12 N88-13241
Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630
Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653
Documentation of separated flows for computational fluid dynamics validation p 170 N89-18662

HYPERSONIC SPEED
Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653

HYPERSONIC VEHICLES
The effects of sweep and bluntness on a glancing shock wave turbulent boundary layer interaction p 10 N88-13227

IMAGE PROCESSING

Hypersonic static and dynamic stability of axisymmetric shapes: A comparison of prediction methods and experiment p 13 N88-13246
Aerodynamics of Hypersonic Lifting Vehicles: Fluid Dynamics Panel AGARD Symposium [AGARD-AR-246] p 164 N88-27480

HYPERSONIC WIND TUNNELS
A survey of existing hypersonic ground test facilities North America p 84 N88-13220
European hypersonic wind tunnels p 84 N88-13221
Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
Turbulence measurement in hypersonic flow p 10 N88-13224
The drag of slender axisymmetric cones in rarefied hypersonic flow p 11 N88-13229
Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles p 11 N88-13230
Aerothermodynamics research at NASA Ames p 12 N88-13242
Characterization of hypersonic wind tunnel flow fields for improved data accuracy p 90 N89-16674

HYPERTENSION
Hypertension in the aviator p 194 N87-24077

HYPOGLYCEMIA
Spontaneous cerebral electrical activity during prolonged hypoglycemia: A quantitative study in humans p 203 N88-27717

HYPOXIA
Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25712
Pharmacological approaches to performance enhancement in animals p 190 N87-25715
The effects of hypoxia on P300 and reaction time [DCIEM-87-RR-12] p 200 N88-27697
The effect of mild hypoxia on the vestibular evoked response p 202 N88-27713

ICE FORMATION
Rotorcraft icing: Progress and potential [AGARD-AR-223] p 32 N87-15966

ICE PREVENTION
Rotorcraft icing: Progress and potential [AGARD-AR-223] p 32 N87-15966

IDENTIFYING
The use of simulated synthetic-aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18758

IFF SYSTEMS (IDENTIFICATION)
A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735

IGNITERS
String solid propellant engine charges p 116 N87-28596

IGNITION
Interior Ballistics of Guns p 117 N86-29063
Ignition, combustion, and physical properties of liquid propellants at gun pressures p 115 N86-29065
Mechanical behaviour of propellant grains under heavy dynamic load p 115 N86-29066
Experimental study of the ignition of explosive charges using visualization of the phenomena p 116 N86-29073
Ignition of high-performance gun ammunition p 116 N86-29077

IGNITION SYSTEMS
Novel ignition systems for heavy calibre guns p 118 N86-29076

ILLUMINATING
Maintenance of vision-related components p 216 N88-28296
Night lighting and night vision goggle compatibility p 216 N88-28297

IMAGE ENHANCEMENT
Postintegration of radar images p 132 N87-18755

IMAGE INTENSIFIERS
Development, testing and evaluation of a night vision goggle compatible BO-105 for night low level operation p 214 N88-11868

IMAGE MOTION COMPENSATION
Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18727
Implementation of an airborne SAR motion compensation system p 127 N87-18728

IMAGE PROCESSING
High-resolution MTI with SAR p 126 N87-18734
Radar display: Conversion of scanning Errors and correction techniques p 132 N87-18754
Postintegration of radar images p 132 N87-18755
Digital image processing applied to fluid dynamic problems p 156 N87-21193

IMAGE RECONSTRUCTION

- Advanced visuals in mission simulators p 80 N87-23636
- The BAE (Bracknell) automatic detection, tracking and classification system p 241 N87-29476
- Helicopter fire control: Advantages of an automatic target tracker p 84 N88-11667
- Techniques of flow visualization [AGARD-AG-302] p 160 N88-16977
- Flow velocity measurements by image processing of optically modulated fringes p 163 N88-23147
- Influence of vection axis and body posture on visually induced self-rotation and tilt p 206 N89-12185
- Applications of image analysis in precision guided weapons p 93 N89-17610
- Experiment and theory for backscattering enhancement and imaging in random media p 241 N89-17708
- Markov random fields: A strategy for clutter modelling p 143 N89-17712
- Coherent scattering from random media p 174 N89-17714
- Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722
- ### IMAGE RECONSTRUCTION
- Optical imagery across atmospheric turbulence p 242 N89-17721
- ### IMAGE RESOLUTION
- High-resolution MTI with SAR p 128 N87-18734
- ### IMAGERY
- Visual display research tool p 80 N87-23635
- ### IMAGING RADAR
- Multifunction Radar for Airborne Applications ... conference p 125 N87-18721
- [AGARD-CP-381] Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18727
- Implementation of an airborne SAR motion compensation system p 127 N87-18728
- MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
- ECM effectiveness of a low side-lobe antenna for SAR ground mapping p 127 N87-18730
- Synthetic aperture imaging airborne radar p 127 N87-18731
- High-resolution MTI with SAR p 128 N87-18734
- Flow: monostatic polarimetric, broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
- Multi-BI static high frequency (PO/GO) radar target imaging of airborne scatterers p 130 N87-18745
- Postintegration of radar images p 132 N87-18755
- The use of simulated synthetic aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18758
- ### IMAGING TECHNIQUES
- Visual Effects in the High Performance Aircraft Cockpit [AGARD-LS-156] p 216 N88-29291
- Display system image quality p 216 N88-29298
- Long term possibilities for nondestructive evaluation for US Navy aircraft p 181 N89-17259
- ### IMPACT DAMAGE
- Impact damage to composite structures [AGARD-R-729] p 102 N86-27425
- Aircraft Dynamic Response to Damaged and Repaired Structures [AGARD-R-739] p 34 N87-23609
- Design manual for impact damage tolerant aircraft structure: addendum [AGARD-AG-238-ADD] p 42 N88-27185
- ### IMPACT LOADS
- Human crashworthiness and crash load limits p 25 N89-18439
- MADYMO crash victim simulations: A flight safety application p 122 N89-18441
- Design and simulated-crash validation of a dynamic response recorder p 221 N89-18442
- ### IMPACT STRENGTH
- Crashworthiness of airframes [AGARD-R-737] p 22 N86-30709
- ### IMPACT TESTS
- Crashworthy design of aircraft subfloor structural components p 24 N89-18431
- ### IMPACT TOLERANCES
- Design manual for impact damage tolerant aircraft structure: addendum [AGARD-AG-238-ADD] p 42 N88-27185
- ### IMPELLERS
- Vibration analysis by speckle interferometry p 183 N87-21197
- Secondary flow measurements with LIF technique in centrifugal compressors p 66 N88-17676
- ### IMPROVEMENT
- The assessment and evaluation of combat performance improvements p 34 N87-22675
- Improvement of specific fastening elements for assembling composite structures p 186 N89-17694
- ### IN-FLIGHT MONITORING
- Acquisition of gust statistics from AIDS-recorded data p 190 N88-29733

- Engine Condition Monitoring Technology and Experience [AGARD-CP-448] p 52 N89-16780
- Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781
- An overview of US Navy engine monitoring system programs and user experience p 69 N89-16782
- Engine usage condition and maintenance management systems in the UK armed forces p 69 N89-16783
- On board life monitoring system Tornado (OLMOS) p 52 N89-16785
- Information management systems for on-board monitoring systems p 52 N89-16786
- CF-18 engine performance monitoring p 69 N89-16787
- B-1B CITS engine monitoring p 52 N89-16788
- Engine life consumption monitoring program for RB199 integrated in the on-board life monitoring system p 53 N89-16789
- Recent UK trials in engine health monitoring: Feedback and feedforward p 69 N89-16790
- F110 engine monitoring and maintenance management systems for F-16 C/D p 70 N89-16791
- Engine condition monitoring: State-of-the-art civil application p 53 N89-16792
- The CFM 56-5 on the A-320 at Air France p 53 N89-16793
- Implication of engine performance monitoring for the aircraft manufacturer p 53 N89-16794
- F100-PW-220 engine monitoring system p 53 N89-16795
- Service life calculator for the M53 turbofan engine p 70 N89-16796
- Military engine condition monitoring systems: The UK experience p 53 N89-16797
- Military engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 53 N89-16798
- Gas path analysis and engine performance monitoring in a Chinook helicopter p 70 N89-16802
- Sym considerations for integrated machinery health monitoring p 70 N89-16804
- Maintenance aid system for wide body aircraft p 70 N89-16806
- Identification of dynamic characteristics for fault isolation purposes in a gas turbine using closed-loop measurements p 71 N89-16813
- Space shuttle main engine monitoring experience and advanced monitoring systems development p 100 N89-16815
- Gas path condition monitoring using electrostatic techniques p 54 N89-16817
- COMPASS (Trademark): A generalized ground-based monitoring system p 55 N89-16819
- ### INCIDENCE
- Description of a water tank facility: Study of a missile at high incidence p 85 N88-23133
- ### INCOHERENT SCATTER RADAR
- Incoherent/coherent scatter p 142 N89-11940
- ### INCOMPRESSIBLE FLOW
- Computation of unsteady flows using the point vortex method p 157 N87-22138
- Classical two-dimensional methods p 8 N87-24400
- Validation of an Euler code for hydraulic turbines p 168 N89-18637
- Time-dependent numerical simulation of the starting flow of an incompressible fluid past a downstream-facing step p 169 N89-18646
- ### INCOMPRESSIBLE FLUIDS
- Time-dependent numerical simulation of the starting flow of an incompressible fluid past a downstream-facing step p 169 N89-18646
- ### INDIUM
- Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959
- ### INDUSTRIAL SAFETY
- The workplace vibration environment of off-road machines p 209 N87-13935
- Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 191 N87-13940
- Investigation of the lumbar flexion of office workers p 191 N87-13944
- ### INERTIAL GUIDANCE
- Navigation systems for the new generation of combat and transport helicopters and associated flight tests p 29 N87-29481
- ### INERTIAL NAVIGATION
- Fibre optic gyroscopes in inertial navigation p 25 N87-13275
- Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276
- Inertial-GPS: A marriage of reason, an analysis p 26 N87-21885
- Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MIISA) p 171 N87-29479
- The NAVSTAR GPS System [AGARD-LS-161] p 29 N89-10874
- GPS/inertial navigation system integration for enhanced navigation performance and robustness p 30 N89-10880

SUBJECT INDEX

- ### INERTIAL PLATFORMS
- Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
- ### INFERENCE
- A graphical aid to IKBS program development p 224 N87-29521
- ### INFLUENCE COEFFICIENT
- Comparison of the influence of different gust models on structural design p 43 N88-29772
- ### INFORMATION
- A programme manager's needs for information p 247 N86-28795
- The information needs of scientists and engineers in aerospace p 247 N86-28796
- The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19520
- Planning and Designing Effective Defence and Related Information Services [AGARD-CP-416] p 249 N87-26675
- The information scene in Turkey p 249 N87-26676
- User needs and how to determine them p 249 N87-26679
- The treatment of grey literature p 250 N87-26684
- Interfacing and integrating hardware and software design systems p 50 N88-23796
- Evaluating the Effectiveness of Information Centres and Services [AGARD-LS-160] p 253 N89-11625
- Evaluating the effectiveness of information use p 253 N89-11626
- Measures, methods and models employed in evaluating the effectiveness of information centers and services p 253 N89-11627
- European examples of evaluating the effectiveness of information centers and services p 253 N89-11628
- Evaluating the performance of information centre staff p 253 N89-11629
- Evaluating performance of information centre operations and services p 253 N89-11630
- A framework for evaluating the effectiveness of information centers and services p 253 N89-11631
- Evaluating for information center planning p 254 N89-11632
- ### INFORMATION DISSEMINATION
- The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes [AGARD-CP-385] p 247 N86-28793
- Information Services: Pros and cons p 247 N86-28797
- International information exchange programmes: Are necessary p 248 N86-28800
- The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19520
- Microcomputers in information resource sharing: Part 1: Data and graphics systems p 223 N87-19924
- Microcomputers in information resource sharing: Part 2: Text systems p 249 N87-19927
- Planning and Designing Effective Defence and Related Information Services [AGARD-CP-416] p 249 N87-26675
- Benefits of scientific and technical information services for aerospace and defense p 249 N87-26677
- A model of a defence information service as seen by the user p 249 N87-26678
- User needs and how to determine them p 249 N87-26679
- The resources required to run an information service p 250 N87-26682
- Sources of information for a defense information service p 250 N87-26683
- The treatment of grey literature p 250 N87-26684
- Telling the user what is available: Announcement and search p 250 N87-26685
- Barriers to Information Transfer and Approaches Toward Their Reduction [AGARD-CP-430] p 251 N88-30458
- Linguistic and cultural barriers to the transfer of information p 251 N88-30459
- Civil and military applications of GPS p 30 N89-10882
- Evaluating the effectiveness of information use p 253 N89-11626
- Measures, methods and models employed in evaluating the effectiveness of information centers and services p 253 N89-11627
- Evaluating the performance of information centre staff p 253 N89-11629
- Evaluating performance of information centre operations and services p 253 N89-11630
- ### INFORMATION FLOW
- The policy maker looks at information p 247 N86-28794
- Planning and Designing Effective Defence and Related Information Services [AGARD-CP-416] p 249 N87-26675
- Telling the user what is available: Announcement and search p 250 N87-26685

SUBJECT INDEX

- Rapid prototyping of complex avionics system architectures p 47 N86-23771
- INFORMATION MANAGEMENT**
- The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes [AGARD-CP-385] p 247 N86-26793
- Information resources management in the R and D environment p 248 N86-26803
- The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19920
- Applications in library management, requisitions, loans and stock control p 222 N87-19921
- Planning and Designing Effective Defence and Related Information Services [AGARD-CP-416] p 249 N87-26675
- Benefits of scientific and technical information services for aerospace and defense p 249 N87-26677
- A model of a defence information service as seen by the user p 249 N87-26678
- User needs and how to determine them p 249 N87-26679
- Strategic planning process at the National Technical Information Service p 249 N87-26680
- Security considerations, defence-related and commercial p 250 N87-26681
- The resources required to run an information service p 250 N87-26682
- Sources of information for a defense information service p 250 N87-26683
- The treatment of grey literature p 250 N87-26684
- Telling the user what is available: Announcement and search p 250 N87-26685
- Information Management and Decision Making in Advanced Airborne Weapon Systems [AGARD-CP-414] p 46 N87-29503
- Perceptual organisation and information management p 251 N87-29514
- Advanced information management and decision making in Airborne Early Warning and Control (AEW&C) training systems p 251 N87-29517
- Crewstation Information and Development System (CIDS) p 49 N86-23781
- Designing for design effectiveness of complex avionics systems p 50 N86-23788
- Information retrieval systems evolve: advances for easier and more successful use p 252 N86-30462
- Evaluating the Effectiveness of Information Centres and Services [AGARD-LS-160] p 253 N89-11625
- Evaluating the effectiveness of information use p 253 N89-11626
- Measures, methods and models employed in evaluating the effectiveness of information centers and services p 253 N89-11627
- European examples of evaluating the effectiveness of information centers and services p 253 N89-11628
- Evaluating the performance of information center staff p 253 N89-11629
- Evaluating performance of information center operations and services p 253 N89-11630
- A framework for evaluating the effectiveness of information centers and services p 253 N89-11631
- Evaluating for information center planning p 254 N89-11632
- INFORMATION PROCESSING (BIOLOGICAL)**
- Information Management and Decision Making in Advanced Airborne Weapon Systems [AGARD-CP-414] p 46 N87-29503
- Study of anticipation mechanisms in the aeronautical environment p 207 N87-29505
- The effects of display-control I/O, compatibility, and integrity on dual-task performance and subjective workload p 211 N87-29508
- A study of pilot flight information crossmonitoring performance p 211 N87-29509
- Sophisticated integral control methods for use in flight p 212 N87-29510
- An assessment of variable format information presentation p 250 N87-29512
- Perceptual processing capabilities relevant to design of visual displays for information management in advanced airborne weapon systems p 250 N87-29513
- Perceptual organisation and information management p 251 N87-29514
- Information management in the Army battlefield helicopter p 251 N87-29515
- Integrating avionics sensor signals for tactical aircraft p 46 N87-29519
- Voice command and the change of mental representation during task performance p 135 N87-29523
- The role of asymmetric transfer in the evaluation of voice generation and recognition systems p 136 N87-29525
- Mental workload measurement in operational aircraft systems: Two promising approaches p 207 N87-30060
- Assessing workload for minimum crew certification Part 1: Static workload analysis and performance analysis p 214 N87-30067

- Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine [AGARD-CP-432] p 190 N86-27683
- Dissecting the visual and auditory pathways by means of the two-input technique p 199 N86-27690
- Electric and magnetic brain activity related to cognitive performance p 199 N86-27692
- Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N86-27693
- A study of sources in the human brain associated with stereopsis p 200 N86-27695
- The effects of hypoxia on P300 and reaction time [DCIEM-87-RR-12] p 200 N86-27697
- Using ERPS to study human information processing p 208 N86-27698
- The effect of mild hypoxia on the vestibular evoked response p 202 N86-27713
- INFORMATION RETRIEVAL**
- The ideal information system? What does the user really want? p 248 N86-26801
- The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19920
- Microcomputer-based catalog creation software options for small libraries p 223 N87-19922
- Microcomputers in information resource sharing: Part 1: Data and graphics systems p 223 N87-19925
- Knowledge based systems in information work p 248 N87-19926
- Trends in software and system development p 223 N87-19928
- Planning and Designing Effective Defence and Related Information Services [AGARD-CP-416] p 249 N87-26675
- The treatment of grey literature p 250 N87-26684
- Telling the user what is available: Announcement and search p 250 N87-26685
- Information retrieval systems evolve: advances for easier and more successful use p 252 N86-30462
- INFORMATION SYSTEMS**
- A programme manager's needs for information information services: Pros and cons p 247 N86-28797
- The costs of not having refined information p 247 N86-28798
- Measuring the value of information and information systems, services and products p 247 N86-28799
- The ideal information system? What does the user really want? p 248 N86-28801
- New technologies for improved information systems and services p 248 N86-28802
- Information resources management in the R and D environment p 248 N86-28803
- The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19920
- Applications in library management, requisitions, loans and stock control p 222 N87-19921
- Knowledge based systems in information work p 248 N87-19926
- Trends in software and system development p 223 N87-19928
- Procurement and management of microcomputer-based systems p 222 N87-19929
- Automation strategy and results for an airbase command and control information system (ABOCCS) p 236 N87-24952
- Current state of an expert system -- military information systems p 236 N87-24953
- Planning and Designing Effective Defence and Related Information Services [AGARD-CP-416] p 249 N87-26675
- The information scene in Turkey p 199 N87-26676
- Benefits of scientific and technical information services for aerospace and defense p 249 N87-26677
- A model of a defence information service as seen by the user p 249 N87-26678
- User needs and how to determine them p 249 N87-26679
- Strategic planning process at the National Technical Information Service p 249 N87-26680
- Security considerations, defence-related and commercial p 250 N87-26681
- The resources required to run an information service p 250 N87-26682
- Sources of information for a defense information service p 250 N87-26683
- Telling the user what is available: Announcement and search p 250 N87-26685
- Evaluating the Effectiveness of Information Centres and Services [AGARD-LS-160] p 253 N89-11625
- Measures, methods and models employed in evaluating the effectiveness of information centers and services p 253 N89-11627
- European examples of evaluating the effectiveness of information centers and services p 253 N89-11628

INLET FLOW

- Information management systems for on-board monitoring systems p 52 N89-16786
- INFORMATION THEORY**
- Measures, methods and models employed in evaluating the effectiveness of information centers and services p 253 N89-11627
- INFORMATION TRANSFER**
- The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes [AGARD-CP-385] p 247 N86-26793
- The costs of not having refined information p 247 N86-26798
- International information exchange programmes are necessary p 248 N86-26800
- Barriers to Information Transfer and Approaches Toward Their Reduction [AGARD-CP-430] p 251 N86-30458
- Linguistic and cultural barriers to the transfer of information p 251 N86-30459
- Political and economic barriers to information transfer p 251 N86-30460
- Information retrieval systems evolve: advances for easier and more successful use p 252 N86-30462
- Words: Keys or barriers to information transfer p 252 N86-30464
- Technical change needs organizational change p 246 N86-30466
- Using standards to break down information transfer barriers p 252 N86-30467
- INFRARED ABSORPTION**
- Preparation and properties of infrared transmitting heavy metal fluoride glass optical fibers p 239 N87-13296
- Single crystal fibers p 239 N87-13298
- Fluoride glasses for infrared waveguides p 240 N87-13299
- INFRARED DETECTORS**
- Sapphire fiber optic temperature probe p 241 N87-21186
- INFRARED IMAGERY**
- Digital image processing applied to fluid dynamic problems p 156 N87-21193
- INFRARED INSTRUMENTS**
- Turbine rotor blade measurements using infrared pyrometry p 171 N87-21188
- INFRARED RADAR**
- Considerations in utilizing IR signatures p 241 N87-18747
- Multisensor target reconnaissance p 219 N89-18020
- INFRARED SIGNATURES**
- Considerations in utilizing IR signatures p 241 N87-18747
- INGESTION (ENGINES)**
- Impact of IPS and IRS configurations on engine installation design p 31 N87-10070
- INJURIES**
- Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 191 N87-13940
- INLET FLOW**
- Engine Response to Distorted Inflow Conditions -- conference proceedings [AGARD-CP-400] p 60 N87-24464
- Review of current knowledge on engine response to distorted inflow conditions p 60 N87-24465
- Air inlet/engine compatibility: Impact of theoretical and experimental methods p 60 N87-24466
- New trends in intake/engine compatibility assessment p 60 N87-24467
- Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
- Viscous analyses for flow through subsonic and supersonic intakes p 61 N87-24469
- Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
- Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
- Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473
- Transmission of inlet distortion through a fan p 62 N87-24475
- Experimental investigation on small turbo-prop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476
- Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477
- Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478
- Experimental determination of the transfer function of an axial compressor to distorted inlet flow p 9 N87-24479
- Development of intake swirl generators for turbo jet engine testing p 83 N87-24480
- Parametric study of choke flutter with a linear theory p 66 N88-17673
- Experimental investigation of a supercritical compressor rotor blade section p 67 N88-17680

INLET NOZZLES

Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model p 20 N88-18642

INLET NOZZLES

Propulsion system technologies for thrust vectoring p 60 N87-22670

INLET TEMPERATURE

Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477

INOCULATION

Seeding gas flows for laser anemometry p 172 N87-21178

INSERTION LOSS

Low-cost, monolithic beamforming components for radar p 131 N87-18750

INSPECTION

Economical manufacturing and inspection of the electron-beam welded Tornado wing box p 176 N87-17055

The welding of aluminum alloys: A new technology in space application p 176 N87-17056

Thermoelastic testing of stratified materials p 179 N87-17064

AIR 42 carbon fibre flap repair design and inspection p 180 N87-17256

TV holography: A promising inspection tool for analysis of composite materials p 170 N87-20180

The application of radiation physics and photogrammetric techniques for the diagnosis and solution of mechanical engineering problems and performance improvements in the development of aero gas turbine engines at Rolls Royce p 178 N87-21138

The impact of engineering assumptions on NDE requirements p 180 N88-17254

Relationships of nondestructive evaluation needs and component design p 180 N88-17256

Importance of sensitivity and reliability of NDE techniques on damage tolerance based life prediction of turbine discs p 181 N88-17257

Long term possibilities for nondestructive evaluation for US Navy aircraft p 181 N88-17259

Need for common AGARD approach and actions p 181 N88-17260

INSTALLING

Airframe/store compatibility p 40 N88-13323

Installed thrust as a predictor of engine health for jet engines p 71 N89-16806

INSULATION

Radiation charging and breakdown of insulators p 179 N87-26954

Design and analysis of solid rocket motor internal insulation p 101 N89-16915

INTAKE SYSTEMS

Impact of IPS and IRS configurations on engine installation design p 31 N87-10070

Helicopter air intake protection systems p 32 N87-10073

Fundamentals of fighter aircraft design: Engine intake and afterbody p 40 N88-13322

The advantage of variable geometry for turbine engines at low power p 63 N88-17653

Investigation of dihedral effects in compressor cascades p 66 N88-17672

Air intake aerodynamics p 15 N88-29762

INTEGRAL EQUATIONS

Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center [NAS 115 89133] p 9 N87-28519

Numerical modeling: Integral equation method p 137 N88-11919

INTEGRALS

Three-dimensional boundary layers: Introduction to calculation methods p 158 N87-22146

INTEGRATED CIRCUITS

Progress in optical fiber gyroscopes: using integrated optics p 238 N87-13283

MMIC T/R modules for the next generation airborne surveillance platforms p 131 N87-18749

Low-cost, monolithic beamforming components for radar p 131 N87-18750

MIC technology for phased arrays p 135 N87-23866

INTEGRATED LIBRARY SYSTEMS

Bibliographic networks and microcomputer applications for aerospace and defense scientific and technical information p 248 N87-19923

Application of LAN's and electronic office techniques in the library p 232 N87-19924

INTEGRATED OPTICS

Progress in optical fiber gyroscopes using integrated optics p 238 N87-13283

Performance of integrated optical frequency shifters digitalized to high birefringence fibres using ion-milled grooves p 238 N87-13289

Nonlinear planar guided wave interactions and devices p 239 N87-13290

Integrated optics optical limiters p 239 N87-13292

Acoustooptic spectrum analyzer using a planar Bragg cell p 239 N87-13295

INTERACTIONAL AERODYNAMICS

Computation of three-dimensional flows by viscous-inviscid interaction using the MZM method p 155 N87-20223

Carnage of external stores p 36 N87-24449

Experience with three dimensional composite grids p 227 N88-29324

INTERACTIONS

Task interactions in distributed machines of embedded computer systems p 232 N89-18479

INTERACTIVE CONTROL

Mesh generation for industrial application of Euler and Navier Stokes solvers p 227 N88-29323

INTERFACES

Test philosophy of the EH101 integrated avionics p 48 N88-23775

Interfacing and integrating hardware and software design systems p 50 N88-23796

Guidance and Control Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation [AGARD-AR-249] p 44 N89-12564

The Man-Machine Interface in Tactical Aircraft Design and Combat Automation p 217 N89-18009

Matching crew system specifications to human performance capabilities p 220 N89-18031

INTERFERENCE FIT

Bolted scarf joints in carbon composite materials: Comparison between assemblies with an interference fit and those with play p 103 N89-17707

INTERFEROMETERS

Packaged fiber optic gyros p 172 N89-17608

INTERFEROMETRY

Vibration analysis by speckle interferometry p 183 N87-21137

INTERIOR BALLISTICS

Bore temperature and heat flux in a 40 mm gun barrel p 117 N88-29069

On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N88-29070

Interior ballistics of small arms: Particular problems: Part 1: Heat transfer and cook-off phenomenon in a small caliber weapon p 154 N86-23071

Interior ballistics of small arms: Particular problems: Part 2: Thermodynamic model, powder parameters, initiation p 154 N86-23072

Modeling the behaviour of additives in gun barrels p 155 N86-23075

Propellant grain design p 116 N87-28595

Propellant grain design p 117 N88-16912

INTERMODULATION

Intermodulation interferences in radio systems p 152 N89-18595

INTERNATIONAL COOPERATION

The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes [AGARD-CP-20851] p 247 N88-28793

International information exchange programmes are necessary p 248 N86-28800

The influence of infrastructure on the costs and timescales of collaborative programmes p 246 N88-20201

A review of the NATO special group of experts on Naval hydrodynamics and related problems p 164 N88-23157

Using standards to break down information transfer barriers p 252 N86-30467

INTERNATIONAL SUN EARTH EXPLORER 1

High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944

INTERPLANETARY MEDIUM

Remote sensing of interplanetary shocks using a scintillation method p 255 N89-17749

INTERPOLATION

Analytical surfaces and grids p 227 N88-29322

INTERVERTEBRAL DISKS

Low back pain and narrowed disc spaces in fighter pilots p 191 N87-13937

The biomechanical characteristics of the spinal column: Bibliographic review p 191 N87-13941

Vehicle vibration and back pain p 209 N87-13945

Prediction of lumbar spinal segment instability by centre patterns p 192 N87-13949

Measurements of change of stature in the assessment of static and dynamic spinal loading p 193 N87-13957

INVENTORY CONTROLS

Applications in library management, requisitions, loans and stock control p 222 N87-19921

INVERSE SCATTERING

Theoretical aspects of target classification: Physical optics and radar transform methods p 137 N88-11915

INVESTMENTS

The judgement and evaluation of long term investments demonstrated by means of a civil aircraft program p 254 N88-20180

SUBJECT INDEX

INVISID FLOW

Aircraft drag prediction and reduction: Addendum 1: Computational drag analyses and minimization: mission impossible? p 5 N86-27187

[AGARD R-723 ADD 1] p 5 N86-27187

Numerical simulation of internal and external inviscid and viscous 3-D flow fields p 155 N87-20213

Computation of three-dimensional flows by viscous-inviscid interaction using the MZM method p 155 N87-20223

Computation of unsteady flows using the point vortex method p 157 N87-22138

Progress in Viscous-Inviscid Solvers (VIVS) p 159 N87-22152

A spatial marching technique for the inviscid blunt body problem p 12 N88-13239

Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13745

The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660

Physical aspects of viscous simulation and associated research requirements p 89 N89-16865

Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems p 167 N88-18625

ION IMPLANTATION

Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959

Microelectronics the next fifteen years p 154 N86-23792

IONIZATION

Satellite in-situ probing p 142 N89-11939

IONOSPHERES

Specular scatter: A new mechanism for ionospheric backscatter p 189 N89-17751

IONOSPHERIC DISTURBANCES

Developments in HF equipment and systems mobile and portable terminals p 123 N86-27573

Propagation 2: Problems in HF propagation p 123 N86-27574

ELF/VLF/LF propagation and system design p 124 N87-18705

Media effects on electronic systems in the high latitude region: H F radar probing (including modifications) p 142 N89-11937

A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747

IONOSPHERIC PROPAGATION

Correcting ray field failures caused by focusing in an inhomogeneous duct: A critical analysis of the Gaussian beam method p 139 N88-19665

Media effects on electronic systems in the high latitude region: Transionospheric probing and propagation p 141 N89-11932

Satellite in-situ probing p 142 N89-11939

Modeling electromagnetic wave propagation through a strongly fluctuating ionized medium by the phase screen method p 147 N89-17749

VLF radio noise p 148 N89-18569

Experimental observations of spectral occupancy at HF p 149 N89-18570

IONOSPHERIC SOUNDING

Transionospheric probing and propagation p 141 N89-11934

IONS

Large ionic species in sooting acetylene and benzene flames p 107 N88-29432

ISOTHERMAL PROCESSES

Aerospace Materials Process Modeling [AGARD-CP-4261] p 119 N89-15262

Modeling of deformation and microstructural changes in P/M Re 95 under isothermal forging conditions p 119 N89-15264

Metallurgical modelling of superalloy disc isothermal forgings p 120 N89-15266

Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270

The Forge 2 isothermal forging model p 112 N89-15271

An application of computer modelling to isothermal forging p 121 N89-15268

ITALY

Vortex dynamics: survey of the activity in Italy p 157 N87-22141

ITERATIVE SOLUTION

A quasi three dimensional method for the calculation of transonic flows in turbomachines p 59 N87-21941

Grid generation around transonic aircraft configurations using a multi-block structured computational domain p 227 N88-29325

J

J-57 ENGINE

Operation of gas turbine engines in dust laden environments p 63 N88-17654

SUBJECT INDEX

JAGUAR AIRCRAFT

Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674

JAMMING

Developments in HF equipment and systems mobile and portable terminals p 123 N86-27573
Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems (AGARD-CP-420) p 147 N89-18565
Jamming and electronic countermeasures p 174 N89-18566

Predicting the effects of noise and interference on fast frequency-hopped M-ary NCSK systems p 151 N89-18588
Inherent jitter effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A jitter-lighting scheme p 151 N89-18589
Automating the deconvolution of jamming and spectrum management p 152 N89-18596

JET AIRCRAFT

DFVLR in-flight simulators ATTAS and ATTHES for flying qualities and flight control research p 83 N87-23657

JET CONTROL

Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
Three-dimensional calculations of lateral jet interaction with an external supersonic flow p 19 N89-18631

JET ENGINE FUELS

Fuel property effects on the US Navy's TF30 engine p 67 N88-29911

JET ENGINES

Effects of unfavorable environmental conditions on the service life of jet engine and helicopter bearings p 174 N86-29228
Military aircraft propulsion lubricants: Current and future trends p 113 N86-29249
Performance improvement of airborne weapon systems methods, scope and limitations p 33 N87-22665
Engine Response to Distorted Inflow Conditions ... conference proceedings p 60 N87-24464

Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
Optimization of military compressors for weight and volume p 63 N88-17649
An examination of the impact of potential advances in component technology for future military engines p 63 N88-17650
Specification of an engine and its components starting from a consideration of aircraft missions p 63 N88-17651

Application of highly loaded single-stage mixed-flow compressors in small jet engines p 63 N88-17652
Aerodynamic performance of a scale-model, counter-rotating unducted fan p 65 N88-17666
Design and development of an advanced F100 compressor p 67 N88-17678
Gas path modeling, diagnosis and sensor fault detection p 54 N89-16811
Review of existing NDT technologies and their capabilities p 180 N89-17255

JET FLOW

Combustion related shear-flow dynamics in elliptic supersonic jets p 11 N88-13232
Modeling of CO oxidation in dilution jet flows p 109 N88-29947

JET IMPINGEMENT

On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N88-18645

JET PROPULSION

Propulsion system technologies for thrust vectoring p 60 N87-22670

JETTISONING

Store separation flight testing (AGARD-AG-300-VOL-5) p 31 N86-30727

JOINTS (JUNCTIONS)

Design of bolted joints in composites (AGARD-R-727) p 175 N86-31064
Development of precision structural joints for large space structures p 97 N87-20374
Interferometric measurement of strains and displacements in engine components p 178 N87-21196

Literature review on the design of mechanically fastened composite joints p 179 N89-17686
Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687
Stresses in pinloaded anisotropic plates p 186 N89-17690
Typical joints in a wing structure p 44 N89-17693
A study to optimize the CFRP-Al mechanical joint in order to reduce electrical resistance p 154 N89-17695
The static strength of bolted joints in fibre reinforced plastics p 102 N89-17699
Mechanism of single shear fastened joints p 187 N89-17700

Joining of carbon fiber composite with fasteners p 103 N89-17701

Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading p 187 N89-17704

Behaviour of mechanically fastened joints in advanced composites p 103 N89-17705

JP-4 JET FUEL

The performance of a surrogate blend in simulating JP-4 in a spray-fueled combustor p 106 N88-29925

K

K-EPSILON TURBULENCE MODEL

Three-dimensional gas turbine combustor modelling p 108 N88-29937
Numerical modeling of combustion processes in gas turbines p 108 N88-29939

Three-dimensional combustor predictions: A comparison of equilibrium and laminar flamelet chemistry models p 108 N88-29940
Analysis of the flow through double swirl airblast atomizers p 110 N88-29949

KALMAN FILTERS

Midcourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-16005
Application of optimal estimation and control concepts to a bank-to-turn missile p 92 N87-29483
An intelligent multi-target tracking system p 119 N87-29484

GPS navigation processing and Kalman filtering p 30 N89-10884

KAPTON (TRADEMARK)

Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959

KERR ELECTROOPTICAL EFFECT

Nonlinear ellipse rotation in a low-birefringence optical fiber p 238 N87-13282

KEYLAR (TRADEMARK)

The static strength of bolted joints in fibre reinforced plastics p 102 N89-17699

KINEMATICS

The biomechanical characteristics of the spinal column: Bibliographic review p 191 N87-13941

KINETICS

A numerical model of directional solidification of cast turbine blades p 121 N89-15277

KNOWLEDGE

Towards the unmanned cockpit p 36 N88-10812
Generating diagnostic knowledge from a structural and functional description p 232 N88-10813
A review of the knowledge engineering process p 233 N88-10814

L

L-1011 AIRCRAFT

Development of field level repairs for composite structures p 1 N87-20177

LAMINAR BOUNDARY LAYER

Numerical investigation of the laminar boundary layer on a 3-D body started impulsively from rest p 6 N87-20220
Hypersonic laminar boundary layer: Parametric study for the representation of real gas effects p 11 N88-13236

A new laminar water tunnel to study the transition process in a Blasius layer and in a separation bubble and a new tool for industrial aerodynamics and hydrodynamic research p 85 N88-23150
Techniques for boundary layer tripping and control p 86 N88-28863

LAMINAR FLOW

Aircraft drag prediction and reduction: Addendum 1: Computational drag analyses and minimization: mission impossible? (AGARD-R-723-ADD-1) p 5 N86-27187
Simulation of three-dimensional transonic flow with separation past a hemisphere cylinder configuration p 8 N87-20230

Simultaneous temperature measurements with Paman and CARS in laminar flames p 103 N87-21171
Three-dimensional layers: Laminar-turbulent transition p 158 N87-22149

Transition to turbulence via spatio-temporal intermittency p 160 N88-11976
On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
Experimental study of vortex sheets in plane flow p 162 N88-23142

Radiation from soot-containing flames p 106 N88-29927
Finite difference methods in recirculating flows p 169 N89-18651
Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660

LAMINATES

Thermoelastic testing of stratified materials p 179 N87-17064

LASER APPLICATIONS

Repair procedures for composite parts on the alpha jet p 1 N87-20175

Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures (AGARD-CP-427) p 121 N89-17685

Damage growth in composite bolted joints p 186 N89-17689
Stresses in pinloaded anisotropic plates p 186 N89-17690

Strength analysis of mechanically fastened composite structures p 186 N89-17692
Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17696

Bearing-bypass loading on bolted composite joints p 186 N89-17697
The static strength of bolted joints in fibre reinforced plastics p 102 N89-17699

Mechanism of single shear fastened joints p 187 N89-17700
Effect of environment and improvement measures on static and fatigue strength of bolted CFRP-joints p 187 N89-17703

LANDING AIDS

Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military airspace users (AGARD-AR-236) p 28 N87-23608

LANGUAGES

Linguistic-technical aspects of machine translation p 252 N88-30461
Linguistic barriers: Translation problems p 252 N88-30465

LAP JOINTS

Diffusion bonding of Al-alloys in the solid state p 177 N87-17058

LARGE SPACE STRUCTURES

Mechanical Qualification of Large Flexible Spacecraft Structures (AD-A175529) p 94 N87-20375
Future trends in spacecraft design and qualification p 94 N87-20356

Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357
Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358

Structural qualification of large spacecraft p 95 N87-20361
Effect of modal damping in modal synthesis of spacecraft structures p 95 N87-20362

Active structural controllers emulating structural elements by ICUs p 96 N87-20367
Spacecraft qualification using advanced vibration and modal testing techniques p 96 N87-20368

Influence co-efficient testing as a substitute for modal survey testing of large space structures p 94 N87-20369
Benefits of passive damping as applied to active control of large space structures p 96 N87-20371

Development of precision structural joints for large space structures p 97 N87-20374

LASER ANEMOMETERS

Laser fringe anemometry for aero engine components p 118 N87-21176
Seeding gas flows for laser anemometry p 172 N87-21178

Application of Doppler and transit laser anemometry in small turbomachines p 172 N87-21180
Combined fringe and Fabry-Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility p 118 N87-21183

Turbulence measurement in hypersonic flow p 10 N88-13224
Matched index laser anemometry systems for flow studies in complex geometries p 171 N88-23145

LASER APPLICATIONS

Novel ignition systems for heavy calibre guns p 118 N86-29076
Guarded Optical Structures in the Military Environment (AGARD-CP-383) p 237 N87-13273

Progress in optical fiber sensors p 237 N87-13274
Wavelength division multiplexing at 15 microns for high capacity optical transmission p 238 N87-13284

A hybrid transmission scheme on single mode fibers for tactical communications p 241 N87-13306
Thermoelastic testing of stratified materials p 179 N87-17064

A real time vision system for robotic arc welding p 177 N87-17066
TV holography: A promising inspection tool for analysis of composite materials p 170 N87-20180

Particle imaging velocimetry in a low turbulent wind tunnel and other flow facilities p 79 N87-21205
Advances in Guidance and Control Systems and Technology (AGARD-CP-411) p 28 N87-29474

An ultra-high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13228

LASER DAMAGE

- Three-dimensional flow visualization using laser sheet scanning p 162 N88-23143
- Laser applications in flow diagnostics (AGARD AG-296) p 173 N89-12849
- Long term possibilities for nondestructive evaluation for US Navy aircraft p 181 N89-17259

LASER DAMAGE

- Eye safe Raman laser range finder for ground and airborne application p 173 N87-29475

LASER DOPPLER VELOCIMETERS

- Advanced instrumentation for Aero Engine Components (AGARD CP-399) p 118 N87-21170
- Laser-2 focus velocimetry p 172 N87-21177
- How to select a laser velocimeter for a given application? p 118 N87-21179
- Laser velocimetry study of stator-rotor interactions in a multi-stage gas turbine compressor p 173 N87-21181
- Evaluation of L2F-measurements in unsteady turbine flow p 156 N87-21182
- Velocity and temperature measurements in a can-type gas-turbine combustor p 57 N87-21184
- The flow around a square obstacle p 156 N87-21185
- Processing techniques for correlation of LDA and thermocouple signals p 171 N87-21194
- Flow measurements in a water tunnel using a holographic velocimeter p 162 N88-23141
- Laser applications in flow diagnostics (AGARD AG-296) p 173 N89-12849

LASER INTERFEROMETRY

- A study of methods of phase noise reduction of semiconductor lasers for sensor applications p 172 N87-13286
- Vibration analysis by speckle interferometry p 183 N87-21197

LASER RANGE FINDERS

- Eye safe Raman laser range finder for ground and airborne application p 173 N87-29475

LASER SPECTROMETERS

- The study of combustion by means of diode laser spectroscopy p 173 N87-21201

LASER SPECTROSCOPY

- Wide bandwidth long distance fibre-optic communication systems p 240 N87-13300

LASER WELDING

- Non-destructive testing and laser welding in the fabrication of aerospace structures p 176 N87-17054

LATERAL CONTROL

- Three-dimensional calculations of lateral jet interaction with an external supersonic flow p 19 N89-18631

LATERAL STABILITY

- Investigation of dihedral effects in compressor cascades p 66 N88-17672

LATITUDE

- Satellite in-situ probing p 142 N89-11939

LATTICES (MATHEMATICS)

- Transition to turbulence via spatio-temporal intermittency p 160 N88-11976
- Lattice gas hydrodynamics p 160 N88-11978

LAUNCHING

- Guided stand-off weapons and the evaluation of means for launch calculation: The application of new techniques p 235 N87-16009

LEADING EDGE SWEEP

- Flow field surveys of leading edge vortex flows p 167 N89-18621

LEADING EDGES

- Shock waves losses analysis p 58 N87-21936
- Structure of unsteady flows at leading- and trailing-edges: Flow visualization and its interpretation p 164 N88-23154
- Status of CFD validation on the vortex flow experiment p 167 N89-18620
- Arjet validation of surface catalytic using a viscous shock layer approach p 168 N89-18634
- Experiments and code validation for junction flows p 21 N89-18658
- Large scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18650

LEAST SQUARES METHOD

- Nonlinearity and single shot noise problems in CARS spectroscopy p 104 N87-21174

LEAVES

- A scattering model for forested area p 143 N89-17713

LECTURES

- Short Course on Cardiopulmonary Aspects of Aerospace Medicine (AGARD R-758) p 193 N87-24070

LENGTH

- Automated measurement of crack length and load line displacement at elevated temperature (AGARD R-751) p 153 N88-26695

LENS DESIGN

- A spherical waveguide multiplex demultiplexer p 238 N87-13285

LESIONS

- Relation between VEP and visual function in lesions of the optic nerve and visual pathway p 203 N88-27718

LIBRARIES

- Measuring the value of information and information systems, services and products p 247 N86-28799
- The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work (AGARD-LS-149) p 221 N87-19920
- Applications in library management: requisitions, loans and stock control p 222 N87-19921
- Microcomputer based catalog creation software options for small libraries p 223 N87-19922
- Application of LAN's and electronic office techniques in the library p 232 N87-19924
- Microcomputers in information resource sharing Part 1: Data and graphics systems p 223 N87-19925
- Procurement and management of microcomputer based systems p 222 N87-19929
- Planning and Designing Effective Defence and Related Information Services (AGARD-CP-416) p 249 N87-26675
- The information scene in Turkey p 249 N87-26676
- Evaluating the Effectiveness of Information Centres and Services (AGARD-LS-160) p 253 N89-11625
- Measures, methods and models employed in evaluating the effectiveness of information centres and services p 253 N89-11627
- European examples of evaluating the effectiveness of information centres and services p 253 N89-11628
- Evaluating the performance of information centre staff p 253 N89-11629
- Evaluating performance of information centre operations and services p 253 N89-11630
- A framework for evaluating the effectiveness of information centres and services p 253 N89-11631
- Evaluating for information center planning p 254 N89-11632

LIFE (DURABILITY)

- Life time prediction: Synthesis on ONERA's research in viscoplasticity and continuous damage mechanics, applied to engine materials and structures p 68 N89-10011
- Engine life consumption monitoring program for RB199 integrated in the on board life monitoring system p 53 N89-16789
- Installed thrust as a predictor of engine health for jet engines p 71 N89-16806
- AGARD/SMP Review: Damage Tolerance for Engine Structures 1: Non-Destructive Evaluation (AGARD-R-768) p 180 N89-17253
- Relationships of nondestructive evaluation methods and component design p 180 N89-17256

LIFT

- Calculations for a generic fighter at supersonic high-lift conditions p 33 N87-20226
- Numerical simulation of the flow field around a complete aircraft p 8 N87-20231
- Nonlinear lift control at high speed and high angle of attack using vortex flow technology p 76 N88-13319
- Prediction of wing aeroblastic effects on aircraft life and pitching moment characteristics p 77 N88-13356
- Comparison of the results of tests on A300 aircraft in the RAE 5 metre and the ONERA F1 wind tunnels p 17 N89-16849
- Accuracy of lift and center-of-thrust measurements at missile control surfaces p 18 N89-16875

LIFT DRAG RATIO

- Airframe/store compatibility p 40 N88-13323

LIFTING BODIES

- Aerodynamics of Hypersonic Lifting Vehicles (AGARD-CP-428) p 10 N88-13219
- Numerical experiments with hypersonic flows beneath a cone-delta-wing combination p 12 N88-13238
- Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245
- Dynamic stability of hypersonic conical lifting vehicles according to Newton-Eusemann theory p 75 N88-13247
- Lifting bodies: An attractive aerodynamic configuration choice for hypersonic vehicles p 39 N88-13248
- Aerodynamics of Hypersonic Lifting Vehicles: Fluid Dynamics Panel AGARD Symposium (AGARD-AR-246) p 164 N88-27480

LIFTING REENTRY VEHICLES

- European hypersonic wind tunnels p 84 N88-13221
- Shock tunnels for real gas hypersonics p 84 N88-13223
- Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles p 11 N88-13230

LIGAMENTS

- The biomechanical characteristics of the spinal column: Bibliographic review p 191 N87-13841

LIGHT (VISIBLE RADIATION)

- Lightwave technology in future radar developments p 240 N87-13304

LIGHT AIRCRAFT

- An interim comparison of operational CG records in turbulence on small and large civil aircraft p 78 N88-29729

LIGHT ALLOYS

- Materials for fighter aircraft p 40 N88-13325

LIGHT BEAMS

- Coupled-mode theory approach to depolarization associated with propagation in turbulent media p 241 N89-17707

LIGHT EMITTING DIODES

- Progress in optical fiber gyroscopes using integrated optics p 238 N87-13283

LIGHT MODULATION

- Fiber optic device for temperature remote sensing p 237 N87-13280
- Acousto-optic spectrum analyzer using a planar Bragg cell p 239 N87-13295

LIGHT SCATTERING

- Laser-2 focus velocimetry p 172 N87-21177
- Particle imaging velocimetry in a low turbulent wind tunnel and other flow facilities p 79 N87-21205

LIGHT SOURCES

- Laser applications in flow diagnostics (AGARD AG-296) p 173 N89-12849

LIGHT TRANSMISSION

- PIV-FET preamplifier for high-speed optical transmission systems p 239 N87-13293

LIGHTNING

- Lightning generation of low-frequency TE atmospheric noise p 148 N89-18568

LIGHTNING SUPPRESSION

- Interaction between EMP (Electromagnetic Pulse) lightning and static electricity with aircraft and avionics systems (AGARD-LS-144) p 22 N86-30708

LIMITED CIRCUITS

- Integrated optics optical limiters p 239 N87-13292

LINE OF SIGHT COMMUNICATION

- Identification of microwave line-of-sight multipath components p 139 N88-19665
- Reflexive index meteorology and fading in line of sight transmission paths p 140 N88-19666
- Radio and radar holes and multipath zones: The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667
- Space diversity effects on line-of-sight propagation paths p 140 N88-19670
- An EHF telecommunication system engineering model p 141 N88-19674
- Transhorizon cochannel interference path measurements in Europe p 149 N89-18572
- Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593

LINEAR SYSTEMS

- Restructuring of basic linear algebraic algorithms, chapter 5: Effects of noise and interference on system performance p 149 N89-18576

LINEARITY

- Parametric study of choke flutter with a linear theory p 66 N88-17673

LINGUISTICS

- Linguistic and cultural barriers to the transfer of information p 251 N88-30459
- Linguistic-technical aspects of machine translation p 252 N88-30461
- Linguistic barriers: Translation problems p 252 N88-30465

LININGS

- Design and analysis of solid rocket motor internal insulation p 101 N89-18915

LINKAGES

- Critical analysis of achievements and missing links in gear and bearing tribology in relation to power envelopes p 175 N86-29254

LIPOPROTEINS

- Coronary risk factors in aerospace medicine p 195 N87-24078

LIQUID ATOMIZATION

- Atomization of alternative fuels p 104 N88-29913
- Turbulence effects on the droplet distribution behind airblast atomizers p 104 N88-29915
- Influence of operating conditions on the atomization and distribution of fuel by airblast atomizers p 105 N88-29918
- Spray performance of a vaporizing fuel injector p 105 N88-29919
- The characterization of combustion by fuel composition: Measurements in a small conventional combustor p 105 N88-29920
- The performance of a surrogate blend in simulating JP-4 in a wave-1 atom combustor p 106 N88-29926

LIQUID FUELS

- Liquid propellant gun technology p 115 N86-29064

LITERATURE

- The treatment of grey literature p 250 N87-26684

SUBJECT INDEX

SUBJECT INDEX

LITHOGRAPHY

Microelectronic the next fifteen years p 154 N88-23792

LOAD DISTRIBUTION (FORCES)

Comparison of the results of tests on A300 aircraft in the RAE 5 metre and the ONERA F1 wind tunnels p 17 N89-16849

LOADS (FORCES)

Mechanical behaviour of propellant grains under heavy dynamic load p 115 N86-29066
Structural qualification of large spacecraft p 95 N87-20361
Operational load measurements on service helicopters p 37 N88-11658
Static aeroelastic considerations in the definition of design loads for fighter airplanes p 76 N88-13351
A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655
Determination of design loads for modern combat aircraft p 42 N88-19457
Bearing-bypass loading on bolted composite joints p 186 N89-17697

LOCAL AREA NETWORKS

Development of a generic architecture p 48 N88-23774

LOGIC

Built-in self test p 154 N88-18468

LONG TERM EFFECTS

Lifting bodies: An attractive aerodynamic configuration choice for hypersonic vehicles p 39 N88-13248

LONGITUDINAL CONTROL

Low-speed longitudinal flying qualities of modern transport aircraft p 43 N88-29736

LOSSES

Measurements of HF propagation parameters for Real-Time Channel Evaluation (RTCE) systems p 123 N86-27575
Form factor optimization for HFR emission p 130 N87-16742
Shock waves losses analysis p 58 N87-21936
Experimental investigations on shock losses of transonic and supersonic compressor air p 58 N87-21937
A shock loss model for supersonic subsonic flows in transonic axial flow compressors p 60 N87-21950

LOW ALTITUDE

Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
Active vehicle charging measurements in sounding rocket and space shuttle orbit environments at Low Earth Orbit (LEO) altitude p 97 N87-26945
Development, testing and evaluation of a night vision goggle compatible BO-105 for night low level operation p 214 N88-11666

LOW ASPECT RATIO

The design of the GARTEUR low aspect-ratio wing for use in the validation of shear layer and overall flow predictor methods p 45 N89-16652

LOW FREQUENCIES

ELF/VLF/LF propagation and system design p 124 N87-18705
Low frequency vibration testing on satellites p 96 N87-20364
Lightning generation of low-frequency TE atmospheric noise p 148 N89-18568

LOW LEVEL TURBULENCE

Measurement and analysis of low altitude atmospheric turbulence obtained using a specially instrumented Gnat aircraft p 190 N88-29728

LOW PRESSURE

CARS thermometry for low and high pressure combustion systems p 103 N87-21172

LOW REYNOLDS NUMBER

Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles p 11 N88-13230

LOW SPEED STABILITY

Experiments on boundary layer transition tripping at low Reynolds numbers p 18 N89-16866

LOW SPEED WIND TUNNELS

Flow unsteadiness in three low-speed wind tunnels p 88 N89-16859

LUBRICANTS

Tribology in aircraft systems: Basic principles and applications p 174 N86-29240
A study of the potential benefits associated with the development of a dedicated helicopter transmission lubricant p 112 N86-29242
Future trends in helicopter transmission lubricants p 113 N86-29250
Performance modelling: A tool for lubricant development p 113 N86-29252
Critical analysis of achievements and missing links in gear and bearing tribology in relation to power envelopes p 175 N86-29254

LUBRICATING OILS

Aircraft and Bearing Tribological Systems (AGARD-CP-194) p 174 N86-29236

Requirements on lubrication oil from the view of a helicopter manufacturer p 112 N86-29244
Military aircraft propulsion lubricants: Current and future trends p 113 N86-29249

Aircraft engine oils and their behaviour at high temperatures p 113 N86-29251
Scoring tests of aircraft transmission lubricants at high speeds and high temperatures p 113 N86-29253

LUBRICATION

The lubrication of dynamically loaded concentrated hard line contacts: Temperature and pressure measurements p 175 N86-29247

LUMBAR REGION

Backache and Back Discomfort --- conference (AGARD-CP-378) p 190 N87-13932
Relationships between whole body vibration and disorders of the backbone diagnosed on operators of earth-moving machinery p 208 N87-13934
Low back pain and narrowed disc spaces in fighter pilots p 191 N87-13937
Back discomfort in US Army helicopter aircrew members p 209 N87-13939
Biostereometric study of the outward curve of the spine for various reference positions p 191 N87-13943
Investigation of the lumbar flexion of office workers p 191 N87-13944
Vehicle vibration and back pain p 209 N87-13945
In vivo measurements of vibration transmission in the human spine p 210 N87-13947
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949
A review of the NDMC back care education programme p 192 N87-13952
Postural fatigue and the backache of helicopter pilots (DCIEM-85-R-30) p 210 N87-13953
Muscle fatigue in static and vibrational seating environments p 210 N87-13955
Lower back pain in helicopter pilots: Etiopathological factors p 210 N87-13955
Backache in aircrew p 193 N87-13958

M

MACH NUMBER

Fundamentals of fighter aircraft design: Engine intake and afterbody p 40 N88-13322

MACHINE TRANSLATION

Linguistic-technical aspects of machine translation p 252 N88-30461
Linguistic barriers: Translation problems p 252 N88-30465

MAGNETIC FIELDS

Magnetic and pressure sensors using the compensated polarimetric sensor configuration p 237 N87-13279
The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine (AGARD-CP-432) p 190 N88-27683
Studies of the intact human brain: Implications for performance p 198 N88-27684
Squad instrumentation for neuromagnetic study of complex brain activity p 199 N88-27691
Electric and magnetic brain activity related to cognitive performance p 199 N88-27692
Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N88-27693
H F radar probing (including modification) p 142 N89-11937

MAGNETIC STORMS

Magnetic storm effects on F layer irregularities near the auroral oval p 189 N89-17750

MAGNETOHYDRODYNAMIC FLOW

Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems p 146 N89-17735

MAGNETOHYDRODYNAMIC STABILITY

H F radar probing (including modification) p 142 N89-11937

MAGNETOMETERS

Magnetic and pressure sensors using the compensated polarimetric sensor configuration p 237 N87-13279
Studies of the intact human brain: Implications for performance p 198 N88-27684

MAGNETOSPHERE-IONOSPHERE COUPLING

Ionospheric scintillations and in-situ measurements at an auroral location in the European sector p 189 N89-17752

MAGNETOSPHERIC ELECTRON DENSITY

Thick dielectric charging on high altitude spacecraft p 99 N87-26961

MAGNETOSPHERIC INSTABILITY

The use of Pz pulsations as indicators of substorm effects at geostationary orbit p 188 N87-26942

MAGNETS

An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818

MAINTENANCE

DEDALE: An expert system for analog circuit maintenance p 153 N88-10809
Avionic corrosion p 46 N88-13332
US Naval Air Force avionic and electrical system corrosion prevention and control maintenance p 47 N88-13334

Maintenance of vision-related components

Fuel effects on flame radiation and hot-section durability p 106 N88-29925
Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781
Engine usage condition and maintenance management systems in the UK armed forces p 69 N89-16783
Canadian forces aircraft condition/health monitoring: Policy, plans and experience p 68 N88-16784
On board life monitoring system Tornado (OLMOS) p 52 N89-16785
Information management systems for on-board monitoring systems p 52 N89-16786
CF-18 engine performance monitoring p 69 N89-16787
F110 engine monitoring and maintenance management systems for F-16 C/D p 70 N89-16791
Engine condition monitoring: State-of-the-art civil application p 53 N89-16792
F100-PW-220 engine monitoring system p 53 N89-16795
The effects of a compressor rebuild on gas turbine engine performance p 70 N89-16803
CF-18/F404 transient performance trending p 71 N89-16814

MAN MACHINE SYSTEMS

Improved guidance and control automation at the man-machine interface (AGARD-AR-228) p 211 N87-18987
Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897
Next generation of control techniques in advanced TMA p 27 N87-21898
Some experiences in integrating avionic systems on the civil flight deck p 45 N87-21902
The application of intelligent knowledge based systems to air traffic control p 28 N87-21904
Use of VDU's by flight simulator instructors p 80 N87-23641

Trends in ground-based and in-flight simulators for development applications p 81 N87-23645
Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations (AGARD-CP-404) p 235 N87-24940
New technology impacts on future avionics architecture p 45 N87-24949
Information Management and Decision Making in Advanced Airborne Weapon Systems (AGARD-CP-414) p 46 N87-29503
Automation at the man-machine interface p 211 N87-29504

Closing the man-machine loop: On the use of physiological measures to affect computer controlled devices p 211 N87-29507
Sophisticated integral control methods for use in flight p 212 N87-29510

A rule-based system for arrival sequencing and scheduling in air traffic control p 29 N88-10815
Development and testing of a predictive methodology for optimization of man-machine interface in future avionics systems p 48 N88-23780
Crewstation Information and Development System (CIDS) p 49 N88-23781
A change in system design emphasis: From machine to man p 49 N88-23782
Psychosensory cockpit ergonomics, advantages of intelligent information systems p 49 N88-23784
Experience in the integration of human engineering effort with avionics systems development p 50 N88-23793
A look toward the future of complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88-23797
General operational and training visual concerns p 46 N88-29295

Barriers to Information Transfer --- Approaches Toward Their Reduction (AGARD-CP-430) p 251 N88-30458

Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation (AGARD-AR-249) p 44 N89-12564

The Man-Machine Interface in Tactical Aircraft Design and Combat Automation (AGARD-CP-425) p 217 N89-18009

Pilots as supervisors and managers of automatic systems: A risky new factor in man-machine systems reliability p 219 N89-18021

Lessons learned from the use of new command systems p 219 N89-18023

MAN-COMPUTER INTERFACE

- Matching crew system specifications to human performance capabilities p 220 N89-18031
An avionics software expert system design p 231 N89-18467
Integration of vocal dialogue on-board a combat aircraft p 56 N89-18471
- MAN-COMPUTER INTERFACE**
Information Management and Decision Making in Advanced Airborne Weapon Systems p 46 N87-29503
Rapid prototyping of user-computer interfaces during system design p 222 N87-29520
Layered protocols in voice interaction with computers p 136 N87-29524
A man-machine interface solution: The EAP plane shields p 219 N89-18018
Panoramic Cockpit Control and Display System (PCCADS) p 219 N89-18019
Expert system man-machine interface for a combat aircraft cockpit p 219 N89-18022
- MANAGEMENT**
Problems of spectrum management and system compatibility p 125 N87-18711
- MANAGEMENT INFORMATION SYSTEMS**
Evaluating performance of information centre operations and services p 253 N89-11630
- MANAGEMENT METHODS**
Technical change needs organizational change p 246 N88-30466
Software readiness planning p 230 N89-18466
- MANAGEMENT PLANNING**
Engine-airframe integration for rotorcraft: System specifications and qualification p 32 N87-10074
Tactical mission planning and management p 235 N87-16006
Prototype manufacturing techniques for reducing cost, schedule, and technical risk p 244 N88-20189
Minimizing development flight test time and cost in the US Air Force p 245 N88-20192
- MANAGEMENT SYSTEMS**
F110 engine monitoring and maintenance management systems for F-16 C/D p 70 N89-16791
- MANEUVERABILITY**
Airframe/store compatibility p 40 N88-13323
A second look at MIL prime flying qualities requirements p 44 N88-29740
- MANEUVERS**
Application of optimal estimation and control concepts to a bank-to-turn missile p 92 N87-29483
- MANIPULATORS**
Low speed longitudinal flying qualities of modern transport aircraft p 43 N88-29738
- MANPOWER**
The resources required to run an information service p 250 N87-26682
- MANUAL CONTROL**
Computer simulation studies on human control reliability in manual aircraft control: The origin of PIO p 211 N87-23644
The optimal control pilot model and applications p 217 N88-29741
Demonstration of FOG-M (Fibre Optic Guided Missile) capabilities by means of simulation and effects of proprioceptive feedback on the control p 93 N89-17609
- MANUALS**
US Naval Air Force avionics and electrical system corrosion prevention and control maintenance p 47 N88-13334
Engineering data compendium Human perception and performance: User's guide (LC-87-19560) p 215 N88-27749
Engineering data compendium Human perception and performance, volume 1 (LC-87-19560) p 215 N88-28630
Engineering data compendium Human perception and performance, volume 2 (LC-87-19560) p 215 N88-28631
Engineering data compendium Human perception and performance, volume 3 (LC-87-19560) p 215 N88-28632
- MANUFACTURING**
Economic manufacturing and inspection of the electron-beam-welded Tornado wing box p 178 N87-17055
Diffusion bonding in the manufacture of aircraft structure p 178 N87-17057
Superplasticity (AGARD-LS-154) p 111 N87-29641
Superplasticity: An overview p 111 N87-29642
The manufacture of superplastic alloys p 119 N87-29649
Avionics and corrosion p 47 N88-13336
Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20186
A small annular combustor of high power density, wide operating range and low manufacturing cost p 110 N88-29951
On the conditions and limits of user intervention in delivered software manufacturer's viewpoint p 229 N89-18451

MAPPING

- ECOM effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
The digital colour map simplifies ground map operations p 187 N87-24950
Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951
Computer aided sensor placement optimization p 236 N87-24954
Matched index laser anemometry systems for flow studies in complex geometries p 171 N88-23145
CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685
- MAPS**
Development of a ground conductivity map for the area of the Federal Republic of Germany from measured field strength contours p 138 N88-19656
Mono- and bistatic radar coverage diagrams including diffractive wave propagation p 139 N88-19660
- MARAGING STEELS**
Inertia welding of Initalloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program p 177 N87-17067
- MARINE ENVIRONMENTS**
A propagation campaign in a marine environment utilizing a digital system at 36 GHz p 141 N88-19615
Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722
- MARCOV CHAINS**
Criteria for the evaluation of range performances in air/air interception p 133 N87-18760
- MARCOV PROCESSES**
Real-time expert systems: A status report p 175 N88-10817
Markov random fields: A strategy for clutter modelling p 143 N89-17712
On functional approach to random wave propagation p 234 N89-17741
Use of Markov probability and reliability model generation methods in the analysis of reliability of a fault tolerant hardware and software based system with flexible repair policies p 181 N89-18477
- MASS FLOW**
Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- MATCHED FILTERS**
Adaptive antennas p 134 N87-23865
- MATHEMATICAL MODELS**
Interior ballistics of small arms: Particular problems: Part 1: Heat transfer and cook-off phenomenon in a small caliber weapon p 154 N86-29071
Measurement of important ballistic flow properties by spectroscopic techniques p 154 N86-29074
Performance modelling: A tool for lubricant development p 113 N86-29252
Collision probability of cruise missiles flying in formation p 91 N87-16007
Practical Application of Finite Element Analysis to Aircraft Structural Design (AGARD-LS-147) p 182 N87-16376
Interior ballistics of small arms: Particular problems: Part 2: Heat transfer and cook-off phenomenon in a small caliber weapon p 175 N87-17052
Spacecraft qualification using advanced vibration and modal testing techniques p 96 N87-20366
Physics and modelling of three-dimensional boundary layers p 158 N87-22147
Aircraft Dynamic Response to Damaged and Repaired Runways (AGARD-R-738) p 34 N87-23609
An experimental-analytical routine for the dynamic qualification of aircraft operating on rough runway surfaces p 35 N87-23611
Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24472
Secondary electron generation, emission and transport: Effects on spacecraft charging and NASAP models p 98 N87-26950
An intelligent multi-target tracking system p 119 N87-29484
Superplastic sheet forming NATO/AGARD lecture series on superplasticity p 111 N87-29643
Real-time expert systems: A status report p 225 N88-10817
Numerical modeling: integral equation method p 137 N88-11919
Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modelling (AGARD-R-755) p 159 N88-11970
Turbulence modelling through one point closures: applications: enlightening by large eddy simulation p 159 N88-11972
Transition to turbulence via spatio-temporal intermittency p 160 N88-11976
Lattice gas hydrodynamics p 160 N88-11978

SUBJECT INDEX

- Dissecting the visual and auditory pathways by means of the two-input technique p 199 N88-27690
Development and analysis of turbulent non-equilibrium boundary layers p 165 N88-28872
Vortex flows p 165 N88-28875
Environmental effects on transition and boundary layer characteristics p 165 N88-28876
Status review of atmospheric turbulence and aircraft response p 78 N88-29726
Extreme gusts distribution p 190 N88-29734
Advances in Flying Qualities (AGARD-LS-157) p 4 N88-29735
Pilot modeling p 217 N88-29736
Pilot modeling applications p 217 N88-29737
Advances in flying qualities: Concepts and criteria for a mission oriented flying qualities specification p 43 N88-29739
The optimal control pilot model and applications p 217 N88-29741
Prediction of dynamic derivatives p 15 N88-29761
Prediction of base flows p 16 N88-29765
Combustion and fuels in gas turbine engines (AGARD-CP-422) p 104 N88-29910
Flamelet chemistry modeling of soot formation for radiation p 106 N88-29928
Numerical models for analytical predictions of combustor aerothermal performance characteristics p 108 N88-29935
Gas turbine combustor modeling p 108 N88-29936
Three-dimensional gas turbine combustor modeling p 108 N88-29937
Flamelet modeling of turbulent premixed flames p 109 N88-29942
Numerical modelling of premixed flames in gaseous media p 109 N88-29944
Modelling of CO oxidation in dilution jet flows p 109 N88-29947
Influence of the convection on evaporation and combustion of a fuel droplet p 110 N88-29948
Basic structural dynamics p 193 N89-10007
Structural dynamic characteristics of individual blades p 68 N89-10008
Structural dynamic characteristics of bladed assemblies p 68 N89-10009
Simulation validation experience: PATRIOT guidance system p 79 N89-10055
Measures, methods and models employed in evaluating the effectiveness of information centers and services p 213 N89-11627
Aerospace Materials Process Modelling (AGARD-CP-426) p 119 N89-15262
Modelling of deformation and microstructural changes in P/M Rene 95 under isothermal forging conditions p 119 N89-15264
Metallurgical modelling of superalloy disc isothermal forgings p 120 N89-15266
A computer program simulating the hot forging of metal powder p 111 N89-15267
Physical modeling and viscoelasticity studies of the forging process p 120 N89-15269
Computer prediction of internal stresses during heat treatment p 112 N89-15272
Generic casting modeling p 121 N89-15276
An application of computer modeling to isothermal forging p 121 N89-15280
The application of process modelling to heat treatment of superalloys p 112 N89-15281
System-theoretical method for dynamic on-condition monitoring of gas turbines p 54 N89-16812
Accuracy of various wall correction methods for 3D subsonic wind-tunnel testing p 89 N89-16863
Some difficulties in the wind tunnel prediction of modern civil aircraft buffeting: Proposed remedies p 18 N89-16869
Requirements and capabilities in unsteady wind-tunnel testing p 90 N89-16878
Scattering and Propagation in Random Media (AGARD-CP-419) p 122 N89-17706
Multiple scattering from rough surfaces p 143 N89-17710
Regions of validity for some rough surface scattering models p 241 N89-17711
Markov random fields: A strategy for clutter modelling p 143 N89-17712
A scattering model for forested area p 143 N89-17713
Coherent scattering from random media p 174 N89-17714
The enhancement effect of the backscattered intensity in a random medium p 143 N89-17715
Hierarchical scattering models p 144 N89-17717
Generation and properties of self-similar stochastic processes with application to ray propagation in random media p 242 N89-17718
Space-time statistics of waves propagating through a deep phase screen p 144 N89-17719
Observed phase delay through rain at 96 GHz p 144 N89-17724
FM CW radar remote sensing of hydrometeors p 144 N89-17725

SUBJECT INDEX

- Modeling of electromagnetic wave and sea surface interaction p 145 N89-17726
- Rough surface propagation and scatter with applications to ground wave remote sensing in an ocean environment p 145 N89-17727
- Wave-tilt sounding of tropospheric ducts above the sea p 145 N89-17728
- Measurement and modeling of 36 GHz sea reflection phenomena p 145 N89-17730
- Modeling of wideband HF channels p 146 N89-17732
- Measurement, modeling and simulation of LOS microwave channels p 148 N89-17734
- Intensity fluctuations due to moving point sources p 236 N89-17737
- Cross-frequency correlation of intensity fluctuations in the phase-changing media p 146 N89-17738
- On the applicability of continuous scattering methods to discrete scattering problems p 237 N89-17740
- On functional approach to random wave propagation problems p 234 N89-17741
- Numerical simulation of wave propagation in random media p 234 N89-17742
- Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745
- Specular scatter: A new mechanism for ionospheric backscatter p 188 N89-17751
- The pilot is not the limiting factor in high performance aircraft p 218 N89-18012
- A model to predict visual performance at the man-display interface in the cockpit p 218 N89-18013
- The design of helicopter crashworthiness p 23 N89-18446
- Stiffness of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18434
- Crashworthiness of aircraft structures p 24 N89-18436
- Embedding formal methods in SAFRA p 229 N89-18445
- Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead line responses p 151 N89-18590
- Accuracy requirements and benchmark experiments for CFD validation p 186 N89-18612
- MATRIX MATERIALS**
- Unconventional approaches to field repair p 3 N87-20190
- MEASURING INSTRUMENTS**
- Tip clearance measurement in modern compressor components p 179 N87-21199
- Compressor blade clearance measurement using capacitance and phase lock techniques p 133 N87-21200
- Computer aided sensor placement optimization p 236 N87-24954
- Accurate drag estimation using a single component drag model technique p 88 N89-18656
- Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722
- MECHANICAL DRIVES**
- Engine-Airframe Integration for Rotocraft [AGARD-LS-148] p 31 N87-10067
- Analysis of possible transmission arrangements applicable for driving single or twin counterrotating fans on propfan engines p 66 N88-18760
- MECHANICAL PROPERTIES**
- Impact damage to composite structures [AGARD-R-729] p 102 N86-27425
- Direction of R and D and current status of understanding of advanced gear steels p 110 N86-29245
- Rocket altitude test facilities register [AGARD-AG-297] p 91 N87-24489
- The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87-29647
- MELTS (CRYSTAL GROWTH)**
- Study of the electron beam weldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
- MEMORY**
- Pharmacological approaches to performance enhancement in animals p 190 N87-25715
- The evaluation of vigilance in studies of aeronautical pharmacology p 196 N87-25716
- MEMORY (COMPUTERS)**
- The application of multi-dimensional access memories to radar signal processing systems p 129 N87-18740
- MENTAL PERFORMANCE**
- Study of anticipation mechanisms in the aeronautical environment p 207 N87-29505
- Voice command and use change of mental representation during task performance p 135 N87-29523
- The practical assessment of pilot workload [AGARD-AG-282] p 212 N87-30054
- In-flight workload assessment using embedded secondary radio communications tasks p 212 N87-30055
- Pilot subjective evaluation of workload during a flight test certification programme p 212 N87-30057

- The use of subjective workload assessment technique in a complex flight task p 213 N87-30058
- Workload methodology p 213 N87-30059
- Mental workload measurement in operational aircraft systems: Two promising approaches p 207 N87-30060
- Cortical evoked response and eyeblink measures in the workload evaluation of alternative landing system displays p 213 N87-30061
- Flight test evaluation of crew workload Part 1: Aircraft certification for a minimum crew of two pilots p 213 N87-30063
- Assessing workload for minimum crew certification Part 1: Static workload analysis and performance analysis p 214 N87-30067
- Event-related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696
- Pilot modeling applications p 217 N88-29737
- MESSAGE PROCESSING**
- GPS signal structure p 30 N89-10878
- MESSAGES**
- Narrative compression coding for a channel with errors p 150 N89-18584
- METAL COATINGS**
- Diffusion bonding of Al-alloys in the solid state p 177 N87-17058
- The application of the RBD process to the deposition of anti-wear alloys p 177 N87-17069
- Intermodulation interferences in radio systems p 152 N89-18595
- METAL FATIGUE**
- AGARD engine disc cooperative test programme [AGARD-R-766] p 67 N88-28926
- Fatigue and assessment methods of blade vibration p 68 N89-10010
- Life time prediction: Synthesis on ONERA's research in viscoplasticity and continuous damage mechanics applied to engine materials and structures p 68 N89-10011
- Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
- METAL FLUORIDES**
- Preparation and properties of infrared transmitting heavy metal fluoride glass optical fibers p 239 N87-13296
- Fluoride glasses for infrared waveguides p 240 N87-13299
- METAL PLATES**
- Experiments: Test range facilities, part 2 p 138 N88-11921
- Mechanism of single shear fastened joints p 187 N89-17700
- METAL POWDER**
- The application of the RBD process to the deposition of anti-wear alloys p 177 N87-17069
- A computer program simulating the hot forging of metal powder p 111 N89-15267
- METAL PROPELLANTS**
- Performance of rocket motors with metallized propellants [AGARD-AR-230] p 99 N87-18610
- METAL SHEETS**
- Diffusion bonding of Al-alloys in the solid state p 177 N87-17058
- Application of diffusion bonding combined with superplastic forming (SPF/DB) to the fabrication of TAGV metal sheet structures p 177 N87-17060
- Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- Patch repair of corroded aircraft skin areas p 3 N87-20191
- Superplasticity [AGARD-LS-154] p 111 N87-29641
- The manufacture of superplastic alloys p 119 N87-29649
- METAL SHELLS**
- Considerations for designers of cases for small solid propellant rocket motors p 100 N87-28584
- Considerations for designers of cases for small solid propellant rocket motors p 101 N89-18911
- METAL SURFACES**
- On the possibility of a several-kilovolt differential charge in the day sector of a geosynchronous orbit p 99 N87-26953
- METAL-METAL BONDING**
- Advanced Joining of Aerospace Metallic Materials ... conference proceedings p 175 N87-17051
- [AGARD-CP-388] p 175 N87-17052
- Computational weld mechanics p 175 N87-17052
- Study of the electron beam weldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
- Diffusion bonding in the manufacture of aircraft structure p 178 N87-17057
- Diffusion bonding of Al-alloys in the solid state p 177 N87-17058
- Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059

MICROSTRUCTURE

- Application of diffusion bonding combined with superplastic forming (SPF/DB) to the fabrication of TAGV metal sheet structures p 177 N87-17060
- Thermoelectric testing of stratified materials p 179 N87-17064
- Welding of aluminum castings p 177 N87-17068
- The application of the RBD process to the deposition of anti-wear alloys p 177 N87-17069
- Evaluation of DOH and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
- Repair techniques for gas turbine components p 178 N87-17071
- Diffusion bonding of metals p 179 N87-29648
- METALLIC GLASSES**
- Preparation and properties of infrared transmitting heavy metal fluoride glass optical fibers p 239 N87-13296
- METALS**
- Turbine rotor blade measurements using infrared pyrometry p 171 N87-21188
- The application of radiation physics and photogrammetric techniques for the diagnosis and solution of mechanical engineering problems and performance improvements in the development of aero gas turbine engines at Rolls Royce p 178 N87-21188
- Physical modeling and viscoplasticity studies of the forging process p 120 N89-15269
- A numerical model of directional solidification of cast turbine blades p 121 N89-15277
- METEORITES**
- A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747
- METEOROID SHOWERS**
- Meteor burst propagation and system design p 125 N87-18708
- METEOROLOGICAL RADAR**
- A practical example of Moving Target Detection (MTD) processing for an air traffic control radar with weather channel p 133 N87-21890
- METEOROLOGY**
- Refractive index, meteorology and fading in line-of-sight transmission paths p 140 N88-19666
- The correlation between methodological and low-level angle-of-arrival measurements p 140 N88-19668
- Propagation medium adaptive techniques for adverse communications and for remote sensing p 142 N89-11941
- METEOSAT SATELLITE**
- Spacecraft charging: Meteosat experience p 98 N87-26951
- METHODOLOGY**
- Avionics acquisition, trends and future approaches p 244 N88-20184
- MICROBIOLOGY**
- AGARD Corrosion Handbook Volume 1 Corrosion causes and case histories [AGARD-AG-278-VOL-1] p 110 N86-16374
- MICROCOMPUTERS**
- The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19920
- Applications in library management, regulations, loans and stock control p 222 N87-19921
- Microcomputer-based catalog creation software options for small libraries p 223 N87-19922
- Bibliographic networks and microcomputer applications for aerospace and defense scientific and technical information p 248 N87-19923
- Application of LAN's and electronic office techniques in the library p 232 N87-19924
- Microcomputers in information resource sharing Part 1: Data and graphics systems p 223 N87-19925
- Microcomputers in information resource sharing: Two full text systems p 249 N87-19927
- Trends in software and system development p 223 N87-19928
- Computer aided tactics for air combat p 214 N88-19559
- MICROELECTRONICS**
- Microelectronics the next fifteen years p 154 N88-23792
- Advanced avionics architecture pave pillar p 51 N89-10834
- MICROPROCESSORS**
- Procurement and management of microcomputer-based systems p 222 N87-19929
- The flow around a squared obstacle p 156 N87-21185
- Microprocessor applications in airborne flight test instrumentation [AGARD-AG-160-VOL-18] p 45 N87-21920
- MICROSTRUCTURE**
- Cavitation and superplasticity p 111 N87-29645
- The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87-29647
- Modelling of deformation and microstructure changes in P/M Rene 95 under isothermal forging conditions p 119 N89-15264
- Microstructures, flow properties and processing of Ti6242 alloy p 112 N89-15268
- Computer prediction of internal stresses during heat treatment p 112 N89-15272

MICROWAVE ANTENNAS

- Microstructural examination of core programme material p 184 N89-17289
- Suggested plastic replica method p 185 N89-17293
- MICROWAVE ANTENNAS**
- Microwave Antennas for Avionics (AGARD-LS-151) p 134 N87-23859
- Aircraft antennas/conformal antennas p 134 N87-23862
- Millimeter wave antennas for avionics p 134 N87-23864
- Mic technology for phased arrays p 135 N87-23866
- Printed circuit antenna technology p 153 N87-23867
- MICROWAVE ATTENUATION**
- Millimeter wave transmission through man-made obstructions in a battlefield environment p 127 N87-18732
- MICROWAVE CIRCUITS**
- MIMIC T/R modules for the next generation airborne surveillance platforms p 131 N87-18749
- Mic technology for phased arrays p 135 N87-23866
- MICROWAVE LANDING SYSTEMS**
- Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users (AGARD-CP-410) p 25 N87-21881
- Microwave Landing System (MLS) area navigation: computerized centerline experiments and system accuracy analysis in an RF environment p 26 N87-21891
- MLS: its technical features and operational capabilities p 26 N87-21892
- Development of an airborne facility for advanced avionics research p 51 N88-23801
- MICROWAVE SCATTERING**
- A precipitation scatter experiment at 30 GHz p 144 N89-17723
- MICROWAVE TRANSMISSION**
- Performance of RF fiber optic links p 240 N87-13301
- Millimeter wave transmission through man-made obstructions in a battlefield environment p 127 N87-18732
- A review of the role of surface reflection in multipath propagation over terrestrial microwave links p 138 N88-19655
- MICROWAVES**
- Low-THF microwave LDF terrestrial propagation and system design p 125 N87-18709
- 102 laser radar systems for target acquisition and guidance p 173 N89-17606
- Measurement modeling and simulation of LDF microwave channels p 146 N89-17734
- MILITARY AIR FACILITIES**
- V-SW and STOLV fighter design p 36 N87-24452
- MILITARY AIRCRAFT**
- The EH101 integrated project: A naval utility and commercial helicopter system p 38 N88-11672
- MILITARY HELICOPTERS**
- The influence of operational requirements on LHA concept formulation p 37 N88-11665
- Investigation of vertical axis handling qualities for helicopter hover and NOE flight p 75 N88-11653
- MHB simulation facilities applied for rotorcraft research p 84 N88-11655
- Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems p 37 N88-11663
- Helicopter performance management p 38 N88-11666
- Helicopter fire control: Advantages of an automatic target tracker p 84 N88-11667
- Development, testing and evaluation of a night vision goggle compatible BO 105 for night low level operation p 714 N88-11569
- A129 advanced solutions for meeting today's combat helicopter requirement p 38 N88-11669
- Test philosophy of the EH101 integrated avionics p 48 N88-23775
- Operation and performance of an integrated helicopter communication system p 49 N88-23781
- Task path analysis and engine performance monitoring in a Chinook helicopter p 70 N89-16902
- Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034
- MILITARY OPERATIONS**
- Guidance Control and Positioning of Future Precision Guided Stand-Off Weapons Systems (AGARD-CP-388) p 91 N87-16000
- The unmanned aircraft as a force multiplier p 32 N87-16001
- Millimeter wave transmission through man-made obstructions in a battlefield environment p 127 N87-18732
- DoDPA's AirLand Battle Management Program and USAF's Tactical Expert Mission Planner (TEMPAR) p 235 N87-24942
- Machine architectures for artificial intelligence computing p 222 N87-24948

- New technology impacts on future avionics architectures p 45 N87-24949
- Automation strategy and results for an airbase command and control information system (ABCCIS) p 236 N87-24952
- Sedating and nonsedating sleeping aids in air operation p 197 N87-25720
- Engine Condition Monitoring Technology and Experience (AGARD-CP-448) p 52 N89-16780
- A joint study on the compensation of in-field aero engine vibration diagnosis p 71 N89-16808
- MILITARY TECHNOLOGY**
- Tactical fiber optic assembly requirements p 240 N87-13305
- Navy technology requirements for unmanned airborne vehicles p 32 N87-16002
- Lethal air defense suppression technology base definition p 224 N87-18004
- Aircraft Dynamic Response to Damaged and Repaired Runways (AGARD-R-739) p 34 N87-23609
- Current state of an expert system: military information systems p 236 N87-24953
- Configuration design of a helicopter integrated navigation system p 29 N87-29480
- Civil and military applications of GPS p 30 N89-10882
- Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781
- An overview of US Navy engine monitoring system programs and user experience p 69 N89-16782
- Engine usage condition and maintenance management systems in the UK armed forces p 69 N89-16783
- Canadian forces aircraft condition health monitoring: Policy, plans and experience p 69 N89-16784
- Software Engineering and Its Application to Avionics (AGARD-CP-499) p 55 N89-18446
- Measures of merit for advanced military avionics: A user's perspective on software utility p 55 N89-18447
- Automated Ada code generation for military avionics p 230 N89-18459
- Guidelines for evaluation of software engineering tools p 230 N89-18461
- Functional programming languages and modern multiprocessor architectures: The EMSP example p 231 N89-18460
- Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems (AGARD-CP-420) p 147 N89-18565
- MILLIMETER WAVES**
- Multifunction millimeter wave radar for all-weather ground attack aircraft p 126 N87-18725
- MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
- Millimeter wave transmission through man-made obstructions in a battlefield environment p 127 N87-18732
- Dual frequency MM wave radar for antitank helicopter p 132 N87-18736
- Millimeter wave antennas for avionics p 134 N87-23864
- Printed circuit antenna technology p 153 N87-23867
- MM wave propagation and application in military communication systems p 140 N88-19669
- Operation and performance of an integrated helicopter communication system p 49 N88-23781
- Cost effective simulation for millimeter wave guidance systems p 79 N89-10053
- Line of sight millimeter wave propagation characteristics p 144 N89-17720
- Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a tactical radar p 147 N89-17748
- MINICOMPUTERS**
- Military engine condition monitoring systems: The UK experience p 53 N89-16797
- MIRAGE AIRCRAFT**
- Testing complex avionics software: A practical experience p 50 N88-23794
- Development of complex avionics systems: Experience from French military programs p 51 N88-23804
- MISSILE ANTENNAS**
- Basic parameters of antennas for aircraft, satellites and missiles p 134 N87-23860
- Aircraft antennas/conformal antennas/misile antennas p 134 N87-23862
- MISSILE BODIES**
- Numerical simulation of superheated supersonic flows around tactical missile bodies p 19 N89-18632
- MISSILE CONFIGURATIONS**
- A second order Godunov method for tactical missiles p 233 N87-20211
- Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
- Prediction of dynamic derivatives p 15 N88-29761
- Semipirical methods for antiradiating missiles p 16 N88-29763
- Full dynamic heating of missiles p 16 N88-29764
- Next generation missile design p 16 N88-29766

- Development and application of a weapons multiblock suite p 168 N89-18633
- MISSILE CONTROL**
- Fiber optic gyroscopes in inertial navigation p 25 N87-13275
- Single-mode fibers for fiber optic guided missiles: A comparison with graded-index multimode fibers p 240 N87-13303
- Guidance Control and Positioning of Future Precision Guided Stand-Off Weapons Systems (AGARD-CP-388) p 91 N87-16000
- Midcourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-16005
- Angular super-resolution with array antennas p 128 N87-18737
- Application of optimal estimation and control concepts to a bank-to-turn missile p 92 N87-29483
- Advances in Air Launched Weapon Guidance and Control (AGARD-CP-431) p 92 N88-19553
- A prototype fiber optic gyroscope for missile guidance applications p 92 N88-19554
- Effects of closing speed uncertainty on optimal guidance p 92 N88-19556
- Guidance and control of air launched armaments: An aerodynamic perspective p 92 N88-19557
- A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- The use of hardware in the loop techniques in the development of a modern air-to-surface missile system p 93 N88-19562
- Special Course on Missile Aerodynamics (AGARD-R-754) p 14 N88-29755
- Guidance and control systems simulation and validation techniques p 78 N89-10048
- (AGARD-AG-273) p 227 N89-10049
- Comparison of statistical digital simulation methods p 227 N89-10049
- A generic seeker simulation for the evaluation of active RF guidance systems p 227 N89-10051
- Cost effective simulation for millimeter wave guidance systems p 79 N89-10053
- Simulation validation experience: PATRIOT guidance system p 79 N89-10055
- Computing Systems Configuration for Highly Integrated Guidance and Control Systems (AGARD-LS-158) p 4 N89-10831
- Accuracy of lift and center-of-thrust measurements at missile control surfaces p 18 N88-16875
- Guidance and Control of Precision Guided Weapons (AGARD-CP-435) p 93 N89-17605
- ACM Accelerometer for precision guided weapons p 93 N89-17605
- Demonstration of FOGM (Fiber Optic Guided Missile) capabilities by means of simulation and effects of proprioceptive feedback on the control p 93 N89-17605
- Applications of image analysis in precision guided weapons p 93 N89-17605
- Statistical techniques applied to analysis of armament distributions p 234 N89-17611
- Can Ada (MLI, STC) really fly missiles? p 231 N89-18473
- Three dimensional calculations of lateral interference with an external supersonic flow p 13 N89-18611
- MISSILE DESIGN**
- Guidance and control of air launched armaments: An aerodynamic perspective p 92 N88-19557
- Special Course on Missile Aerodynamics (AGARD-R-754) p 14 N88-29755
- Accuracy criteria for evaluating supersonic aerodynamic coefficient predictions p 15 N88-29756
- Survey on nonlinear effects p 15 N88-29757
- Semi-empirical methods for conventional and unconventional missiles p 15 N88-29758
- Space marching Euler solvers p 15 N88-29759
- Numerical methods: Euler time dependent solver p 15 N88-29760
- Semipirical methods for antiradiating missiles p 16 N88-29763
- Aerodynamic heating of missiles p 16 N88-29764
- Next generation missile design p 16 N88-29766
- Guidance and control systems simulation and validation techniques p 78 N89-10048
- (AGARD-AG-273) p 227 N89-10049
- Comparison of statistical digital simulation methods p 227 N89-10049
- A generic seeker simulation for the evaluation of active RF guidance systems p 227 N89-10051
- Heuristic system model validation p 44 N89-10051
- MISSILE TRACKING**
- Midcourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-16005
- MISSILE TRAJECTORIES**
- Strapdown inertial systems applications for tactical missiles (stand off missiles) p 91 N87-16008
- Guided stand off weapons and the evaluation of means for launch calculation: The application of new techniques p 235 N87-16009

SUBJECT INDEX

SUBJECT INDEX

MISSILES

- Lethal air defense suppression technology base definition p 234 N87-16004
- Strapdown inertial systems applications for tactical missiles (stand off missiles) p 31 N87-16106
- Guided stand-off weapons and the evaluation of means for launch calculation The application of new techniques p 235 N87-16009
- Precision delivery of unguided submunitions from a tactical standoff missile p 91 N87-16010
- Jet reaction control system for autonomous precision munition p 92 N87-29482
- A prototype fibre optic gyroscope for missile guidance applications p 92 N88-19554
- A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- Description of a water tank facility Study of a missile at high incidence p 85 N88-23133
- Missiles, fuselages and similar bodies p 85 N88-29858
- Missiles, fuselages and similar bodies p 14 N88-28869
- Air intake aerodynamics p 15 N88-29762
- Prediction of base flows p 16 N88-29765

MISSION PLANNING

- Guidance Control and Positioning of Future Precision Guided Stand-Off Weapons Systems (AGARD-CP-388) p 31 N87-16000
- Tactical mission planning and management p 235 N87-16006
- Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
- DARPA's AirLand Battle Management Program and USAF's Tactical Expert Mission Planner (TEMLAR) p 235 N87-24942
- KRS A knowledge-based mission planner p 235 N87-24943
- Decision aid for threat penetration analysis p 235 N87-24944
- Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951
- Helicopter performance management p 38 N88-11666
- Mission requirements and aircraft sizing p 39 N88-13317
- Fight Mechanics Panel Symposium on Rotocraft Design for Operations Technical evaluation report (AGARD-AR-243) p 42 N88-26362
- Mission planning and proper design The long range connection p 217 N89-18010
- Moding strategy for cockpit data management in modern fighter aircraft p 218 N89-18017

MOBILE COMMUNICATION SYSTEMS

- The design of static and mobile HF communication systems p 122 N86-27567
- Developments in HF equipment and systems mobile and portable terminals p 123 N86-27573
- The selection of future civil air navigation systems p 25 N87-21882
- Inherent filter effects in the new rapid acquisition method for frequency hopped push-to-talk spread spectrum systems A filter fighting scheme p 151 N88-18589
- Coding of radio terminals p 152 N89-18594

MODAL RESPONSE

- Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363

MODELS

- Vortex dynamics survey of the activity in Italy p 157 N87-22141
- Modelling of time-variant flows using vortex dynamics activities in the Netherlands p 157 N87-22142
- Flow models using vortex dynamics Work in the United Kingdom p 157 N87-22143
- Reliability modeling of fault-tolerant computer based systems p 73 N88-10801
- Development savings through parametric modeling of program costs p 243 N88-20175
- Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 164 N88-23155
- The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179

MODEMS

- Experimental robust HF modems incorporating adaptive modulation p 150 N89-18571

MODULATION

- Modern HF communications modulation and coding p 123 N88-27571
- Signal noise interferer combiner unit programmable (SINICUP) p 149 N89-18575

MODULES

- Systems for the 21st century p 47 N88-23769
- Design for interoperability interchangeability p 50 N88-23789

MOIRE INTERFEROMETRY

- Interferometric measurement of strains and displacements in engine components p 178 N87-21196

MOLECULAR BEAM EPITAXY

- Microelectronics the next fifteen years p 154 N88-23792

MOLECULAR WEIGHT

- Field artillery gun performances related to triple-base powder quality p 116 N86-29067

MOMENT DISTRIBUTION

- Experiments on the C-VLR-F4 wing body configuration in several European windtunnels p 87 N89-16848

MONKEYS

- Introduction of a new stimulant CRJ 40476 p 196 N87-25714
- Evoked potential analysis of impact acceleration experiments p 201 N88-27708

MONOCHROMATIC RADIATION

- Numerical simulation of wave propagation in random media p 234 N89-17742

MONOPULSE RADAR

- Angular super-resolution with array antennas Application to seeker heads p 128 N87-18737
- Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
- Monopulse secondary radar Practical realization and achievement Mode S The radar of tomorrow p 133 N87-21889

MONTE CARLO METHOD

- Markov random fields A strategy for cluster modelling p 143 N89-17712
- Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745
- Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a bistatic radar p 147 N89-17748

MOTION PERCEPTION

- Simulator motion characteristics and perceptual fidelity p 80 N87-23639
- Designing for design effectiveness of complex avionics systems p 50 N88-23788
- Motion cues in every day life p 205 N89-12180
- vection and the spatial disposition of competing moving displays p 206 N89-12186

MOTION SICKNESS

- Motion Cues in Flight Simulation and Simulator Induced Sickness (AGARD-CP-433) p 203 N89-12171
- Etiological significance of equipment features and pilot history in simulator sickness p 203 N89-12172
- Technology involved in the simulation of motion cues The current trend p 204 N89-12173
- Etiological factors in simulator sickness p 204 N89-12174
- Horizontal study of the incidence of simulator induced sickness among French Air Force pilots p 204 N89-12175
- Simulator induced sickness among Hercules crew p 204 N89-12176
- Simulator sickness in the Royal Air Force A survey p 204 N89-12177
- Simulator sickness in US Army and Navy fixed and rotary-wing flight simulators p 205 N89-12178
- Manifestation of visual/vestibular disruption in simulators. Severity and empirical measurement of symptomatology p 205 N89-12181
- An investigation of simulator sickness and an electroencephalographic study p 206 N89-12183
- Cues for training vertigo, providing suggestions for the management of simulator sickness p 206 N89-12187

MOTION SIMULATION

- Simulation of aircraft behaviour on and close to the ground Summary of AGARDograph AG-289 p 80 N87-23640
- Unusual airborne simulator applications p 82 N87-23656
- Collected flight and simulation comparisons and considerations p 83 N87-23660
- Motion evoked vestibular potentials p 202 N88-27712
- The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179
- Modeling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N89-12182

MOTION SIMULATORS

- Fight Simulation (AGARD-CP-408) p 80 N87-23633
- Visual and motion cueing in helicopter simulation p 80 N87-23634
- The application of optimal control techniques to the UTIAS research simulator p 80 N87-23637
- Progress in the implementation of AGARD AR 144 in motion system assessment and monitoring p 81 N87-23642
- Piloted simulation in the development of the XV 15 tilt rotor research aircraft p 81 N87-23646

MOVING TARGET INDICATORS

- A practical example of Moving Target Detection (MTD) processing for an air traffic control radar with weather channel p 133 N87-21890

NARROWBAND

MRCA AIRCRAFT

- Economical manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055

MULTIBEAM ANTENNAS

- Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863

MULTIPATH TRANSMISSION

- Propagation 2. Problems in HF propagation p 123 N86-27574
- Single-mode fibers for fiberoptic-guided missiles A companion with graded-index multimode fibers p 240 N87-13303
- Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control (AGARD-CP-407) p 138 N88-19653
- An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave lines p 138 N88-19654
- A review of the role of surface reflection in multipath propagation over terrestrial microwave lines p 138 N88-19655
- Identification of microwave line-of-sight multipath components p 139 N88-19665
- Radio and radar holes and multipath zones The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667
- The 6 GHz propagation measurements over a 51 km path in the UK p 141 N88-19673
- 1 band multipath propagation over the sea surface p 145 N89-17729
- Propagation and performance measurements over a digital troposcatter communications link p 146 N89-17733
- Measurement, modeling and simulation of LOS microwave channels p 146 N89-17734
- Impulse response measurements and characterization of wideband VHF radio links p 146 N89-17736

MULTIPLE ACCESS

- Wavelength division multiplexing at 1.5 microns for high capacity optical transmission p 238 N87-13284
- The application of multi-dimensional access memories to radar signal processing systems p 129 N87-18740

MULTIPLE BEAM INTERVAL SCANNERS

- Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863

MULTIPLEXING

- A129 advanced solutions for meeting today's combat helicopter requirement p 38 N88-11669

MULTIPROCESSING (COMPUTERS)

- Flexible and high quality software on a multiprocessor computer system controlling a research flight simulator p 81 N87-23643
- Functional programming languages and modern multiprocessor architectures The EMSP example p 231 N89-18480

MULTISPECTRAL LINEAR ARRAYS

- Progress with multiplexed sensor arrays based on reflection at spliced joints between sensors p 237 N87-13278

MULTISTATIC RADAR

- Multi-mode multistatics for passive/active airborne surveillance p 126 N87-18726
- Millimeter wave transmission through man made obstructions in a battlefield environment p 127 N87-18732
- Multi-Bi-static high frequency (PO/GO) radar target imaging of airborne scatterers p 130 N87-18744
- Simulation of multistatic and backscattering cross sections for airborne radar p 132 N87-18757
- Mono- and bistatic radar coverage diagrams including diffractive wave propagation p 139 N88-19660
- Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a bistatic radar p 147 N89-17748

MUSCULAR FATIGUE

- Muscle fatigue in static and vibrational seating environments p 210 N87-13954

MUSCULOSKELETAL SYSTEM

- Musculo-skeletal stresses among workers exposed to low-intensity work load of long duration p 191 N87-13940

N

NACELLES

- Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows p 170 N89-18661

NAP-OF-THE-EARTH NAVIGATION

- Investigation of vertical axis handling qualities for helicopter hover and NUT flight p 75 N88-11653
- Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654
- Advanced flight control system for nap-of-the-earth flight p 220 N89-18030

NARROWBAND

- Effects of noise and interference on system performance p 149 N89-18576

NATIONAL AIRSPACE SYSTEM

NATIONAL AIRSPACE SYSTEM

Advanced ATC An aircraft perspective p 27 N87-21893

NAVIER-STOKES EQUATION

Zonal solutions for airfoils using Euler boundary-layer and Navier-Stokes equations p 6 N87-20219
Using the boundary-layer equations in three-dimensional viscous flow simulation p 155 N87-20222
Application of the Navier-Stokes equations to solve aerodynamic problems p 7 N87-20225
Calculations for a generic fighter at supersonic high-lift conditions p 33 N87-20226
High speed viscous flow calculations about complex configurations p 7 N87-20227
Transonic Navier-Stokes wing solution using a zonal approach Part 1 Solution methodology and code validation p 7 N87-20228
Transonic Navier-Stokes wing solutions using a zonal approach Part 2 High angle-of-attack simulation p 7 N87-20229

Numerical simulation of the flow field around a complete aircraft p 8 N87-20231
A numerical study of unsteady flow effects in a supersonic compressor cascade p 59 N87-21944
Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946

Some turbomachinery blade passage analysis methods Retrospect and prospect p 59 N87-21947
Viscous analyses for flow through subsonic and supersonic intakes p 61 N87-24469
Numerical analysis of flow through scramjet engine inlets p 11 N88-13233
Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234

Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 11 N88-13235
Numerical experiments with hypersonic flows beneath a cone-delta wing combination p 12 N88-13238

Lessons learned in the mesh generation for PN/S calculations p 226 N88-29314
Mesh generation for industrial application of Euler and Navier-Stokes solvers p 227 N88-29328
Experience with three dimensional composite grids p 227 N88-29324

Aerodynamic heating of missiles p 16 N88-29764
On the application of finite-difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N88-29938
Modeling the stability of a turbulent premixed flame downstream from a step by a Lagrangian method p 109 N88-29943

Accuracy problems in wind tunnels during transport aircraft development p 30 N89-16877
Validation of Computational Fluid Dynamics Volume 1 Symposium papers and round table discussion [AGARD CP-437-VOL-1] p 165 N89-18610
Parametric study of grid size, time step and turbulence modeling on Navier-Stokes computations over airfoils p 118 N89-18615

Numerical solution of compressible Navier-Stokes flows p 166 N89-18618
The DFVLR FS wing experiment Towards the validation of the numerical simulation of transonic viscous wing flow p 19 N89-18623
Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems p 167 N89-18625

Solution on unstructured grids for the Euler and Navier-Stokes equations p 168 N89-18636
Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640
Efforts toward the validation of a computational fluid dynamics code for analysis of internal aerodynamics p 169 N89-18643

A comparative study and validation of upwind and central difference Navier-Stokes codes for high-speed flows p 169 N89-18647
Finite difference methods in recirculating flows p 169 N89-18651

Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653
Experiments and code validation for junction flows p 21 N89-18658

Large scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660

NAVIGATION AIDS

Guidance Control and Positioning of Future Precision Guided Stand-Off Weapons Systems [AGARD CP-388] p 91 N87-16000
Midcourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-16005

GPS Overview and present status p 26 N87-21884
Inertial-GPS A marriage of reason, an analysis p 26 N87-21885
An integrated aircraft navigation and display system utilizing an on board composite data base p 236 N87-24955

Configuration design of a helicopter integrated navigation system p 29 N87-29480

Navigation systems for the new generation of combat and transport helicopters and associated flight tests p 29 N87-29481

NAVIGATION SATELLITES

Air navigation services and aircraft around the year 2000 p 25 N87-21883
The NAVSTAR GPS System [AGARD-LS-161] p 29 N89-10874

The GPS overview and navigation system concept p 29 N89-10875

NAVSTAR SATELLITES

GPS Overview and present status p 26 N87-21884

NAVY

Avionic corrosion p 46 N88-13332
A review of the NATO special group of experts on Naval hydromechanics and related problems p 164 N88-23157

NECK (ANATOMY)

Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 191 N87-13940

NERVES

Relation between VEP and visual function in lesions of the optic nerve and visual pathway p 203 N88-27718

NETWORK CONTROL

Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18578

NEUROLOGY

Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 196 N88-27687

NEURONS

Biochemical Enhancement of Performance [AGARD-CP-415] p 195 N87-25709
Use of tyrosine and other nutrients to enhance and sustain performance p 195 N87-25711

NEUROPHYSIOLOGY

Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine [AGARD-CP-432] p 190 N88-27683
Fourth generation neurocognitive pattern analysis system p 198 N88-27686

Neurophysiological patterns of operational fatigue Preliminary results p 201 N88-27703
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706

The neuroelectric selection of Naval aviation personnel An evaluation p 208 N88-27707
Electroencephalographic correlates of pilot performance: Simulation and in-flight studies p 208 N88-27711

Spontaneous cerebral electrical activity during prolonged hypoglycemia A quantitative study in humans p 203 N88-27717
Relation between VEP and visual function in lesions of the optic nerve and visual pathway p 203 N88-27718

Advances in workload measurement for cockpit design evaluation p 218 N89-18016

NICKEL STEELS

Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program p 177 N87-17067

NIGHT VISION

Development, testing and evaluation of a night vision goggle compatible BO-105 for night low level operation p 214 N88-11568
Night lighting and night vision goggle compatibility p 216 N88-29297

NITROAMINES

Smokeless propellants of improved performance p 113 N86-26459

NOISE

Nonlinearity and single shot noise problems in CARS spectroscopy p 104 N87-21174

NOISE POLLUTION

Voice interactive systems in severe noise conditions p 136 N87-29528

NOISE REDUCTION

A study of methods of phase noise reduction of semiconductor lasers for sensor applications p 172 N87-13286

Voice interactive systems in severe noise conditions Effect of audio bandwidth and bit error rate on PCM ADPCM and LPC speech coding algorithm intelligibility p 136 N87-29529

Radio noise Characteristics and their system performance implications p 148 N89-18566
New method for suppression of goniometer of errors by radio noise from overhead power lines p 151 N89-18585

Inherent jitter effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems A jitter-lighting scheme p 151 N89-18589

NOISE SPECTRA

Closed loop fiber optic gyro p 237 N87-13277
Effects of optical feedback on the performance of high data rate single-mode fiber systems p 218 N87-13288

NONDESTRUCTIVE TESTS

Ultrasonic testing techniques for diffusion-bonded titanium components p 179 N87-17061
NDT of electron beam welded joints (micro-focus and real time X-ray) p 179 N87-17063
Thermoelastic testing of stratified materials p 179 N87-17064

AGARD/SMP Review: Damage Tolerance for Engine Structures 1 Non-Destructive Evaluation [AGARD-R-768] p 180 N89-17253

The impact of engineering assumptions on NDE requirements p 180 N89-17254
Review of existing NDT technologies and their capabilities p 180 N89-17255
Relationships of nondestructive evaluation needs and component design p 180 N89-17256

Importance of sensitivity and reliability of NDT techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
Short term developments in non-destructive evaluation applicable to turbine engine parts p 181 N89-17258

Long term possibilities for nondestructive evaluation for US Navy aircraft p 181 N89-17259
Need for common AGARD approach and actions p 181 N89-17260

State-of-the-art in non-destructive evaluation of turbine engine parts p 181 N89-17261

Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading p 187 N89-17704

NON-EQUILIBRIUM FLOW

Development and analysis of turbulent non-equilibrium boundary layers p 165 N88-28872

NONLINEAR OPTICS

Bistability in nonlinear waveguides p 124 N87-13291

Integrated optics optical limiters p 239 N87-13292

NONLINEAR SYSTEMS

Utilization of Euler codes in nonlinear aerodynamics p 6 N87-20215

NONLINEARITY

Nonlinearity and single shot noise problems in CARS spectroscopy p 104 N87-21174
Survey on nonlinear effects p 15 N88-29757
Non-linear effects on the atmospheric transmission of high-frequency electromagnetic beams p 147 N89-17746

NONUNIFORM FLOW

Gaseous premixed flames in non-uniform flows p 109 N88-29945

NORTH AMERICA

A survey of existing hypersonic ground test facilities North America p 84 N88-13220

NORTH ATLANTIC TREATY ORGANIZATION (NATO)

Special Course on Fundamentals of Fighter Aircraft Design [AGARD-R-740] p 39 N88-13315

A review of the NATO special group of experts on Naval hydromechanics and related problems p 164 N88-23157

NOSE CONES

A spatial marching technique for the inviscid blunt body problem p 12 N88-13239

NOTCH SENSITIVITY

Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687

NOTCH STRENGTH

Behaviour of mechanically fastened joints in advanced composites p 103 N89-17705

NOTCH TESTS

Approximate stress-intensity factors for a surface crack and through crack at a semi-circular notch p 185 N89-17294

NOZZLE DESIGN

Propulsion system technologies for thrust vectoring p 60 N87-22670

Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 100 N87-28590
Design and sizing of solid rocket nozzles p 100 N87-28591

Impact of nozzle design constraints on test section flow quality p 88 N89-16860
Engine simulator tests Comparison of calibration and wind tunnel results p 89 N89-16871

Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 101 N89-16907

Design and analysis of solid rocket motor nozzle p 101 N89-16908

NOZZLE FLOW

Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
Experimental evaluation of a translating nozzle sidewall radial turbine p 54 N88-17556

Nozzle flow influences on fuel patternation p 105 N88-29916

Impact of nozzle design constraints on test section flow quality p 88 N89-16860

Investigation of the accuracy of finite volume methods for 2 and 3-dimensional flows p 170 N89-18661

SUBJECT INDEX

NOZZLE GEOMETRY

- Combustion related shear-flow dynamics in elliptic supersonic jets p 11 N88-13232
- Experimental evaluation of a translating nozzle sidewall radial turbine p 84 N88-17656
- Impact of nozzle design constraints on test section flow quality p 88 N89-16860

NOZZLE THRUST COEFFICIENTS

- Design and analysis of solid rocket motor nozzle p 101 N89-16908

NOZZLE WALLS

- Experimental evaluation of a translating nozzle sidewall radial turbine p 84 N88-17656

NUCLEAR EXPLOSION EFFECT

- Interaction between EMP (Electromagnetic Pulse), lightning and static electricity with aircraft and missile avionics systems (AGARD-LS-144) p 22 N86-30708

- Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead line responses p 151 N89-16590

NUCLEAR RADIATION

- Fiber optics: A survivable and cost-effective transmission medium for terrestrial networks p 240 N87-13302

NUMERICAL ANALYSIS

- Experimental observations on an unsteady, normal shock/boundary layer interaction p 156 N87-21933
- Measured and predicted loss generation in transonic turbine blading p 58 N87-21934
- Numerical viscous-inviscid interaction method for external separated flows and shock wave-boundary layer interaction p 156 N87-21939
- Vortex dynamics: A report on work in Germany p 157 N87-22139
- Three-dimensional boundary layers: Introduction to calculation methods p 158 N87-22145
- An approach to practical aerodynamic calculations p 158 N87-22151
- Numerical analysis of flow through scramjet engine inlets p 11 N88-13233
- Space marching Euler solvers p 15 N88-29759
- Analysis of the flow through double swirl airblast atomizers p 110 N88-29949
- Accuracy of lift and center-of-thrust measurements at missile control surfaces p 18 N89-16875
- Numerical accuracy assessment p 156 N89-16813
- Accuracy and efficiency of a time marching approach for combustor modeling p 170 N89-16859
- Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-16860

NUMERICAL CONTROL

- Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948
- Automation strategy and results for an airborne command and control information system (ABCCIS) p 236 N87-24952

NUMERICAL DATA BASES

- Microcomputers in information resource sharing. Part 1 Data and graphics systems p 223 N87-19925

NUMERICAL INTEGRATION

- VHF/UHF propagation by diffraction: Calculation by numerical integration p 139 N88-19659

NUTS (FASTENERS)

- Improvement of specific fastening elements for assembling composite structures p 186 N89-17694

NYSTAGMUS

- The effect of acetyl-di-leucine on the vestibulo-ocular reflex in humans p 196 N87-25717
- An investigation of simulator sickness and an electronystagmographic study p 206 N89-12183

O

OBJECT PROGRAMS

- Role and design of a software engineering data base in the context of an advanced support environment p 231 N89-18485

OBSERVABILITY (SYSTEMS)

- Optimal detection of sensor failures in flight control systems using deterministic observers p 74 N88-10803

OBSTACLE AVOIDANCE

- Dual frequency MM-wave radar for antitank helicopter p 132 N87-18756

OCEAN MODELS

- Rough surface propagation and scatter with applications to ground wave remote sensing in an ocean environment p 145 N89-17727

OCEAN SURFACE

- Modeling of electromagnetic wave and sea surface interaction p 145 N89-17726
- Rough surface propagation and scatter with applications to ground wave remote sensing in an ocean environment p 145 N89-17727
- Wave tilt sounding of tropospheric ducts above the sea p 145 N89-17728
- I-band multipath propagation over the sea surface p 145 N89-17729
- Measurement and modeling of 36 GHz sea reflection phenomena p 145 N89-17730

OCEANS

- Review of recent developments in evaporation ducting assessment p 139 N88-19864

OILS

- Multi-axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373

ON-LINE SYSTEMS

- Information services: Pros and cons p 247 N86-28797
- Measuring the value of information and information systems, services and products p 247 N86-28799
- The ideal information system? What does the user really want? p 248 N86-28801
- Information resources management in the R and D environment p 248 N86-28803
- Improved flight test productivity using advanced on line data systems p 245 N88-20193
- On-line spectrum loading accuracy verification p 184 N89-17292

ONBOARD EQUIPMENT

- Systems for the 21st century p 47 N88-23769
- Flight test equipment for the on-board measurement of wind turbulence p 51 N88-29719

OPERATING SYSTEMS (COMPUTERS)

- Conversion to Ada: Does it really make sense? p 229 N89-18453
- Debugging distributed Ada avionics software p 229 N89-18458
- Software readiness planning p 230 N89-18466

OPERATIONAL PROBLEMS

- Modeling strategy for cockpit data management in modern fighter aircraft p 218 N89-18017

OPERATIONS RESEARCH

- Cost analysis of aircraft projects p 3 N87-22684

OPERATOR PERFORMANCE

- Biochemical Enhancement of Performance (AGARD-CP-415) p 195 N87-25709
- Enhancement of performance: Operational considerations p 195 N87-25710
- FB-111A aircrew use of temazepam during surge operations p 197 N87-25721
- Closing the man-machine loop: On the use of physiological measures to affect computer-controlled devices p 211 N87-29507
- Stars, polygons and clusters p 250 N87-29511
- Perceptual processing capabilities relevant to design of visual displays for information management in advanced airborne weapon systems p 250 N87-29513
- In-flight workload assessment using embedded secondary radio communications tasks p 212 N87-30055
- Workload methodology p 213 N87-30059
- Neurophysiological patterns of operational fatigue: Preliminary results p 201 N88-27703
- Display system image quality p 216 N88-29298
- Mission planning and proper design: The long range connection p 217 N88-18010
- Matching crew system specifications to human performance capabilities p 220 N89-18031

OPERATORS (MATHEMATICS)

- Differential operation of NAVSTAR GPS for enhanced accuracy p 30 N89-10883

OPERATORS (PERSONNEL)

- Epidemiology of the driver's back p 191 N87-13933
- Relationships between whole-body vibration and disorders of the backbone diagnosed on operators of earth-moving machinery p 208 N87-13934
- The workplace vibration environment of off-road machines p 209 N87-13935
- Back pain and discomfort resulting from exposure to vibration in tracked armoured vehicles p 209 N87-13936

OPTICAL BISTABILITY

- Bistability in nonlinear waveguides p 124 N87-13291

OPTICAL COMMUNICATION

- Single crystal fibers p 239 N87-13298

OPTICAL COMPUTERS

- Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739

OPTICAL COUPLING

- Performance of integrated optical frequency shifters digitized to high birefringence fibres using ion-milled grooves p 238 N87-13289
- Integrated optics optical limiters p 239 N87-13292

OPTICAL DISKS

- New technologies for improved information systems and services p 248 N86-28802

OPTICAL EQUIPMENT

- Guided Optical Structures in the Military Environment (AGARD-CP-383) p 237 N87-13273

OPTICAL FIBERS

- Preparation and properties of infrared transmitting heavy metal fluoride glass optical fibers p 239 N87-13296

OPTICAL FIBERS

- Preparation and properties of infrared transmitting heavy metal fluoride glass optical fibers p 239 N87-13296

OPTICAL FIBERS

- Fibre optic gyroscopes in inertial navigation p 25 N87-13275

OPTICAL FIBERS

- Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276

OPTICAL FIBERS

- Closed loop fiber optic gyro p 237 N87-13277

- Progress in optical fiber gyroscopes using integrated optics p 238 N87-13263

OPTICAL HETERODYNING

- Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13267

- Beam-modulation methods in quantitative and flow-visualization holographic interferometry p 119 N87-21204

OPTICAL PATHS

- Uniform geometrical theory of diffraction p 136 N88-11911

OPTICAL POLARIZATION

- Nonlinear ellipse rotation in a low-birefringence optical fiber p 239 N87-13282

OPTICAL PROPERTIES

- Vision through aircraft transparencies p 216 N88-26294

OPTICAL RADAR

- Considerations in utilizing IR signatures p 241 N87-18747

- Guidance and Control of Precision Guided Weapons (AGARD-CP-435) p 93 N89-17605

OPTICAL SCANNERS

- A real time vision system for robotic arc welding p 177 N87-10666

OPTICAL SWITCHING

- Optoelectronic broadband switching for communications and signal processing p 124 N87-13294

OPTICAL WAVEGUIDES

- Guided Optical Structures in the Military Environment (AGARD-CP-383) p 237 N87-13273

- Nonlinear planar guided wave interactions and devices p 239 N87-13290

- Bistability in nonlinear waveguides p 124 N87-13291

- Integrated optics optical limiters p 239 N87-13292

- PIN-FET preamplifier for high-speed optical transmission systems p 239 N87-13293

- Glass fibres for transmission in the 8-12 micrometers waveband p 239 N87-13297

- Fluoride glasses for infrared waveguides p 240 N87-13299

- Wide bandwidth, long distance fibre-optic communication systems p 240 N87-13300

- Tactical fiber optic assembly requirements p 240 N87-13305

- A hybrid transmission scheme on single mode fibers for tactical communications p 241 N87-13306

OPTICS

- Flow velocity measurements by image processing of optically modulated traces p 163 N88-23147

OPTIMAL CONTROL

- Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358
- The application of optimal control techniques to the UTIAS research simulator p 80 N87-29637
- Application of optimal estimation and control concepts to a bank-to-turn missile p 92 N87-29483
- Effects of closing speed uncertainty on optimal guidance p 92 N88-19556
- The optimal control pilot model and applications p 217 N88-29741

OPTIMIZATION

- Gust load prediction and alleviation on a lighter aircraft (AGARD-R-728) p 72 N86-30741

- Form factor optimization for HFR emission p 130 N87-18742

- Design optimization for a family of multi-role combat aircraft p 36 N87-24450

- Design optimization of fighter aircraft p 36 N87-24451

- Computer aided sensor placement optimization p 236 N87-24254

- Techniques for performance optimisation in cruise and manoeuvrability p 39 N88-13321

- Aeroelasticity and optimization in lighter aircraft design p 40 N88-13324

- Optimization of military compressors for weight and volume p 63 N88-17649

- Specification of an engine and its components starting from a consideration of aircraft missions p 63 N88-17651

- Optimizing powerplant design and development cycles p 254 N88-20183

ORBIT SPECTRUM UTILIZATION

- Problems of spectrum management and system compatibility p 125 N87-18711

ORGANIZATIONS

- Technical change needs organizational change p 246 N88-30466

ORTHOGONALITY

- Specular scatter: A new mechanism for ionospheric backscatter p 189 N89-17751

OSCILLATING FLOW

- Oscillating flow over bluff bodies in a U-shaped water tunnel p 161 N88-23131

OSCILLATIONS

- Computer simulation studies on human control reliability in manual aircraft control: The origin of PIO p 211 N87-23644

OSCILLATORS

- Prediction of dynamic derivatives p 15 N88-29761
- OSCILLATORS**
- Dynamics and routes to chaos from quasiperiodicity p 160 N88-11974

OVER-THE-HORIZON RADAR

- Media Effects on Electronic Systems in the High Latitude Region [AGARD-LS-162] p 141 N88-11931

OXIDATION

- Modeling of CO oxidation in dilution jet flows p 109 N88-29947
- OXIDES**
- Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959

P

PACKET SWITCHING

- The design and performance of an adaptive packet-switched HF data terminal p 149 N88-18577

PAIN

- Backache and Back Discomfort --- conference [AGARD-CP-378] p 190 N87-13932
- Epidemiology of the driver's back p 191 N87-13933
- Relationships between whole-body vibration and disorders of the backbone diagnosed on operators of earth-moving machinery p 208 N87-13934
- Back pain and discomfort resulting from exposure to vibration in tracked armoured vehicles p 209 N87-13936
- Low back pain and narrowed disc spaces in fighter pilots p 191 N87-13937
- Relationship between backache and flying duty in jet- and prop-pilots demonstrated by a flying wing p 191 N87-13938
- Back discomfort in US Army helicopter aircrew members p 209 N87-13939
- Evaluation and prediction of back pain during military field service p 192 N87-13950
- Individual predictability of back trouble in 18-year old men: A prospective study during military service p 192 N87-13951
- A review of the NDMC back care education programme p 192 N87-13952
- Postural fatigue and the backache of helicopter pilots [OCIEH-85-R-30] p 210 N87-13953
- Muscle fatigue in static and vibrational seating environments p 210 N87-13954
- Lower back pain in helicopter pilots: Etiopathological factors p 210 N87-13955
- Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956
- Backache in aircrew p 193 N87-13958
- Back pain in parallel aircrew p 193 N87-13959

PANEL METHOD (FLUID DYNAMICS)

- An assessment of the use of low-order panel methods for the calculation of supersonic flows p 224 N87-20204

PANELS

- Composite repair of cocured J-stiffened panels. Design and test verification p 1 N87-20181
- Composite repair of cracked aluminum structure p 2 N87-20183
- Fibre composite repair of cracked metallic aircraft components: Practical and basic aspects p 2 N87-20187

PANORAMIC SCANNING

- Design considerations for Virtual Panoramic Display (VPD) helmet systems p 219 N88-18024

PARABOLIC ANTENNAS

- Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863

PARABOLIC DIFFERENTIAL EQUATIONS

- Lessons learned in the mesh generation for PN/S calculations p 226 N88-29314

PARACHUTE DESCENT

- The aerodynamics of parachutes [AGARD-AG-295] p 9 N87-26881

PARACHUTES

- The aerodynamics of parachutes [AGARD-AG-295] p 9 N87-26881
- Developmental air-drop testing techniques and devices [AGARD-AG-300-VOL-6] p 38 N88-12481
- Measurements of aerodynamic forces on unsteady moving bluff parachute canopies p 162 N88-23137

PARALLEL COMPUTERS

- Computational fluid dynamics and supercomputers, chapter 6 p 165 N89-11400

PARALLEL PLATES

- Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17896

PARALLEL PROCESSING (COMPUTERS)

- High speed parallel processing networks for advanced architectures p 223 N89-10817
- Multi-level parallel processing for very high performance real-time database management p 254 N89-18478

PARAMETER IDENTIFICATION

- Identification of dynamic systems - applications to aircraft. Part 1: The output error approach [AGARD-AG-300-VOL-3-PT-1] p 33 N87-21913
- Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
- Modeling XV-15 tilt-rotor aircraft dynamics by frequency and time-domain identification techniques p 37 N88-11657

PARAMETERIZATION

- Parameterization in scattering models p 137 N88-11916
- Parametric study of choke flutter with a linear theory p 66 N88-17673
- Development savings through parametric modeling of program costs p 243 N88-20175
- Picking winners: Parametric cost estimating and project management p 243 N88-20176
- Boundary layer manipulation p 165 N88-28877

PARTIAL DIFFERENTIAL EQUATIONS

- Determination of fractal dimension, connection of space and temporal chaos and application to experimental results p 160 N88-11977

PARTICLE PRECIPITATION

- Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations p 188 N87-26943
- Satellite in-situ probing p 142 N89-11939

PARTICLE SIZE DISTRIBUTION

- Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-26477
- Simulation study of spraying, streaming and vaporization phenomena associated with fuel injection p 104 N88-29914
- Turbulence effects on the droplet distribution behind airblast atomizers p 104 N88-29915
- Multiple scattering effects in drop sizing of dense fuel sprays by laser diffraction p 105 N88-29917
- Influence of operating conditions on the atomization and distribution of fuel by air blast atomizers p 105 N88-29918
- Particle size measurements in cooling combustion systems p 107 N88-29931

PARTICLE TRACKS

- Flow velocity measurements by image processing of optically modulated traces p 163 N88-23147

PARTICLES

- Laser-2 focus velocimetry p 172 N87-21177
- Particle imaging velocimetry in a low turbulent wind tunnel and other flow facilities p 79 N87-21205
- Multiple scattering effects of random distributions of irregularly shaped particles on infrared and optical propagation p 242 N89-17716
- FM-CW radar remote sensing of hydrometeors p 144 N89-17725

PARTICULATE SAMPLING

- Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-26477

PASSIVITY

- AGARD Corrosion Handbook. Volume 1: Corrosion, causes and case histories [AGARD-AG-278-VOL-1] p 110 N86-16374

PATHOGENESIS

- Backache and Back Discomfort --- conference [AGARD-CP-378] p 190 N87-13932
- Epidemiology of the driver's back p 191 N87-13933
- Relationship between backache and flying duty in jet- and prop-pilots demonstrated by a flying wing p 191 N87-13938
- Back discomfort in US Army helicopter aircrew members p 209 N87-13939
- In-vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
- Lower back pain in helicopter pilots: Etiopathological factors p 210 N87-13955

PATHOLOGY

- Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 191 N87-13940
- Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949
- Squad instrumentation for neuromagnetic study of complex brain activity p 199 N88-27691
- An investigation of simulator sickness and an electronystagmographic study p 206 N89-12183

PATTERN RECOGNITION

- Fourth generation neurocognitive pattern analysis system p 196 N86-27886

PAYLOADS

- Modal testing of the Olympus development model stowed solar array p 96 N87-20366

PEPTIDES

- Multivariate and psycho-physiological functions of DSP p 196 N87-25713

PERCEPTION

- Perceptual organisation and information management p 251 N87-29514

SUBJECT INDEX

PERFORMANCE PREDICTION

- Performance of rocket motors with metalized propellants [AGARD-AR-230] p 99 N87-18610
- The prediction of transonic loading on advancing helicopter rotors p 5 N87-20208
- Prediction of wing-body-store aerodynamics using a small perturbation method and a grid embedding technique p 5 N87-20207
- A shock loss model for supercritical subsonic flows in transonic small flow compressors p 60 N87-21950
- Performance improvement of airborne weapon systems methods, scope and limitations p 33 N87-22665
- Perceptual processing capabilities relevant to design of visual displays for information management in advanced airborne weapon systems p 250 N87-29513
- The off-design performance of hypersonic waveguides p 38 N88-13244
- Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245
- Dynamic stability of hypersonic conical lifting vehicles according to Newton-Eusemann theory p 75 N88-13247
- Experiences using the Mark IV supersonic hypersonic arbitrary body program p 13 N88-13249
- The RAE experimental data-base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250
- Method for predicting performance limits of centrifugal compressors p 66 N88-17677
- High-aspect-ratio wings p 85 N88-28859
- Measured and predicted responses of the Nord 260 aircraft to the low altitude atmospheric turbulence p 78 N88-29723
- Semi-empirical methods for conventional and unconventional missiles p 15 N88-29758
- Space marching Euler solvers p 15 N88-29759
- Numerical models for analytical predictions of combustor aerothermal performance characteristics p 108 N88-29935
- Three-dimensional gas turbine combustor modeling p 108 N88-29937
- Numerical modeling of combustion processes in gas turbines p 108 N88-29939
- AGARD manual on aeroelasticity in small-flow turbomachines. Volume 2: Structural dynamics and aeroelasticity [AGARD-AG-298-VOL-2] p 16 N89-10006
- Guidance and control systems simulation and validation techniques [AGARD-AG-273] p 78 N89-10048
- Simulation validation experience PATRIOT guidance system p 79 N89-10055
- Computing system configuration for fighter aircraft flight control systems p 78 N89-10817
- Algorithm and general software considerations p 228 N89-11397
- Trend monitoring of a turboprop engine at low and mean power p 54 N89-16801
- Wind tunnel predicted air vehicle performance: A review of lessons learned p 87 N89-16852
- Statistical techniques applied to analysis of airport distributions p 234 N89-17611
- PERFORMANCE TESTS**
- Engine-airframe integration considerations for preliminary air vehicle performance analysis p 31 N87-10068
- Implementation of an airborne SAR motion compensation system p 127 N87-18728
- Application of modified loss and deviation correlations to transonic axial compressors [AGARD-R-745] p 62 N88-13344
- Design and test of a high blade speed, high work capacity transonic turbine p 64 N88-17658
- Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17679
- The effects of two Carlucci initiatives: concurrency and streamlining, on the test and evaluation phase of system acquisitions p 245 N89-20198
- Use of water towing tanks for aerodynamics and hydrodynamics p 163 N88-23149
- Test philosophy of the EH101 integrated avionics p 48 N88-23775
- Testing complex avionics software: A practical experience p 50 N88-23794
- A small annular combustor of high power density, wide operating range and low manufacturing cost p 110 N88-29951
- Fan flutter test p 68 N89-10014
- Digital simulation techniques for end game phenomena p 228 N89-10051
- PERSONNEL DEVELOPMENT**
- The resources required to run an information service p 250 N87-26682
- PERSONNEL MANAGEMENT**
- People, procedures, performance: The keys to improving the development environment p 245 N88-20187
- Evaluating the performance of information centre staff p 253 N89-11629
- Evaluating performance of information centre operations and services p 253 N89-11630

SUBJECT INDEX

- A framework for evaluating the effectiveness of information centres and services p 253 N89-11631
- PERTURBATION**
Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center [NAS 115-89133] p 9 N87-28519
On the applicability of continuous scattering methods to discrete scattering problems p 237 N89-17740
- PERTURBATION THEORY**
Prediction of wing-body-store aerodynamics using a small perturbation method and a grid embedding technique p 5 N87-20207
Hierarchy of uncertainty sources in transonic wind tunnel testing p 87 N89-16851
Regions of validity for some rough surface scattering models p 241 N89-17711
Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N89-18654
- PETRI NETS**
RISE: Requirements and Incremental Specification Environment p 230 N89-18462
- PHARMACOLOGY**
The evaluation of vigilance in studies of aeronautical pharmacology p 196 N87-25716
Sedating and non-sedating sleeping aids in air operation p 187 N87-25720
FB-111A aircrew use of temazepam during surge operations p 197 N87-25721
- PHASE CHANGE MATERIALS**
Cross-frequency correlation of intensity fluctuations in the phase-changing media p 146 N89-17738
- PHASE COHERENCE**
Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13287
- PHASE DEMODULATORS**
Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13287
- PHASE DETECTORS**
Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13287
- PHASE LOCKED SYSTEMS**
Compressor blade clearance measurement using capacitance and phase lock techniques p 133 N87-21200
- PHASE MODULATION**
A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- PHASE SHIFT CIRCUITS**
Low-cost, monolithic beamforming components for radar p 131 N87-18750
EHF multifunction phased array antenna p 131 N87-18752
- PHASE SHIFT KEYING**
Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672
Jamming and electronic countermeasures p 151 N89-18586
- PHASED ARRAYS**
Solid state multifunction phased array radar p 126 N87-18723
The mixture of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18748
Low-cost, monolithic beamforming components for radar p 131 N87-18750
EHF multifunction phased array antenna p 131 N87-18752
MIC technology for phased arrays p 135 N87-23866
- PHOTODIODES**
PIN-FET preamplifier for high-speed optical transmission systems p 239 N87-13293
Some considerations relating to aero engine pyrometry p 171 N87-21187
- PHOTOELECTRONICS**
Spacecraft charging: Mateosol experience p 98 N87-26951
- PHOTOGRAMMETRY**
Use of a video-photogrammetry system for the measurement of the dynamic response of the shuttle remote manipulator arm p 94 N87-20370
- PHOTOGRAPHY**
The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs p 162 N88-23140
- PHOTOLITHOGRAPHY**
Performance of integrated optical frequency shifters pigtailed to high birefringence fibres using ion-milled grooves p 238 N87-1289
- PHYSICAL EXAMINATIONS**
Cardiopulmonary screening for high-performance flying Selection and retention issues p 195 N87-24079
- PHYSICAL EXERCISE**
Measurements of change of stature in the assessment of static and dynamic spinal loading p 193 N87-13957
- PHYSICAL OPTICS**
Theoretical Aspects of Target Classification [AGARD-LS-152] p 136 N88-11909

- Physical optics method: Prediction of radar signatures p 137 N88-11914
Theoretical aspects of target classification: Physical optics and radon transform methods p 137 N88-11915
Scattering and depolarization by random rough terrain and vegetation covered terrain-uniform full wave approach p 138 N88-18657
Regions of validity for some rough surface scattering models p 241 N89-17711
- PHYSIOLOGICAL EFFECTS**
Biochemical Enhancement of Performance [AGARD-CP-415] p 195 N87-25709
Use of tyrosine and other nutrients to enhance and sustain performance p 195 N87-25711
Multivariate and psycho-physiological functions of DSP p 196 N87-25713
The effect of acetyl-di-leucine on the vestibulo-ocular reflex in humans p 198 N87-25717
Human respiratory responses during high performance flight [AGARD-AG-312] p 197 N88-12923
- PHYSIOLOGICAL FACTORS**
Closing the man-machine loop: On the use of physiological measures to affect computer-controlled devices p 211 N87-29507
- PHYSIOLOGICAL RESPONSES**
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25712
Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine [AGARD-CP-432] p 190 N88-27683
The interaction of thalamo-cortical systems in the 40 Hz following response p 199 N88-27694
A study of sources in the human brain associated with stereopsis p 200 N88-27695
Cognitive task demands as reflected in physiological measures p 200 N88-27699
- PHYSIOLOGICAL TESTS**
Short Course on Cardiopulmonary Aspects of Aerospace Medicine [AGARD-R-758] p 193 N87-24070
Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072
Aeromedical aspects of mitral valve prolapse p 194 N87-24074
Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075
Cardiopulmonary screening for high-performance flying: Selection and retention issues p 195 N87-24079
- PHYSIOLOGY**
Squid instrumentation for neuromagnetic study of complex brain activity p 199 N88-27691
Vision and visual protection in fast jet aircraft p 216 N88-29292
- PILOT ERROR**
The task taxonomy method: A basis for an expert system on human reliability p 207 N87-29506
- PILOT PERFORMANCE**
Computer simulation studies on human control reliability in manual aircraft control: The origin of PIO p 211 N87-23644
Simulation as a fighter design tool p 35 N87-24447
Advanced fighter design: Operational experience and future requirements p 36 N87-24453
The integration and operational suitability of emerging technologies for future fighter aircraft: A pilot's perspective p 36 N87-24454
Phobic manifestations among experienced pilots p 197 N87-25722
Automation at the man-machine interface p 211 N87-29504
Study of anticipation mechanisms in the aeronautical environment p 207 N87-29505
A study of pilot flight information crossmonitoring performance p 211 N87-29509
Perceptual organisation and information management p 251 N87-29514
Information management in the Army battlefield helicopter p 251 N87-29515
Integrating avionics sensor signals for tactical aircraft p 46 N87-29519
- The practical assessment of pilot workload [AGARD-AG-282] p 212 N87-30054
Pilot subjective evaluation of workload during a flight test certification programme p 212 N87-30057
Mental workload measurement in operational aircraft systems: Two promising approaches p 207 N87-30060
In-flight assessment of workload using instrument scan p 213 N87-30062
Flight test evaluation of crew workload: Part 1: Aircraft certification for a minimum crew of two pilots p 213 N87-30063
In-flight assessment of workload using pilot ratings and heart rate p 197 N87-30065

PILOT TRAINING

- The assessment of workload in helicopters p 214 N87-30066
Assessing workload for minimum crew certification: Part 1: Static workload analysis and performance analysis p 214 N87-30067
Measurement of pilot workload p 214 N87-30068
Investigation of workload measuring techniques: A theoretical and practical framework p 214 N87-30069
Event-related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696
Fighter pilot performance during airborne and simulator missions: Physiological companions p 215 N88-27704
The neuroelectric selection of Naval aviation personnel: An evaluation p 208 N88-27707
Electroencephalographic correlates of pilot performance: Simulation and in-flight studies p 208 N88-27711
Correlation between EEG abnormal activity and aircraft accidents: A long term observation p 208 N88-27719
The auditory evoked response in military pilots p 203 N88-27721
Visual Effects in the High Performance Aircraft Cockpit [AGARD-LS-156] p 216 N88-29291
Vision and visual protection in fast jet aircraft p 216 N88-29292
Visual related accidents/incidents p 216 N88-29293
Advances in Flying Qualities [AGARD-LS-157] p 4 N88-29735
Pilot modeling p 217 N88-29736
Pilot modeling applications p 217 N88-29737
Low-speed longitudinal flying qualities of modern transport aircraft p 43 N88-29738
The optimal control pilot model and applications p 217 N88-29741
Ecological significance of equipment features and pilot history in simulator sickness p 203 N89-12172
Horizontal study of the incidence of simulator induced sickness among French Air Force pilots p 204 N89-12175
Simulator sickness in the Royal Air Force: A survey p 204 N89-12177
Modelling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N89-12182
An investigation of simulator sickness and an electrophysiological study p 206 N89-12183
Cues for training vertigo: providing suggestions for the management of simulator sickness p 206 N89-12187
The Man-Machine Interface in Tactical Aircraft Design and Combat Automation [AGARD-CP-425] p 217 N89-18009
Pilot workload assessment: A flight test approach p 218 N89-18014
Considerations concerning the assessment of pilot workload for complex task conditions p 218 N89-18015
Advances in workload measurement for cockpit design evaluation p 218 N89-18016
Pilots as supervisors and managers of automatic systems: A risky new factor in man-machine systems reliability p 219 N89-18021
Pilot integration and the implications on the design of advanced cockpits p 220 N89-18026
Pilot control devices p 220 N89-18027
Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034
Measures of merit for advanced military avionics: A user's perspective on software utility p 55 N89-18447
- PILOT SELECTION**
Coronary risk factors in aerospace medicine p 195 N87-24078
Cardiopulmonary screening for high-performance flying: Selection and retention issues p 195 N87-24079
- PILOT TRAINING**
Advanced visuals in mission simulators p 80 N87-23636
The application of optimal control techniques to the UTIAS research simulator p 80 N87-23637
Simulator motion characteristics and perceptual fidelity p 80 N87-23639
Use of VDU's by flight simulator instructors p 80 N87-23641
Radar simulators p 82 N87-23651
Operational training: Application and experience p 82 N87-23653
A look toward the future of complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88-23797
General operational and training visual concerns p 216 N88-29295
Motion Cues in Flight Simulation and Simulator Induced Sickness [AGARD-CP-433] p 203 N89-12171
Horizontal study of the incidence of simulator induced sickness among French Air Force pilots p 204 N89-12175

PILOTS (PERSONNEL)

- Preadaptation to the stimulus rearrangement of weightlessness Preliminary studies and concepts for trainer designs p 207 N89-12188
- PILOTS (PERSONNEL)**
- Simulator induced sickness among Hercules aircrew p 204 N89-12176
- PITCHING MOMENTS**
- Dynamic stability of hypersonic conical lifting vehicles according to Newton-Busemann theory p 75 N88-13247
- Prediction of wing aerodynamic effects on aircraft life and pitching moment characteristics p 77 N88-13356
- PLANE WAVES**
- Coupled-mode theory approach to depolarization associated with propagation in turbulent media p 241 N89-17707
- Multiple scattering from rough surfaces p 143 N89-17710
- Cross-frequency correlation of intensity fluctuations in the phase-changing media p 146 N89-17738
- PLANETARY WAVES**
- Random propagation through the longwave channel p 145 N89-17731
- PLANNING**
- Strategic planning process at the National Technical Information Service p 249 N87-26680
- Evaluating for information center planning p 254 N89-11632
- Canadian forces aircraft condition/health monitoring Policy plans and experience p 69 N89-16784
- PLASMA ARC WELDING**
- The welding of aluminum alloys A new technology in space application p 176 N87-17056
- Welding of aluminum castings p 177 N87-17068
- PLASMA DENSITY**
- The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
- PLASMA GENERATORS**
- Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
- PLASMA INTERACTIONS**
- Electron beam experiments at high altitudes p 97 N87-26946
- PLASMA JETS**
- Arcjet validation of surface catalysis using a viscous shock layer approach p 188 N89-18634
- PLASMA PHYSICS**
- The quiet and distributed plasmasphere p 187 N87-26938
- PLASMA PROBES**
- Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
- PLASMA SHEATHS**
- The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications [AGARD-CP-406] p 97 N87-26937
- Computer models of the spacecraft wake p 98 N87-26948
- The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
- PLASMA SPRAYING**
- Repair techniques for gas turbine components p 178 N87-17071
- PLASMA TURBULENCE**
- Electromagnetic reflectivity in non-homogeneous continuous random media with cylindrical symmetry p 147 N89-17744
- PLASMAPAUSE**
- The quiet and distributed plasmasphere p 187 N87-26938
- PLASMAS (PHYSICS)**
- Magnetospheric control of the bulk ionospheric plasma p 187 N87-26939
- High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944
- Giotto-spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947
- Secondary electron generation, emission and transport Effects on spacecraft charging and NASCAP models p 98 N87-26950
- Spacecraft charging: Meteorological experience p 98 N87-26951
- The high latitude ionosphere Geophysical basis p 188 N89-11933
- Transionospheric probing and propagation p 141 N89-11934
- H F radar probing (including modification) p 142 N89-11937
- The high latitude ionosphere Dynamical aspects, and models p 188 N89-11938
- PLASMASPHERE**
- The quiet and distributed plasmasphere p 187 N87-26938

PLASTIC DEFORMATION

- Effects of unfavorable environmental conditions on the service life of jet engine and helicopter bearings p 174 N86-29238

PLASTICS

- Suggested plastic replica method p 185 N89-17293

PLATES (STRUCTURAL MEMBERS)

- Structural dynamic characteristics of bladed assemblies p 68 N89-10009

PLENUM CHAMBERS

- Advanced Technology for Aero Gas Turbine Components [AGARD-CP-421] p 62 N88-17647
- Development of a plenum chamber burner system for an advanced VTOL engine p 65 N88-17664

PLUMES

- Smokeless Propellants p 113 N86-26468
- Elastomer modified cast double base propellants p 114 N86-26473

PNEUMOTHORAX

- Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax p 194 N87-24076

POINT SOURCES

- Intensity fluctuations due to moving point sources p 236 N89-17737

POLAR ORBITS

- Polar-orbital charging of the space shuttle and EVA astronaut p 94 N87-26962

POLAR REGIONS

- Media Effects on Electronic Systems in the High Latitude Region [AGARD-LS-162] p 141 N89-11931
- The high-latitude ionosphere Geophysical basis p 188 N89-11933

POLARIMETERS

- Magnetic and pressure sensors using the compensated polarimetric sensor configuration p 237 N87-13279

POLARIZATION (WAVES)

- Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744

POLAROGRAPHY

- Water tunnel measurements by an electrochemical method p 183 N88-23146

POLICIES

- Canadian forces aircraft condition/health monitoring Policy, plans and experience p 69 N89-16784

POLITICS

- Political and economic barriers to information transfer p 251 N88-30480

POLYGONS

- Stars, polygons and clusters p 250 N87-29511

POLYIMIDES

- Surface modification to minimize the electrostatic charging of Kapton in the space environment p 153 N87-26959

PORTABLE EQUIPMENT

- Nose measurement systems/techniques p 149 N89-18574

POSITION (LOCATION)

- The Global Positioning System (GPS) constellation and coverage p 29 N89-10876
- Coasting of radio terminals p 152 N89-18594

POSITION INDICATORS

- GPS: Overview and present status p 26 N87-21884

POSTFLIGHT ANALYSIS

- Measurement of aircrew workload during low-level flight Part 1 A comparison between in-flight and post flight assessment methods p 213 N87-30964

POSTURE

- Automatic research on optimal posture p 191 N87-13942
- Investigation of the lumbar flexion of office workers p 191 N87-13944
- Postural fatigue and the backache of helicopter pilots [DCIEM-85-R-30] p 210 N87-13953
- Lower back pain in helicopter pilots: Etiopathological factors p 210 N87-13955

POTENTIAL FLOW

- Matrices, transonic potential flow calculations about transport aircraft p 5 N87-20208
- Theoretical analysis of flows around helicopter fuselages Application to design and development p 7 N87-20221
- Numerical methods for unsteady transonic flow p 8 N87-24403
- Accurate solutions, parameter studies and comparisons for the Euler and potential flow equations p 167 N89-18624

POWDER (PARTICLES)

- Field artillery gun performances related to triple-base powder quality p 116 N86-29067

POWDER METALLURGY

- Review of existing NDT technologies and their capabilities p 180 N89-17255

SUBJECT INDEX

POWER LINES

- New method for suppression of goniometer of errors by radio nose from overhead power lines p 151 N89-18585

- Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead line responses p 151 N89-18590
- EMP-induced transients and their impact on system performance p 152 N89-18591
- Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18592

POWER SPECTRA

- Matching P.S.D. Design loads p 43 N88-28720

PREAMPLIFIERS

- PIN-FET preamplifier for high-speed optical transmission systems p 239 N87-13293

PRECIPITATION (METEOROLOGY)

- A precipitation scatter experiment at 30 GHz p 144 N89-17723
- FM-CW radar remote sensing of hydrometeors p 144 N89-17725

PRECISION

- Aerodynamic data accuracy and quality Requirements and capabilities in wind tunnel testing [AGARD-AR-254] p 14 N88-28893

PRECISION GUIDED PROJECTILES

- AOM Accelerometer for precision-guided weapons p 93 N89-17607

PREDICTION ANALYSIS TECHNIQUES

- On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N86-29070
- Modelling the behaviour of additives in gun barrels p 155 N86-29075

- Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949
- Individual predictability of back trouble in 18-year old men A prospective study during military service p 192 N87-13951

- Using the boundary-layer equations in three-dimensional viscous flow simulation p 155 N87-20222
- Noninvasive methods for the detection of coronary artery disease in aviators A stratified Bayesian approach p 194 N87-24072

- Hypersonic static and dynamic stability of axisymmetric shapes: A comparison of prediction methods and experiment p 13 N88-13246
- Experiences using the Mark IV supersonic hypersonic arbitrary body program p 13 N88-13249

- Application of modified loss and deviation correlations to transonic axial compressors p 62 N88-13344

- [AGARD-R-745] Computational tools for simulation methodologies p 86 N88-28865

- Special Course on Missile Aerodynamics [AGARD-R-754] p 14 N88-29755

- Accuracy criteria for evaluating supersonic aerodynamic coefficient predictions p 15 N88-29756
- Survey on nonlinear effects p 15 N88-29757
- Prediction of base-flows p 16 N88-29765
- Next generation missile design p 16 N88-29766
- Three-dimensional combustor predictors: A comparison of equilibrium and laminar flamelet chemistry models p 108 N88-29940

- Some difficulties in the wind tunnel prediction of modern civil aircraft buffeting Proposed remedies p 18 N89-16869

- Comparison of experimental results and analytically predicted data for double shear fastened joints p 165 N89-17687

- Remote sensing of interplanetary shocks using a scintillation method p 255 N89-17749

- Crashworthiness design methods applicable at concept stage p 22 N89-18424
- Full scale helicopter crash testing p 23 N89-18428
- Predicting crash performance p 25 N89-18438

PREDICTIONS

- Gust load prediction and alleviation on a fighter aircraft [AGARD-R-728] p 72 N86-30741

- The potential impact of developments in electronic technology on the future conduct of air warfare, volume 3 [AGARD-AR-232-VOL-3] p 153 N87-22094

- Physical optical method: Prediction of radar signatures p 137 N88-11914

- Prediction of wing aerodynamic effects on aircraft life and pitching moment characteristics p 77 N88-13356
- Avionics acquisition, trends and future approaches p 244 N88-20184

- Structural materials The changing scene p 102 N88-20180

- Development and testing of a predictive methodology for optimization of man-machine interface in future avionics systems p 48 N88-23780

- Empirical tools for simulation methodologies p 86 N88-28866

- Digital simulation techniques for end game phenomena p 228 N89-10051

- Prediction of temperature distribution in axisymmetric extrusion p 120 N89-15265

SUBJECT INDEX

- Computer prediction of internal stresses during heat treatment p 112 N89-15272
The application of process modeling to heat treatment of superalloys p 112 N89-15281
Short-crack growth behaviour in an aluminum alloy: An AGARD cooperative test program p 184 N89-17288
Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687
Measurement, modeling and simulation of LOS microwave channels p 146 N89-17734
Predicting the effects of noise and interference on test frequency-hopped M-ary NCSK systems p 151 N89-18589
The design of the CARTEUR low aspect-ratio wing for use in the validation of shear layer and overall flow prediction methods p 45 N89-18652
- PREFLIGHT OPERATIONS**
Preadaptation to the stimulus rearrangement of weightlessness: Preliminary studies and concepts for trainer designs p 207 N89-12188
- PREMIXED FLAMES**
Simultaneous temperature measurements with Raman and CARS in laminar flames p 103 N87-21171
Application of CARS thermometry to a turbulent flame p 104 N87-21175
The influence of pressure on soot formation p 107 N88-29934
Flamelet modeling of turbulent premixed flames p 109 N88-29942
Modeling the stability of a turbulent premixed flame, downstream from a step by a Lagrangian method p 109 N88-29943
Numerical modelling of premixed flames in gaseous media p 109 N88-29944
Gaseous premixed flames in non-uniform flows p 109 N88-29945
- PRESSURE DISTRIBUTION**
On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N88-29070
An assessment of the use of low-order neural methods for the calculation of supersonic flows p 224 N87-20204
Comparison of finite difference calculations of a large region of recirculating flow near an airfoil trailing edge p 6 N87-20218
Calculations for a generic fighter at supersonic high-lift conditions p 33 N87-20226
Experiments on the DFVLR-F4 wing body configuration in several European windtunnels p 87 N89-18648
Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18644
- PRESSURE EFFECTS**
Novel ignition systems for heavy calibre guns p 118 N88-29076
High-pressure combustion: Comparison of theoretical and actual results p 118 N88-29078
Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 106 N88-29923
- PRESSURE MEASUREMENT**
The lubrication of dynamically loaded concentrated hard line contacts: Temperature and pressure measurements p 175 N86-26247
Acquisition and processing of non-stationary pressure measurements in studies of air intake distortion p 178 N87-21191
New trends in intake/engine compatibility assessment p 60 N87-24467
The international vortex flow experiment p 186 N89-18619
- PRESSURE OSCILLATIONS**
Review of current knowledge on engine response to distorted inflow conditions p 60 N87-24465
Air intake/engine compatibility: Impact of theoretical and experimental methods p 60 N87-24466
New trends in intake/engine compatibility assessment p 60 N87-24467
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477
Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478
- PRESSURE REDUCTION**
Measured and predicted loss generation in transonic turbine blading p 58 N87-21934
- PRESSURE SENSORS**
Magnetic and pressure sensors using the compensated polarimetric sensor configuration p 237 N87-13279
The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195
- PRETREATMENT**
Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- PREVENTION**
A review of the NDMC back care education programme p 192 N87-13952

PRINTED CIRCUITS

- Microwave Antennas for Avionics (AGARD-LS-151) p 134 N87-23859
Printed circuit antenna technology p 153 N87-23867

PROBABILITY DENSITY FUNCTIONS

- Application of CARS thermometry to a turbulent flame p 104 N87-21175
Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672

PROBABILITY THEORY

- Computer simulation studies on human control reliability in manual aircraft control: The origin of PIO p 211 N87-23644
Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072
The task taxonomy method: A basis for an expert system on human reliability p 207 N87-29506
Use of Markov probability and reliability model generation methods in the analysis of reliability of a fault tolerant hardware and software based system with flexible repair policies p 181 N89-18477

PROBLEM SOLVING

- Engine-transmission-structural airframe members compatibility p 91 N87-10069
Solving the problem: The step before F. E. modelling p 182 N87-16378
The use of the finite element method p 182 N87-16380
Utilization of Euler codes in nonlinear aerodynamics p 6 N87-20215
Progress in Viscous-Inviscid Solvers (VIS) p 159 N87-22152
A 3-D Euler solution for hypersonic Mach numbers p 12 N88-13240
Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
Barriers to Information Transfer and Approaches Toward Their Reduction (AGARD-CP-430) p 251 N88-30458
Linguistic barriers: Translation problems p 252 N88-30465
Accuracy problems in wind tunnels during transport aircraft development p 90 N89-18677
Avionics expert systems p 58 N89-18469

PROCEDURES

- Semi-automatic cross-checking between different copies of the same flight plan p 28 N87-21903
Alignment verification procedures p 184 N89-17291

PROCESS CONTROL (INDUSTRY)

- Weld quality monitor and control system p 179 N87-17062
Superplasticity (AGARD-LS-154) p 111 N87-29641
Superplasticity: An overview p 111 N87-29642
Superplastic sheet forming NATO/AGARD lecture series on superplasticity p 111 N87-29643
Cavitation and superplasticity p 111 N87-29645
Designing for superplastic alloys p 119 N87-29648
Avionics and corrosion p 47 N88-13036
Reducing time required for the development of avionic systems p 244 N88-20185
Prototype manufacturing techniques for reducing cost, schedule, and technical risk p 244 N88-20189
Aerospace Materials Process Modelling (AGARD-CP-426) p 119 N88-15262
Processing science and materials development p 118 N89-15263
Prediction of temperature distribution in axisymmetric extrusion p 120 N89-15265
Simulation and design of high precision unit processes via numerical methods p 120 N89-15273
Use of vendor consortiums for implementation of process simulation technology p 121 N89-15278
- PROCUREMENT**
Applications in library management, requisitions, loans, and stock control p 222 N87-19921
Procurement and management of microcomputer-based systems p 222 N87-19929
Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795

PRODUCT DEVELOPMENT

- Flight Vehicle Development Time and Cost Reduction (AGARD-CP-424) p 243 N88-20173
Risk reduction cost avoidance for full scale development begins with concept formulation p 243 N88-20174
Picking winners: Parametric cost estimating and project management p 243 N88-20176
Parametric study of the total cost of aircraft modernization in terms of development and equipment series costs p 243 N88-20177
The increased time and cost of development: Causes and (some) remedies p 243 N88-20178
Reasons for increasing development cost of rotary wing aircraft and ideas to reverse the trend p 254 N86-20179
What can be done to face growing development costs p 244 N88-20181

PROLOG (PROGRAMMING LANGUAGE)

- Optimizing powerplant design and development cycles p 254 N88-20183
Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20186
The use of simulation in the development of the Airbus p 244 N88-20188
Use of demonstration/validation prototypes: Impact on total development costs and times p 245 N88-20189
Engineering management for validation prototype phase p 245 N88-20195
People, procedures, performance: The keys to improving the development environment p 245 N88-20197
Organization of helicopter development activities with a view toward reduction of costs and cycles p 246 N88-20200
Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Vehicle Development Time and Cost Reduction (AGARD-AR-244) p 4 N89-10001
- PRODUCTION MANAGEMENT**
Control of on-board software p 55 N89-18452
- PRODUCTIVITY**
Time and cost reduction through computer integrated manufacture p 225 N88-20191
Improved flight test productivity using advanced on line data systems p 245 N88-20193
People, procedures, performance: The keys to improving the development environment p 245 N88-20197
A framework for evaluating the effectiveness of information offices and services p 253 N89-11631
Software productivity through Ada engines p 228 N89-18449
- PROGRAM VERIFICATION (COMPUTERS)**
Testing complex avionics software: A practical experience p 50 N88-23794
Verification and validation of flight critical software p 230 N89-18460
Validation of Computational Fluid Dynamics Volume 1: Symposium papers and round table discussion (AGARD-CP-437-VOL-1) p 165 N89-18610
CFD validation philosophy p 166 N89-18611
On the validation of a code and a turbulence model appropriate to circular control airfoils p 18 N89-18616
Status of CFD validation on the vortex flow experiment p 167 N89-18620
The DFVLR-F5 wing experiment: Towards the validation of the numerical simulation of transonic viscous wing flows p 19 N88-16623
Separation around ellipsoid-type obstacles: Modeling and validation experiments p 167 N89-18627
Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630
Arcjet validation of surface catalytic using a viscous shock-layer approach p 168 N89-18634
CFD validation experiments for internal flows p 168 N89-18635
Solution on unstructured grids for the Euler and Navier-Stokes equations p 168 N89-18636
Validation of an Euler code for hydraulic turbines p 168 N89-18637
Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 168 N89-18638
Efforts toward the validation of a computational fluid dynamics code for analyses of internal aerodynamics p 168 N89-18643
Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18644
On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N89-18645
A comparative study and validation of upwind and central-difference Navier-Stokes codes for high-speed flows p 169 N89-18647
- PROGRAMMING LANGUAGES**
Functional programming languages and modern multiprocessor architectures: The EMSP example p 231 N89-18480
SPOCK: A tool for real time artificial intelligence p 233 N89-18482
- PROJECT MANAGEMENT**
The policy maker looks at information p 247 N86-26794
A programme manager's needs for information p 247 N86-26795
What can be done to face growing development costs p 244 N88-20181
The integration, characterization and testing of a modern complex airborne radar p 50 N88-23791
- PROJECTILES**
Jet reaction control system for autonomous precision munition p 92 N87-26452
- PROJECTORS**
Visual display research tool p 80 N87-23635
- PROLOG (PROGRAMMING LANGUAGE)**
How to use PROLOG for expert system programming p 225 N88-10816
Utilization of EMICAT for the development of aerospace expert systems p 56 N89-18483

PROP-FAN TECHNOLOGY

PROP-FAN TECHNOLOGY

Analysis of possible transmission arrangements applicable for driving single or twin counterrotating fans on propan engines p 66 N88-17670

PROPAGATION MODES

Experimental observations on an unsteady, normal shock/boundary layer interaction p 156 N87-21933

PROPELLANT ADDITIVES

Measurements of distributed combustion p 115 N86-26479

PROPELLANT BINDERS

Perforator combustion based on octogenes p 114 N86-26470

Elastomer modified cast double base propellants p 114 N86-26473

PROPELLANT CASTING

Elastomer modified cast double base propellants p 114 N86-26473

PROPELLANT COMBUSTION

Direct erosive burning measurements of a reduced-smoke solid propellant rocket by flash X-rays p 114 N86-26476

Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-26477

Measurements of distributed combustion p 115 N86-26479

Liquid propellant gun technology p 115 N86-29064

Ignition, combustion, and physical properties of liquid propellants at gun pressures p 115 N86-29065

Internal ballistics of small arms. Particular problems. Part 2. Thermodynamic model, powder parameters, initiation p 154 N86-29372

Experimental study of the ignition of explosive charges using visualization of the phenomena p 116 N86-29073

Measurement of important ballistic flow properties by spectroscopic techniques p 154 N86-29074

Modeling the behaviour of additives in gun barrels p 155 N86-29075

High-pressure combustion. Comparison of theoretical and actual results p 118 N86-29078

Design and analysis of solid rocket motor internal combustion p 101 N89-18515

PROPELLANT GRAINS

Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-26477

Mechanical behaviour of propellant grains under heavy dynamic load p 115 N86-29066

Ignition of high-performance gun ammunition p 116 N86-29077

Design Methods in Solid Rocket Motors (AGARD-LS-150) p 100 N87-28589

Propellant grain design p 116 N87-28595

State of the art of solid propellant rocket motor grain design in the United States p 116 N87-28597

Propellant grain design p 117 N88-18912

Solid propellant grain design p 117 N88-18913

State of the art of solid propellant rocket motor grain design in the United States p 117 N88-18914

PROPELLANT PROPERTIES

Internal Ballistics of Guns (AGARD-CP-392) p 117 N86-29063

Liquid propellant gun technology p 115 N86-29064

Ignition, combustion, and physical properties of liquid propellants at gun pressures p 115 N86-29065

Ignition of high-performance gun ammunition p 116 N86-29077

Fuel property effects on the US Navy's TF30 engine p 67 N88-29911

Alternative fuel spray behavior p 104 N88-29912

The characterization of combustion by fuel composition. Measurements in a small conventional combustor p 105 N88-29920

Solid propellant grain design p 117 N88-18913

PROPELLANTS

Liquid propellant gun technology p 115 N86-29064

PROPELLER BLADES

Numerical methods for propeller aerodynamics and acoustics at DFVLR p 65 N88-17668

PROPELLER EFFICIENCY

Numerical methods for propeller aerodynamics and acoustics at DFVLR p 65 N88-17668

PROPELLER FANS

Analysis of possible transmission arrangements applicable for driving single or twin counterrotating fans on propan engines p 66 N88-17670

PROPELLER SLIPSTREAMS

Validation of a multi-block Euler flow solver with propeller-slipstream flows p 20 N89-18649

PROPELLERS

Aerodynamic performance of a scale-model, counter-rotating unducted fan p 65 N88-17668

Numerical methods for propeller aerodynamics and acoustics at DFVLR p 65 N88-17668

Analysis of high-speed propellers aerodynamics p 65 N88-17669

Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 184 N88-23155

Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639

Validation of a multi-block Euler flow solver with propeller-slipstream flows p 20 N89-18649

PROPORTIONAL CONTROL

Precision delivery of unguided submunitions from a tactical standoff missile p 91 N87-16010

PROPULSION

Digital image processing applied to fluid dynamic problems p 156 N87-21193

Special Course on Mesic Aerodynamics (AGARD-R-754) p 14 N88-29755

PROPULSION SYSTEM CONFIGURATIONS

Propulsion system technologies for thrust vectoring p 60 N87-22670

CFD validation experiments for internal flows p 168 N89-18635

PROPULSION SYSTEM PERFORMANCE

Engine Response to Distorted Inflow Conditions ... conference proceedings (AGARD-CP-400) p 60 N87-24464

Review of current knowledge on engine response to distorted inflow conditions p 60 N87-24465

Air inlet/engine compatibility: Impact of theoretical and experimental methods p 60 N87-24466

Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468

Turbulent engine post-instability behavior: Computer simulations, test validation and application of simulations p 62 N87-24474

Experimental investigation on small turbo-prop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476

Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477

Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478

Development of intake swirl generators for turbo jet engine testing p 63 N87-24480

Space shuttle main engine monitoring experience and advanced monitoring systems development p 100 N89-18615

PROPULSIVE EFFICIENCY

Gear systems for advanced turboprops p 65 N88-17667

PROTECTION

Helicopter air intake protection systems p 32 N87-10073

Future visual environment and concerns p 217 N88-28299

PROTECTIVE COATINGS

The application of the RBD process to the deposition of anti-wear alloys p 177 N87-17069

Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959

The effects of a compressor rebuild on gas turbine engine performance p 70 N89-18603

PROTOCOL (COMPUTERS)

Layered protocols in voice interaction with computers p 136 N87-29524

Accelerated convergence for synchronous approximate agreement p 231 N89-18474

Multi-level parallel processing for very high performance real-time database management p 254 N89-18478

PROTOTYPES

Reducing time required for the development of avionic systems p 244 N88-20185

Prototype manufacturing techniques for reducing cost, schedule, and technical risk p 244 N88-20189

Use of demonstration/validation prototypes. Impact on total development costs and times p 245 N88-20194

Engineering management for validation prototype phase p 245 N88-20195

Acceleration of prototype development and reduction of cost by multidisciplinary integration p 246 N88-20199

Rapid prototyping of complex avionic system architectures p 47 N88-23771

The integration, characterisation and testing of a modern complex airborne radar p 90 N88-23791

Coherent functional development: Key to successful future system integration p 246 N88-23803

PROVING

Composite repair of occurred J-stiffened panels. Design and test verification p 1 N87-20181

A method for aircraft simulation verification and validation developed at the United States Air Force Flight Simulation Facility p 82 N87-23654

Generating diagnostic knowledge from a structural and functional description p 232 N88-18613

Use of demonstration/validation prototypes. Impact on total development costs and times p 245 N88-20194

Engineering management for validation prototype phase p 245 N88-20195

Wind tunnel requirements for computational fluid dynamics code verification p 90 N88-18680

Alignment verification procedures p 184 N89-17291

On-line spectrum loading accuracy verification p 184 N89-17292

Validation of Computational Fluid Dynamics Volume 2 Poster papers (AGARD-CP-437-VOL-2) p 189 N89-18648

Validation of a multi-block Euler flow solver with propeller-slipstream flows p 20 N89-18649

Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N89-18654

Detailed flowfield measurements over a 75 deg swept delta wing for code validation p 21 N89-18657

PSYCHIATRY

Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27687

PSYCHOLOGICAL EFFECTS

Biochemical Enhancement of Performance (AGARD-CP-415) p 195 N87-25709

Multivariate and psycho-physiological functions of DSP p 196 N87-25713

CEEG dynamic brain mapping. A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685

Using ERPS to study human information processing p 208 N88-27698

PSYCHOMETRICS

Side effects of hypnotic benzodiazepines on the vigilance and efficiency of personnel after awakening p 196 N87-25719

Performance assessment register (AGARD-R-763) p 246 N89-10666

PSYCHOMOTOR PERFORMANCE

The evaluation of vigilance in studies of aeronautic pharmacology p 196 N87-25716

Side effects of hypnotic benzodiazepines on the vigilance and efficiency of personnel after awakening p 196 N87-25719

FB-111A aircrew use of temazepam during surge operations p 197 N87-25721

PSYCHOPHYSIOLOGY

Psychophysiological measures of drowsiness as estimators of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702

PSYCHOTROPIC DRUGS

CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685

PULMONARY FUNCTIONS

Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075

PULSE COMMUNICATION

Design for interoperability (interchangeability) p 50 N88-23789

Propagation and performance measurements over a digital troposcatter communications link p 146 N89-17733

PULSE DOPPLER RADAR

Basic characteristics of FM-CW radar systems p 131 N87-18753

PULSE MODULATION

Embedded real-time channel evaluation techniques p 122 N86-27569

PULSE RADAR

Form factor optimization for HFR emission p 130 N87-18742

PULSED LASERS

Particle imaging velocimetry in a low turbulent windtunnel and other flow facilities p 79 N87-21205

PULSES

Transport airplane crash simulation, validation and application to crash design criteria p 24 N89-18435

PYROLYSIS

The influence of pressure on soot formation p 107 N88-29934

PYROMETERS

Sapphire fiber optic temperature probe p 241 N87-21186

Turbine rotor blade measurements using infrared pyrometry p 171 N87-21188

Q

QUALIFICATIONS

Mechanical Qualification of Large Flexible Spacecraft Structures (AD-A175529) p 94 N87-20355

Future trends in spacecraft design and qualification p 94 N87-20356

Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357

Qualification of the faint object camera p 170 N87-20359

Dynamic analysis of direct television satellite TV-SAT/TDF p 95 N87-20360

Structural qualification of large spacecraft p 95 N87-20361

Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363

Low frequency vibration testing on satellites p 96 N87-20364

SUBJECT INDEX

- Model-survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365
- QUALITY**
Assessment of software quality for the AIRBUS A310 automatic pilot p 74 N88-10804
Aerodynamic data accuracy and quality Requirements and capabilities in wind tunnel testing [AGARD-AR-254] p 14 N88-28893
- QUALITY CONTROL**
Engine-airframe integration for rotorcraft: Component specifications and qualification p 31 N87-10071
Economical manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055
Weld quality monitor and control system p 179 N87-17062
Avionics and corrosion p 47 N88-13336
Systems engineering technique p 48 N88-23776
AGARD/SMP Review Damage Tolerance for Engine Structures. 1. Non-Destructive Evaluation [AGARD-R-768] p 180 N89-17253
The impact of engineering assumptions on NDE requirements p 180 N89-17254
- QUANTITATIVE ANALYSIS**
Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-26477
The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs p 162 N86-23140
- QUENCHING (COOLING)**
Computer prediction of internal stresses during heat treatment p 112 N89-15272
The application of process modeling to heat treatment of superalloys p 112 N89-15281
- QUERY LANGUAGES**
New technologies for improved information systems and services p 248 N86-28802

R

- RADAR**
Multifunction Radar for Airborne Applications ... conference [AGARD-CP-381] p 125 N87-18721
Dynamics and signal processing algorithms for high frequency of recurrence radar modes p 129 N87-18738
The application of multi-dimensional access memories to radar signal processing systems p 129 N87-18740
On a single step technique for adaptive array processing p 129 N87-18741
Radar simulators p 82 N87-23651
The use of knowledge based systems techniques in ESM processing p 235 N87-24941
Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control [AGARD-CP-407] p 138 N88-19653
Radio and radar waves and multipath zones: The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667
The integration, characterization and trialing of a modern complex airborne radar p 50 N88-23791
Guidance and Control of Precision Guided Weapons [AGARD-CP-435] p 93 N89-17505
CO2 laser radar systems for target acquisition and guidance p 173 N89-17506
- RADAR ANTENNAS**
ECCM effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
Angular super-resolution with array antennas: Application to seeker-heads p 128 N87-18737
Electronic scanning antenna for military aircraft of the 1990s p 131 N87-18751
EHF multifunction phased array antenna p 131 N87-18752
Aircraft radar antennas p 134 N87-23861
- RADAR APPROACH CONTROL**
Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military airspace users [AGARD-AR-236] p 28 N87-23808
- RADAR CROSS SECTIONS**
Determination of antennae patterns and radar reflection characteristics of aircraft [AGARD-AG-300-VOL-4] p 124 N86-30931
Simulation of multistatic and backscattering cross sections for airborne radar p 132 N87-18757
- RADAR DETECTION**
About the future of airborne radar p 125 N87-18722
Multi-mode multistatics for passive/active airborne surveillance p 126 N87-18726
A CFAR design concept for operation in heterogeneous clutter p 128 N87-18733

- A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
High resolution signal processor for limited aperture multimode radar p 128 N87-18736
Form factor optimization for HFR emission p 130 N87-18742
Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
Dual frequency MM-wave radar for antitank helicopter p 132 N87-18756
The use of simulated synthetic-aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18758
Requirements and applications for radar simulations: A standpoint of an airframe company p 133 N87-18759
Criteria for the evaluation of range performances in air/air interception p 133 N87-18760
- RADAR ECHOES**
Determination of antennae patterns and radar reflection characteristics of aircraft [AGARD-AG-300-VOL-4] p 124 N86-30931
Dynamics and signal processing algorithms for high frequency of recurrence radar modes p 129 N87-18738
Form factor optimization for HFR emission p 130 N87-18742
A general solution for the synthesis of binary sequences with desired correlation sequence p 130 N87-18743
The hybrid wavefront resonance method p 137 N88-11913
- RADAR EQUIPMENT**
Multifunction Radar for Airborne Applications ... conference [AGARD-CP-381] p 125 N87-18721
Solid state multifunction phased array radar p 126 N87-18723
Multimission airborne radar for the 1990s p 126 N87-18724
Multifunction millimetre-wave radar for all-weather ground attack aircraft p 126 N87-18725
Multi-mode multistatics for passive/active airborne surveillance p 126 N87-18726
MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
Low-cost, monolithic beamforming components for radar p 131 N87-18750
Basic characteristics of FM-CW radar systems p 131 N87-18753
- RADAR HOMING MISSILES**
Guidance and control systems simulation and validation techniques [AGARD-AG-273] p 78 N89-10048
Range delay techniques for radar target simulation p 87 N89-10054
- RADAR IMAGERY**
Synthetic aperture imaging airborne radar p 127 N87-18731
High-resolution MTI with SAR p 128 N87-18734
Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
Multi-BI-static high frequency (PO/GO) radar target imaging of airborne scatterers p 130 N87-18745
Radar display: Conversion of scanning: Errors and correction techniques p 132 N87-18754
Postintegration of radar images p 132 N87-18755
Avionics expert systems p 56 N89-18469
- RADAR MAPS**
ECCM effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
Postintegration of radar images p 132 N87-18755
- RADAR MEASUREMENT**
Observed phase delay through rain at 96 GHz p 144 N89-17724
FM-CW radar remote sensing of hydrometeors p 144 N89-17725
Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems p 146 N89-17735
Real time expert system for onboard radar identification p 56 N89-18481
- RADAR NAVIGATION**
Multifunction Radar for Airborne Applications ... conference [AGARD-CP-381] p 125 N87-18721
About the future of airborne radar p 125 N87-18722
Multifunction millimetre-wave radar for all-weather ground attack aircraft p 126 N87-18725
Dual frequency MM-wave radar for antitank helicopter p 132 N87-18756
Requirements and applications for radar simulations: A standpoint of an airframe company p 133 N87-18759
- RADAR RANGE**
Criteria for the evaluation of range performances in air/air interception p 133 N87-18760

RADAR TARGETS

- RADAR RECEIVERS**
The mixture of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18748
MMIC T/R modules for the next generation airborne surveillance platforms p 131 N87-18749
CO2 laser radar systems for target acquisition and guidance p 173 N89-17506
- RADAR RESOLUTION**
Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18727
High-resolution MTI with SAR p 128 N87-18734
High resolution signal processor for limited aperture multimode radar p 128 N87-18736
Angular super-resolution with array antennas: Application to seeker-heads p 128 N87-18737
Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
Target analysis through line distance discrimination p 137 N87-18746
- RADAR SCANNING**
Solid state multifunction phased array radar p 126 N87-18723
Electronic scanning antenna for military aircraft of the 1990s p 131 N87-18751
Radar display: Conversion of scanning: Errors and correction techniques p 132 N87-18754
Postintegration of radar images p 132 N87-18755
Criteria for the evaluation of range performances in air/air interception p 133 N87-18760
- RADAR SCATTERING**
Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
Multi-BI-static high frequency (PO/GO) radar target imaging of airborne scatterers p 130 N87-18745
The use of simulated synthetic-aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18758
Target strength: An overview of some recent theoretical developments p 136 N88-11910
The hybrid wavefront resonance method p 137 N88-11913
Physical optics method: Prediction of radar signatures p 137 N88-11914
Input signal shaping: K-pulse p 137 N88-11917
Media Effects on Electronic Systems in the High Latitude Region [AGARD-LS-162] p 141 N89-11931
Incoherent/coherent scatter p 142 N89-11940
- RADAR SIGNATURES**
Determination of antennae patterns and radar reflection characteristics of aircraft [AGARD-AG-300-VOL-4] p 124 N86-30931
Considerations in utilizing IR signatures p 241 N87-18747
Physical optics method: Prediction of radar signatures p 137 N88-11914
Numerical modeling: Integral equation method p 137 N88-11919
- RADAR TARGETS**
Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
Multi-BI-static high frequency (PO/GO) radar target imaging of airborne scatterers p 130 N87-18745
Target analysis through line distance discrimination p 137 N87-18746
Simulation of multistatic and backscattering cross sections for airborne radar p 132 N87-18757
The use of simulated synthetic-aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18758
Theoretical Aspects of Target Classification [AGARD-LS-152] p 136 N88-11909
Target strength: An overview of some recent theoretical developments p 136 N88-11910
The hybrid wavefront resonance method p 137 N88-11913
Theoretical aspects of target classification: Physical optics and radar transform methods p 137 N88-11915
Parametrization in scattering models p 137 N88-11916
Input signal shaping: K-pulse p 137 N88-11917
Numerical modeling: Integral equation method p 137 N88-11919
Experiments: Test range facilities, part 1 p 138 N88-11920
Mono- and bistatic radar coverage diagrams including diffractive wave propagation p 139 N88-19660
H F radar probing (including modification) p 142 N89-11937
I-band multipath propagation over the sea surface p 145 N89-17729

RADAR TRACKING

RADAR TRACKING

- Solid state multifunction phased array radar
 - p 126 N87-18723
- Multifunction millimetre-wave radar for all-weather ground attack aircraft
 - p 126 N87-18725
- Requirements and applications for radar simulations. A standpoint of an airborne company
 - p 133 N87-18759
- The correlation between methodological and low-level angle-of-arrival measurements
 - p 140 N88-19668
- Multisensor target reconnaissance
 - p 219 N89-18020

RADAR TRANSMISSION

- Millimeter wave transmission through man-made obstructions in a battlefield environment
 - p 127 N87-18732

RADAR TRANSMITTERS

- The nature of different semiconductor technologies in radar modules and its impact on cooling problems and reliability
 - p 131 N87-18748
- MMIC T/R modules for the next generation airborne surveillance platforms
 - p 131 N87-18749

RADIAL FLOW

- Application of Doppler and trans laser anemometry in small turbomachines
 - p 172 N87-21180

RADIATION BELTS

- Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations
 - p 188 N87-26943

RADIATION DAMAGE

- Hostile energetic particle radiation environments in Earth's outer magnetosphere
 - p 188 N87-26941
- EMP-induced transients and their impact on system performance
 - p 152 N89-18591

RADIATION EFFECTS

- Fiber optics. A survivable and cost-effective transmission medium for terrestrial networks
 - p 240 N87-13302
- Vision and visual protection in fast jet aircraft
 - p 216 N88-29292

RADIATION PROTECTION

- The Aerospace Environment at High Altitudes and its implications for Spacecraft Charging and Communications
 - [AGARD-CP-406] p 97 N87-26937
- Spacecraft protection against electrostatic discharge application to the ARABSAT spacecraft
 - p 99 N87-26956

RADIATIVE HEAT TRANSFER

- Flamelet chemistry modelling of soot formation for radiation
 - p 106 N88-29928
- Radiation transfer in gas turbine combustors
 - p 107 N88-29929
- The effect of particle properties on radiative heat transfer
 - p 109 N88-29941

RADIO ANTENNAS

- Space-diversity effects on line-of-sight propagation paths
 - p 140 N88-19670
- Some measurements of height gain at VLF
 - p 140 N88-19671
- Electromagnetic code for naval applications
 - p 150 N88-18583

RADIO ATTENUATION

- The 6 GHz propagation measurements over a 51 km path in the UK
 - p 141 N88-19673
- An EHF telecommunication system engineering model
 - p 141 N88-19674
- A propagation campaign in a marine environment utilizing a digital system at 36 GHz
 - p 141 N88-19675

RADIO COMMUNICATION

- MM-wave propagation and application in military communication systems
 - p 140 N88-19669
- Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems
 - [AGARD-CP-420] p 147 N89-18565
- Processing techniques for radio communications in non-Gaussian noise environments
 - p 150 N89-18581
- Improved coding and control of HF systems in a non-Gaussian noise environment
 - p 150 N89-18582

RADIO ECHOES

- Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control
 - [AGARD-CP-407] p 138 N88-19653

RADIO EQUIPMENT

- Propagation and performance measurements over a digital troposcatter communications link
 - p 146 N89-17733
- Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems
 - [AGARD-CP-420] p 147 N89-18565

RADIO FREQUENCIES

- Propagation Impact on Modern HF Communications System Design
 - [AGARD-LS-145] p 122 N86-27566
- The design of static and mobile HF communication systems
 - p 122 N86-27567
- Propagation 1. State of the art of modelling and prediction in HF propagation
 - p 122 N86-27568
- Developments in HF equipment and systems mobile and portable terminals
 - p 123 N86-27573

Measurements of HF propagation parameters for Real-Time Channel Evaluation (RTCE) systems

- p 123 N86-27575
- Adaptive systems in operation
 - p 124 N86-27576
- Identification of microwave line-of-sight multipath components
 - p 139 N88-19665
- A generic seeker simulation for the evaluation of active RF guidance systems
 - p 227 N89-10050
- Media effects on electronic systems in the high latitude region
 - p 141 N89-11932

RADIO FREQUENCY INTERFERENCE

- HF communications and remote sensing in the high latitude region
 - p 142 N89-11936
- Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems
 - p 146 N89-17735
- Radio noise characteristics and their system performance implications
 - p 148 N89-18566
- Balloon measurement soft low frequency TE and TM atmospheric noise
 - p 148 N89-18567
- Transhorizon cochannel interference path measurements in Europe
 - p 149 N89-18572
- Experimental observations of spectral occupancy at HF
 - p 149 N89-18573
- Predicting the effects of noise and interference on fast frequency-hopped M-ary NCFSK systems
 - p 151 N89-18588
- Intermodulation interferences in radio systems
 - p 152 N89-18595

- Determining the azimuthal distribution of noise and interference across the HF spectrum at the RAE Receiving Station, Cobbett Hill, Surrey, England
 - p 153 N89-18597

RADIO METEOROLOGY

- Review of recent developments in evaporation ducting assessment
 - p 139 N88-19664

RADIO RECEIVERS

- Balloon measurement soft low frequency TE and TM atmospheric noise
 - p 148 N89-18567
- A new global survey of ELF/VLF radio noise
 - p 148 N89-18570
- Signal noise/interferer combiner unit programmable (SINCUPI)
 - p 149 N89-18575
- Effects of noise and interference on system performance
 - p 149 N89-18576
- Costing of radio terminals
 - p 152 N89-18594

RADIO RELAY SYSTEMS

- A review of the role of surface reflection in multipath propagation over terrestrial microwave links
 - p 138 N88-19655
- Space-diversity effects on line-of-sight propagation paths
 - p 140 N88-19670

RADIO SCATTERING

- Scattering and depolarization by random rough terrain and vegetation covered terrain-uniform full wave approach
 - p 138 N88-19657

RADIO SPECTRA

- Problems of spectrum management and system compatibility
 - p 125 N87-18711
- Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield
 - p 152 N89-18593
- Automating the deconvolution of jamming and spectrum management
 - p 152 N89-18596
- Determining the azimuthal distribution of noise and interference across the HF spectrum at the RAE Receiving Station, Cobbett Hill, Surrey, England
 - p 153 N89-18597

RADIO TRANSMISSION

- Development of a ground-conductivity map for the area of the Federal Republic of Germany from measured field strength contours
 - p 138 N88-19656
- Scattering and depolarization by random rough terrain and vegetation covered terrain-uniform full wave approach
 - p 138 N88-19657
- VHF/UHF propagation by diffraction: Calculation by numerical integration
 - p 139 N88-19659
- A diffraction based theoretical model for prediction of UHF path loss in cities
 - p 139 N88-19661
- A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles
 - p 139 N88-19662
- Review of recent developments in evaporation ducting assessment
 - p 139 N88-19664
- Refractive index, meteorology and fading in line-of-sight transmission paths
 - p 140 N88-19665
- The correlation between methodological and low-level angle-of-arrival measurements
 - p 140 N88-19668
- Space-diversity effects on line-of-sight propagation paths
 - p 140 N88-19670
- Some measurements of height gain at VLF
 - p 140 N88-19671
- An EHF telecommunication system engineering model
 - p 141 N88-19674
- A propagation campaign in a marine environment utilizing a digital system at 36 GHz
 - p 141 N88-19675
- Media Effects on Electronic Systems in the High Latitude Region
 - [AGARD-LS-162] p 141 N89-11931

HF communications and remote sensing in the high latitude region

- p 142 N89-11936
- Propagation medium adaptive techniques for adverse communications and for remote sensing
 - p 142 N89-11941
- Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems
 - [AGARD-CP-420] p 147 N89-18565
- Radio noise characteristics and their system performance implications
 - p 148 N89-18566
- VLF radio noise
 - p 148 N89-18569
- Man-made radio noise and interference
 - p 148 N89-18571

- Transhorizon cochannel interference path measurements in Europe
 - p 149 N89-18572
- Noise measurement systems/techniques
 - p 149 N89-18574

- Signal noise/interferer combiner unit programmable (SINCUPI)
 - p 149 N89-18575
- Effects of noise and interference on system performance
 - p 149 N89-18576
- The design and performance of an adaptive packet-switched HF data terminal
 - p 149 N89-18577
- Intermodulation interferences in radio systems
 - p 152 N89-18595

RADIO TRANSMITTERS

- Balloon measurement soft low frequency TE and TM atmospheric noise
 - p 148 N89-18567
- Costing of radio terminals
 - p 152 N89-18594

RADIO WAVE REFRACTION

- Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control
 - [AGARD-CP-407] p 138 N88-19653
- Radio and radar holes and multipath zones: The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance
 - p 140 N88-19667
- MM-wave propagation and application in military communication systems
 - p 140 N88-19669

RADIO WAVES

- Transionospheric probing and propagation
 - p 141 N89-11934
- Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems
 - p 146 N89-17735
- Impulse response measurements and characterization of wideband VHF radio lines
 - p 146 N89-17736

RADIOACTIVITY

- The application of radiation physics and photogrammetric techniques for the diagnosis and solution of mechanical engineering problems and performance improvements in the development of aero gas turbine engines at Rolls Royce
 - p 178 N87-21198

RADIOMETERS

- A new global survey of ELF/VLF radio noise
 - p 148 N89-18570

RADIOTELEPHONES

- A diffraction based theoretical model for prediction of UHF path loss in cities
 - p 139 N88-19661

RADOMES

- Microwave Antennas for Avionics
 - [AGARD-LS-151] p 134 N87-23859

RAIN

- A propagation campaign in a marine environment utilizing a digital system at 36 GHz
 - p 141 N88-19675
- Line-of-sight millimeter wave propagation characteristics
 - p 144 N89-17720
- Observed phase delay through rain at 96 GHz
 - p 144 N89-17724
- Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a bistatic radar
 - p 147 N89-17748

RAMAN SPECTROSCOPY

- Advanced Instrumentation for Aero Engine Components
 - [AGARD-CP-399] p 118 N87-21170
- Simultaneous temperature measurements with Raman and CARS in laminar flames
 - p 103 N87-21171
- CARS thermometry for low and high pressure combustion systems
 - p 103 N87-21172
- Accurate measurements of combustion species concentrations using CARS
 - p 103 N87-21173
- Nonlinearly and single shot noise problems in CARS spectroscopy
 - p 104 N87-21174
- Application of CARS thermometry to a turbulent flame
 - p 104 N87-21175

RAMJET ENGINES

- Water flow visualisation of a ramrocket combustion chamber
 - p 162 N88-23138
- Air intake aerodynamics
 - p 15 N88-29762
- Semempirical methods for airbreathing missiles
 - p 16 N88-29763

RANDOM NOISE

- Signal noise/interferer combiner unit programmable (SINCUPI)
 - p 149 N89-18575

RANDOM PROCESSES

- Electromagnetic reflectivity in non-homogeneous continuous random media with cylindrical symmetry
 - p 147 N89-17744

SUBJECT INDEX

SUBJECT INDEX

RANGE FINDERS

The GPS overview and navigation system concept
p 29 N89-10875

RANGEFINDING

GPS Overview and present status p 26 N87-21884

RAREFACTION

Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles
p 11 N88-13230

RATS

Pharmacological approaches to performance enhancement in animals p 190 N87-25715

RAYLEIGH-BENARD CONVECTION

Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modeling
[AGARD-R-755] p 159 N88-11970

Dynamics and routes to chaos from quasiperiodicity
p 160 N88-11974

A deterministic approach to turbulence: Chaos in Rayleigh-Benard convection p 160 N88-11975

Determination of fractal dimension, connection of space and temporal chaos and application to experimental results p 160 N88-11977

RDX

Smokeless propellants of improved performance
p 113 N86-26469

REACTION KINETICS

Flamelet modeling of turbulent premixed flames
p 109 N88-29942

REACTION TIME

The effects of hypoxia on P300 and reaction time
[DCIEM-87-RR-12] p 200 N88-27697

REAL GASES

Hypersonic laminar boundary layer: Parametric study for the representation of real gas effects
p 11 N88-13236

On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237

Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N88-18630

REAL TIME OPERATION

Propagation impact on Modern HF Communications System Design
[AGARD-LS-145] p 122 N86-27566

Embedded real-time channel evaluation techniques
p 122 N86-27569

Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation
[ISBA-92-835-0396-6] p 79 N87-15985

Weld quality monitor and control system
p 179 N87-17062

NDT of electron beam welded joints (micro-focus and real time X-ray) p 179 N87-17063

A real time vision system for robotic arc welding
p 177 N87-17066

On a single step technique for adaptive array processing p 129 N87-18741

TV-holography: A promising inspection tool for analysis of composite materials p 170 N87-20180

OASIS: A modern tool for real-time simulation
p 80 N87-23638

Integrated multisensor targeting p 236 N87-24947

The BAE (Bracknell) automatic detection, tracking and classification system p 241 N87-29476

Real-time expert systems: A status report
p 225 N88-10817

The use of hardware-in-the-loop techniques in the development of a modern air-to-surface missile system
p 93 N88-19562

Improved flight test productivity using advanced on line data systems p 245 N88-20193

Applications of image analysis in precision guided weapons p 93 N89-17610

Panoramic Cockpit Control and Display System (PCCADS) p 219 N89-18019

Formalizing a theory of real-time software specification
p 229 N89-18456

Tools for developing real-time embedded systems in Ada: Needs, portability and efficiency
p 230 N89-18464

Definitions and requirements for distributed real-time systems p 232 N89-18476

Multi-level parallel processing for very high performance real-time database management p 254 N89-18478

Task interactions in distributed machines of embedded computer systems p 232 N89-18479

Real time expert system for onboard radar identification p 56 N89-18481

SPOCK: A tool for real time artificial intelligence
p 233 N89-18482

Artificial intelligence in HF communication systems
p 150 N89-18580

RECEIVERS

ELF/VLF/LF propagation and system design
p 124 N87-18705

Aiding and integration of a GPS receiver
p 30 N89-10881

RECEPTION DIVERSITY

Space diversity effects on line-of-sight propagation paths
p 140 N88-19670

RECIRCULATIVE FLUID FLOW

Comparison of finite difference calculations of a large region of recirculating flow near an airfoil trailing edge
p 6 N87-20218

Validation of Computational Fluid Dynamics: Volume 2: Poster papers p 169 N89-18648

[AGARD-CP-437-VOL-2] Finite difference methods in recirculating flows
p 169 N89-18651

Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656

RECONNAISSANCE AIRCRAFT

The specification and design of a future maritime reconnaissance aircraft p 47 N88-23772

RECTANGULAR PLATES

Experiments: Test range facilities, part 2
p 138 N88-11921

REDUCED GRAVITY

Preadaptation to the stimulus rearrangement of weightlessness: Preliminary studies and concepts for trainer designs p 207 N89-12188

REDUNDANCY

Flight test of a resident backup software system
p 74 N88-10805

REDUNDANCY ENCODING

Robust control system design p 73 N88-10800

REENTRY EFFECTS

Hypersonic aerodynamics: Applications for HOTOL
p 13 N88-13252

REFLECTANCE

Geometrical theory of diffraction for high-frequency coherence functions in weakly random medium with inhomogeneous background profile p 143 N89-17709

Measurement and modeling of 36 GHz sea reflection phenomena p 145 N89-17730

Electromagnetic reflectivity in non-homogeneous continuous random media with cylindrical symmetry
p 147 N89-17744

REFLECTOMETERS

Progress with multiplexed sensor arrays based on reflection at spaced joints between sensors
p 237 N87-13278

REFLECTOR ANTENNAS

Physical optics method: Prediction of radar signatures
p 137 N88-11914

REFRACTIVITY

Nonlinear ellipse rotation in a low-breigning optical fiber p 238 N87-13282

Correcting ray field failures caused by focusing in an inhomogeneous duct: A critical look at the Gaussian beam method p 139 N88-19663

Reflective index, meteorology and fading in line-of-sight transmission paths p 140 N88-19666

Ground/lower atmosphere consideration
p 142 N89-11935

REGRESSION ANALYSIS

Statistical techniques applied to analysis of airport distributions p 234 N89-17611

REGULATIONS

Regulatory aspect of crashworthiness
p 22 N89-18422

RELAXATION METHOD (MATHEMATICS)

Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems
p 167 N89-18625

RELIABILITY

Computing systems dependability and fault tolerance: Basic concepts and terminology p 222 N88-10797

A highly reliable computer for airborne applications
p 222 N89-10833

Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257

Use of Markov probability and reliability model generation methods in the analysis of reliability of a fault tolerant hardware and software based system with flexible repair policies p 181 N89-18477

RELIABILITY ANALYSIS

Use of Markov probability and reliability model generation methods in the analysis of reliability of a fault tolerant hardware and software based system with flexible repair policies p 181 N89-18477

Reliability and validity of CFD codes: Flight and wind tunnel comparison p 167 N89-18626

RELIABILITY ENGINEERING

The application of emulation techniques in the analysis of highly reliable, guidance and control computer systems p 73 N88-10798

Some approaches to the design of high integrity software p 73 N88-10799

Reliability modeling of fault-tolerant computer based systems p 73 N88-10801

Fault management in aircraft power plant controls
p 71 N89-16808

REMOTE MANIPULATOR SYSTEM

Use of a video-photogrammetry system for the measurement of the dynamic response of the shuttle remote manipulator arm p 94 N87-20370

REMOTE SENSING

Fiber optic device for temperature remote sensing
p 237 N87-13280

RESEARCH AND DEVELOPMENT

Media Effects on Electronic Systems in the High Latitude Region
[AGARD-LS-182] p 141 N89-11931

HF communications and remote sensing in the high latitude region p 142 N89-11936

Satellite in-situ probing p 142 N89-11939

Propagation medium adaptive techniques for adverse communications and for remote sensing
p 142 N89-11941

Remote sensing of interplanetary shocks using a scintillation method p 255 N89-17749

REMOTE SENSORS

Guided Optical Structures in the Military Environment
[AGARD-CP-383] p 237 N87-13273

Progress in optical fiber sensors p 237 N87-13274

Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281

REMOVELY PILOTED VEHICLES

The unmanned aircraft as a force multiplier
p 32 N87-16001

Navy technology requirements for unmanned airborne vehicles p 32 N87-16002

High altitude, long endurance RPV design technology study p 32 N87-16011

Unusual airborne simulator applications
p 82 N87-23656

RENE 95

Modeling of deformation and microstructural changes in P/M Rene 95 under isothermal forging conditions
p 119 N89-15264

REPLICAS

Suggested plastic-replica method p 185 N89-17293

REPORTS

AGARD guide to aerospace and defence technical report series in NATO countries p 197 N87-27391

[AGARD-R-743] Workshop on Avionics Corrosion Control
[AGARD-R-733] p 46 N88-13331

REQUIREMENTS

Aircraft and Bearing Tribological Systems
[AGARD-CP-394] p 174 N86-29236

Rotorcraft Design for Operations
[AGARD-CP-423] p 37 N88-11649

The influence of operational requirements on LHX concept formulation p 37 N88-11650

Apache for the battlefield of today and the 21st century p 38 N88-11670

The EH-101 integrated project: A naval, utility and commercial helicopter system p 38 N88-11672

Specification of an engine and its components starting from a consideration of aircraft missions
p 63 N88-17651

An integrated aero/mechanical performance approach to high technology turbine design p 64 N88-17657

Design loads for Swedish military aircraft in a twenty years perspective p 42 N88-19456

A structured approach to weapon system design
p 48 N88-23773

Night lighting and night vision goggle compatibility
p 216 N88-29287

Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781

An overview of US Navy engine monitoring system programs and user experience p 69 N89-16782

Requirements and capabilities in unsteady wind tunnel testing p 90 N89-16878

Requirements and criteria for the passive safety of automobiles p 221 N89-18440

Avionics systems engineering and its relationship to mission software development p 55 N89-18454

Embedding formal methods in SAFRA p 229 N89-18455

Formalizing a theory of real-time software specification
p 229 N89-18456

RISE Requirements and Incremental Specification Environment p 230 N89-18462

Three generations of software engineering for airborne systems p 230 N89-18465

Definitions and requirements for distributed real-time systems p 232 N89-18476

RESCUE OPERATIONS

System for SAR missions p 46 N89-11671

Design and development of an avionics system adapted to helicopter missions p 49 N88-23786

RESEARCH AIRCRAFT

Development of an airborne facility for advanced avionics research p 51 N88-23801

The NAE atmospheric research aircraft
p 51 N88-23730

RESEARCH AND DEVELOPMENT

The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes
[AGARD-CP-385] p 247 N86-28793

The costs of not having refined information
p 247 N86-28796

Information resources management in the R and D environment p 248 N86-28803

Rocket altitude test facilities register
[AGA-ID-AG-297] p 91 N87-24469

Benefits of scientific and technical information services for aerospace and defense p 249 N87-26677

RESEARCH FACILITIES

- Strategic planning process at the National Technical Information Service** p 249 N87-28680
Aerothermodynamics research at NASA Ames p 12 N88-13242
Engineering data compendium: Human perception and performance. User's guide p 215 N88-27749 [LC-87-19560]
Engineering data compendium: Human perception and performance, volume 1 p 215 N88-28630 [LC-87-19560]
Engineering data compendium: Human perception and performance, volume 2 p 215 N88-28631 [LC-87-19560]
Engineering data compendium: Human perception and performance, volume 3 p 215 N88-28632 [LC-87-19560]
Guidance and control systems simulation and validation techniques p 78 N89-10048 [AGARD-AG-273]
RESEARCH FACILITIES
A method for aircraft simulation verification and validation developed at the United States Air Force Flight Simulation Facility p 82 N87-23554
MBS simulation facilities applied for rotorcraft research p 84 N88-11655
Research simulators for helicopters p 84 N88-11656
Experiments: Test range facilities, part 1 p 138 N88-11920
Aerothermodynamics research at NASA Ames p 12 N88-13242
Development of an airborne facility for advanced avionics research p 51 N88-23501
RESEARCH MANAGEMENT
Atmospheric turbulence research at DFLR [AGARD-R-752] p 189 N88-27669
Short-Crack Growth Behaviour in an Aluminum Alloy: An AGARD Cooperative Test Programme [AGARD-R-732] p 184 N89-17287
RESIDUAL STRENGTH
Effect of environment and improvement measures on static and fatigue strength of bolted CFRP-joints p 187 N89-17703
Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading p 187 N89-17704
RESIDUAL STRESS
The role of residual stress in the performance of gears and bearings p 175 N86-29246
Computer prediction of internal stresses during heat treatment p 112 N89-15272
RESONANCE
Singularity expansion method: Target Resonances p 137 N88-11912
The hybrid wavefront resonance method p 137 N88-11913
RESPIRATION
Human respiratory responses during high performance flight p 197 N88-12923 [AGARD-AG-312]
RESPIRATORY DISEASES
Short Course on Cardiopulmonary Aspects of Aerospace Medicine [AGARD-R-758] p 193 N87-24070
Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075
Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax p 194 N87-24076
Cardiopulmonary screening for high-performance flying: Selection and retention issues p 195 N87-24079
RESPIRATORY WEDDANCE
Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax p 194 N87-24076
RESPIRATORY PHYSIOLOGY
Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075
REVERSED FLOW
Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 106 N88-29923
REVISIONS
Parametric study of the total cost of aircraft modernization in terms of development and equipment series costs p 243 N88-20177
REYNOLDS NUMBER
The drag of slender asymmetric cones in rarefied hypersonic flow p 11 N88-13229
Reynolds number effects and the wind tunnel environment p 86 N88-28862
Experimental tools: The tunnel and the model p 86 N88-28864
Reynolds number effects in transonic flow [AGARD-AG-303] p 17 N89-16780
On Reynolds number effects and simulation p 17 N89-16886
REYNOLDS STRESS
Turbulence modelling through one point closures-applications-enlightening by large eddy simulation p 158 N88-11972

A-60

SUBJECT INDEX

- RHEOLOGY**
Performance modelling: A tool for lubricant development p 113 N86-29252
RING LASERS
Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276
RISK
Coronary risk factors in aerospace medicine p 195 N87-24078
Hypersonic aerodynamics: Applications for HOTOL p 13 N88-13252
Risk reduction cost avoidance for full scale development begins with concept formulation p 243 N88-20174
RIVETS
Improvement of specific fastening elements for assembling composite structures p 186 N89-17694
ROBOTICS
A real time vision system for robotic arc welding p 177 N87-17066
ROBUSTNESS (MATHEMATICS)
Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 11 N88-13235
Robust algorithm synchronizes mode changes in fault-tolerant asynchronous architectures p 231 N89-18475
ROCKET ENGINE CASES
Design Methods in Solid Rocket Motors [AGARD-LS-150] p 100 N87-28589
Composite motor case design p 100 N87-28592
Design of filament-wound rocket cases p 100 N87-28593
Considerations for designers of cases for small solid propellant rocket motors p 101 N87-28594
Composite motor case design p 101 N89-16909
Design of filament-wound rocket cases p 101 N89-16910
Considerations for designers of cases for small solid propellant rocket motors p 101 N89-16911
Design and analysis of solid rocket motor internal insulation p 101 N89-16915
ROCKET ENGINE DESIGN
Design Methods in Solid Rocket Motors [AGARD-LS-150] p 100 N87-28589
Design of filament-wound rocket cases p 100 N87-28593
Considerations for designers of cases for small solid propellant rocket motors p 100 N87-28594
Propellant grain design p 116 N87-28595
Sizing solid propellant engine charges p 116 N87-28596
State of the art of solid propellant rocket motor grain design in the United States p 116 N87-28597
Design and sizing of internal thermal insulators for solid propellant rocket engines p 116 N87-28598
Comprehensive optimization of solid propellant rocket engines p 116 N87-28599
Design Methods in Solid Rocket Motors [AGARD-LS-150-REV] p 101 N89-17066
Considerations for designers of cases for small solid propellant rocket motors p 101 N89-16911
Propellant grain design p 117 N89-16912
ROCKET EXHAUST
Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816
ROCKET NOZZLES
Design Methods in Solid Rocket Motors [AGARD-LS-150] p 100 N87-28589
Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 100 N87-28590
Design and sizing of solid rocket nozzles p 100 N87-28591
Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 101 N89-16907
Design and analysis of solid rocket motor nozzle p 101 N89-16908
ROLLER BEARINGS
Aircraft and Bearing Tribological Systems [AGARD-CP-394] p 174 N86-29236
Design and calculation of high speed engine bearings p 174 N86-29241
The role of residual stress in the performance of gears and bearings p 175 N86-29246
Wear of high speed roller bearings p 175 N86-29248
Critical analysis of achievements and missing links in gear and bearing tribology in relation to power envelopes p 175 N86-29254
ROLLING
Aerospace Materials Process Modelling [AGARD-CP-426] p 119 N89-15262
Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270
ROLLING CONTACT LOADS
The lubrication of dynamically loaded concentrated hard line contacts: Temperature and pressure measurements p 175 N86-29247
ROTARY WING AIRCRAFT
Operational load measurements on service helicopters p 37 N89-11858
Reasons for increasing development cost of rotary wing aircraft and ideas to reverse the trend p 254 N88-20179
Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20186
Simulator sickness in US Army and Navy fixed- and rotary-wing flight simulators p 205 N89-12178
ROTARY WINGS
Engine-airframe integration considerations for preliminary air vehicle performance analysis p 31 N87-10068
Rotorcraft icing: Progress and potential [AGARD-AR-223] p 32 N87-15966
The prediction of transonic loading on advancing helicopter rotors p 5 N87-20206
Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
ROTATING BODIES
The application of holography as a transonic flow diagnostic to rotating components in turbomachinery p 171 N87-21202
ROTATING STALLS
Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473
Turbofan engine post-instability behavior: Computer simulations, test validation and application of simulations p 62 N87-24474
Transmission of inlet distortion through a fan p 62 N87-24475
Experimental investigation on small turbo-prop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476
ROTATION
Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276
Nonlinear ellipse rotation in a low-birefringence optical fiber p 238 N87-13282
ROTOR AERODYNAMICS
Transonic and Supersonic Phenomena in Turbomachines [AGARD-CP-401] p 57 N87-21927
Shock structure measured in a transonic fan using laser anemometry p 57 N87-21929
Wake and shock interactions in a transonic turbine stage p 57 N87-21930
The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21931
Vortex shedding in compressor blade wakes p 58 N87-21932
Measured and predicted loss generation in transonic turbine blading p 58 N87-21934
Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
Shock waves losses analysis p 58 N87-21936
Experimental investigations on shock losses of transonic and supersonic compressor cascades p 58 N87-21937
Three-dimensional computation around turbomachine blades with fins p 59 N87-21940
A quasi three dimensional method for the calculation of transonic flows in turbomachines p 59 N87-21941
Transonic three-dimensional inviscid calculations in turbomachines p 59 N87-21942
Computation of transonic 2D cascade flow and comparison with experiments p 59 N87-21943
A numerical study of unsteady flow effects in a supersonic compressor cascade p 59 N87-21944
A numerical study of the 3D flowfield in a transonic compressor rotor with a modeling of the tip clearance flow p 59 N87-21945
Some turbomachinery blade passage analysis methods: Retrospect and prospect p 59 N87-21947
Determination of the supersonic cascade entrance zone p 157 N87-21948
Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949
Comparison between inverse designed (PVD) airfoils and standard series airfoils for high loaded axial turbine nozzle application p 60 N87-21951
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473
ROTOR BLADES
Repair of helicopter composite structure techniques and substantiations p 1 N87-20179
Aeroelasticity in axial-flow turbomachines. Volume 1: Unsteady turbomachinery aerodynamics [AGARD-AG-298-VOL 1] p 8 N87-24398
Unsteady aerodynamic measurements on rotors p 9 N87-24408

SUBJECT INDEX

- Active control of helicopter vibration using multiloop self-adaptive control p 75 N88-11660
- Minimization of helicopter vibration through active control of structural response p 75 N88-11662
- Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems p 37 N88-11663
- Design and test of a high blade speed, high work capacity transonic turbine p 64 N88-17656
- Experimental investigation of a supercritical compressor rotor blade section p 67 N88-17680
- ### ROTOR BLADES (TURBOMACHINERY)
- Transonic and Supersonic Phenomena in Turbomachines [AGARD-CP-401] p 57 N87-21927
- Shock structure measured in a transonic fan using laser anemometry p 57 N87-21929
- Wake and shock interactions in a transonic turbine stage p 57 N87-21930
- The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21931
- Measured and predicted loss generation in transonic turbine blading p 58 N87-21934
- Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
- Shock waves losses analysis p 58 N87-21936
- Experimental investigations on shock losses of transonic and supersonic compressor cascades p 58 N87-21937
- Optimization of a transonic flow radial vane diffuser p 58 N87-21938
- Three-dimensional computation around turbomachine blades with fins p 59 N87-21940
- A quasi three dimensional method for the calculation of transonic flows in turbomachines p 59 N87-21941
- Transonic three-dimensional inviscid calculations in turbomachines p 59 N87-21942
- Computation of transonic 2D cascade flow and comparison with experiments p 59 N87-21943
- A numerical study of unsteady flow effects in a supersonic compressor cascade p 59 N87-21944
- A numerical study of the 3D flowfield in a transonic compressor rotor with a modelling of the tip clearance flow p 59 N87-21945
- Some turbomachinery blade passage analysis methods: Retrospect and prospect p 59 N87-21947
- Determination of the supersonic cascade entrance zone p 157 N87-21948
- Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949
- Comparison between inverse designed (PVD) airfoils and standard series airfoils for high loaded axial turbine application p 60 N87-21951
- AGARD manual on aeroelasticity in axial-flow turbomachines. Volume 2: Structural dynamics and aeroelasticity [AGARD-AC-298-VOL-2] p 16 N89-10006
- Basic structural dynamics p 183 N89-10007
- Structural dynamic characteristics of individual blades p 68 N89-10008
- Structural dynamic characteristics of bladed assemblies p 68 N89-10009
- Fatigue and assessment methods of blade vibration p 68 N89-10010
- Aeroelastic coupling. An elementary approach p 68 N89-10012
- Aeroelastic formulation for tuned and mistuned rotors p 68 N89-10013
- Computation of transonic 3D cascade flow and comparison with experiments p 20 N89-18641
- ### ROTORS
- Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059
- Evaluation of L2F-measurements in unsteady turbine flow p 156 N87-21182
- Unsteady aerodynamic measurements on rotors p 9 N87-24408
- Controlling the dynamic environment during NOE flight p 75 N88-11661
- A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655
- The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660
- Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 168 N89-18638
- ### ROUTES
- Strategic control to improve efficiency of air traffic management p 27 N87-21894
- ### RUDDERS
- The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355
- ### RULES
- A rule-based system for arrival sequencing and scheduling in air traffic control p 29 N88-10815
- ### RUN TIME (COMPUTERS)
- SPOCK: A tool for real time artificial intelligence p 233 N89-18482

- ### RUNGE-KUTTA METHOD
- Strapdown inertial systems applications for tactical missiles (stand-off missile) p 91 N87-16008
- ### RUNWAYS
- Aircraft Dynamic Response to Damaged and Repaired Runways [AGARD-R-739] p 34 N87-23609
- Interpretation in terms of the response of a one degree-of-freedom oscillator to two successive disturbances p 35 N87-23610
- An experimental-analytical routine for the dynamic qualification of aircraft operating on rough runway surfaces p 35 N87-23611

S

- ### SAFETY
- Introduction of a new stimulant: CRL 40476 p 196 N87-25714
- Eye safe Raman laser range finder for ground and airborne application p 173 N87-29475
- Minimizing development flight test time and cost in the US Air Force p 245 N88-20192
- ### SAFETY DEVICES
- Requirements and criteria for the passive safety of automobiles p 221 N89-18440
- ### SAFETY FACTORS
- Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness [AGARD-CP-443] p 22 N89-18421
- ### SAFETY MANAGEMENT
- Semi-automatic cross-checking between different copies of the same flight plan p 28 N87-21903
- ### SANDWICH STRUCTURES
- Repair procedures for composite parts on the alpha jet p 1 N87-20175
- ### SATELLITE ANTENNAS
- Basic parameters of antennas for aircraft, satellites and missiles p 134 N87-23860
- The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
- ### SATELLITE COMMUNICATION
- Review of modulation, coding and speech digitalisation techniques p 124 N87-18704
- UHF/SHF SATCOM propagation and system design p 125 N87-18710
- ### SATELLITE CONTROL
- Utilization of EMICAT for the development of aerospace expert systems p 58 N89-18483
- ### SATELLITE NETWORKS
- The Global Positioning System (GPS) constellation and coverage p 29 N89-10876
- The Global Positioning System (GPS) accuracy, system error budget, space and control segment overview p 29 N89-10877
- ### SCALE EFFECT
- On Reynolds number effects and simulation p 17 N89-18666
- ### SCALE MODELS
- Measurement of model deformation in wind tunnels p 77 N88-13358
- Aerodynamic performance of a scale-model, counter-rotating unducted fan p 85 N88-17666
- ### SCANNING
- In-flight assessment of workload using instrument scan p 213 N87-30062
- Three-dimensional flow visualization using laser-sheet scanning p 152 N88-23143
- ### SCATTER PROPAGATION
- Meteor burst propagation and system design p 125 N87-18708
- ### SCATTERING
- Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations p 188 N87-26943
- Uniform geometrical theory of diffraction p 136 N88-11911
- Singularity expansion method: Target Resonances p 137 N88-11912
- Numerical modeling: Integral equation method p 137 N88-11919
- Experiments: Test range facilities, part 2 p 138 N88-11921
- The effect of particle properties on radiative heat transfer p 106 N88-29941
- Scattering and Propagation in Random Media [AGARD-CP-419] p 122 N89-17706
- Multiple scattering from rough surfaces p 143 N89-17710
- Regions of validity for some rough surface scattering models p 241 N89-17711
- Markov random fields: A strategy for cluster modelling p 143 N89-17712
- A scattering model for forested area p 143 N89-17713
- Coherent scattering from random media p 174 N89-17714
- Hierarchical scattering models p 144 N89-17717

SELECTION

- Generation and properties of self-similar stochastic processes with application to ray propagation in random media p 242 N89-17718
- FM-CW radar remote sensing of hydrometers p 144 N89-17725
- I-band multipath propagation over the sea surface p 145 N89-17729
- Propagation and performance measurements over a digital troposcatter communications link p 146 N89-17733
- Intensity fluctuations due to moving point sources p 236 N89-17737
- Cross-frequency correlation of intensity fluctuations in the phase-changing media p 146 N89-17738
- On the applicability of continuous scattering methods to discrete scattering problems p 237 N89-17740
- Numerical simulation of wave propagation in random media p 234 N89-17742
- Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745
- A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747
- Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a bistatic radar p 147 N89-17748
- ### SCATTERING CROSS SECTIONS
- Simulation of multistatic and backscattering cross sections for airborne radar p 132 N87-18757
- ### SCHEDULES
- Software development guidelines p 228 N89-18450
- ### SCHEDULING
- Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897
- Next generation of control techniques in advanced TMA p 27 N87-21898
- A rule-based system for arrival sequencing and scheduling in air traffic control p 29 N88-10815
- Schedule and cost control of development p 245 N88-20196
- ### SCIENTIFIC SATELLITES
- Thick dielectric charging on high altitude spacecraft p 99 N87-26961
- ### SCIENTISTS
- The information needs of scientists and engineers in aerospace p 247 N86-28796
- ### SCINTILLATION
- Ionospheric probing and propagation p 141 N89-11934
- Satellite in-situ probing p 142 N89-11939
- Remote sensing of interplanetary shocks using a scintillation method p 255 N89-17749
- Ionospheric scintillations and in-situ measurements at an auroral location in the European sector p 189 N89-17752
- ### SCREWS
- Improvement of specific fastening elements for assembling composite structures p 186 N89-17694
- ### SEA STATES
- A propagation campaign in a marine environment utilizing a digital system at 25 GHz p 141 N88-19675
- ### SEALING
- Development of field level repairs for composite structures p 1 N87-20177
- ### SEARCH RADAR
- About the future of airborne radar p 125 N87-18722
- Solid state multifunction phased array radar p 126 N87-18723
- A CFAR design concept for operation in heterogeneous clutter p 128 N87-18733
- High resolution signal processor for limited aperture multimode radar p 128 N87-18736
- ### SEARCHING
- Search for SAR missions p 46 N88-11671
- ### SEATS
- Backache and Back Discomfort ... conference [AGARD-CP-378] p 190 N87-13932
- Investigation of the lumbar flexion of office workers p 191 N87-13944
- Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956
- Backache in aircrew p 193 N87-13958
- Back pain in gazelle aircrew p 193 N87-13959
- Seat isolation system p 193 N87-13960
- ### SECONDARY FLOW
- Computation of tip and corner region flows p 159 N87-22153
- Investigation of dihedral effects in compressor cascades p 66 N88-17672
- Secondary flow measurements with L2F-technique in centrifugal compressors p 66 N88-17676
- Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17679
- Computation of secondary flows in an axial multistage compressor p 67 N88-17681
- ### SECURITY
- Security considerations, defence-related and commercial p 250 N87-26681
- ### SELECTION
- How to select a laser velocimeter for a given application? p 118 N87-21179

SELECTIVE DISSEMINATION OF INFORMATION

- SELECTIVE DISSEMINATION OF INFORMATION**
Security considerations, defence-related and commercial p 250 N87-26681
- SELECTIVE FADING**
Measurement, modeling and simulation of LOS microwave channels p 146 N89-17734
- SELF ADAPTIVE CONTROL SYSTEMS**
Active control of helicopter vibration using multiloop self-adaptive control p 75 N88-11660
- SELF TESTS**
Built-in self test p 154 N89-18488
- SEMANTICS**
Increasing the usefulness of AWACS downlink transmissions by semantic compression p 135 N87-29518
Role and design of a software engineering data base in the context of an advanced support environment p 231 N89-18485
- SEMICONDUCTOR DEVICES**
The mature of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18748
- SEMICONDUCTOR DIODES**
Effects of optical feedback on the performance of high data rate single-mode fiber systems p 238 N87-13288
- SEMICONDUCTOR LASERS**
A study of methods of phase noise reduction of semiconductor lasers for sensor applications p 172 N87-13286
- SENSITIVITY**
Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
- SENSORIMOTOR PERFORMANCE**
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706
- SENSORS**
Optimal detection of sensor failures in flight control systems using deterministic observers p 74 N88-10803
A comparison of integrated and separate systems for flight control and navigation p 48 N88-23779
- SENSORY FEEDBACK**
Motion cues in every day life p 205 N89-12180
- SENSORY PERCEPTION**
Engineering data compendium Human perception and performance User's guide (LC-87-19560) p 215 N88-27749
Engineering data compendium Human perception and performance volume 1 (LC-87-19560) p 215 N88-28630
Engineering data compendium Human perception and performance, volume 2 (LC-87-19560) p 215 N88-28631
Engineering data compendium Human perception and performance, volume 3 (LC-87-19560) p 215 N88-28632
Motion cues in every day life p 205 N89-12180
- SEPARATED FLOW**
Using the boundary-layer equations in three-dimensional viscous flow simulation p 155 N87-20222
Numerical viscous-inviscid interaction method for internal separated flows and shock wave-boundary layer interaction p 156 N87-21939
Driving mechanism of unsteady separation shock motion in hypersonic interactive flow p 10 N88-13226
Some aspects of aircraft dynamic loads due to flow separation (AGARD-R-750) p 40 N88-18588
A new laminar water tunnel to study the transition process in a blasus layer and in a separation bubble and a new tool for industrial aerodynamics and hydrodynamic research p 85 N88-23150
Development and analysis of turbulent non-equilibrium boundary layers p 165 N88-28872
Shock boundary layer interaction p 163 N88-28873
Classical separation, trailing-edge flows and buffeting p 14 N88-28874
Vortex flows p 165 N88-28875
Numerical methods Euler time dependent solver p 15 N88-29780
Numerical simulation of separated supersonic flows around tactical missile bodies p 19 N88-18632
Documentation of separated flows for computational fluid dynamics validation p 170 N89-18662
- SEPARATORS**
Impact of IPS and IRS configurations on engine installation design p 31 N87-10070
- SEQUENCING**
A general solution for the synthesis of binary sequences with desired correlation sequence p 130 N87-18743
- SERVICE LIFE**
Fuel effects on flame radiation and hot-section durability p 106 N88-29925
Service life calculator for the M53 turbofan engine p 70 N89-18796
- SERVICES**
Information services Pros and cons p 247 N86-28797
Measuring the value of information and information systems, services and products p 247 N86-28799

- New technologies for improved information systems and services p 248 N86-28802
- SERVOMECHANISMS**
Active and passive side stick controllers Tracking task performance and pilot control behaviour p 220 N89-18028
- SHAKERS**
Spacecraft qualification using advanced vibration and model testing techniques p 96 N87-20368
- SHAPE CONTROL**
Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358
- SHARP LEADING EDGES**
Applications of Euler equations to sharp edge delta wings with leading edge vortices p 6 N87-20214
- SHEAR FLOW**
An investigation of ducted propellers in axisymmetric shear flow p 161 N88-23136
Experimental study of vortex sheets in plane flow p 162 N88-23142
- SHEAR LAYERS**
Simulation of impinging shear layers using vortex dynamics p 157 N87-22140
Three-dimensional shear layer experiments and their use as test cases for calculation methods p 158 N87-22148
Combustion related shear-flow dynamics in elliptic supersonic jets p 11 N88-13232
The design of the GARTEUR low aspect-ratio wing for use in the validation of shear layer and overall flow prediction methods p 45 N89-18652
- SHEAR STRENGTH**
Diffusion bonding of Al-alloys in the solid state p 177 N87-17058
Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17636
- SHELLS (STRUCTURAL FORMS)**
Study of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18434
- SHIP HULLS**
An investigation of ducted propellers in axisymmetric shear flow p 161 N88-23136
- SHIPS**
Navy technology requirements for unmanned airborne vehicles p 32 N87-16002
The use of simulated synthetic-aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18758
The Ekt-101 integrated project: A naval utility and commercial helicopter system p 38 N88-11672
Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 164 N88-23155
Electromagnetic code for naval applications p 150 N89-18583
- SHOCK LAYERS**
Physical aspects of viscous simulation and associated research requirements p 89 N89-16865
Arcjet validation of surface catalysis using a viscous shock-layer approach p 168 N89-18634
- SHOCK LOADS**
Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948
- SHOCK TUNNELS**
Fundamental studies on shock-wave/boundary-layer interactions in a 3-D channel p 156 N87-21928
Shock tunnels for real gas hypersonics p 84 N88-11223
- SHOCK WAVE INTERACTION**
Shock-wave boundary layer interactions (AGARD-AG-280) p 155 N86-29173
Transonic and Supersonic Phenomena in Turbomachines (AGARD-CP-401) p 57 N87-21927
Fundamental studies on shock wave/boundary-layer interactions in a 3-D channel p 156 N87-21928
Shock structure measured in a transonic fan using laser anemometry p 57 N87-21929
Wake and shock interactions in a transonic turbine stage p 57 N87-21930
Experimental observations on an unsteady, normal shock/boundary layer interaction p 156 N87-21933
Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
Shock waves losses analysis p 58 N87-21936
Experimental investigations on shock losses of transonic and supersonic compressor cascades p 58 N87-21937
Optimization of a transonic flow radial vane diffuser p 58 N87-21938
Numerical viscous-inviscid interaction method for internal separated flows and shock wave-boundary layer interaction p 156 N87-21939
The effects of sweep and bluntness on a glancing shock wave turbulent boundary layer interaction p 10 N88-13227
Shock boundary layer interaction p 165 N88-28873

SUBJECT INDEX

- SHOCK WAVES**
Experimental investigations on shock losses of transonic and supersonic compressor cascades p 58 N87-21937
Optimization of a transonic flow radial vane diffuser p 58 N87-21938
A shock loss model for supercritical subsonic flows in transonic axial flow compressors p 50 N87-21950
Driving mechanism of unsteady separation shock motion in hypersonic interactive flow p 10 N88-13226
On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
Numerical experiments with hypersonic flows beneath a cone-delta-wing combination p 12 N88-13238
The off-design performance of hypersonic waveriders p 38 N88-13244
Remote sensing of interplanetary shocks using a scintillation method p 255 N89-17749
- SHORT TAKEOFF AIRCRAFT**
Development of in-flight simulation aircraft for research and training applications in UK p 83 N87-23658
- SHORT WAVE RADIO TRANSMISSION**
ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N89-18587
- SHOULDERS**
Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 191 N87-13940
- SHROUDED PROPELLERS**
An investigation of ducted propellers in axisymmetric shear flow p 161 N88-23136
- SIDE-LOOKING RADAR**
MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
Synthetic aperture imaging airborne radar p 127 N87-18731
- SIDELOBES**
ECOM effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
On a single step technique for adaptive array processing p 129 N87-18741
- SIGNAL FADING**
Experimental robust HF modems incorporating adaptive excision p 150 N89-18579
- SIGNAL PROCESSING**
Analogue signal conditioning for flight test instrumentation (AGARD-AJ-00-VOL-17) p 45 N86-29816
Guided Optical Structures in the Military Environment (AGARD-CP-383) p 237 N87-13273
Progress in optical fibre gyroscopes using integrated optics p 238 N87-13283
Nonlinear planar guided wave interactions and devices p 239 N87-12990
Optoelectronic broadband switching for communications and signal processing p 124 N87-13294
Multifunction Radar for Airborne Applications conference (AGARD-CP-381) p 125 N87-18721
A CFAR design concept for operation in heterogeneous clutter p 128 N87-18733
High-resolution MTI with SAR p 128 N87-18734
A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
High resolution signal processor for limited aperture multimode radar p 128 N87-18736
Angular super-resolution with array antennas Application to seeker-heads p 128 N87-18737
Dynamics and signal processing algorithms for high frequency of recurrence radar modes p 129 N87-18738
Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739
The application of multi-dimensional access memories to radar signal processing systems p 129 N87-18740
On a single step technique for adaptive array processing p 129 N87-18741
Form factor optimization for HFR emission p 130 N87-18742
A general solution for the synthesis of binary sequences with desired correlation sequence p 130 N87-18743
Target analysis through time distance discrimination p 130 N87-18746
Basic characteristics of FM-CW radar systems p 131 N87-18753
Radar display Conversion of scanning Errors and correction techniques p 132 N87-18754
Experiments Test range facilities, part 1 p 138 N88-11920
Fourth generation neurocognitive pattern analysis system p 198 N88-27686
The application of non-stationary data analysis techniques in the identification of changes in the electroencephalogram associated with the onset of drowsiness p 198 N88-27688
A statistical procedure for the evaluation of presence/non-presence of stimulus-related EEG activity p 199 N88-27689
Digital simulation techniques for end game phenomena p 228 N89-10051

SUBJECT INDEX

- Range delay techniques for radar target simulators p 87 N89-10054
- Data and signal processing architectures for future avionics p 52 N89-10835
- GPS signal structure p 30 N89-10878
- User equipment overview p 30 N89-10879
- Aiding and integration of a GPS receiver p 30 N89-10881
- Civil and military applications of GPS p 30 N89-10882
- Differential operation of NAVSTAR GPS for enhanced accuracy p 30 N89-10883
- GPS navigation processing and Kalman filtering p 30 N89-10884
- Gas path condition monitoring using electrostatic techniques p 54 N89-16817
- A precipitation scatter experiment at 30 GHz p 144 N89-17723
- I-band multipath propagation over the sea surface p 145 N89-17729
- Measurement and modeling of 36 GHz sea reflection phenomena p 145 N89-17730
- Random propagation through the longwave channel p 145 N89-17731
- Impulse response measurements and characterization of wideband VHF radio lines p 146 N89-17736
- Functional programming languages and modern multiprocessor architectures: The EMSP example p 231 N89-18480
- Processing techniques for radio communications in non-Gaussian noise environments p 150 N89-18581
- New method for suppression of galvanometer of errors by radio noise from overhead power lines p 151 N89-18585
- SIGNAL TO NOISE RATIOS**
- Adaptive antennas p 134 N87-23865
- Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672
- Detection of acceleration ($\pm G_z$) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710
- Balloon measurement soft low frequency TE and TM atmospheric noise p 148 N89-18567
- Signal noise/interferer combiner unit programmable (SINCUPI) p 149 N89-18575
- Inherent jitter effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A jitter-lighting scheme p 151 N89-18589
- SIGNAL TRANSMISSION**
- Experiments Test range facilities, part 2 p 138 N88-11921
- Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722
- Propagation and performance measurements over a digital troposcatter communications link p 146 N89-17733
- SIGNATURES**
- Propagation medium adaptive techniques for adverse communications and for remote sensing p 142 N89-11941
- SIGNS AND SYMPTOMS**
- Back discomfort in US Army helicopter aircrew members p 208 N87-13939
- SIMULATION**
- The value of laboratory simulation testing for predicting gearbox performance p 174 N86-29237
- Criteria for the evaluation of range performances in air air interception p 133 N87-18760
- Simulation of an integrated flight/fire control system during air-to-ground gunnery attack p 34 N87-22672
- Fundamentals of turbulence for turbulence modeling and simulation p 159 N88-11971
- Turbulence modelling through one point closures applications: unlightening by large eddy simulation p 159 N88-11972
- Lattice gas hydrodynamics p 180 N88-11978
- European hypersonic wind tunnels p 84 N88-13221
- Manrid simulation: helpful means to determine and improve structural load criteria p 42 N88-19459
- Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20186
- The use of simulation in the development of the Airbus p 244 N88-20188
- Electroencephalographic correlates of pilot performance: Simulation and in-flight studies p 208 N88-27711
- Boundary layer simulation and control in wind tunnels (AGARD AR 224) p 3 N88-28857
- Missiles: fuselage and similar bodies p 1 N88-28858
- Empirical tools for simulation methodologies p 86 N88-28866
- Transport type configurations p 43 N88-28867
- Introduction and critical flow phenomena p 14 N88-28870
- Shock boundary layer interaction p 165 N88-28873
- Classical separation: trailing edge flows and buffeting p 14 N88-28874
- Vortex flows p 165 N88-28875

- Boundary layer manipulation p 165 N88-28877
- Design criteria for hardware-in-the-loop simulation facilities p 238 N89-10052
- Cost effective simulation for millimeter wave guidance systems p 79 N89-10053
- Simulation with real elements of Exocet anti-ship missiles p 44 N89-10056
- Accuracy requirements for high-speed test with engine simulation on transport aircraft models in the NLR-HST p 89 N89-16870
- Demonstration of FOG-M (Fibre Optic Guided Missile) capabilities by means of simulation and effects of proprioceptive feedback on the control p 93 N89-17609
- Validation of a multi-block Euler flow solver with propeller-slipstream flows p 20 N89-18649
- Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660
- SIMULATORS**
- Radar simulators p 82 N87-23651
- Advanced sensor exploitation p 83 N87-24946
- Development of an airborne facility for advanced avionics research p 51 N88-23801
- Can CNV amplitude predict ability to accomplish a demanding task? p 214 N88-27700
- Engine simulator tests: Comparison of calibration and wind tunnel results p 89 N89-16871
- Modeling of wideband HF channels p 146 N89-17732
- Signal noise/interferer combiner unit programmable (SINCUPI) p 149 N89-18575
- SINGLE CRYSTALS**
- Single crystal fibers p 239 N87-13298
- SINGULARITY (MATHEMATICS)**
- New numerical techniques in the method of singularities for application to complex three-dimensional configurations p 233 N87-20205
- Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
- Singularity expansion method: Target Resonances p 137 N88-11912
- The hybrid wavefront resonance method p 137 N88-11913
- SITE SELECTION**
- Electromagnetic code for naval applications p 150 N89-18583
- SITES**
- Costing of radio terminals p 152 N89-18594
- SITTING POSITION**
- Epidemiology of the driver's back p 191 N87-13931
- Relationship between backache and flying duty in jet- and prop-pilots demonstrated by a flying wing p 191 N87-13938
- Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 191 N87-13940
- Bostereometric study of the outward curve of the spine for various reference positions p 191 N87-13943
- Investigation of the lumbar flexion of office workers p 191 N87-13944
- Postural fatigue and the backache of helicopter pilots (DCIEM-85-R-30) p 210 N87-13953
- Muscle fatigue in static and vibrational seating environments p 210 N87-13954
- Backache in aircrew p 193 N87-13958
- Back pain in gazelle aircrew p 193 N87-13959
- SIZE DETERMINATION**
- Gas turbine smoke measurement: A smoke generator for the assessment of current and future techniques p 107 N88-29930
- Particle size measurements in sooting combustion systems p 107 N88-29931
- The effect of particle properties on radiative heat transfer p 109 N88-29941
- SIZING (SHAPING)**
- Mission requirements and aircraft sizing p 39 N88-13317
- SKIN (STRUCTURAL MEMBER)**
- Composite repair of corroded J stiffened panels: Design and test verification p 1 N87-20181
- Composite repair techniques for J stiffened composite fuselage structures p 2 N87-20186
- Battle damage repair of composite structures p 3 N87-20189
- Patric repair of corroded aircraft skin areas p 3 N87-20191
- Typical joints in a wing structure p 44 N89-17693
- Test specimens for bearing and bypass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17696
- SKIN FRICTION**
- Aircraft drag prediction and reduction: Addendum 1: Computational drag analyses and minimization: mission impossible? (AGARD-H-723 ADD 1) p 5 N86-27187
- SKY WAVES**
- HF groundwave and skywave propagation p 124 N87-18706
- SLEEP**
- Enhancement of performance: Operational considerations p 195 N87-25710

SOFTWARE ENGINEERING

- Multivariate and psycho-physiological functions of DSP p 196 N87-25713
- Homeostatic entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25714
- Sedating and non-sedating sleeping aids in air operation p 197 N87-25721
- FB-111A aircrew use of temazepam during surge operations p 197 N87-25721
- Sleep and wakefulness: Handbook for flight medical officers, second edition p 197 N88-11366
- The application of non-stationary data analysis techniques in the identification of changes in the electroencephalogram associated with the onset of drowsiness p 198 N88-27688
- Psychophysiological measures of drowsiness as estimators of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702
- Sleep and wakefulness: Handbook for flight medical officers, 2nd edition p 207 N89-17399
- SLEEP DEPRIVATION**
- Sleep and wakefulness: Handbook for flight medical officers, second edition p 197 N88-11366
- Psychophysiological measures of drowsiness as estimators of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702
- Sleep and wakefulness: Handbook for flight medical officers, 2nd edition p 207 N89-17399
- SLENDER BODIES**
- Semi-empirical methods for conventional and unconventional missiles p 15 N88-29758
- SLENDER CONES**
- The drag of slender axisymmetric cones in rarefied hypersonic flow p 11 N88-13224
- SLENDER WINGS**
- High aspect-ratio wings p 85 N88-28855
- Delta wing configurations p 13 N88-28861
- SMOKE**
- Smokeless Propellants (AGARD-CP-391) p 113 N86-24464
- Millimeter wave transmission through man-made obstructions in a battlefield environment p 127 N87-18732
- Gas turbine smoke measurement: A smoke generator for the assessment of current and future techniques p 107 N88-29930
- SOFTWARE ENGINEERING**
- Guided stand-off weapons and the evaluation of means for launch calculation: The application of new techniques p 235 N87-16095
- Trends in software and system development p 223 N87-19924
- Configuration design of a helicopter integrated navigation system p 29 N87-29480
- Some approaches to the design of high integrity software p 73 N88-10799
- Assessment of software quality for the AIRBUS A311 automatic pilot p 74 N88-13864
- The Design, Development and Testing of Complex Avionics Systems (AGARD-CP-417) p 47 N88-23767
- The avionics software architecture impact on system architecture p 48 N88-23778
- Testing complex avionics software: A practical experience p 50 N88-23794
- Interfacing and integrating hardware and software design systems p 50 N88-23796
- Software engineering for the British Aerospace Experimental Aircraft Programme (EAP) p 225 N86-23748
- A software life cycle support environment p 225 N88-23800
- Software Engineering and its Application to Avionics (AGARD-CP-339) p 55 N89-18446
- Measures of merit for advanced military avionics: A user's perspective on software utility p 55 N89-18447
- Software productivity through Ada engines p 228 N89-18449
- Software development guidelines p 228 N89-18450
- On the conditions and limits of user intervention in delivered software manufacturer's viewpoint p 229 N89-18451
- Control of on-board software p 55 N89-18452
- Embedding formal methods in SAFIRA p 229 N89-18453
- Formalizing a theory of real time software specification p 229 N89-18456
- The state of practice in Ada-based program design languages p 229 N89-18457
- Debugging distributed Ada avionics software p 229 N89-18458
- Automated Ada code generation for military avionics p 230 N89-18459
- Verification and validation of flight critical software p 230 N89-18460
- Guidelines for evaluation of software engineering tools p 230 N89-18461

SOFTWARE TOOLS

- RISE: Requirements and Incremental Specification Environment p 230 N89-18462
- The MBB test strategy and tool set for software and system integration p 230 N89-18463
- Tools for developing real-time embedded systems in Ada: Needs, portability and efficiency p 231 N89-18464
- Three generations of software engineering for airborne systems p 230 N89-18465
- Software readiness planning p 230 N89-18466
- An avionics software expert system design p 231 N89-18467
- Avionics expert systems p 56 N89-18469
- Can Ada (Mil-STD-1815A) fly missiles p 231 N89-18473
- Role and design of a software engineering data base in the context of an advanced support environment p 231 N89-18485
- Ada in embedded avionics systems p 57 N89-18486
- SOFTWARE TOOLS**
- Computer aided sensor placement optimization p 236 N87-24954
- The Design, Development and Testing of Complex Avionics Systems (AGARD-CP-417) p 47 N88-23767
- Managing advanced avionics system design p 49 N88-23783
- Advanced development of a cockpit automation design support system p 49 N88-23785
- Design and development of an avionics system adapted to helicopter missions p 49 N88-23786
- Testing complex avionics software: A practical experience p 50 N88-23784
- Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795
- Software engineering for the British Aerospace Experimental Aircraft Programme (EAP) p 225 N88-23798
- Avionics systems: Development method and computer tools p 51 N88-23799
- A software life cycle support environment p 225 N88-23800
- Workshop for the design of avionics systems and the development of onboard software p 51 N88-23802
- Coherent functional development: Key to successful future system integration p 246 N88-23803
- Algorithm and general software considerations p 228 N89-11397
- Avionics systems engineering and its relationship to mission software development p 55 N89-18454
- Guidelines for evaluation of software engineering tools p 230 N89-18451
- The MBB test strategy and tool set for software and system integration p 230 N89-18463
- Tools for developing real-time embedded systems in Ada: Needs, portability and efficiency p 230 N89-18464
- SPOCK: A tool for real time artificial intelligence p 233 N89-18482
- SOLAR ACTIVITY EFFECTS**
- Experimental observations of spectral occupancy at HF p 149 N89-18573
- SOLAR ARRAYS**
- Modal testing of the Olympus development model stowed solar array p 96 N87-20366
- Acoustic effects on the dynamic of lightweight structures p 183 N87-20372
- SOLAR PLANETARY INTERACTIONS**
- Experimental observations of spectra occupancy at HF p 149 N89-18573
- SOLAR TERRESTRIAL INTERACTIONS**
- Remote sensing of interplanetary shocks using a scintillation method p 255 N89-17749
- SOLAR WIND**
- Hostile energetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941
- The high-latitude ionosphere: Dynamical aspects, and models p 188 N89-11938
- SOLID MECHANICS**
- Introduction to finite element basics p 233 N87-16377
- The use of the finite element method p 182 N87-16380
- SOLID PROPELLANT COMBUSTION**
- The reduction of exhaust signature in solid propellant rocket motors p 114 N86-26474
- Gas analysis for investigation of the combustion of double base propellants and HMX p 115 N86-26478
- Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- SOLID PROPELLANT ROCKET ENGINES**
- Performance of rocket motors with metalized propellants (AGARD-AR-230) p 99 N87-18610
- Rocket altitude test facilities register (AGARD-AG-297) p 91 N87-24489
- Design Methods in Solid Rocket Motors (AGARD-LS-150) p 100 N87-28589
- Design and sizing of solid rocket nozzles p 100 N87-28591
- Composite motor case design p 100 N87-28592
- Design of filament wound rocket cases p 100 N87-28593
- Considerations for designers of cases for small solid propellant rocket motors p 100 N87-28594
- Propellant grain design p 116 N87-28595
- Sizing solid propellant engine charges p 116 N87-28596
- State of the art of solid propellant rocket motor grain design in the United States p 116 N87-28597
- Design and sizing of internal thermal insulators for solid propellant rocket engines p 116 N87-28598
- Comprehensive optimization of solid propellant rocket engines p 116 N87-28599
- Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
- Design Methods in Solid Rocket Motors (AGARD-LS-150-REV) p 101 N89-16906
- Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 101 N89-16907
- Design and analysis of solid rocket motor nozzle p 101 N89-16908
- Composite motor case design p 101 N89-16908
- Considerations for designers of cases for small solid propellant rocket motors p 101 N89-16911
- Propellant grain design p 117 N89-16912
- Overall optimization of solid rocket motor p 102 N89-16916
- SOLID PROPELLANTS**
- Propagol combustion based on octogenase p 114 N86-26470
- Measurements of distributed combustion p 115 N86-26479
- SOLID ROCKET PROPELLANTS**
- Propellant grain design p 116 N87-28595
- Sizing solid propellant engine charges p 116 N87-28596
- State of the art of solid propellant rocket motor grain design in the United States p 116 N87-28597
- Design Methods in Solid Rocket Motors (AGARD-LS-150-REV) p 101 N89-16906
- Propellant grain design p 117 N89-16912
- Solid propellant grain design p 117 N89-16913
- State of the art of solid propellant rocket motor grain design in the United States p 117 N89-16914
- SOLID STATE DEVICES**
- Solid state multifunction phased array radar p 126 N87-18723
- SOLIDIFICATION**
- A numerical model of directional solidification of cast turbine blades p 121 N89-15277
- SOOT**
- Combustion and fuels in gas turbine engines (AGARD-CP-422) p 104 N88-29910
- The performance of a surrogate blend in simulating JP-4 in a spray-fueled combustor p 106 N88-29926
- Radiation from soot-containing flames p 106 N88-29927
- Flamelet chemistry modelling of soot formation for radiation p 106 N88-29928
- Large ionic species in sooting acetylene and benzene flames p 107 N88-29932
- Rates of formation of soot from hydrocarbon flames and its destruction p 107 N88-29933
- The influence of pressure on soot formation p 107 N88-29934
- SOUND INTENSITY**
- Intensity fluctuations due to moving point sources p 236 N89-17737
- SOUNDING ROCKETS**
- Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude p 97 N87-26945
- SPACE BASED RADAR**
- Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21886
- SPACE CHARGE**
- The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications (AGARD-CP-406) p 97 N87-26937
- High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944
- Giotto-spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947
- Thick dielectric charging on high altitude spacecraft p 99 N87-26961
- Polar auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
- SPACE PLASMAS**
- Electron beam experiments at high altitudes p 97 N87-26946
- Computer models of the spacecraft wake p 99 N87-26948
- Automatic charge control system for geosynchronous satellites p 99 N87-26960
- SPACE SHUTTLE MAIN ENGINE**
- Engine Condition Monitoring Technology and Experience (AGARD-CP-448) p 52 N89-16780
- Space shuttle main engine monitoring experience and advanced monitoring systems development p 100 N89-16815
- Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816
- SPACE SHUTTLE ORBITERS**
- Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude p 97 N87-26945
- Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
- SPACE SHUTTLE PAYLOADS**
- Influence co-efficient testing as a substitute for modal survey testing of large space structures p 94 N87-20369
- SPACE SHUTTLES**
- Influence co-efficient testing as a substitute for modal survey testing of large space structures p 94 N87-20369
- Polar auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
- SPACE SURVEILLANCE (SPACEBORNE)**
- Communication, Navigation and Surveillance services for the aviation industry using satellite technology p 26 N87-21886
- Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21886
- SPACE TRANSPORTATION SYSTEM**
- Technology development program for twenty-first century aerospace vehicles p 47 N88-23768
- SPACE WEAPONS**
- Developments in HF equipment and systems models and portable terminals p 123 N86-27573
- SPACE-TIME FUNCTIONS**
- Space-time statistics of waves propagating through a deep phase screen p 144 N89-17719
- SPACECRAFT ANTENNAS**
- Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863
- SPACECRAFT CHARGING**
- The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications (AGARD-CP-406) p 97 N87-26937
- The use of P2 potentials as indicators of substorm effects at geostationary orbit p 188 N87-26942
- High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944
- Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude p 97 N87-26945
- Giotto spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947
- Spacecraft charging in the auroral plasma: Progress toward understanding the physical effects involved p 98 N87-26949
- Secondary electron generation, emission and transport: Effects on spacecraft charging and NASCAP models p 98 N87-26950
- Spacecraft charging: Meteoroid experience p 98 N87-26951
- Arc propagation, emission and damage on spacecraft dielectrics p 98 N87-26952
- On the possibility of a several-kilovolt differential charge in the day sector of a geosynchronous orbit p 99 N87-26953
- Radiation charging and breakdown of insulators p 153 N87-26954
- Spacecraft protection against electrostatic discharge application to the ARABSAT spacecraft p 99 N87-26956
- Electrostatic immunity of geostationary satellites p 99 N87-26957
- The effects of electrostatic discharge phenomena on Telesat's domestic communications satellites p 99 N87-26958
- Surface modification to minimise the electrostatic charging of Kapton in the space environment p 151 N87-26959
- Automatic charge control system for geosynchronous satellites p 99 N87-26960
- Thick dielectric charging on high altitude spacecraft p 99 N87-26961
- Polar auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
- SPACECRAFT COMMUNICATION**
- The selection of future civil air navigation systems p 25 N87-21882
- Air navigation services and aircraft around the year 2000 p 25 N87-21883
- Communication, Navigation and Surveillance services for the aviation industry using satellite technology p 26 N87-21886
- The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications (AGARD-CP-406) p 97 N87-26937
- Media Effects on Electronic Systems in the High Latitude Region (AGARD-LS-162) p 141 N89-11931

SUBJECT INDEX

SUBJECT INDEX

Media effects on electronic systems in the high latitude region p 141 N88-11932
Satellite in-situ probing p 142 N88-11939

SPACECRAFT CONFIGURATIONS
Modal testing of the Olympus development model stowed solar array p 96 N87-20366

SPACECRAFT CONSTRUCTION MATERIALS
The welding of aluminum alloys: A new technology in space application p 176 N87-17056
Future trends in spacecraft design and qualification p 94 N87-20356
Radiation charging and breakdown of insulators p 153 N87-26954

SPACECRAFT CONTROL
Technology development program for twenty-first century aerospace vehicles p 47 N88-23768

SPACECRAFT DESIGN
Future trends in spacecraft design and qualification p 94 N87-20356
Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357
Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358
Effect of modal damping in modal synthesis of spacecraft structures p 95 N87-20362
Benefits of passive damping as applied to active control of large space structures p 96 N87-20371
Computer models of the spacecraft wake p 98 N87-26948
General aerodynamic/aerothermodynamic concepts for Hermes p 13 N88-13251
Flight Vehicle Development Time and Cost Reduction [AGARD-CP-424] p 243 N88-20173
Technology development program for twenty-first century aerospace vehicles p 47 N88-23768

SPACECRAFT ENVIRONMENTS
Hostile energetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941
Glint-to-spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947

SPACECRAFT MODELS
Influence co-efficient testing as a substitute for modal survey testing of large space structures p 94 N87-20369

SPACECRAFT POWER SUPPLIES
Utilization of EMICAT for the development of aerospace expert systems p 56 N89-18483

SPACECRAFT PROPULSION
Smokeless Propellants [AGARD-CP-391] p 113 N86-26468

SPACECRAFT RELIABILITY
Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357

SPACECRAFT STRUCTURES
The welding of aluminum alloys: A new technology in space application p 176 N87-17056
Mechanical Qualification of Large Flexible Spacecraft Structures [AD-A175529] p 94 N87-20355
Future trends in spacecraft design and qualification p 94 N87-20356
Dynamic analysis of direct television satellite TV-SAT/TDF-1 p 95 N87-20360
Structural qualification of large spacecraft p 75 N87-20361
Effect of modal damping in modal synthesis of spacecraft structures p 95 N87-20362
Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363
Low frequency vibration testing on satellites p 96 N87-20364
Modal survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365
Active structural controllers emulating structural elements by ICUS p 96 N87-20367
Spacecraft qualification using advanced vibration and modal testing techniques p 96 N87-20368
Influence co-efficient testing as a substitute for modal survey testing of large space structures p 94 N87-20369
Acoustic effects on the dynamic of lightweight structures p 183 N87-20372
k- ω axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373

SPACELAB
The welding of aluminum alloys: A new technology in space application p 176 N87-17056

SPARK IGNITION
Novel ignition systems for heavy calibre guns p 118 N86-29076

SPATIAL MARCHING
Computation of three-dimensional flows by viscous-inviscid interaction using the MZM method p 155 N87-20223
A spatial marching technique for the inviscid blunt body problem p 12 N88-13239

SPATIAL RESOLUTION

Head-mounted spatial instruments Synthetic reality or impossible dream p 206 N88-12184
Vector and the spatial disposition of competing moving displays p 206 N89-12186

SPECIFICATIONS
Engine-airframe integration for rotorcraft: System specifications and qualification p 32 N87-10074
Specification of an engine and its components starting from a consideration of aircraft missions p 63 N88-17651
Workshop on Design Loads for Advanced Fighters [AGARD-R-746] p 41 N88-19449
Changes in USAF structural loads requirements p 41 N88-19452
The specification and design of a future maritime reconnaissance aircraft p 47 N88-23772
Systems engineering technique p 48 N88-23776
Modeling of functional specifications for onboard software: Experience with the Rafale avionics system p 48 N88-23777
Interfacing and integrating hardware and software design systems p 50 N88-23796
Development of complex avionics systems: Experience from French military programs p 51 N88-23804
RISE Requirements and Incremental Specification Environment p 230 N89-18462

SPECKLE INTERFEROMETRY
Optical imagery across atmospheric turbulence p 242 N89-17721

SPECKLE PATTERNS
Vibration analysis by speckle interferometry p 183 N87-21197

SPECTRA
Experimental observations of spectral occupancy at HF p 149 N89-18573

SPECTRAL METHODS
On-line spectrum loading accuracy verification p 184 N89-17292

SPECTRAL SIGNATURES
The study of combustion by means of diode laser spectroscopy p 173 N87-21201

SPECTROMETERS
Spacecraft charging: Meteorol experience p 98 N87-26951

SPECTROSCOPY
Laser applications in flow diagnostics [AGARD-AG-296] p 173 N89-12849
Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816

SPECTRUM ANALYSIS
Acousto-optic spectrum analyzer using a planar Bragg-cell p 239 N87-13295

SPEECH RECOGNITION
The effects of display-control I/O, compatibility, and integrality on dual-task performance and subjective workload p 211 N87-29508
Speech is more than just an audible version of text p 135 N87-29522
Voice control of cockpit systems p 73 N87-29526
The flight evaluation of a speech recognition and a speech output system in an advanced cockpit display and flight management system for helicopters p 46 N87-29527
Voice interactive systems in severe noise conditions p 138 N87-29528
Effect of audio bandwidth and bit error rate on PCM, ADPCM and LPC speech coding algorithm intelligibility p 136 N87-29529

SPEED CONTROL
Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561

SPHERES
A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles p 139 N88-19662
Selective extinction of a dispersion of single and aggregated layered spheres p 147 N89-17743
Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745

SPIN REDUCTION
Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674

SPIN STABILIZATION
Guidance and Control of Precision Guided Weapons [AGARD-CP-435] p 93 N89-17605

SPLINES
Aero-engine gears: Manufacturing cracks and their effect on operation p 174 N86-29239

SPRAY CHARACTERISTICS
Turbulence effects on the droplet distribution behind airblast atomizers p 104 N88-29915
Nozzle airflow influences on fuel patternation p 105 N88-29916
Spray performance of a vaporizing fuel injector p 105 N88-29919

SPREAD SPECTRUM TRANSMISSION
Modeling of wideband HF channels p 146 N89-17732

STATISTICAL DISTRIBUTIONS

Jamming and electronic countermeasures p 151 N89-18586
Inherent jitter effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A jitter-fighting scheme p 151 N89-18589

SQUID (DETECTORS)
Squad instrumentation for neuromagnetic study of complex brain activity p 199 N88-27691

STABILITY
Experimental study of vortex sheets in plane flow p 162 N88-23142

STABILITY DERIVATIVES
Controlling the dynamic environment during NOE flight p 75 N88-11661

STABILIZERS (AGENTS)
Stability of nitrocellulose propellants assessed via thermal decomposition and alteration of the stabilizer composition p 114 N86-26471

STALLING
Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 66 N88-17674

STANDARDIZATION
Interfacing and integrating hardware and software design systems p 50 N88-23796

STANDARDS
The prospects for finite element analysis methods for structural qualification p 182 N86-31063
[AGARD-R-726]
Standard fatigue test specimens for fastener evaluation [AGARD-AG-304] p 183 N88-12818
Vision and visual protection in fast jet aircraft p 216 N88-29292
Using standards to break down information transfer barriers p 252 N88-30467
Need for common AGARD approach and actions p 181 N89-17260
The state of practice in Ade-based program design languages p 229 N88-18457

STATE ESTIMATION
Application of optimal estimation and control concepts to a bank-to-turn missile p 92 N87-29483

STATIC DEFORMATION
Influence of the static deformation on a wing in the unsteady aerodynamic p 77 N88-13357

STATIC DISCHARGERS
Electrostatic immunity of geostationary satellites p 99 N87-26957

STATIC ELECTRICITY
Interaction between EMP (Electromagnetic Pulse), lightning and static electricity with aircraft and missile avionics systems [AGARD-LS-144] p 22 N86-30708

STATIC LOADS
Static aerolasticity in combat aircraft [AGARD-R-725] p 182 N86-27678
Influence co-efficient testing as a substitute for modal survey testing of large space structures p 94 N87-20369

STATIC STABILITY
Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674
An experimental study to determine the flow and the subsonic static and dynamic stability characteristics of aircraft operating at high angles-of-attack p 42 N88-23729

STATIC TESTS
Recent studies on bolted joints in composite structures p 185 N89-17688

STATICS
Static aeroelastic considerations in the definition of design loads for fighter airplanes p 76 N88-13351

STATISTICAL ANALYSIS
A statistical procedure for the evaluation of presence/non-presence of stimulus-related EEG activity p 199 N88-27689
Measurement and analysis of low altitude atmospheric turbulence obtained using a specially instrumented Gnat aircraft p 196 N89-29728
Re-assessment of gust statistics using CAADRP data p 78 N88-29732
Comparison of statistical digital simulation methods p 227 N89-10049
CF-18/F404 transient performance trending p 71 N89-16814
A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747
A new global survey of ELF/VLF radio noise p 148 N89-18570

STATISTICAL DISTRIBUTIONS
Experiment and theory for backscattering enhancement and imaging in random media p 241 N89-17708
A scattering model for forested area p 143 N89-17713
Multiple scattering effects of random distributions of irregularly shaped particles on infrared and optical propagation p 242 N89-17716

STATORS

STATORS

- Laser velocimetry study of stator/rotor interactions in a multi-stage gas turbine compressor p 173 N87-21181
- Evaluation of L2F-measurements in unsteady turbine flow p 156 N87-21182
- The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660
- Parametric study of choke flutter with a linear theory p 66 N88-17673

STEADY FLOW

- A second order Godunov method for tactical missiles p 233 N87-20211
- Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 164 N88-23155

STEELS

- Direction of R and D and current status of understanding of advanced gear steels p 110 N86-29245
- Computer prediction of internal stresses during heat treatment p 112 N89-15272
- Mechanism of single shear fastened joints p 187 N89-17700

STIFFENING

- Composite repair techniques for J-stiffened composite fuselage structures p 2 N87-20186

STIFFNESS

- Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading p 187 N89-17704

STIMULANTS

- Introduction of a new stimulant CRL 40476 p 196 N87-25714

STIMULI

- Cognitive task demands as reflected in physiological measures p 200 N88-27699

STOCHASTIC PROCESSES

- Geometrical theory of diffusion for high-frequency coherence functions in weakly random medium with inhomogeneous background profile p 143 N89-17709
- Generation and properties of self-similar stochastic processes with application to ray propagation in random media p 242 N89-17718

STORAGE STABILITY

- Stability of nitrocellulose propellants assessed via thermal decomposition and alteration of the stabilizer composition p 114 N86-26471

STRAIN GAGES

- Manoeuvres by default, by demand and by design p 41 N88-19455

STRAIN MEASUREMENT

- Measurement of model deformation in wind tunnels p 77 N88-13358

STRAPDOWN INERTIAL GUIDANCE

- Fibre optic gyroscopes in inertial navigation p 25 N87-13275
- Strapdown inertial systems applications for tactical missiles (stand-off missiles) p 91 N87-16008
- Advances in Air-Launched Weapon Guidance and Control (AGARD-CP-431) p 92 N88-19553
- A prototype fibre optic gyroscope for missile guidance applications p 92 N88-19554
- A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- The NAE atmospheric research aircraft p 51 N88-29730

STRATEGY

- The MBB test strategy and tool set for software and system integration p 230 N89-18463

STREAMLINING

- The effects of two Carlucci initiatives: concurrency and streamlining, on the test and evaluation phase of system acquisitions p 245 N88-20198

STRESS (PHYSIOLOGY)

- Can CNV amplitude predict ability to accomplish a demanding task? p 214 N88-27700
- Visual related accidents/incidents p 216 N88-29293

STRESS ANALYSIS

- Vehicle vibration and back pain p 209 N87-13945
- Preliminary fatigue tests on short-crack specimens p 184 N89-17290
- Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures (AGARD-CP-427) p 121 N89-17685
- Recent studies on bolted joints in composite structures p 185 N89-17688
- Stresses in preloaded anisotropic plates p 186 N89-17690
- An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691
- Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17696
- Bolted joints in composites primary structures p 186 N89-17698

STRESS CONCENTRATION

- Bolted joints in composites primary structures p 186 N89-17698

STRESS CORROSION CRACKING

- Aero-engine gears: Manufacturing cracks and their effect on operation p 174 N86-29239

STRESS DISTRIBUTION

- Particle size measurements in sooting combustion systems p 107 N88-29931
- Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687
- Stresses in preloaded anisotropic plates p 186 N89-17690

STRESS FUNCTIONS

- The Forge 2 isothermal forging model p 112 N89-15271

STRESS INTENSITY FACTORS

- Approximate stress-intensity factors for a surface crack and through crack at a semi-circular notch p 185 N89-17294
- Long-crack growth rate data: Constant amplitude and FALSTAFF loading p 185 N89-17295

STRESSES

- Pharmacological approaches to performance enhancement in animals p 190 N87-25715
- Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687
- Strength analysis of mechanically fastened composite structures p 186 N89-17692
- Typical joints in a wing structure p 44 N89-17693

STRUCTURAL ANALYSIS

- The prospects for finite element analysis methods for structural qualification (AGARD-R-736) p 182 N86-31083
- Practical Application of Finite Element Analysis in Aircraft Structural Design (AGARD-LS-147) p 182 N87-16376
- Introduction to finite element basics p 233 N87-16377
- Stating the problem: The step before F.E. modelling p 182 N87-16378
- Modelling for the finite element method p 182 N87-16379
- The use of the finite element method p 182 N87-16380

- Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358
- Reliability of finite element methods in North America (AGARD-R-748) p 183 N88-11139
- Static Aeroelastic Effects on High Performance Aircraft (AGARD-CP-403) p 76 N88-13348
- An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691
- Strength analysis of mechanically fastened composite structures p 186 N89-17692

STRUCTURAL DESIGN

- Impact damage to composite structures (AGARD-R-729) p 102 N86-27425
- Modelling the behaviour of additives in gun barrels p 155 N86-29075
- Novel ignition systems for heavy calibre guns p 118 N86-29076
- The influence of large-scale computing on aircraft structural design (AGARD-R-726) p 31 N86-30726
- Introduction to finite element basics p 233 N87-16377
- Stating the problem: The step before F.E. modelling p 182 N87-16378
- Jet reaction control system for autonomous precision munition p 92 N87-29482
- Lifting bodies: An attractive aerodynamic configuration choice for hypervelocity vehicles p 39 N88-13248
- Static aeroelastic considerations in the definition of design loads for fighter airplanes p 76 N88-13351
- The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355
- Interaction between structural considerations and system design in advanced flight controls p 77 N88-19458
- Manned simulation: Helpful means to determine and improve structural load criteria p 42 N88-19459
- Missiles, fuselages and similar bodies p 14 N88-28869
- Comparison of the influence of different gas models on structural design p 43 N88-29722
- Gas turbine combustion modeling p 108 N88-29936
- A small annular combustor of high power density, wide operating range and low manufacturing cost p 110 N88-29951
- AGARD/SMP Review: Damage Tolerance for Engine Structures: 1. Non-Destructive Evaluation (AGARD-R-768) p 180 N89-17253
- The impact of engineering assumptions on NDE requirements p 180 N89-17254
- Literature review on the design of mechanically fastened composite joints p 179 N89-17686
- Evolving crashworthiness design criteria p 22 N89-18423
- Crashworthiness design methods applicable at concept stage p 22 N89-18424

SUBJECT INDEX

STRUCTURAL DESIGN CRITERIA

- Combat loads on modern fighters (AGARD-R-730) p 30 N86-27276
- Engine-transmission-structural airframe members compatibility p 31 N87-10069
- Helicopter air intake protection systems p 32 N87-10073
- Engine-airframe integration for rotorcraft: System specifications and qualification p 32 N87-10074
- High altitude, long endurance RPV design technology study p 32 N87-16011
- Workshop on Design Loads for Advanced Fighters (AGARD-R-746) p 41 N88-19449
- Structural design requirements for aircraft incorporating active control technology p 41 N88-19453
- Manoeuvres by default, by demand and by design p 41 N88-19455

STRUCTURAL STABILITY

- Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433

STRUCTURAL VIBRATION

- Dynamic analysis of direct television satellite TV/SAT/TDF-1 p 95 N87-20360
- Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363
- Low frequency vibration testing on satellites p 96 N87-20364
- Benefits of passive damping as applied to active control of large space structures p 96 N87-20371
- Multi-axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373
- Acquisition and analysis of dynamic rotating machinery data p 178 N87-21190
- Active control of helicopter vibration using multiloop self-adaptive control p 75 N88-11660
- Controlling the dynamic environment during NDE flight p 75 N88-11661
- Minimisation of helicopter vibration through active control of structural response p 75 N88-11662

SUBMARINES

- Experiments to investigate the vortices shed from a submarine-like body of revolution p 164 N88-23156

SUBMERGED BODIES

- The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs p 162 N88-23140

SUBSONIC FLOW

- Euler solution for a complete fighter aircraft at sub- and supersonic speed p 33 N87-20216
- Viscous analyses for flow through subsonic and supersonic intakes p 61 N87-24469
- Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
- Wind tunnel experiments on aerofol models for the assessment of computational flow methods p 18 N89-18614
- Validation of a multi-block Euler flow solver with propeller-slipstream flows p 20 N89-18649

SUBSONIC SPEED

- Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650

- Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N89-18654

SUBSONIC WIND TUNNELS

- A comparative study of vortex flows in wind and water tunnels p 163 N88-23151

SUBSTRUCTURES

- Crushing behaviour of helicopter subfloor structures p 23 N89-18429

- Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430

- Crashworthy design of aircraft subfloor structural components p 24 N89-18431

SUNLIGHT

- High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944

SUNSPOTS

- Experimental observations of spectral occupancy at HF p 149 N89-18573

SUPERCOMPUTERS

- Computational Fluid Dynamics: Algorithms and Supercomputers (AGARD-AG-311) p 223 N89-11395
- Hardware architecture, chapter 2 p 223 N89-11396
- Vectorization of FORTRAN programs at do-loop level p 228 N89-11398
- Computational fluid dynamics and supercomputers, chapter 6 p 165 N89-11400
- An informal glossary of terms used in supercomputing appendix A p 252 N89-11401

SUPERCritical AIRFOILS

- Influence of the static deformation on a wing in the unsteady aerodynamic p 77 N88-13357
- Comparison of theory and experiment for four supercritical, low drag airfoils p 21 N88-18655

SUPERCritical WINGS

- Static aeroelastic effects on the flutter of a supercritical wing p 76 N88-13353

SUBJECT INDEX

SUPERHIGH FREQUENCIES

- UHF/SHF SATCOM propagation and system design p 125 N87-18710
- Electronic scanning antenna for military aircraft of the 1990s p 131 N87-18751

SUPERPLASTICITY

- Application of diffusion bonding combined with superplastic forming (SPF/DB) to the fabrication of TGV metal sheet structures p 177 N87-17050
- Superplasticity (AGARD-LS-154) p 111 N87-29841
- Superplasticity: An overview p 111 N87-29842
- Superplastic sheet forming NATO/AGARD lecture series on superplasticity p 111 N87-29843
- Bulk forming of superplastic alloys p 111 N87-29844
- Cavitation and superplasticity p 111 N87-29845
- The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87-29847
- Designing for superplastic alloys p 119 N87-29848
- The manufacture of superplastic alloys p 119 N87-29849
- Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270
- SUPERSONIC AIRCRAFT**
 - Experiences using the Mark IV supersonic hypersonic arbitrary body program p 13 N88-13249
 - Instantaneous force measurement on a model subjected to rapid control variations p 90 N88-16872
- SUPERSONIC COMBUSTION RAMJET ENGINES**
 - Aerodynamics of Hypersonic Lifting Vehicles (AGARD-CP-428) p 10 N88-13219
 - Hypersonic airbreathing propulsion: Evolution and opportunities p 62 N88-13231
 - Numerical analysis of flow through scramjet engine inlets p 11 N88-13233

SUPERSONIC COMPRESSORS

- Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
- Experimental investigations on shock losses of transonic and supersonic compressor cascades p 58 N87-21937
- A numerical study of unsteady flow effects in a supersonic compressor cascade p 59 N87-21944
- Application of highly loaded single-stage mixed-flow compressors in small jet engines p 63 N88-17652
- Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17679

SUPERSONIC FLOW

- Shock-wave boundary layer interactions (AGARD-AG-280) p 155 N86-29173
- An assessment of the use of low-order panel methods for the calculation of supersonic flows p 224 N87-20204
- The integration of computational fluid dynamics into the military aircraft design process p 33 N87-20210
- A second order Godunov method for tactical missiles p 233 N87-20211
- Euler solution for a complete fighter aircraft at sub- and supersonic speed p 33 N87-20216
- Transonic and Supersonic Phenomena in Turbomachines (AGARD-CP-401) p 57 N87-21927
- Combustion related shear-flow dynamics in elliptic supersonic jets p 11 N88-13232
- Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 111 N88-13235
- Application of highly loaded single-stage mixed-flow compressors in small jet engines p 63 N88-17652
- Accuracy criteria for evaluating supersonic aerodynamic coefficient predictions p 15 N88-29756
- A theoretical and experimental evaluation of a numerical method for calculating supersonic flows over wing-body configurations p 19 N89-18632
- Numerical simulation of separated supersonic flows around tactical missile bodies p 19 N89-18632
- A comparative study and validation of upwind and central-difference Navier-Stokes codes for high-speed flows p 169 N89-18647
- Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650

SUPERSONIC INLETS

- Viscous analyses for flow through subsonic and supersonic inlets p 61 N87-24469
- Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model p 20 N89-18642

SUPERSONIC JET FLOW

- Three-dimensional calculations of lateral jet interaction with an external supersonic flow p 19 N89-18631

SUPERSONIC SPEED

- Vortex formation over delta, double-delta and wave rider configurations at supersonic speeds p 12 N88-13243
- Design of wings and wing/body configurations for transonic and supersonic speeds p 39 N88-13318
- Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model p 20 N89-18642

- Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650
- Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N88-18654

SUPERSONIC TURBINES

- Design and test of a high blade speed, high work capacity transonic turbine p 54 N88-17658

SUPERSONIC WIND TUNNELS

- A comparative study of vortex flows in wind and water tunnels p 163 N88-23151

SUPPORTS

- The use of computational fluid dynamic methods to assess the effects of model support systems and working section modifications on the flow around wind tunnel models p 88 N89-18682

SURFACE ACOUSTIC WAVE DEVICES

- Low-cost, monolithic beamforming components for radar p 131 N87-18750

SURFACE CRACKS

- Approximate stress-intensity factors for a surface crack and through crack at a semi-circular notch p 185 N89-17294

SURFACE PROPERTIES

- Techniques for boundary layer tripping and control p 86 N88-28863
- Approximate stress-intensity factors for a surface crack and through crack at a semi-circular notch p 185 N89-17294
- Multiple scattering from rough surfaces p 143 N89-17710
- Coherent scattering from random media p 174 N89-17714

SURFACE REACTIONS

- Bore temperature and heat flux in a 40 mm gun barrel p 117 N86-29069

SURFACE ROUGHNESS

- Experiments on boundary layer transition tripping at low Reynolds numbers p 18 N89-18688
- Regions of validity for some rough surface scattering models p 241 N89-17711
- Multiple scattering effects of random distributions of irregularly shaped particles on infrared and optical propagation p 242 N89-17716
- Generation and properties of self-similar stochastic processes with application to ray propagation in random media p 242 N89-17718
- Rough surface propagation and scatter with applications to ground wave remote sensing in an ocean environment p 145 N89-17727
- Wave-tit sounding of tropospheric ducts above the sea p 145 N89-17728

SURFACE TO AIR MISSILES

- Guidance and Control of Precision Guided Weapons (AGARD-CP-425) p 93 N89-17605
- Demonstration of FOG-M (Fibre Optic Guided Missile) capabilities by means of simulation and effects of proprioceptive feedback on the control p 93 N89-17609

SURFACE VEHICLES

- Vehicle vibration and back pain p 209 N87-13945

SURFACE WAVES

- Determination of fractal dimension, connection of space and temporal chaos and application to experimental results p 160 N88-11977

SURGES

- Review of current knowledge on engine response to distorted inflow conditions p 60 N87-24465
- Air inlet/engine compatibility: Impact of theoretical and experimental methods p 60 N87-24466
- New trends in intake/engine compatibility assessment p 60 N87-24467
- Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
- Turbulent engine post-instability behavior: Computer simulations, test validation and application of simulations p 62 N87-24474
- Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477
- Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478
- Possibilities for on-line surge suppression by test guide vane adjustment in axial compressors p 66 N88-17674

SURVEILLANCE

- The selection of future civil air navigation systems p 25 N87-21882
- Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control (AGARD-CP-407) p 138 N88-19653
- HF communications and remote sensing in the high latitude region p 142 N89-11936
- SURVEILLANCE RADAR**
 - Possible contributions from the SSR mode S data link to the conduct of efficient aircraft operations p 26 N87-21887
 - Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21888

SYSTEM IDENTIFICATION

- Monopulse secondary radar: Practical realization and achievement: Mode S: The radar of tomorrow p 133 N87-21889
- Development of an airborne facility for advanced avionics research p 51 N88-23801

SURVEYS

- A survey of existing hypersonic ground test facilities: North America p 84 N88-13220
- Performance assessment register (AGARD-R-763) p 246 N89-10666
- A new global survey of ELF/VLF radio noise p 148 N89-18570

SWEEP ANGLE

- The effects of sweep and bluntness on a glancing shock wave turbulent boundary layer interaction p 10 N88-13227

SWEEP FORWARD WINGS

- X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
- Wing divergence of trimmed aircraft p 76 N88-13354

SWEEP WINGS

- Static aeroelastic effects on the flutter of a supercritical wing p 76 N88-13353
- AGARD standard aeroelastic configurations for dynamic response 1: Wing 445.6 (AGARD-R-765) p 42 N88-27193

SWIRLING

- Development of intake swirl generators for turbo jet engine testing p 83 N87-24480
- Analysis of the flow through double swirl airblast atomizers p 110 N88-29949
- Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18644

SWITCHING CIRCUITS

- Optoelectronic broadband switching for communications and signal processing p 124 N87-13294

SYMBOLIC PROGRAMMING

- A graphical aid to IKBS program development p 224 N87-29521

SYMPTOMOLOGY

- An investigation of simulator sickness and an electrocystagmographic study p 206 N89-12183

SYNCHRONISM

- Robust algorithm synchronizes mode changes in fault-tolerant asynchronous architectures p 231 N89-18475

SYNTAX

- Speech is more than just an audible version of text p 135 N87-29522

SYNTHETIC APERTURE RADAR

- Lightwave technology in future radar equipment designs p 240 N87-13304
- Multifunction Radar for Airborne Applications ... conference (AGARD-CP-381) p 125 N87-18721
- Transmission airborne radar for the 1990s p 126 N87-18724
- Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18727
- Implementation of an airborne SAR motion compensation system p 127 N87-18728
- MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
- ECCM effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
- Synthetic aperture imaging airborne radar p 127 N87-18731
- High-resolution MTI with SAR p 128 N87-18734
- Postintegration of radar images p 132 N87-18735
- The use of simulated synthetic-aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18738
- Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21888

SYNTHETIC ARRAYS

- Lightwave technology in future radar equipment designs p 240 N87-13304

SYNTHETIC FUELS

- The behaviour of synthetic fuels in a small transparent combustor p 110 N88-29950

SYSTEM EFFECTIVENESS

- The unmanned aircraft as a force multiplier p 32 N87-18001
- Heavy technology requirements for unmanned airborne vehicles p 32 N87-18002
- Requirements and applications for radar simulations: A standpoint of an airframe company p 133 N87-18759
- Criteria for the evaluation of range performances in air/air interception p 133 N87-18760
- Guidance and Control of Precision Guided Weapons (AGARD-CP-435) p 93 N89-17605

SYSTEM FAILURES

- Modeling of functional specifications for onboard software: Experience with the Rafale avionics system p 48 N88-23777

SYSTEM IDENTIFICATION

- Modal-survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365

SYSTEMS ANALYSIS

SYSTEMS ANALYSIS

- Letal air defense suppression technology base detection p 234 N87-16004
- Problems of spectrum management and system compatibility p 125 N87-18711
- Procurement and management of microcomputer-based systems p 222 N87-19929
- Air navigation services and aircraft around the year 2000 p 25 N87-21883
- Microwave Landing System (MLS) area navigation Computed centerline experiments and system accuracy analysis in an RF environment p 26 N87-21891
- Strategic control to improve efficiency of air traffic management p 27 N87-21894
- Performance improvement of airborne weapon systems methods, scope and limitations p 33 N87-22665
- Weapon systems polyvalence: An economic and operational challenge p 34 N87-22667
- Systems analysis and simulation techniques: Essential tools for balanced complex weapon system designs in terms of performance and cost p 244 N88-20187
- Measures, methods and models employed in evaluating the effectiveness of information centers and services p 253 N88-11627
- Processing science and materials development p 119 N89-15263
- Engine Condition Monitoring Technology and Experience [AGARD-CP 448] p 52 N89-16780
- Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781
- Use of Markov probability and reliability model generation methods in the analysis of reliability of a fault tolerant hardware and software based system with flexible repair policies p 181 N89-18477
- SYSTEMS COMPATIBILITY**
- Acquisition and processing of non-stationary pressure measurements in studies of air intake distortion p 178 N87-21191
- The impact of future avionics technology on the conduct of air warfare p 45 N87-22673
- Air inlet/engine compatibility impact of theoretical and experimental methods p 50 N87-24466
- New trends in intake/engine compatibility assessment p 60 N87-24467
- SYSTEMS ENGINEERING**
- HF system design p 125 N87-18707
- Meteor burst propagation and system design p 125 N87-18708
- UHF/SHF SATCOM propagation and system design p 125 N87-18710
- Dynamic analysis of direct television satellite TV-SA/77DF-1 p 95 N87-20360
- Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21888
- Performance improvement of airborne weapon systems methods: scope and limitations p 33 N87-22665
- Weapon systems polyvalence: An economic and operational challenge p 34 N87-22667
- Evolution of combat performance of the Hawk light combat aircraft p 34 N87-22668
- Integrated design of structures p 34 N87-22669
- Propulsion system technologies for thrust vectoring p 60 N87-22670
- AI expert system technology issues for guidance and control applications p 74 N88-10808
- Research simulators for helicopters p 84 N88-11856
- A129 advanced solutions for meeting today's combat helicopter requirement p 38 N88-11869
- Guidance and control of air-launched armaments: An aerodynamic perspective p 92 N88-19557
- An EHF telecommunication system engineering model p 141 N88-19674
- The Design, Development and Testing of Complex Avionics Systems [AGARD-CP 417] p 47 N88-23767
- Systems for the 21st century p 47 N88-23768
- Architecture and role of the Sensor Subsystem in future aircraft weapon systems p 47 N88-23770
- Rapid prototyping of complex avionics system architectures p 47 N88-23771
- The specification and design of a future maritime reconnaissance aircraft p 47 N88-23772
- A structured approach to weapon system design p 48 N88-23773
- Development of a generic architecture p 48 N88-23774
- Test philosophy of the EH101 integrated avionics p 48 N88-23775
- Systems engineering technique p 48 N88-23776
- A comparison of integrated and separate systems for flight control and navigation p 48 N88-23779
- Development and testing of a predictive methodology for optimization of man-machine interface in future avionics systems p 48 N88-23780
- A change in system design emphasis: From machine to man p 49 N88-23782
- Managing advanced avionics system design p 49 N88-23783

- Psychosensory cockpit ergonomics, advantages of intelligent information systems p 49 N88-23784
- Design for interoperability (interchangeability) p 50 N88-23789
- The integration, characterization and trialing of a modern complex airborne radar p 50 N88-23791
- Experience in the integration of human engineering effort with avionics systems development p 50 N88-23793
- Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795
- Workshops for the design of avionics systems and the development of onboard software p 51 N88-23802
- Coherent functional development: Key to successful future system integration p 246 N88-23803
- Development of complex avionics systems: Experience from French military programs p 51 N88-23804
- Avionics systems engineering and its relationship to mission software development p 55 N89-18454
- Debugging distributed Ada avionics software p 229 N89-18458
- Software readiness planning p 230 N89-18466
- Ada in embedded avionics systems p 57 N89-18486
- SYSTEMS INTEGRATION**
- Engine Airframe Integration for Rotocraft [AGARD-LS-148] p 31 N87-10067
- Engine-airframe integration for rotorcraft: System specifications and qualification p 32 N87-10074
- Qualification of the faint object camera p 170 N87-20359
- Inertial-GPS: A marriage of reason, an analysis p 26 N87-21885
- Some experiences in integrating avionics systems on the civil flight deck p 45 N87-21902
- Propulsion system technologies for thrust vectoring p 60 N87-22670
- X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
- Simulation of an integrated flight/line control system during air-to-ground gunnery attack p 34 N87-22672
- The impact of future avionics technology on the conduct of air warfare p 45 N87-22673
- Trends in ground-based and in-flight simulators for development applications p 81 N87-23645
- The integration and operational suitability of emerging technologies for future fighter aircraft: A pilot's perspective p 36 N87-24454
- Advances in Guidance and Control Systems and Technology [AGARD-CP 411] p 28 N87-29474
- Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MIIISA) p 171 N87-29479
- Configuration design of a helicopter integrated navigation system p 29 N87-29480
- Workshop on Design Loads for Advanced Fighters [AGARD-R-746] p 41 N88-19449
- Interaction between structural considerations and system design in advanced flight controls p 77 N88-19458
- Development cost reduction using integrated CAE-CAD-CAM techniques p 225 N88-20182
- The Design, Development and Testing of Complex Avionics Systems [AGARD-CP 417] p 47 N88-23767
- A comparison of integrated and separate systems for flight control and navigation p 48 N88-23779
- Development and testing of a predictive methodology for optimization of man-machine interface in future avionics systems p 48 N88-23780
- Crewstation Information and Development System (CIDS) p 49 N88-23781
- Design for interoperability (interchangeability) p 50 N88-23789
- The electromagnetics threat to future avionics systems p 50 N88-23790
- The integration, characterization and trialing of a modern complex airborne radar p 50 N88-23791
- Experience in the integration of human engineering effort with avionics systems development p 50 N88-23793
- A look toward the future of complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88-23797
- Coherent functional development: Key to successful future system integration p 246 N88-23803
- Design criteria for hardware-in-the-loop simulation facilities p 228 N89-10052
- GPS/inertial navigation system integration for enhanced navigation performance and robustness p 30 N89-10880
- Aiding and integration of a GPS receiver p 30 N89-10881
- System considerations for integrated machinery health monitoring p 70 N89-18804
- A man-machine interface solution: The EAP glare shields p 219 N89-18018
- The use of integrated side-arm controllers in helicopters p 220 N89-18029
- Integrated control and avionics for air superiority p 221 N89-18032
- AFIT/F-16 impact of cockpit automation on pilot acceptance p 221 N89-18033
- Software development guidelines p 228 N89-18450

- Avionics systems engineering and its relationship to mission software development p 55 N89-18454
- The MBB test strategy and tool set for software and system integration p 230 N89-18463
- Real time expert system for onboard radar identification p 56 N89-18481
- SYSTEMS MANAGEMENT**
- Procurement and management of microcomputer-based systems p 222 N87-19929
- SYSTOLIC ARRAYS**
- Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739
- T**
- TACTICS**
- Computer aided tactics for air combat p 214 N88-19559
- TACTILE DISCRIMINATION**
- Voice control of cockpit systems p 73 N87-29526
- TAIL ASSEMBLIES**
- Battle damage repair of composite structures p 3 N87-20189
- TAIL ROTORS**
- New aerodynamic design of the fenestron for improved performance p 37 N88-11664
- TAKEOFF**
- Interpretation in terms of the response of a one degree-of-freedom oscillator to two successive disturbances p 35 N87-23610
- Simulation of aircraft behaviour on and close to the ground: Summary of AGARDograph AG-285 p 80 N87-23640
- Changes in USAF structural loads requirements p 41 N88-19452
- TANKS (COMBAT VEHICLES)**
- An investigation of step descent guidance for terminally-guided sub-munitions p 92 N88-19555
- TANKS (CONTAINERS)**
- Use of water towing tanks for aerodynamics and hydrodynamics p 163 N88-23149
- TAPERING**
- AGARD standard aeroelastic configurations for dynamic response: I Wing 445.6 p 42 N88-27193
- TARGET ACQUISITION**
- Multifunction millimetre-wave radar for all-weather ground attack aircraft p 126 N87-18725
- Criteria for the evaluation of range performances in air/air interception p 133 N87-18780
- Integrated multisensor targeting p 236 N87-24947
- The BAe (Bracknell) automatic detection, tracking and classification system p 241 N87-29476
- An intelligent multi-target tracking system p 119 N87-29484
- Air-to-air radar flight testing [AGARD-AG-300-VOL 7] p 141 N88-27406
- Guidance and Control of Precision Guided Weapons [AGARD-CP 435] p 93 N89-17605
- CO2 laser radar systems for target acquisition and guidance p 173 N89-17606
- Multisensor target reconnaissance p 219 N89-18020
- TARGET RECOGNITION**
- Advanced sensor exploitation p 83 N87-24946
- The BAe (Bracknell) automatic detection, tracking and classification system p 241 N87-29476
- An intelligent multi-target tracking system p 119 N87-29484
- Theoretical Aspects of Target Classification [AGARD-LS-152] p 136 N88-11909
- Input signal shaping K-pulse p 137 N88-11917
- Applications of image analysis in precision guided weapons p 93 N89-17610
- Statistical techniques applied to analysis of amplitude distributions p 234 N89-17611
- Observed phase delay through rain at 96 GHz p 144 N89-17724
- Multisensor target reconnaissance p 219 N89-18020
- Multi-input decision aid procedure: Application to multi-sensor target classification p 233 N89-18484
- TARGETS**
- Helicopter fire control: Advantages of an automatic target tracker p 84 N88-11867
- Singularity expansion method: Target Resonances p 137 N88-11912
- Statistical techniques applied to analysis of amplitude distributions p 234 N89-17611
- TASK COMPLEXITY**
- The task taxonomy method: A basis for an expert system on human reliability p 207 N87-29506
- The effects of display-control I/O, compatibility, and integrity on dual-task performance and subjective workload p 211 N87-29508
- A study of pilot flight information crossmonitoring performance p 211 N87-29509
- Stars, polygons and clusters p 250 N87-29511
- An assessment of variable format information presentation p 250 N87-29512

SUBJECT INDEX

- Voice command and the change of mental representation during task performance p 135 N87-29523
- The role of asymmetric transfer in the evaluation of voice generation and recognition systems p 136 N87-29525
- The practical assessment of pilot workload [AGARD-AG-282] p 212 N87-30054
- In-flight workload assessment using embedded secondary radio communications tasks p 212 N87-30055
- Use of task timeline analysis to assess crew workload p 212 N87-30056
- Pilot subjective evaluation of workload during a flight test certification programme p 212 N87-30057
- The use of subjective workload assessment technique in a complex flight task p 213 N87-30058
- Workload methodology p 213 N87-30059
- The assessment of workload in helicopters p 214 N87-30066
- Investigation of workload measuring techniques: A theoretical and practical framework p 214 N87-30069
- Pilot workload assessment: A flight test approach p 218 N89-18014
- Considerations concerning the assessment of pilot workload for complex task conditions p 218 N89-18015
- TASKS**
- KRS A knowledge-based mission planner p 235 N87-24943
- Measurement of pilot workload p 214 N87-30068
- Task interactions in distributed machines of embedded computer systems p 232 N89-18479
- TAXIING**
- Aircraft Dynamic Response to Damaged and Repaired Runways [AGARD-R-739] p 34 N87-23809
- Interpretation in terms of the response of a one degree-of-freedom oscillator to two successive disturbances p 35 N87-23610
- An experimental-analytical routine for the dynamic qualification of aircraft operating on rough runway surfaces p 35 N87-23611
- TECHNOLOGICAL FORECASTING**
- About the future of airborne radar p 125 N87-18722
- Multimission airborne radar for the 1990s p 126 N87-18724
- Cost analysis of aircraft projects p 3 N87-22664
- TECHNOLOGY ASSESSMENT**
- Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation [ISBN:92-835-0399-6] p 79 N87-15985
- About the future of airborne radar p 125 N87-18722
- Considerations in utilizing IR signatures p 241 N87-18747
- GPS: Overview and present status p 26 N87-21884
- The potential impact of developments in electronic technology on the future conduct of air warfare, volume 3 [AGARD-AR-232-VOL-3] p 153 N87-22094
- The assessment and evaluation of combat performance improvements p 34 N87-22675
- Microwave Antennas for Avionics [AGARD-LS-151] p 134 N87-23859
- Impact of future developments in electronic technology on cockpit engineering [AGARD-R-757] p 211 N87-25769
- Technical evaluation report on the Fluid Dynamics Panel Symposium on Applications of Computational Fluid Dynamics in Aeronautics [AD-A172209] p 159 N87-27958
- Hypersonic airbreathing propulsion: Evolution and opportunities p 62 N88-13231
- The RAE experimental data-base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250
- Hypersonic aerodynamics Applications for HOTOL p 13 N88-13252
- Fundamentals of fighter aircraft design p 39 N88-13316
- An examination of the impact of potential advances in component technology for future military engines p 83 N88-17650
- Parametric study of the total cost of aircraft modernization in terms of development and equipment series costs p 243 N88-20177
- The increased time and cost of development: Causes and (some) remedies p 243 N88-20178
- Microelectronics the next fifteen years p 154 N88-23792
- Flight Mechanics Panel Symposium on Rotorcraft Design for Operations Technical evaluation report [AGARD-AR-243] p 42 N88-26362
- The anatomy of the gyroscope [AGARD-AG-113] p 172 N88-26287
- TECHNOLOGY TRANSFER**
- Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795

- TECHNOLOGY UTILIZATION**
- Influence of engine variables on future helicopter systems p 32 N87-10072
- Considerations in utilizing IR signatures p 241 N87-18747
- TELECOMMUNICATION**
- HF groundwave and skywave propagation p 124 N87-18706
- HF system design p 125 N87-18707
- Meteor burst propagation and system design p 125 N87-18708
- UHF/SHF SATCOM propagation and system design p 125 N87-18710
- Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control [AGARD-CP-407] p 138 N88-19653
- Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672
- Development of a generic architecture p 48 N88-23774
- Information technology to facilitate group interaction p 252 N88-30463
- Using standards to break down information transfer barriers p 252 N88-30467
- TELEMETRY**
- Range delay techniques for radar target simulators p 87 N89-10054
- TELEPHONY**
- Adaptive systems in operation p 124 N86-27576
- TEMPERATURE DISTRIBUTION**
- On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N86-29070
- Prediction of temperature distribution in anti-missile extrusion p 120 N89-15265
- TEMPERATURE EFFECTS**
- Aeroelastic thermal effects p 68 N89-10015
- TEMPERATURE GRADIENTS**
- Sapphire fiber optic temperature probe p 241 N87-21186
- TEMPERATURE MEASUREMENT**
- Bore temperature and heat flux in a 40 mm gun barrel p 117 N86-29069
- Interior ballistics of small arms: Particular problems. Part 1: Heat transfer and cook-off phenomenon in a small caliber weapon p 154 N86-29071
- The lubrication of dynamically loaded concentrated hard line contacts. Temperature and pressure measurements p 175 N86-29247
- Advanced instrumentation for Aero Engine Components [AGARD-CP-399] p 118 N87-21170
- Simultaneous temperature measurements with Raman and CARS in laminar flames p 103 N87-21171
- CARS thermometry for low and high pressure combustion systems p 103 N87-21172
- Nonlinearity and single shot noise problems in CARS spectroscopy p 104 N87-21174
- Application of CARS thermometry to a turbulent flame p 104 N87-21175
- Velocity and temperature measurements in a can-type gas-turbine combustor p 57 N87-21164
- Some considerations relating to aero engine pyrometry p 171 N87-21167
- Turbine rotor blade measurements using infrared pyrometry p 171 N87-21168
- TEMPERATURE PROBES**
- Sapphire fiber optic temperature probe p 241 N87-21186
- TEMPERATURE SENSORS**
- Fiber optic device for temperature remote sensing p 237 N87-13280
- Sapphire fiber optic temperature probe p 241 N87-21186
- Some considerations relating to aero engine pyrometry p 171 N87-21167
- The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195
- TENSILE STRENGTH**
- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-Al6 V4 p 182 N87-17065
- Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program p 177 N87-17067
- TENSILE TESTS**
- Behaviour of mechanically fastened joints in advanced composites p 103 N89-17705
- TENSORS**
- Fundamentals of turbulence for turbulence modeling and simulation p 159 N88-11971
- TERMINAL BALLISTICS**
- Internal ballistics of small arms: Particular problems. Part 2: Thermodynamic model, powder parameters, initiation p 154 N86-29072
- TERMINAL GUIDANCE**
- Angular super-resolution with array antennas Application to seeker-heads p 128 N87-18737

THERMAL RADIATION

- An investigation of steep descent guidance for terminal-guided sub-munitions p 82 N88-19555
- TERMINOLOGY**
- An informal glossary of terms used in supercomputing. Appendix A p 252 N89-11401
- TERRAIN**
- Advanced sensor exploitation p 83 N87-24946
- The digital colour map simplifies ground attack operations p 187 N87-24950
- An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave links p 138 N88-19854
- Development of a ground-conductivity map for the area of the Federal Republic of Germany from measured field-strength contours p 138 N88-19856
- Scattering and depolarization by random rough terrain and vegetation covered terrain-uniform full wave approach p 138 N88-19857
- VHF/UHF propagation by diffraction: Calculation by numerical integration p 139 N88-19859
- Mono- and bistatic radar coverage diagrams including diffractive wave propagation p 139 N88-19860
- Ground/lower atmospheric consideration p 142 N89-11935
- TERRAIN FOLLOWING AIRCRAFT**
- Integration of advanced safety enhancements for F-16 terrain following p 56 N89-18472
- TEST FACILITIES**
- Rocket altitude test facilities register [AGARD-AG-297] p 91 N87-24489
- Experiments: Test range facilities, part 2 p 138 N88-11921
- A survey of existing hypersonic ground test facilities North America p 84 N88-13220
- Aerodynamic and Related Hydrodynamic Studies Using Water Facilities [AGARD-CP-413] p 160 N88-23125
- Atmospheric turbulence research at DFVLR [AGARD-R-752] p 189 N88-27669
- Design criteria for hardware-in-the-loop simulation facilities p 228 N89-10052
- Simulation with real elements of Exocet anti-ship missiles p 44 N89-10056
- Helifire system model validation p 44 N89-10057
- TEST STANDS**
- Method and means for ground crash testing at the Centre d'Essais Aeronautique de Toulouse. Application to the SA 341 and As 332 helicopters p 24 N88-18452
- TEXTS**
- Microcomputers in information resource sharing. Two full text systems p 249 N87-19927
- TEXTURES**
- Markov random fields: A strategy for clutter modelling p 143 N89-17712
- Coherent scattering from random media p 174 N89-17714
- TF-30 ENGINE**
- Fuel property effects on the US Navy's TF30 engine p 67 N88-29911
- THALAMUS**
- The interaction of thalamo-cortical systems in the 40 Hz following response p 189 N88-27694
- THERAPY**
- Hypertension in the evaluator p 194 N87-24077
- Phobic manifestations among experienced pilots p 197 N87-25722
- THERMAL CONDUCTIVITY**
- The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195
- THERMAL DECOMPOSITION**
- Propagol combustion based on octogenosis p 114 N86-26470
- Stability of nitrocellulose propellants assessed via thermal decomposition and alteration of the stabilizer composition p 114 N86-26471
- THERMAL DEGRADATION**
- Stability of nitrocellulose propellants assessed via thermal decomposition and alteration of the stabilizer composition p 114 N86-26471
- THERMAL DIFFUSION**
- Burning stability of double base propellants p 114 N86-26472
- THERMAL INSULATION**
- The effects of electrostatic discharge phenomena on Telesat's domestic communications satellites p 99 N87-26958
- Design and sizing of internal thermal insulators for solid propellant rocket engines p 116 N87-28598
- THERMAL PROTECTION**
- Design and sizing of internal thermal insulators for solid propellant rocket engines p 116 N87-28598
- THERMAL RADIATION**
- Combustion and fuels in gas turbine engines [AGARD-CP-422] p 104 N88-29910
- Radiation from soot-containing flames p 106 N88-29927
- Flamelet chemistry modelling of soot formation for radiation p 106 N88-29928
- Radiation transfer in gas turbine combustors p 107 N88-29929

THERMAL STABILITY

THERMAL STABILITY

Stability of nitrocellulose propellants assessed via thermal decomposition and alteration of the stabilizer composition p 114 N86-26471

THERMAL STRESSES

On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N86-29070
Computer prediction of internal stresses during heat treatment p 112 N89-15272

THERMOCHEMISTRY

Three-dimensional combustor predictors: A comparison of equilibrium and laminar flamelet chemistry models p 108 N88-29940

THERMOCOUPLES

Processing techniques for correlation of LDA and thermocouple signals p 111 N87-21191

THERMODYNAMICS

Internal ballistics of small arms: Particular problems. Part 2. Thermodynamic model, powder parameters, initiation p 154 N86-29072
A numerical model of directional solidification of cast turbine blades p 121 N89-15277

THERMOELASTICITY

Thermoelectric testing of stratified materials p 179 N87-17064

THERMOGRAPHY

Digital image processing applied to fluid dynamic problems p 156 N87-21193
Computerized thermographic technique for the detection of boundary layer separation p 18 N89-16876

THIN FILMS

The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195

THREAT EVALUATION

Decision aid for threat penetration analysis p 235 N87-24944
Artificial intelligence and its impact on combat aircraft p 232 N87-24945
Advanced sensor exploitation p 83 N87-24946

THREE DIMENSIONAL BODIES

Numerical grid generation around complete aircraft configurations p 224 N87-20202
Numerical investigation of the laminar boundary layer on a 3-D body started impulsively from rest p 6 N87-20220
Applications of RAE viscous flow methods near separation boundaries for three-dimensional wings in transonic flow p 7 N87-20224
Accuracy study of transonic flow computations for three dimensional wings p 19 N89-18628

THREE DIMENSIONAL BOUNDARY LAYER

Fundamental studies on shock-wave/boundary-layer interactions in a 3-D channel p 156 N87-21928
Computation of Three-Dimensional Boundary Layers Including Separation [AGARD-R-741] p 158 N87-22145
Three-dimensional boundary layers: Introduction to calculation methods p 158 N87-22146
Physics and modelling of three-dimensional boundary layers p 158 N87-22147
Three-dimensional layers: Laminar-turbulent transition p 158 N87-22148
Evaluation of results of boundary-layer calculations with regard to design aerodynamics p 158 N87-22150
An approach to practical aerodynamic calculations p 158 N87-22151

THREE DIMENSIONAL FLOW

A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
New numerical techniques in the method of singularities for application to complex three-dimensional configurations p 233 N87-20205
Numerical simulation of internal and external inviscid and viscous 3-D flow fields p 155 N87-20213
Using the boundary-layer equations in three-dimensional viscous flow simulation p 155 N87-20222
Computation of three-dimensional flows by viscous-inviscid interaction using the M2M method p 155 N87-20223
Application of the Navier-Stokes equations to solve aerodynamic problems p 7 N87-20225
Simulation of three-dimensional transonic flow with separation past a hemispherical cylinder configuration p 9 N87-20230
Fundamental studies on shock-wave/boundary-layer interactions in a 3-D channel p 156 N87-21928
Three-dimensional computation around turbomachine blades with fins p 59 N87-21940
A quasi three dimensional method for the calculation of transonic flows in turbomachines p 59 N87-21941
Transonic three dimensional inviscid calculations in turbomachines p 59 N87-21942
A numerical study of the 3D flowfield in a transonic compressor rotor with a modelling of the tip clearance flow p 59 N87-21945
Some turbomachinery blade passage analysis methods. Retrospect and prospect p 59 N87-21947
Three-dimensional shear layer experiments and their use as test cases for calculation methods p 158 N87-22148

Computation of tip and corner region flows

p 158 N87-22153
Three-dimensional flows p 8 N87-24401
Three-dimensional flow p 8 N87-24402
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471

Techniques of flow visualization

[AGARD-AG-302] p 160 N88-16977
Three-dimensional flow visualization using laser-sheet scanning p 162 N88-23143
Application of high speed holography to aerodynamic and hydrodynamic three-dimensional velocimetry p 183 N88-23144
Shock boundary layer interaction p 165 N88-20813
Experience with three dimensional composite grids p 227 N88-29324
Three-dimensional combustor predictors: A comparison of equilibrium and laminar flamelet chemistry models p 108 N88-29940
Separation around ellipsoid-type obstacles. Modeling and validation experiences p 167 N89-18627
Computational techniques and validation of 3D viscous/turbulent codes for internal flow p 168 N89-18638
Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640
Computation of transonic 3D cascade flow and comparison with experiments p 20 N89-18641
Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows p 170 N89-18661

THREE DIMENSIONAL MODELS

Using the boundary-layer equations in three-dimensional viscous flow simulation p 155 N87-20222

THRUST

The advantage of a thrust rating concept used on the RB199 engine p 70 N89-18680
Installed thrust as a predictor of engine health for jet engines p 71 N89-18686
Accuracy of lift and center-of-thrust measurements at missile control surfaces p 18 N89-18675

THRUST VECTOR CONTROL

Propulsion system technologies for thrust vectoring p 60 N87-22670
Development of in-flight simulation aircraft for research and training applications in UK p 83 N87-23658
Manoeuvres by default, by demand and by design p 41 N88-19455
Three-dimensional calculations of lateral jet interaction with an external supersonic flow p 19 N89-18631

THUNDERSTORMS

Radio and radar holes and multipath zones: The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667

TILT ROTOR AIRCRAFT

Rotorcraft designs for the year 2000 p 37 N88-11665

TILT ROTOR RESEARCH AIRCRAFT PROGRAM

Piloted simulation in the development of the XV-15 tilt rotor research aircraft p 81 N87-23646

TIME

Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics [AGARD-AR-239] p 157 N87-22137
Vortex dynamics-survey of the activity in Italy p 157 N87-22141
Modelling of time-variant flows using vortex dynamics-activities in the Netherlands p 157 N87-22142
Modeling XV-15 tilt-rotor aircraft dynamics by frequency and time-domain identification techniques p 37 N88-11667
Flight Vehicle Development Time and Cost Reduction [AGARD-CP-424] p 243 N88-20173
The increased time and cost of development: Causes and (some) remedies p 243 N88-20178
Reducing time required for the development of avionics systems p 244 N88-20185
Minimizing development flight test time and cost in the US Air Force p 245 N88-20192
The Global Positioning System (GPS): constellation and coverage p 29 N89-10876

TIME DEPENDENCE

Use of task timeline analysis to assess crew workload p 212 N87-30056
On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
Structural materials: The changing scene p 102 N88-20190
Short duration flow establishment on a profile in a Water-Ludwig Tunnel p 161 N88-23134
Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 164 N88-23155
Numerical methods. Euler time dependent solver p 15 N88-29760
Time-dependent numerical simulation of the starting flow of an incompressible fluid past a downstream-facing step p 169 N89-18646

SUBJECT INDEX

TIME DIVISION MULTIPLEXING

Progress with multiplexed sensor arrays based on reflection at spliced joints between sensors p 237 N87-13278

TIME MARCHING

Computation of three-dimensional flows by viscous-inviscid interaction using the M2M method p 155 N87-20223
Computation of transonic 2D cascade flow and comparison with experiments p 59 N87-21943
Some turbomachinery blade passage analysis methods. Retrospect and prospect p 59 N87-21947
Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949
Computation of flow past conical hypersonic wings using a second order Godunov method p 12 N88-13241
Accuracy and efficiency of a time marching approach for combustor modeling p 170 N89-18659

TIPS

Computation of tip and corner region flows p 159 N87-22153

TITANIUM ALLOYS

The application of diffusion bonding and laser welding in the fabrication of aerospace structures p 176 N87-17054
Economic manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055
Diffusion bonding in the manufacture of aircraft structure p 176 N87-17057
Application of diffusion bonding combined with superplastic forming (SPF/DB) to the fabrication of TACV metal shell structures p 177 N87-17060
Ultrasonic testing techniques for diffusion-bonded titanium components p 179 N87-17061
Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-Al6V4 p 132 N87-17065
Diffusion bonding of metals p 179 N87-29646
Designing for superplastic alloys p 119 N87-29648
The manufacture of superplastic alloys p 119 N87-29649
Microstructures, flow properties and processing of Ti6242 alloy p 112 N89-15268
Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270

TOLERANCES (MECHANICAL)

AGARD/SMP Review: Damage Tolerance for Engine Structures. 1. Non-Destructive Evaluation [AGARD-R-756] p 180 N89-17253
Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257

TOMOGRAPHY

Digital image processing applied to fluid dynamic problems p 156 N87-21193
Short term developments in non-destructive evaluation applicable to turbine engine parts p 181 N89-17258

TOUCH

The interaction of thalamo-cortical systems in the 40 Hz following response p 199 N88-27694

TOWING

The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs p 162 N88-23140
Use of water towing tanks for aerodynamics and hydrodynamics p 163 N88-23149

TRACKED VEHICLES

Back pain and discomfort resulting from exposure to vibration in tracked armoured vehicles p 209 N87-13936

TRACKING (POSITION)

Advanced visuals in mission simulators p 80 N87-23636
Advanced sensor exploitation p 83 N87-24346
The digital colour map simplifies ground attack operations p 187 N87-24950
Computer models of the spacecraft wake p 58 N87-26948
The BAE (Bracknell) automatic detection, tracking and classification system p 241 N87-29476
Velocity accuracy measurement of GPS user equipment p 28 N87-29477
Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MIIISA) p 171 N87-29479
An intelligent multi-target tracking system p 119 N87-29484
Helicopter fire control: Advantages of an automatic target tracker p 84 N88-11667
Applications of image analysis in precision guided weapons p 93 N89-17610
Active and passive side stick controllers: Tracking task performance and pilot control behaviour p 220 N89-18026

TRACKING RADAR

Multifunction Radar for Airborne Applications conference [AGARD-CP-381] p 125 N87-18721
About the future of airborne radar p 125 N87-18722

SUBJECT INDEX

- Solid state multifunction phased array radar
p 126 N87-18723
- Multimission airborne radar for the 1990s
p 126 N87-18724
- A general solution for the synthesis of binary sequences
with desired correlation sequence p 130 N87-18743
- TRACTORS**
Relationships between whole-body vibration and
disorders of the backbone diagnosed on operators of
earth-moving machinery p 208 N87-13934
- The workplace vibration environment of off-road
machines p 142 N87-13935
- TRADEOFFS**
Design/development tradeoffs to achieve a mission
effective SOW guidance system p 91 N87-16003
- TRAILING EDGE FLAPS**
Static aerodynamic considerations in the definition of
design loads for fighter airplanes p 76 N88-13351
- TRAILING EDGES**
Comparison of finite difference calculations of a large
region of recirculating flow near an airfoil trailing edge
p 6 N87-20218
- Structure of unsteady flows at leading-
and trailing-edges Flow visualization and its interpretation
p 184 N88-23154
- Classical separation, trailing-edge flows and buffeting
p 14 N88-26874
- TRAINING AIRCRAFT**
Evolution of combat performance of the Hawk light
combat aircraft p 34 N87-22668
- The development of the T-46 next generation trainer
manned engineering simulator at the US Air Force Flight
Test Center p 82 N87-23652
- A look toward the future of complex avionics systems
development using the USAF Test Pilot School's avionics
systems test training aircraft p 50 N88-23797
- TRAINING ANALYSIS**
Advanced information management and decision
making in Airborne Early Warning and Control (AEW&C)
training systems p 251 N87-29517
- TRAINING EVALUATION**
Advanced information management and decision
making in Airborne Early Warning and Control (AEW&C)
training systems p 251 N87-29517
- TRAJECTORIES**
Strategic control to improve efficiency of air traffic
management p 27 N87-21894
- TRAJECTORY ANALYSIS**
Collision probability of cruise missiles flying in
formation p 91 N87-18007
- Advanced ATC: An aircraft perspective p 27 N87-21893
- A time-based concept for terminal-area traffic
management p 27 N87-21895
- Next generation of control techniques in advanced
TMA p 27 N87-21899
- Exploring the capabilities of flight management systems
in solving the airport arrival problem p 28 N87-21899
- TRANSUCERS**
The lubrication of dynamically loaded concentrated hard
line contacts: Temperature and pressure measurements
p 175 N86-29247
- Analogous signal conditioning for flight test
instrumentation p 45 N86-29816
- TRANSFER FUNCTIONS**
Experimental determination of the transfer function of
an axial compressor to distorted inlet flow p 9 N87-24479
- Identification of microwave line-of-sight multipath
components p 139 N88-19965
- Experiment and theory for backscattering enhancement
and imaging in random media p 241 N89-17708
- TRANSFORMATIONS (MATHEMATICS)**
Theoretical aspects of target classification: Physical
optics and radar transform methods p 137 N88-11915
- TRANSIENT LOADS**
Influence coefficient testing as a substitute for modal
survey testing of large space structures p 94 N87-20269
- TRANSITION FLOW**
Three-dimensional layers: Laminar-turbulent transition
p 158 N87-22149
- A new laminar water tunnel to study the transition
process in a Blasius layer and in a separation bubble and
a new tool for industrial aerodynamics and hydrodynamic
research p 85 N88-23150
- Time-dependent numerical simulation of the starting flow
of an incompressible fluid past a downstream-facing
step p 169 N89-18648
- TRANSMISSION EFFICIENCY**
Effects of optical feedback on the performance of high
data rate single-mode fiber systems p 238 N87-13228
- Wide bandwidth, long distance fibre-optic
communication systems p 240 N87-13300
- Performance of RF fiber optic links p 240 N87-13301
- TRANSMISSION LOSS**
A diffraction based theoretical model for prediction of
UHF path loss in cities p 139 N88-19961

- A program for the calculation of radio-wave transmission
loss over the spherical earth and over obstacles p 139 N88-19962
- TRANSMISSIONS (MACHINE ELEMENTS)**
Aircraft and Bearing Tribological Systems
(AGARD-CP-394) p 174 N86-29236
- A study of the potential benefits associated with the
development of a dedicated helicopter transmission
lubricant p 112 N86-29242
- Requirements on lubrication oil from the view of a
helicopter manufacturer p 112 N86-29244
- Future trends in helicopter transmission lubricants
p 113 N86-29246
- Scoring tests of aircraft transmission lubricants at high
speeds and high temperatures p 113 N86-21253
- Critical analysis of achievements and missing links in
gear and bearing tribology in relation to power
envelopes p 175 N86-29250
- The flight evaluation of an advanced engine display and
monitoring system p 46 N88-11859
- A129 advanced solutions for meeting today's combat
helicopter requirement p 38 N88-11669
- TRANSMITTER RECEIVERS**
Tactical fiber optic assembly requirements p 240 N87-13305
- Improved coding and control of HF systems in a
non-Gaussian noise environment p 150 N89-18582
- TRANSMITTERS**
ELF/VLF/LF propagation and system design p 124 N87-18705
- TRANSONIC COMPRESSORS**
A quasi three dimensional method for the calculation
of transonic flows in turbomachines p 59 N87-21941
- A numerical study of the 3D flowfield in a transonic
compressor rotor with a modelling of the tip clearance
flow p 59 N87-21945
- A shock loss model for supercritical subsonic flows in
transonic axial flow compressors p 60 N87-21950
- Radial compressor design using an Euler solver p 66 N88-17675
- TRANSONIC FLOW**
Aircraft drag prediction and reduction Addendum 1:
Computational drag analyses and minimization, mission
impossible? p 5 N86-27187
- (AGARD-R-723-ADD-1) p 5 N86-27187
- Shock-wave boundary layer interactions p 155 N86-29173
- (AGARD-AG-280) p 155 N86-29173
- The prediction of transonic loading on advancing
helicopter rotors p 5 N87-20206
- Prediction of wing-body-store aerodynamics using a
small perturbation method and a grid embedding
technique p 5 N87-20207
- Matrices, transonic potential flow calculations about
transport aircraft p 5 N87-20208
- Analysis of the F-16 flow field by a block grid Euler
approach p 8 N87-20217
- Applications of RAE viscous flow methods near
separation boundaries for three-dimensional wings in
transonic flow p 7 N87-20224
- Transonic Navier-Stokes wing solution using a zonal
approach: Part 1: Solution methodology and code
validation p 7 N87-20228
- Transonic Navier-Stokes wing solutions using a zonal
approach: Part 2: High angle-of-attack simulation p 7 N87-20229
- Simulation of three-dimensional transonic flow with
separation past a hemisphere cylinder configuration p 5 N87-20230
- The application of holography as a transonic flow
diagnostic to rotating components in turbomachinery p 171 N87-21202
- Beam-modulation methods in quantitative and
flow-visualization holographic interferometry p 119 N87-21204
- Transonic and Supersonic Phenomena in
Turbomachines (AGARD-CP-401) p 57 N87-21927
- Shock structure measured in a transonic fan using laser
anemometry p 57 N87-21929
- Wake and shock interactions in a transonic turbine
stage p 57 N87-21930
- Experimental investigations on shock losses of transonic
and supersonic compressor cascades p 58 N87-21937
- Optimization of a transonic flow radial vane diffuser p 58 N87-21938
- Comparison between inverse designed (PVD) airfoils
and standard series airfoils for high loaded axial turbine
nozzle application p 60 N87-21951
- Numerical methods for unsteady transonic flow p 8 N87-24403
- Future Research on Transonic Unsteady Aerodynamics
and its Aeroelastic Applications (AGARD-R-749) p 9 N87-28518
- The unsteady gas flow through stator and rotor of a
turbomachine p 64 N88-17660
- Boundary layer development and transition p 14 N88-28871
- Three-dimensional elliptic grid generation for an F-16 p 226 N88-29315

- TRENDS**
- Reynolds number effects in transonic flow
(AGARD-AG-303) p 17 N89-16760
- Experiments on the DFVLR-F4 wing body configuration
in several European windtunnels p 87 N89-16648
- A proposed boundary layer simulation methodology for
wind tunnel testing p 89 N89-16667
- Comparative study of calculation procedures for viscous
flows around airfoils in the transonic regime p 166 N89-18617
- The DFVLR-F5 wing experiment: Towards the validation
of the numerical simulation of transonic viscous wing
flows p 19 N89-18623
- Accuracy study in transonic flow simulations: Three
dimensional wings p 19 N89-18628
- Development and application of a weapons multiblock
suite p 168 N89-18633
- Computation of transonic 3D cascade flow and
comparison with experiments p 20 N89-18641
- Validation of Computational Fluid Dynamics: Volume 2:
Poster papers (AGARD-CP-437-VOL-2) p 169 N89-18649
- Validation of a multi-block Euler flow solver with
propeller-slipstream flows p 20 N89-18649
- TRANSONIC FLUTTER**
Comparison between 2D transonic flutter calculations
in the time and frequency domain p 10 N87-28520
- TRANSONIC NOZZLES**
A research program on the aerodynamics of a highly
loaded turbine stage p 64 N88-17655
- TRANSONIC SPEED**
Design of wings and wing/body configurations for
transonic and supersonic speeds p 39 N88-13318
- TRANSONIC WIND TUNNELS**
Boundary layer simulation and control in wind tunnels
(AGARD-AR-224) p 3 N88-28857
- Hierarchy of uncertainty sources in transonic wind tunnel
testing p 87 N88-16851
- Development of testing techniques in a large transonic
wind tunnel to achieve a required drag accuracy and flow
standards for modern civil transports p 88 N89-16857
- Transonic wind tunnel boundary interference: A
correction procedure p 88 N89-16861
- Validation of a user-friendly CFD code for prediction of
the aerodynamic characteristics of flight vehicles p 45 N89-18654
- TRANSPARENCY**
Vision through aircraft transparencies p 216 N88-29294
- Maintenance of vision-related components p 216 N88-29296
- TRANSPORT AIRCRAFT**
Matrices, transonic potential flow calculations about
transport aircraft p 5 N87-20206
- DFVLR in-flight simulators ATTAS and ATTHES for flying
qualities and flight control research p 83 N87-23657
- Aeroelastic analysis of modern transport aircraft p 76 N88-13352
- Gear systems for advanced turboprops p 65 N88-17667
- Low-speed longitudinal flying qualities of modern
transport aircraft p 43 N88-29738
- Development of testing techniques in a large transonic
wind tunnel to achieve a required drag accuracy and flow
standards for modern civil transports p 88 N89-16857
- Precision improvement of transport aircraft drag
measurements p 17 N89-16858
- Accuracy of various wall-correction methods for 3D
subsonic wind-tunnel testing p 89 N88-16863
- Accuracy requirements for high-speed test with engine
simulation on transport aircraft models in the NLR-HST
p 89 N89-16870
- Balance accuracy and repeatability as a limiting
parameter in aircraft development force measurements in
conventional and cryogenic wind tunnels p 90 N88-16873
- Accuracy problems in wind tunnels during transport
aircraft development p 90 N88-16877
- Particular flight mechanics specifications related to wind
tunnel test results p 90 N89-16879
- Transport airplane crash simulation, validation and
application to crash design criteria p 24 N89-18435
- TRANSPORT PROPERTIES**
Secondary electron generation, emission and transport
Effects on spacecraft charging and NASCAP models p 98 N87-26950
- TRANSVERSE ACCELERATION**
Computation of tip and corner region flows p 159 N87-22153
- TRAPPING**
Propagation in longitudinally varying ducts, with
emphasis on guiding to antiguiding transitions p 139 N88-19658
- TRAVELING WAVES**
Determination of fractal dimension, connection of space
and temporal chaos and application to experimental
results p 160 N88-11977
- TRENDS**
Avionics acquisition: trends and future approaches p 244 N88-20184
- Trend monitoring of a turboprop engine at low and mean
power p 54 N89-16801

TRIBOLOGY

TRIBOLOGY

- Aircraft and Bearing Tribological Systems [AGARD-CP-394] p 174 N86-29236
- Tribology in aircraft systems: Basic principles and applications p 174 N86-29240
- The role of residual stress in the performance of gears and bearings p 175 N86-29246
- Aircraft engine oils and their behaviour at high temperatures p 113 N86-29251
- Critical analysis of achievements and missing links in gear and bearing tribology in relation to power envelopes p 175 N86-29254

TROPOSPHERE

- Wave-Hit bounding of tropospheric ducts above the sea p 145 N89-17726
- Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593

TRUCKS

- The workplace vibration environment of off-road machines p 209 N87-13935

TUNABLE LASERS

- The study of combustion by means of dode laser spectroscopy p 173 N87-21201

TUNING

- Aeroelastic formulation for tuned and mistuned rotors p 68 N89-10013

TURBINE BLADES

- Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059
- Evaluation of L2F-measurements in unsteady turbine flow p 156 N87-21182
- Some considerations relating to aero engine pyrometry p 171 N87-21187
- Turbine rotor blade measurements using infrared pyrometry p 171 N87-21188
- Aeroelasticity in axial-flow turbomachines Volume 1: Unsteady turbomachinery aerodynamics [AGARD-AG-298-VOL-1] p 8 N87-24398
- Linearized unsteady aerodynamic theory p 8 N87-24399
- Classical two-dimensional methods p 8 N87-24400
- Three-dimensional flows p 8 N87-24401
- Numerical methods for unsteady transonic flow p 8 N87-24403
- Stall flutter p 72 N87-24404
- Unsteady aerodynamic measurements in flutter research p 8 N87-24405
- Unsteady aerodynamic measurements in forced vibration research p 9 N87-24406
- Understanding fan blade flutter through linear cascade aeroelastic testing p 9 N87-24407
- Advanced Technology for Aero Gas Turbine Components [AGARD-CP-421] p 62 N88-17647
- A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655
- Advanced techniques employed in blade cooling research p 64 N88-17659
- Transonic blade design on rotational stream surfaces p 66 N88-17671
- Review of existing NDT technologies and their capabilities p 180 N89-17255

TURBINE ENGINES

- Compressor blade clearance measurement using capacitance and phase lock techniques p 133 N87-21200
- Wake and shock interactions in a transonic turbine stage p 57 N87-21930

TURBINES

- Evaluation of L2F-measurements in unsteady turbine flow p 156 N87-21182
- Combined fringe and Fabry-Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility p 118 N87-21183
- Design and testing of a small radial turbine for auxiliary power units p 64 N88-17661
- Validation of an Euler code for hydraulic turbines p 168 N89-18637

TURBOCOMPRESSORS

- The application of holography as a transonic flow diagnostic to rotating components in turbomachinery p 171 N87-21202
- Engine Response to Distorted Inflow Conditions - conference proceedings [AGARD-CP-400] p 60 N87-24464
- Air inlet/engine compatibility: Impact of theoretical and experimental methods p 60 N87-24466
- Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
- Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
- Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
- Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472

- Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473

- Turbolam engine post-instability behavior: Computer simulations, test validation and application of simulations p 62 N87-24474

- Experimental determination of the transfer function of an axial compressor to distorted inlet flow p 9 N87-24479

- Advanced Technology for Aero Gas Turbine Components [AGARD-CP-421] p 62 N88-17647

- Optimization of military compressors for weight and volume p 63 N88-17649
- Operation of gas turbine engines in dust-laden environments p 63 N88-17654
- Investigation of diaphragm effects in compressor cascades p 66 N88-17672
- Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 66 N88-17674

- Design and development of an advanced F100 compressor p 67 N88-17678

- Experimental investigation of a supercritical compressor rotor blade section p 67 N88-17680

- Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640

TURBOFAN ENGINES

- Evaluation of DDH and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
- Some considerations relating to aero engine pyrometry p 171 N87-21187
- Turbolam engine post-instability behavior: Computer simulations, test validation and application of simulations p 62 N87-24474
- Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478
- High performance turbolam afterburner systems p 105 N88-29922

- The CFM 56-5 on the A-320 at Air France p 53 N89-16793

- Service life calculator for the M53 turbolam engine p 70 N89-18796

- CF-18/F404 transient performance trends p 71 N89-16814

- COMPASS (Trademark): A generalized ground based monitoring system p 55 N89-16819

TURBOFANS

- Transmission of inlet distortion through a fan p 62 N87-24475

TURBOJET ENGINES

- Development of intake swirl generators for turbo jet engine testing p 83 N87-24480
- The coming revolution in turbine engine technology p 62 N88-17648
- Numerical simulation of diffuser/compressor dome interaction p 65 N88-17663
- Air intake aerodynamics p 15 N88-29762
- Semiempirical methods for airbreathing missiles p 16 N88-29763
- Installed thrust as a predictor of engine health for jet engines p 71 N89-16806

TURBOMACHINE BLADES

- A study of passage flow through a cascade of turbine blades using image plane holographic interferometry p 118 N87-21203

TURBOMACHINERY

- The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660

TURBOMACHINERY

- Laser fringe anemometry for aero engine components p 118 N87-21176
- Laser-2 focus velocimetry p 172 N87-21177
- How to select a laser velocimeter for a given application? p 118 N87-21179
- Application of Doppler and transit laser anemometry in small turbomachines p 172 N87-21180
- Acquisition and analysis of dynamic rotating machinery data p 178 N87-21190
- The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195
- Classical two-dimensional methods p 8 N87-24400
- Three-dimensional flows p 8 N87-24401
- Three-dimensional flow p 8 N87-24402
- Numerical methods for unsteady transonic flow p 8 N87-24403
- Unsteady aerodynamic measurements in forced vibration research p 9 N87-24406
- The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660
- Transonic blade design on rotational stream surfaces p 66 N88-17671
- Forced vibration and flutter design methodology p 183 N89-10016

TURBOPROP ENGINES

- Experimental investigation on small turboprop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476
- Design and aerodynamic performance of a small mixed-flow gas generator turbine p 64 N88-17662
- Gear systems for advanced turboprops p 65 N88-17667

- Trend monitoring of a turboprop engine at low and mean power p 54 N89-16801

TURBULENCE

- Aircraft drag prediction and reduction: Addendum: Computational drag analyses and minimization: mission impossible? [AGARD-R-723-ADD-1] p 5 N86-27187
- Shock-wave boundary layer interactions [AGARD-AG-280] p 155 N86-29173
- Aircraft response to turbulence p 72 N86-30739
- [AGARD-R-738] p 72 N86-30739
- Gust load prediction and alleviation on a fighter aircraft p 72 N86-30741
- Fundamentals of turbulence for turbulence modeling and simulation p 159 N88-11971
- A deterministic approach to turbulence: Chaos in Rayleigh-Benard convection p 160 N88-11975
- The enhancement effect of the backscattered intensity in a random medium p 143 N89-17715

TURBULENCE EFFECTS

- Turbulence effects on the droplet distribution behind airblast atomizers p 104 N88-29915
- Radiation transfer in gas turbine combustors p 107 N88-29929

TURBULENCE METERS

- Fight test equipment for the on-board measurement of wind turbulence p 51 N88-29719
- A summary of atmospheric turbulence measurements with specially-equipped aircraft in the US p 189 N88-29727
- Measurement and analysis of low altitude atmospheric turbulence obtained using a specially instrumented Gnat aircraft p 190 N88-29728

TURBULENCE MODELS

- On the validation of a code and a turbulence model appropriate to circular control airfoils p 18 N89-18616
- Comparative study of calculation procedures for viscous flows around airfoils in the transonic regime p 166 N89-18617

TURBULENT BOUNDARY LAYER

- Experimental observations on an unsteady normal shock/boundary layer interaction p 156 N87-21933
- The effects of sweep and bluntness on a glancing shock wave turbulent boundary layer interaction p 10 N88-13227
- Some visualization studies on turbulent boundary layers using multiwire hydrogen bubble generation p 164 N88-23153
- Development and analysis of turbulent non-equilibrium boundary layers p 165 N88-28872
- Environmental effects on transition and boundary layer characteristics p 165 N88-28876
- Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650

TURBULENT FLOW

- Application of CARS thermometry to a turbulent flame p 104 N87-21175
- Laser-2 focus velocimetry p 172 N87-21177
- Processing techniques for correlation of LDA and thermocouple signals p 171 N87-21194
- Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946
- Three-dimensional layers: Laminar turbulent transition p 158 N87-22149
- Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow: Structure and its Modeling [AGARD-R-755] p 159 N88-11970
- Turbulence modeling through one point closures: applications enlightening by large eddy simulation p 159 N88-11972
- Homogeneous turbulence two-point closures and applications to one-point closures p 160 N88-11973
- Transition to turbulence via spatio-temporal intermittency p 160 N88-11976
- Determination of fractal dimension, connection of space and temporal chaos and application to experimental results p 160 N88-11977
- Numerical analysis of flow through scramjet engine inlets p 11 N88-13233
- Aerodynamic heating of missiles p 16 N88-29764
- Flamelet modeling of turbulent premixed flames p 109 N88-29942
- Modeling the stability of a turbulent premixed flame downstream from a step by a Lagrangian method p 109 N88-29943
- Modeling and experimental study of a reactive flow confined with wall injection p 109 N88-29946
- Accuracy requirements and benchmark experiments for CFD validation p 166 N89-18612
- Parametric study of grid size, time step and turbulence modeling on Navier-Stokes computations over airfoils p 18 N89-18615
- Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 168 N89-18638

SUBJECT INDEX

SUBJECT INDEX

- On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N89-18645
- Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656
- Experiments and code validation for junction flows p 21 N89-18658
- TURBULENT WAKES**
- The flow around a squared obstacle p 156 N87-21185
- Vortex shedding in compressor blade wakes p 156 N87-21185
- TURKEY**
- The information scene in Turkey p 249 N87-26676
- TWO DIMENSIONAL BODIES**
- A critical assessment of wind tunnel results for the NACA 0012 airfoil p 17 N88-16847
- TWO DIMENSIONAL FLOW**
- Computation of transonic 2D cascade flow and comparison with experiments p 59 N87-21943
- Downstream flow angle correlations for turbulent cascades in subsonic and transonic flow conditions p 60 N87-21949
- Parametric study of choke flutter with a linear theory p 66 N88-17673
- Numerical modeling of premixed flames in gaseous media p 109 N88-29944
- Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows p 170 N89-18661
- TWO PHASE FLOW**
- Measurement of important ballistic flow properties by spectroscopic techniques p 154 N86-29074
- Performance of rocket motors with metallized propellants [AGARD-AR-230] p 99 N87-18610
- TYROSINE**
- Use of tyrosine and other nutrients to enhance and sustain performance p 195 N87-25711
- Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25712
- U**
- UH-1 HELICOPTER**
- Muscle fatigue in static and vibrational seating environments p 210 N87-13954
- ULTRAHIGH FREQUENCIES**
- VHF/UHF/microwave LOS terrestrial propagation and system design p 125 N87-18709
- UHF/SHF SATCOM propagation and system design p 125 N87-18710
- VHF/UHF propagation by diffraction: Calculation by numerical integration p 139 N88-19659
- A diffraction based theoretical model for prediction of UHF path loss in cities p 139 N88-19661
- Incoherent/coherent scatter p 142 N89-11940
- ULTRASONIC FLOW DETECTION**
- Ultrasonic testing techniques for diffusion-bonded titanium component p 179 N87-17061
- ULTRASONIC TESTS**
- Ultrasonic testing techniques for diffusion-bonded titanium components p 179 N87-17061
- Short term developments in non-destructive evaluation applicable to turbine engine parts p 181 N89-17258
- ULTRASONICS**
- Long term possibilities for nondestructive evaluation for US Navy aircraft p 181 N89-17259
- UNDERCARRIAGES**
- Aircraft Dynamic Response to Damaged and Repaired Runways [AGARD-R-739] p 34 N87-23609
- UNITED KINGDOM**
- Flow models using vortex dynamics: Work in the United Kingdom p 157 N87-22143
- Time and cost reduction through computer integrated manufacture p 225 N88-20191
- Simulator sickness in the Royal Air Force: A survey p 204 N89-12177
- UNITED STATES**
- Recent activity in vortex methods in the United States p 157 N87-22144
- UNIVERSITIES**
- Experiments: Test range facilities, part 1 p 138 N88-11920
- UNSTEADY AERODYNAMICS**
- Technical evaluation report of AGARD Technical Evaluation Meeting on Unsteady Aerodynamics Fundamentals and Applications to Aircraft Dynamics [AGARD-AR-222] p 4 N86-27182
- Aeroelasticity in axial flow turbomachines Volume 1: Unsteady turbomachinery aerodynamics [AGARD-AG-298-VOL-1] p 8 N87-24398
- Linearized unsteady aerodynamic theory p 8 N87-24399
- Unsteady aerodynamic measurements in flutter research p 8 N87-24405
- Unsteady aerodynamic measurements in forced vibration research p 8 N87-24406
- Unsteady aerodynamic measurements on rotors p 8 N87-24408
- Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
- Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
- Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478
- Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center [NAS 1.15.89133] p 9 N87-28519
- Driving mechanism of unsteady separation shock motion in hypersonic interactive flow p 10 N88-13226
- Influence of the static deformation on a wing in the unsteady aerodynamic p 77 N88-13357
- The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660
- Parametric study of choke flutter with a linear theory p 66 N88-17673
- Measurements of aerodynamic forces on unsteady moving bluff parachute canopies p 162 N88-23137
- A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148
- Structure of unsteady flows at leading and trailing edges: Flow visualization and its interpretation p 164 N88-23154
- UNSTEADY STATE**
- Technical evaluation report of AGARD Technical Evaluation Meeting on Unsteady Aerodynamics Fundamentals and Applications to Aircraft Dynamics [AGARD-AR-222] p 4 N86-27182
- Future Research on Transonic Unsteady Aerodynamics and Its Aeroelastic Applications [AGARD-R-749] p 9 N87-23518
- Aircraft dynamics: Aerodynamic aspects and wind tunnel techniques p 39 N88-13320
- Aircraft dynamics: Aerodynamic aspects and wind tunnel techniques p 14 N88-29731

VARIATIONS

- UNSWEEPED WINGS**
- Experiments and code validation for junction flows p 21 N89-18658
- USER REQUIREMENTS**
- The value of information as an integral part of Aerospace and Defence R and D Programmes [AGARD-CP-385] p 247 N86-28793
- A programme manager's needs for information p 247 N86-28795
- The information needs of scientists and engineers in aerospace p 247 N86-28796
- The 'what-if' analysis system: What does the user really want? p 249 N86-28801
- Information resources management in the R and D environment p 248 N86-28803
- Engine-airframe integration for rotorcraft: Component specifications and qualification p 31 N87-10071
- Helicopter air intake protection systems p 32 N87-10073
- Engine-airframe integration for rotorcraft: System specifications and qualification p 32 N87-10074
- Navigation systems for the new generation of combat and transport helicopters and associated flight tests p 29 N87-29481
- Fight Mechanics Panel Symposium on Rotorcraft Design for Operations: Technical evaluation report [AGARD-AR-243] p 42 N88-26362
- Engineering data compendium: Human perception and performance: User's guide [LC-87-19560] p 215 N88-27749
- Engineering data compendium: Human perception and performance, volume 2 [LC-87-19560] p 215 N88-28631
- Engineering data compendium: Human perception and performance, volume 3 [LC-87-19560] p 215 N88-28632
- The NAVSTAR GPS System [AGARD-LS-161] p 29 N89-10874
- The GPS overview and navigation system concept p 29 N89-10875
- The Global Positioning System (GPS) accuracy, system error budget, space and control segment overview p 29 N89-10877
- User equipment overview p 30 N89-10879
- Civil and military applications of GPS p 30 N89-10882
- On the conditions and limits of user intervention in delivered software manufacturer's viewpoint p 229 N89-18451
- V**
- V/STOL AIRCRAFT**
- Propulsion system technologies for thrust vectoring p 60 N87-22670
- V/STOL and STOVL fighter design p 36 N87-24452
- VALUE**
- Measuring the value of information and information systems, services and products p 247 N86-28799
- VANADIUM ALLOYS**
- Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270
- VANES**
- Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059
- Evaluation of DDW and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
- Optimisation of a transonic flow radial vane diffuser p 58 N87-21938
- Experimental evaluation of a translating nozzle sidewall radial turbine p 64 N88-17656
- VAPOR DEPOSITION**
- The lubrication of dynamically loaded concentrated hard line contacts: Temperature and pressure measurements p 175 N86-29247
- VAPORIZERS**
- Flow characteristics of a model annular combustor p 106 N88-29924
- VAPORIZING**
- Simulation study of spraying, streaming and vaporization phenomena associated with fuel injection p 104 N88-29914
- VARIABLE PITCH PROPELLERS**
- Analysis of possible transmission arrangements applicable for driving single or twin counterrotating fans on propfan engines p 66 N88-17670
- VARIANCE (STATISTICS)**
- Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics [AGARD-AR-239] p 157 N87-22137
- Vortex dynamics survey of the activity in Italy p 157 N87-22141
- Modelling of time-variant flows using vortex dynamics: activities in the Netherlands p 157 N87-22142
- VARIATIONS**
- Magnetospheric control of the bulk ionospheric plasma p 187 N87-26939

VECTOR ANALYSIS

- The advantage of variable geometry for turbine engines at low power p 63 N88-17653
- An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave lines p 138 N88-19654

VECTOR ANALYSIS

- Vectorization of FORTRAN programs at do-loop level p 228 N89-11396
- Restructuring of basic linear algebraic algorithms chapter 5 p 228 N89-11399
- Computational fluid dynamics and supercomputers chapter 6 p 165 N89-11400
- VECTORS (MATHEMATICS)
 - Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 11 N88-13235

VEGETATION

- Scattering and depolarization by random rough terrain and vegetation covered terrain-uniform full wave approach p 138 N88-19657

VELOCITY

- Wing divergence of trimmed aircraft p 76 N88-13354
- The Global Positioning System (GPS) constellation and coverage p 29 N89-10876

VELOCITY DISTRIBUTION

- The flow around a squared obstacle p 156 N87-21185
- Transonic blade design on rotational stream surfaces p 6E N88-17671
- A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148
- Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 164 N88-23155

VELOCITY MEASUREMENT

- How to select a laser velocimeter for a given application p 118 N87-21179
- Combined fringe and Fabry-Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility p 118 N87-21183
- Velocity and temperature measurements in a can-type gas turbine combustor p 57 N87-21184
- Particle imaging velocimetry in a low turbulent wind tunnel and other flow facilities p 79 N87-21205
- Velocity accuracy measurement of GPS user equipment p 28 N87-29477
- Application of high speed holography to aerodynamic and hydrodynamic three-dimensional velocimetry p 163 N88-23144
- A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148

VERBAL COMMUNICATION

- Integration of vocal dialogue on-board a combat aircraft p 56 N89-18471

VERTEBRAE

- Low back pain and narrowed disc spaces in fighter pilots p 197 N87-13937
- The biomechanical characteristics of the spinal column: Biomechanics p 191 N87-13941

VERTICAL ORIENTATION

- Investigation of vertical axis handling qualities for helicopter hover and NOE flight p 75 N88-11653

VERTICAL TAKEOFF AIRCRAFT

- Development of a plenum chamber burner system for an advanced VTOL engine p 65 N88-17664

VERTIGO

- Cues for training vertigo: providing suggestions for the management of simulator sickness p 206 N89-12187

VERY HIGH FREQUENCIES

- VHF/UHF/microwave LOS terrestrial propagation and system design p 125 N87-18709
- VHF/UHF propagation by diffraction: Calculation by numerical integration p 139 N88-19659
- Some measurements of height gain at VHF p 140 N88-19671
- Incoherent/coherent scatter p 142 N89-11940
- Impulse response measurements and characterization of wideband VHF radio lines p 146 N89-17736
- A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747
- Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593

VERY LARGE SCALE INTEGRATION

- Microelectronics the next fifteen years p 154 N88-23792
- Interfacing and integrating hardware and software design systems p 50 N88-23796
- Built-in self test p 154 N89-18468

VERY LOW FREQUENCIES

- VLF radio noise p 148 N89-18569
- A new global survey of ELF/VLF radio noise p 148 N89-18570
- Signal noise/interferer combiner unit programmable (SINCU) p 149 N89-18575

VESTIBULAR TESTS

- The effect of acetylcholine on the vestibulo-ocular reflex in humans p 196 N87-25717
- Motion evoked vestibular potentials p 202 N88-27712
- Simulator sickness in US Army and Navy fixed and rotary-wing flight simulators p 205 N89-12178
- The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179
- Manifestation of visual-vestibular disruption in simulators: Severity and empirical measurement of symptomatology p 205 N89-12181

VIBRATION

- Engine Condition Monitoring Technology and Experience [AGARD-CP-448] p 52 N89-16780

VIBRATION DAMPING

- Seat isolation system p 193 N87-13960
- Effect of modal damping in modal synthesis of spacecraft structures p 95 N87-20362
- Modal-survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365
- Benefits of passive damping as applied to active control of large space structures p 96 N87-20371

VIBRATION EFFECTS

- Backache and Back Discomfort - conference [AGARD-CP-37] p 190 N87-13932
- Relationships between whole-body vibration and disorders of the backbone diagnosed on operators of earth-moving machinery p 208 N87-13934
- The workplace vibration environment of off-road machines p 209 N87-13935
- Back pain and discomfort resulting from exposure to vibration in tracked armoured vehicles p 209 N87-13936
- Vehicle vibration and back pain p 209 N87-13945
- In-vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
- In vivo measurements of vibration transmission in the human spine p 210 N87-13947
- Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948
- Muscle fatigue in static and vibrational seating environments p 210 N87-13954
- Lower back pain in helicopter pilots: Epidemiological factors p 210 N87-13955
- Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956

VIBRATION ISOLATORS

- Seat isolation system p 193 N87-13960
- Controlling the vibration environment during NOE flight p 75 N89-11661

VIBRATION MEASUREMENT

- Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956
- Vibration analysis by speckle interferometry p 183 N87-21197
- Unsteady aerodynamic measurements on rotors p 9 N87-24408
- Getting more from vibration analysis p 54 N89-16807

VIBRATION MODE

- Effect of modal damping in modal synthesis of spacecraft structures p 95 N87-20362

VIBRATION SIMULATORS

- Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948

VIBRATION TESTS

- In-vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
- In vivo measurements of vibration transmission in the human spine p 210 N87-13947
- Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948
- Low frequency vibration testing on satellites p 96 N87-20364
- Spacecraft qualification using advanced vibration and modal testing techniques p 96 N87-20368
- Multi-axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373
- A joint study on the computerisation of in field aero engine vibration diagnosis p 71 N89-16808
- VEGETATION
- The workplace vibration environment of off-road machines p 209 N87-13935

VIBRATORY LOADS

- In-vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
- In vivo measurements of vibration transmission in the human spine p 210 N87-13947

VIDEO COMMUNICATION

- Information technology to facilitate group interaction p 252 N88-30463

VIDEO DATA

- Radar display: Conversion of scanning Errors and correction techniques p 132 N87-18754

VIDEO EQUIPMENT

- TV-holography: A promising inspection tool for analysis of composite materials p 170 N87-20180

SUBJECT INDEX

- Use of a video-photogrammetry system for the measurement of the dynamic response of the shuttle remote manipulator arm p 94 N87-20370
- Information technology to facilitate group interaction p 252 N88-30463

VIDEO SIGNALS

- Single-mode-fibers for fiberoptic guided missiles: A comparison with graded-index multimode fibers p 240 N87-13303

- Use of a video-photogrammetry system for the measurement of the dynamic response of the shuttle remote manipulator arm p 94 N87-20370

VIEW EFFECTS

- The use of simulated synthetic-aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18758

VISCOELASTICITY

- Life time prediction: Synthesis on ONERA's research in viscoplasticity and continuous damage mechanics applied to engine materials and structures p 68 N89-10011

VISCOPLASTICITY

- Physical modeling and viscoplasticity studies of the forging process p 120 N89-15269

VISCOUS DAMPING

- Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363
- Benefits of passive damping as applied to active control of large space structures p 96 N87-20371

VISCOUS FLOW

- Numerical simulation of internal and external inviscid and viscous 3-D flow fields p 155 N87-20213
- Zonal solutions for airfoils using Euler boundary layer and Navier-Stokes equations p 61 N87-20219
- Computation of three-dimensional flows by viscous-inviscid interaction using the MZM method p 155 N87-20223
- Applications of RAE viscous flow methods near separation boundaries for three dimensional wings in transonic flow p 7 N87-20224
- High speed viscous flow calculations about complex configurations p 7 N87-20227
- Numerical viscous-inviscid interaction method for internal separated flows and shock wave-boundary layer interaction p 144 N87-20228
- Progress in Viscous-Inviscid Solvers (VIS) p 159 N87-22152
- Viscous analyses for flow through subsonic and supersonic intakes p 61 N87-24469
- Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles p 11 N88-13233
- Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
- Numerical optimization of conical flow waveriders including detailed viscous effects p 28 N88-13245
- Boundary layer manipulation p 165 N88-28877
- Physical aspects of viscous simulation and associated research requirements p 89 N89-16865
- Comparative study of calculation and reduced viscosity flows around airfoils in the transonic regime p 166 N89-18617
- Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems p 167 N89-18618
- Development and application of a weapons multiblock suite p 168 N89-18633
- Arjet validation of surface catalyticity using a viscous shock-layer approach p 168 N89-18634
- Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 168 N89-18638
- Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660

VISIBILITY

- Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654
- A model to predict visual performance at the main display interface in the cockpit p 218 N89-18013

VISION

- Dissecting the visual and auditory pathways by means of the two-input technique p 199 N88-27690
- A study of sources in the human brain associated with stereopsis p 200 N88-27695
- Relation between VEP and visual function in lesions of the optic nerve and visual pathway p 203 N88-27718
- Vision and visual protection in fast jet aircraft p 218 N88-29292
- Vision through aircraft transparencies p 216 N88-29294
- VISIONS
- Vision through aircraft transparencies p 216 N88-29294

VISUAL PERCEPTION

- Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation (ISBN-02-835-0399-6) p 79 N87-15985
- Stars, polygons and clusters p 250 N87-29511
- Perceptual processing capabilities relevant to design of visual displays for information management in advanced airborne weapon systems p 250 N87-29513

SUBJECT INDEX

- Organization of displays in the visual space of the combat aircraft pilot p 212 N87-29516
Designing for design effectiveness of complex avionics systems p 50 N88-23788
Visual Effects in the High Performance Aircraft Cockpit [AGARD-LS-156] p 216 N88-29291
Visual related accidents/incidents p 216 N88-29293
Manifestation of visual/vestibular disruption in simulators: Severity and clinical manifestations of symptomatology p 205 N88-12181
Modeling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N88-12182
An investigation of simulator sickness and an electronystagmographic study p 206 N88-12183
Influence of vector axes and body posture on visually-induced self-rotation and tilt p 206 N88-12185
Vector and the spatial disposition of competing moving displays p 206 N88-12186
A model to predict visual performance at the man-display interface in the cockpit p 218 N89-18013
Design considerations for Virtual Panoramic Display (VPD) helmet systems p 219 N89-18024
- VISUAL SIGNALS**
Visual and motion cueing in helicopter simulation p 80 N87-23634
Technology involved in the simulation of motion cues: The current trend p 204 N89-12173
- VOCODERS**
Effect of audio bandwidth and bit error rate on PCM, ADPCM and LPC speech coding algorithm intelligibility p 136 N87-29529
- VOICE COMMUNICATION**
Speech is more than just an audible version of text p 135 N87-29522
Voice command and the change of mental representation during task performance p 135 N87-29523
Layered protocols in voice interaction with computers p 136 N87-29524
The role of asymmetric transfer in the evaluation of voice generation and recognition systems p 136 N87-29525
Voice control of cockpit systems p 73 N87-29526
The flight evaluation of a speech recognition and a speech output system in an advanced cockpit display and flight management system for helicopters p 46 N87-29527
- VOICE CONTROL**
Voice command and the change of mental representation during task performance p 135 N87-29523
Voice control of cockpit systems p 73 N87-29526
Voice interactive systems in severe noise conditions p 136 N87-29528
Lessons learned from the use of new command systems p 219 N89-18023
Integration of vocal dialogue on-board a combat aircraft p 56 N89-18471
- VOIDS**
Stresses in joints for anisotropic plates p 186 N89-17690
An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691
Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17696
- VORTEX BREAKDOWN**
Investigation on the movement of vortex burst position with dynamically changing angle of attack for a schematic delta-wing in a watertunnel with correlation to similar studies in windtunnel p 163 N88-23152
Vortex flows p 165 N88-28875
Flow field surveys of leading edge vortex flows p 167 N89-18621
- VORTEX GENERATORS**
Development of intake swirl generators for turbo jet engine testing p 83 N87-24480
Flow field surveys of leading edge vortex flows p 167 N89-18621
- VORTEX SHEDDING**
Vortex shedding in compressor blade wakes p 58 N87-21932
Measured and predicted loss generation in transonic turbine blade p 58 N87-21934
Experiments to investigate the vortices shed from a submarine-like body of revolution p 164 N88-23156
- VORTEX SHEETS**
Experimental study of vortex sheets in plane flow p 162 N88-23142
Status of CFD validation on the vortex flow experiment p 167 N89-18620
- VORTICES**
Applications of Euler equations to sharp edge delta wings with leading edge vortices p 8 N87-20214
Theoretical analysis of flows around helicopter fuselages: Application to design and development p 7 N87-20221

- Round Table Discussion on Modeling of Time-Variant Flows Using Vortex Dynamics p 157 N87-22137
[AGARD-AR-239]
Computation of unsteady flows using the point vortex method p 157 N87-22138
Vortex dynamics: A report on work in Germany p 157 N87-22139
Simulation of impinging shear layers using vortex dynamics p 157 N87-22140
Vortex dynamics-survey of the activity in Italy p 157 N87-22141
Modelling of time-variant flows using vortex dynamics-activities in the Netherlands p 157 N87-22142
Flow models using vortex dynamics: Work in the United Kingdom p 157 N87-22143
Recent activity in vortex methods in the United States p 157 N87-22144
Vortex formation over delta, double-delta and wave rider configurations at supersonic speeds p 12 N88-13243
The off-design performance of hypersonic waveriders p 38 N88-13244
Nonlinear lift control at high speed and high angle of attack using vortex flow technology p 76 N88-13319
Secondary flow measurements with L2F-technique in centrifugal compressors p 66 N88-17876
Vortex breakdown and control experiments in the Ames-Dryden water tunnel p 161 N88-23127
Flow visualization study of vortex manipulation on fighter configurations at high angles of attack p 161 N88-23130
A comparative study of vortex flows in wind and water tunnels p 163 N88-23151
Vortex flows p 165 N88-28875
Separation around ellipsoid-type obstacles: Modeling and validation experiences p 167 N89-18627
Numerical simulation of separated supersonic flows around tactical missile bodies p 19 N89-18632
Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660
- VORTICITY**
A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148
- VULNERABILITY**
The avionics software architecture impact on system architecture p 48 N88-23778
EMP-induced transients and their impact on system performance p 152 N89-18591

W

- WAKEFULNESS**
Sleep and wakefulness: Handbook for flight medical officers, second edition p 197 N88-11366
[AGARD-AG-270(E)]
Sleep and wakefulness: Handbook for flight medical officers, 2nd edition p 207 N89-17399
[AGARD-AG-270(F)]
- WAKES**
Computer models of the spacecraft wake p 98 N87-26948
Spacecraft charging in the auroral plasma: Progress toward understanding the physical effects involved p 98 N87-26949
An ultra-high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13228
- WALL FLOW**
Wind tunnel-side-wall-boundary-layer effects in transonic airfoil testing: some correctable, but some not p 89 N89-16864
- WARFARE**
The potential impact of developments in electronic technology on the future conduct of air warfare, volume 3 p 153 N87-22094
[AGARD-AR-232-VOL-3]
The impact of future avionics technology on the conduct of air warfare p 45 N87-22673
- WARNING SYSTEMS**
The flight evaluation of an advanced engine display and monitoring system p 46 N88-11659
An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-18818
- WATER IMMERSION**
Experimental investigation of Hover flowfields in water at the McDonnell Douglas Research Laboratories p 161 N88-23135
- WATER TUNNEL TESTS**
Technical evaluation report on the Fluid Dynamics Panel Symposium on aerodynamic and related hydrodynamic studies using water facilities p 159 N88-11968
[AGARD-AR-225]
Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
Vortex breakdown and control experiments in the Ames-Dryden water tunnel p 161 N88-23127
Qualification of a water tunnel for force measurements on aeronautical models p 85 N88-23128

WAVE PROPAGATION

- An experimental study to determine the flow and the subsonic static and dynamic stability characteristics of aircraft operating at high angles-of-attack p 42 N88-23129
Oscillating flow over bluff bodies in a U-shaped water tunnel p 161 N88-23131
The use of the NRC/NAE water facilities in Canadian aeronautical research and development p 85 N88-23132
Short duration flow establishment on a profile in a Water-Ludwig-Tunnel p 161 N88-23134
Water tunnel measurements by an electrochemical method p 163 N88-23146
Use of water towing tanks for aerodynamics and hydrodynamics p 163 N88-23149
Investigation on the movement of vortex burst position with dynamically changing angle of attack for a schematic delta-wing in a watertunnel with correlation to similar studies in windtunnel p 163 N88-23152
Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 164 N88-23155
- WAVE DIFFRACTION**
VHF/UHF propagation by diffraction: Calculation by numerical integration p 139 N88-19659
A diffraction based theoretical model for prediction of UHF path loss in cities p 139 N88-19661
- WAVE FUNCTIONS**
On functional approach to random wave propagation problems p 234 N89-17741
- WAVE INTERACTION**
Nonlinear planar guided wave interactions and devices p 239 N87-13290
Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations p 188 N87-26943
Numerical experiments with hypersonic flows beneath a cone-delta-wing combination p 12 N88-13238
Computation of flow past conical hypersonic wings using a second order Godunov method p 12 N88-13241
Modeling of electromagnetic wave and sea surface interaction p 145 N89-17726
EMP-induced transients and their impact on system performance p 152 N89-18591
- WAVE PROPAGATION**
Propagation Impact on Modern HF Communications System Design p 122 N86-27566
[AGARD-LS-145]
The design of static and mobile HF communication systems p 122 N86-27567
Propagation 1: State of the art of modelling and prediction in HF propagation p 122 N86-27568
Propagation 2: Problems in HF propagation p 123 N86-27574
Measurements of HF propagation parameters for Real-Time Channel Evaluation (RTCE) systems p 123 N86-27575
Adaptive systems in operation p 124 N86-27576
Bistability in nonlinear waveguides p 124 N87-13291
Special Course on Interaction of Propagation and Digital Transmission Techniques p 124 N87-18703
[AD-A175698]
ELF/VLF/LF propagation and system design p 124 N87-18705
Meteor burst propagation and system design p 125 N87-18708
VHF/UHF/microwave LOS terrestrial propagation and system design p 125 N87-18709
UHF/SHF SATCOM propagation and system design p 125 N87-18710
Target strength: An overview of some recent theoretical developments p 136 N88-11910
Uniform geometrical theory of diffraction p 136 N88-11911
Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control p 136 N88-19653
[AGARD-CP-407]
An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave links p 136 N88-19654
A review of the role of surface reflection in multipath propagation over terrestrial microwave links p 138 N88-19655
Development of a ground-conductivity map for the area of the Federal Republic of Germany from measured field-strength contours p 138 N88-19656
Propagation in longitudinally varying ducts, with emphasis on guiding to antiquating transients p 139 N88-19658
VHF/UHF propagation by diffraction: Calculation by numerical integration p 139 N88-19659
Mono- and bistatic radar coverage diagrams including diffraction wave propagation p 139 N88-19660
A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles p 139 N88-19662
A propagation campaign in a marine environment utilizing a digital system at 36 GHz p 141 N86-19675

WAVE REFLECTION

- Ground/lower atmospheric conseration
p 142 N89-11935
- Scattering and Propagation in Random Media
[AGARD-CP-419] p 122 N89-17706
- Coupled-mode theory approach to depolarization associated with propagation in turbulent media
p 241 N89-17707
- Experiment and theory for backscattering enhancement and imaging in random media
p 241 N89-17708
- Geometrical theory of diffraction for high-frequency convergence functions in weakly random medium with inhomogeneous background profile
p 143 N89-17709
- Multiple scattering from rough surfaces
p 143 N89-17710
- The enhancement effect of the backscattered intensity in a random medium
p 143 N89-17715
- Multiple scattering effects of random distributions of irregularly shaped particles on infrared and optical propagation
p 242 N89-17716
- Generation and properties of self-similar stochastic processes with application to ray propagation in random media
p 242 N89-17718
- Space-time statistics of waves propagating through a deep phase screen
p 144 N89-17719
- Line-of-sight millimeter wave propagation characteristics
p 144 N89-17720
- A precipitation scatter experiment at 30 GHz
p 144 N89-17723
- Observed phase delay through rain at 96 GHz
p 144 N89-17724
- Rough surface propagation and scatter with applications to ground wave remote sensing in an ocean environment
p 145 N89-17727
- I-band multipath propagation over the sea surface
p 145 N89-17729
- Measurement and modeling of 36 GHz sea reflection phenomena
p 145 N89-17730
- Random propagation through the longwave channel
p 145 N89-17731
- Propagation and performance measurements over a digital troposcatter communications link
p 146 N89-17732
- Measurement, modeling and simulation of LOS microwave channels
p 146 N89-17734
- Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems
p 146 N89-17735
- Impulse response measurements and characterization of wideband VHF radio links
p 146 N89-17736
- Intensity fluctuations due to moving point sources
p 236 N89-17737
- Cross-frequency correlation of intensity fluctuations in the phase-changing media
p 146 N89-17738
- On the applicability of continuous scattering methods to discrete scattering problems
p 237 N89-17740
- On functional approach to random wave propagation problems
p 234 N89-17741
- Numerical simulation of wave propagation in random media
p 234 N89-17742
- Selective extinction of a dispersion of single and aggregated layered spheres
p 147 N89-17743
- Non-linear effects on the atmospheric transmission of high flux electromagnetic beams
p 147 N89-17746
- A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band
p 147 N89-17747
- Lightning generation of low-frequency TE atmospheric noise
p 148 N89-18568
- ### WAVE REFLECTION
- A review of the role of surface reflection in multipath propagation over terrestrial microwave links
p 138 N88-19655
- Correcting ray field failures caused by focusing in an inhomogeneous duct: A critical look at the Gaussian beam method
p 139 N88-19663
- A propagation campaign in a marine environment utilizing a digital system at 36 GHz
p 141 N88-19675
- ### WAVE SCATTERING
- Parametrization in scattering models
p 137 N88-11916
- Hierarchical scattering model
p 144 N89-17717
- Transition to cochannel interference path measurements in Europe
p 149 N89-18572
- ### WAVEGUIDES
- Propagation in longitudinally varying ducts, with emphasis on guiding to antiguiding transitions
p 139 N88-19658
- Random propagation through the longwave channel
p 145 N89-17731
- ### WAVELENGTH DIVISION MULTIPLEXING
- Wavelength division multiplexing at 1.5 microns for high capacity optical transmission
p 238 N87-13284
- A spectral waveguide multiplexer/demultiplexer
p 238 N87-13285
- ### WEAPON SYSTEM MANAGEMENT
- Automation at the man-machine interface
p 211 N87-29504
- Perceptual processing capabilities relevant to design of visual displays for information management in advanced airborne weapon systems
p 250 N87-29513

A-76

SUBJECT INDEX

- Contribution of expert systems to avionics advance application of AS30 laser weapon system
p 56 N89-18470
- ### WEAPON SYSTEMS
- Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems
[AGARD-CP-388] p 91 N87-16000
- The unmanned aircraft as a force multiplier
p 32 N87-16001
- Design/development tradeoffs to achieve a mission effective SOW guidance system
p 91 N87-16003
- Lethal air defense suppression technology base definition
p 234 N87-16004
- Strapdown inertial systems applications for tactical missiles (stand-off missiles)
p 91 N87-16008
- Precision delivery of unguided submunitions from a tactical stand-off missile
p 91 N87-16010
- Improvement of Combat Performance for Existing and Future Aircraft
[AGARD-CP-409] p 33 N87-22663
- Performance improvement of airborne weapon systems methods, scope and limitations
p 33 N87-22665
- Some development trends in light ground attack aircraft
p 34 N87-22666
- Weapon systems polyvalence: An economic and operational challenge
p 34 N87-22667
- Evolution of combat performance of the Hawk light combat aircraft
p 34 N87-22668
- The impact of future avionics technology on the conduct of air warfare
p 45 N87-22673
- Manned air to air combat simulation
p 81 N87-23648
- The use of Aerialia flight simulator for the development of the AM X weapon system
p 82 N87-23650
- Automation strategy and results for an airbase command and control information system (ABCCIS)
p 236 N87-24952
- Impact of future developments in electronic technology on cockpit engineering
[AGARD-R-757] p 211 N87-25789
- A low cost gyroscope for guidance and stabilisation units
p 171 N87-29478
- Development savings through parametric modeling of program costs
p 243 N88-20175
- Systems analysis and simulation techniques: Essential tools for balanced complex weapon system designs in terms of performance and cost
p 244 N88-20187
- The Design, Development and Testing of Complex Avionics Systems
[AGARD-CP-4171] p 4 N88-23767
- Architecture and role of the Sensor Subsystem in future aircraft weapon systems
p 47 N88-23770
- The specification and design of a future maritime reconnaissance aircraft
p 47 N88-23772
- A structured approach to weapon system design
p 48 N88-23773
- A change in system design emphasis: From machine to man
p 49 N88-23782
- Advanced development of a cockpit automation design support system
p 49 N88-23785
- The electromagnetic threat to future avionic systems
p 50 N88-23790
- Coherent functional development: Key to successful future system integration
p 246 N88-23803
- Flight testing under extreme environmental conditions [AGARD-AG-300-VOL-8] p 172 N88-27525
- Can CNV amplitude predict ability to accomplish a demanding task?
p 214 N88-27700
- Digital simulation techniques for end game phenomena
p 228 N89-10051
- Design criteria for hardware-in-the-loop simulation facilities
p 228 N89-10052
- Guidance and Control of Precision Guided Weapons [AGARD-CP-435] p 93 N89-17605
- Statistical techniques applied to analysis of airport distributions
p 234 N89-17611
- Software Engineering and its Application to Avionics [AGARD-CP-439] p 55 N89-18446
- ### WEAPONS DELIVERY
- Design/development tradeoffs to achieve a mission effective SOW guidance system
p 91 N87-16003
- Lethal air defense suppression technology base definition
p 234 N87-16001
- Precision delivery of unguided submunitions from a tactical stand-off missile
p 91 N87-16010
- Automation strategy and results for an airbase command and control information system (ABCCIS)
p 236 N87-24952
- AFTI/F-16 impact of cockpit automation on pilot acceptance
p 221 N89-18033
- ### WEAPONS DEVELOPMENT
- Design/development tradeoffs to achieve a mission effective SOW guidance system
p 91 N87-16003
- ### WEAR
- Wear of high speed roller bearings
p 175 N86-29248
- An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids
p 55 N89-18618

WEAR RESISTANCE

- The application of the RBD process to the deposition of anti-wear alloys
p 177 N87-17069

WEIGHT REDUCTION

- Engine-transmission-structural airframe members compatibility
p 31 N87-10069
- Influence of engine variables on future helicopter systems
p 224 N87-20200

WEIGHTING FUNCTIONS

- Flexible grid generation for complex geometries in two space dimensions based on variational principles
p 224 N87-20200

WEIGHTLESSNESS SIMULATION

- Preadaptation to the stimulus rearrangement of weightlessness: Preliminary studies and concepts for trainer designs
p 207 N89-12188

WELD STRENGTH

- Computational weld mechanics
p 175 N87-17052
- The application of diffusion bonding and laser welding in the fabrication of aerospace structures
p 176 N87-17054
- Diffusion bonding in the manufacture of aircraft structure
p 176 N87-17056
- Diffusion bonding of Al alloys in the solid state
p 177 N87-17058
- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-Al6V4
p 182 N87-17065
- Welding of aluminum castings
p 177 N87-17068
- Repair techniques for gas turbine components
p 178 N87-17071
- Diffusion bonding of metals
p 179 N87-29646

WELD TESTS

- Advanced Joining of Aerospace Metallic Materials conference proceedings
[AGARD-CP-398] p 175 N87-17051
- The welding of aluminum alloys: A new technology in space application
p 176 N87-17056
- Ultrasonic testing techniques for diffusion-bonded titanium components
p 179 N87-17061
- Weld quality monitor and control system
p 179 N87-17062
- NDT of electron beam welded joints (micro-focus and real time X-ray)
p 179 N87-17063
- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-Al6V4
p 182 N87-17065
- Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program
p 177 N87-17067
- Welding of aluminum castings
p 177 N87-17068
- Evaluation of DOH and weld repaired F100 turbine vanes under simulated service conditions
p 180 N87-17070

WELDABILITY

- Repair techniques for gas turbine components
p 178 N87-17071

WELDED JOINTS

- Advanced Joining of Aerospace Metallic Materials conference proceedings
[AGARD-CP-398] p 175 N87-17051
- Computational weld mechanics
p 175 N87-17052
- Study of the electron beam weldability of superalloys through the analysis of melt zone morphology
p 176 N87-17053
- The application of diffusion bonding and laser welding in the fabrication of aerospace structures
p 176 N87-17054
- Economical manufacturing and inspection of the electron-beam-welded Tornado wing box
p 176 N87-17055
- The welding of aluminum alloys: A new technology in space application
p 176 N87-17056
- Weld quality monitor and control system
p 179 N87-17062
- NDT of electron beam welded joints (micro-focus and real time X-ray)
p 179 N87-17063
- Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-Al6V4
p 182 N87-17065
- Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program
p 177 N87-17067

WELDING

- Computational weld mechanics
p 175 N87-17052
- Evaluation of DOH and weld repaired F100 turbine vanes under simulated service conditions
p 180 N87-17070

WEST GERMANY

- Atmospheric turbulence research at DFVLR [AGARD-R-752] p 189 N88-27669

WHISTLERS

- Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations
p 188 N87-26943

WIND (METEOROLOGY)

- Incoherent/coherent scatter
p 142 N89-11940

WIND SHEAR

- The application of optimal control techniques to the UTIAS research simulator
p 90 N87-23637

SUBJECT INDEX

WIND TUNNEL APPARATUS

Development of intake swirl generators for turbo jet engine testing p 83 N87-24480

WIND TUNNEL CALIBRATION

Reynolds number effects and the wind tunnel environment p 86 N88-28862
Aerodynamic Data Accuracy and Quality Requirements and Capabilities in Wind Tunnel Testing [AGARD-CP-429] p 87 N89-16846

A critical assessment of wind tunnel results for the NACA 0012 airfoil p 17 N89-16847
Comparison of the results of tests on A300 aircraft in the RAE 5 metre and the ONERA F1 wind tunnels p 17 N89-16849

Analytical and experimental methods used to resolve the aerodynamic results of tests conducted in three test facilities p 17 N89-16850
Hierarchy of uncertainty sources in transonic wind tunnel testing p 87 N89-16851

Wind tunnel predicted air vehicle performance: A review of lessons learned p 87 N89-16852
Measurement uncertainty of the AGARD/PEP uniform engine test program p 71 N89-16853

Development of testing techniques in a large transonic wind tunnel to achieve a required drag accuracy and flow standards for modern civil transports p 88 N89-16857
Transonic wind tunnel boundary interference: A correction procedure p 88 N89-16861

WIND TUNNEL MODELS

Static Aeroelastic Effects on High Performance Aircraft [AGARD-CP-403] p 76 N88-13348
The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355

Techniques for boundary layer tripping and control p 86 N88-28863
Experimental tools: The tunnel and the model p 86 N88-28864

Computational tools for simulation methodologies p 86 N88-28865
The accurate measurement of drag in the 8 ft x 8 ft tunnel p 88 N89-16855

The use of computational fluid dynamic methods to assess the effects of model support systems and working section modifications on the flow around wind tunnel models p 88 N89-16862
Wind tunnel experiments on aerol models for the assessment of computational flow methods p 18 N89-18614

WIND TUNNEL TESTS

Understanding fan blade flutter through linear cascade aerodynamic testing p 9 N87-24407
Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478

Development of intake swirl generators for turbo jet engine testing p 83 N87-24480
European hypersonic wind tunnels p 84 N88-13221
Turbulence measurement in hypersonic flow p 10 N88-13224

The drag of slender axisymmetric cones in rarefied hypersonic flow p 11 N88-13229
Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles p 11 N88-13230

Vortex formation over delta, double delta and wave rider configurations at supersonic speeds p 12 N88-13243
The RAE experimental data-base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250

Aircraft dynamics Aerodynamic aspects and wind tunnel techniques p 39 N88-13320
Fundamentals of fighter aircraft design: Engine intake and afterbody p 40 N88-13322

The role of experimental investigation and computational fluid dynamics during fighter aircraft design p 40 N88-13326
Requirements and recommendations for the development of theoretical codes and experimental facilities in the near future p 40 N88-13327

Static Aeroelastic Effects on High Performance Aircraft [AGARD-CP-403] p 76 N88-13348
The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355

Measurement of model deformation in wind tunnels p 77 N88-13358
Techniques of flow visualization [AGARD-AG-302] p 160 N88-16977

Analysis of high-speed propellers aerodynamics p 65 N88-17669
Experimental investigation of a supercritical compressor rotor blade section p 67 N89-17680

Effectiveness of various control surfaces in quasi-steady and unsteady conditions p 77 N88-17682
Qualification of a water tunnel for force measurements on aeronautical models p 85 N88-23128

Missiles, fuselage and similar bodies p 85 N88-28858
High-aspect-ratio wings p 85 N88-28859
Complex configurations p 86 N88-28861

Reynolds number effects and the wind tunnel environment p 86 N88-28862
Techniques for boundary layer tripping and control p 86 N88-28863

Experimental tools: The tunnel and the model p 86 N88-28864
Empirical tools for simulation methodologies p 86 N88-28865

Introduction and critical flow phenomena p 14 N88-28870
Environmental effects on transition and boundary layer characteristics p 165 N88-28876

Boundary layer manipulation p 165 N88-28877
Aerodynamic data accuracy and quality Requirements and capabilities in wind tunnel testing [AGARD-AR-254] p 14 N88-28893

Reynolds number effects in transonic flow [AGARD-AG-303] p 17 N89-16760
Aerodynamic Data Accuracy and Quality Requirements and Capabilities in Wind Tunnel Testing [AGARD-CP-429] p 87 N89-16846

A critical assessment of wind tunnel results for the NACA 0012 airfoil p 17 N89-16847
Experiments on the DFVLR-F4 wing body configuration in several European wind tunnels p 87 N89-16848

Comparison of the results of tests on A300 aircraft in the RAE 5 metre and the ONERA F1 wind tunnels p 17 N89-16849
Analytical and experimental methods used to resolve the aerodynamic results of tests conducted in three test facilities p 17 N89-16850

Hierarchy of uncertainty sources in transonic wind tunnel testing p 87 N89-16851
Wind tunnel predicted air vehicle performance: A review of lessons learned p 87 N89-16852

Measurement uncertainty of the AGARD/PEP uniform engine test program p 71 N89-16853
An overview of the application of standard measurement uncertainty methodology to propulsion testing p 72 N89-16854

The accurate measurement of drag in the 8 ft x 8 ft tunnel p 88 N89-16855
Accurate drag estimation using a single component drag model technique p 88 N89-16856

Development of testing techniques in a large transonic wind tunnel to achieve a required drag accuracy and flow standards for modern civil transports p 88 N89-16857
Precision improvement of transport aircraft drag measurements p 17 N89-16858

Flow unsteadiness in three low-speed wind tunnels p 88 N89-16859
Impact of nozzle design constraints on test section flow quality p 88 N89-16860

Transonic wind tunnel boundary interference: A correction procedure p 88 N89-16861
The use of computational fluid dynamic methods to assess the effects of model support systems and working section modifications on the flow around wind tunnel models p 88 N89-16862

Accuracy of various wall-correction methods for 3D subsonic wind-tunnel testing p 89 N89-16863
Wind tunnel sidewall-boundary-layer effects in transonic airfoil testing-some correctable, but some not p 89 N89-16864

On Reynolds number effects and simulation p 17 N89-16866
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-16867

Experiments on boundary layer transition tripping at low Reynolds numbers p 18 N89-16868
Some difficulties in the wind tunnel prediction of modern civil aircraft buffet: Proposed remedies p 18 N89-16869

Accuracy requirements for high-speed test with engine simulation on transport aircraft models in the NLR-HST p 89 N89-16870
Engine simulator test: Comparison of calibration and wind tunnel results p 89 N89-16871

Instantaneous force measurement on a model subjected to rapid control variations p 90 N89-16872
Balance accuracy and repeatability as a limiting parameter in aircraft development force measurements in conventional and cryogenic wind tunnels p 90 N89-16873

Characterization of hypersonic wind tunnel flow fields for improved data accuracy p 90 N89-16874
Accuracy of lift and center-of-thrust measurements at missile control surfaces p 18 N89-16875

Computerized thermographic technique for the detection of boundary layer separation p 18 N89-16876
Accuracy problems in wind tunnels during transport aircraft development p 90 N89-16877

Requirements and capabilities in unsteady wind-tunnel testing p 90 N89-16878
Particular flight mechanics specifications related to wind tunnel test results p 90 N89-16879

Wind tunnel experiments on aerol models for the assessment of computational flow methods p 18 N89-16814
Reliability and validity of CFD codes: Flight and wind tunnel comparison p 167 N89-19626

WORKLOADS (PSYCHOPHYSIOLOGY)

Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639

Validation of Computational Fluid Dynamics Volume 2 Poster papers [AGARD-CP-437-VOL 2] p 169 N89-18648

Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653
Comparison of theory and experiment for four supercritical low drag airfoils p 21 N89-18655

WIND TUNNEL WALLS

Wind tunnel sidewall boundary-layer effects in transonic airfoil testing-some correctable, but some not p 89 N89-16864

WIND TUNNELS

Particle imaging velocimetry in a low turbulent wind tunnel and other flow facilities p 79 N87-21205
Investigation on the movement of vortex burst position with dynamically changing angle of attack for a schematic delta-wing in a water tunnel with correlation to similar studies in wind tunnel p 163 N88-23152

WIND VELOCITY

A review of measured gust responses in the light of modern analysis methods p 78 N88-28724
A summary of atmospheric turbulence measurements with specially-equipped aircraft in the US p 189 N88-29727

Re-assessment of gust statistics using CAADRP data p 78 N88-29732

WINDSHIELDS

Vision through aircraft transparencies p 216 N88-29294

WING LOADING

The RAE experimental data-base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250
A summary of methods for establishing airframe design loads from continuous gust design criteria p 43 N88-29701

WING OSCILLATIONS

Influence of the static deformation on a wing in the unsteady aerodynamic p 77 N88-13347

WING PANELS

Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209

WING PROFILES

The DFVLR-F5 wing experiment: Towards the validation of the numerical simulation of transonic viscous wing flows p 19 N89-18623

WING TIP VORTICES

The prediction of transonic loading on advancing helicopter rotors p 5 N87-20206
The international vortex flow experiment p 166 N89-18619

WING-FUSELAGE STORES

Prediction of wing-body store aerodynamics using a small perturbation method and a grid embedding technique p 5 N87-20207

WINGS

Economical manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055

Composite repair of corroded J stiffened panels: Design and test verification p 1 N87-20181
Battle damage repair of composite structures p 3 N87-20189

Transonic Navier-Stokes wing solution using a zonal approach: Part 1: Solution methodology and code validation p 7 N87-20228
Transonic Navier-Stokes wing solutions using a zonal approach: Part 2: High angle-of-attack simulation p 7 N87-20229

Design of wings and wing-body configurations for transonic and supersonic speeds p 39 N88-13318
Transport-type configurations p 43 N88-28867

Typical joints in a wing structure p 44 N89-17693
Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17696

The design of the GARTEUR low aspect-ratio wing for use in the validation of shear layer and overall flow prediction methods p 45 N89-19652

WORDS (LANGUAGE)

Semi-automatic cross-checking between different copies of the same flight plan p 28 N87-21903
Words: Keys or barriers to information transfer p 252 N88-20454

WORK CAPACITY

In-flight workload assessment using embedded secondary radio communications tasks p 212 N87-30054
Use of task timeline analysis to assess crew workload p 212 N87-30056

Measurement of pilot workload p 214 N87-30068

WORKLOADS (PSYCHOPHYSIOLOGY)

Some experiences in integrating avionic systems on the civil flight deck p 45 N87-21907
Automation at the man-machine interface p 211 N87-29504

WORKSTATIONS

- The effects of display-control I/O compatibility, and integrity on dual-task performance and subjective workload p 211 N87-29508
- Organization of displays in the visual space of the combat aircraft pilot p 212 N87-29516
- The practical assessment of pilot workload (AGARD-AG-282) p 212 N87-30054
- In-flight workload assessment using embedded secondary radio communications tasks p 212 N87-30055
- Use of task timeline analysis to assess crew workload p 212 N87-30056
- Pilot subjective evaluation of workload during a flight test certification programme p 212 N87-30057
- The use of subjective workload assessment technique in a complex flight task p 213 N87-30058
- Workload methodology p 213 N87-30059
- Mental workload measurement in operational aircraft systems: Two promising approaches p 207 N87-30060
- Cortical evoked response and eyeblink measures in the workload evaluation of alternative landing system displays p 213 N87-30061
- In-flight assessment of workload using instrument scan p 213 N87-30062
- Flight test evaluation of crew workload Part 1: Aircraft certification for a minimum crew of two pilots p 213 N87-30063
- Measurement of aircrew workload during low-level flight Part 1: A comparison between in-flight and post-flight assessment methods p 213 N87-30064
- In-flight assessment of workload using pilot ratings and heart rate p 197 N87-30065
- The assessment of workload in helicopters p 214 N87-30066
- Assessing workload for minimum crew certification Part 1: Static workload analysis and performance analysis p 214 N87-30067
- Measurement of pilot workload p 214 N87-30068
- Investigation of workload measuring techniques: A theoretical and practical framework p 214 N87-30069
- Event-related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696
- Event-related and steady potential changes in the brain related to workload during tracking p 201 N88-27705
- Pilot workload assessment: A flight test approach p 218 N89-18014
- Considerations concerning the assessment of pilot workload for complex task conditions p 218 N89-18015
- Advances in workload measurement for cockpit design evaluation p 218 N89-18016
- Pilot integration and the implications on the design of advanced cockpits p 220 N89-18026
- WORKSTATIONS**
- The workplace vibration environment of off-road machines p 209 N87-13935
- Investigation of the lumbar flexion of office workers p 191 N87-13944
- Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951

X

X RAY INSPECTION

- NCVT of electron beam welded joints (micro-focus and real time X-ray) p 179 N87-17063
- Short term developments in non-destructive evaluation applicable to turbine engine parts p 181 N89-17258

X RAYS

- The application of radiation physics and photogrammetric techniques for the diagnosis and solution of mechanical engineering problems and performance improvements in the development of aero gas turbine engines at Rolls Royce p 178 N87-21198

X WING ROTORS

- Rotorcraft designs for the year 2000 p 37 N88-11665

X-29 AIRCRAFT

- X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671

XV 15 AIRCRAFT

- Piloted simulation in the development of the xv 15 tilt rotor research aircraft p 81 N87-23646
- Modeling XV 15 tilt rotor aircraft dynamics by frequency and time domain identification techniques p 37 N88-11657

Y

YF-16 AIRCRAFT

- An experimental-analytical routine for the dynamic qualification of aircraft operating on rough runway surfaces p 35 N87-23611

YIELD STRENGTH


- Inertie welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program p 177 N87-17067

SUBJECT INDEX

PERSONAL AUTHOR INDEX

AGARD INDEX OF PUBLICATIONS (1986-1988)

Typical Personal Author Index Listing



Listings in this index are arranged alphabetically by personal author. The title of the document provides a brief description of the subject matter. The report number helps to indicate the type of document cited. It is given only for complete publications, not for individual papers. The page number identifies the page in the abstract section (Part 1) on which the citation appears while the NASA accession number denotes the number by which the citation is identified on the abstract page. Under each author's name, the titles are arranged in accession number order.

A

AARONS, JULES
Magnetic storm effects on F layer irregularities near the auroral oval p 189 N88-17750

ABBOTT, KATHY
Artificial intelligence and its impact on combat aircraft p 232 N87-24945

ABBOTT, W. A.
Transmission of inlet distortion through a fan p 62 N87-24475

ABDELWAHAB, MAHMOUD
Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477

ABRAHAM, PETER
Can CNV amplitude predict ability to accomplish a demanding task? p 214 N88-27700

ACHACHE, MARC
Active control of helicopter vibration using multiloop self-adaptive control p 75 N88-11660

ACKERMANN, J.
Robust control system design p 73 N88-10800

ACTON, E.
Numerical methods for unsteady transonic flow p 8 N87-24403

ADAM, EUGENE
Panoramic Cockpit Control and Display System (PCCADS) p 219 N89-18019

ADAM, P.
Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059

ADAMS, C. D.
Telling the user what is available. Announcement and search p 250 N87-26885

ADAMS, L.
The flight evaluation of an advanced engine display and monitoring system p 46 N88-11659

ADAMS, R. M.
Operation of gas turbine engines in dust-laden environments p 63 N88-17654

ADAMS, ROBERT
A sequential adaptation technique and its application to the Inter 12 IFF system p 126 N87-18735

ADOLPH, CHARLES E.
Minimizing development flight test time and cost in the US Air Force p 245 N88-20192

AGNESESS, D.
Advanced fighter design: Operational experience and future requirements p 36 N87-24453
General operational and training visual concerns p 216 N88-28295

Future visual environment and concerns p 217 N88-28299

AHISBORG, B.
Individual predictability of back trouble in 18-year old men: A prospective study during military service p 192 N87-13951

AKMAN, A.
CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27665

ALBRECHT, G.
An integrated aero/mechanical performance approach to high technology turbine design p 64 N88-17857

ALBRECHT, H. J.
Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control (AGARD-CP-407) p 138 N88-19653

ALBRITTON, WILLIAM P., JR.
Guidance and control systems simulation and validation techniques (AGARD-AG-273) p 78 N89-10048

ALBUQUERQUE, AUGUSTO A.
Inherent-prior effect in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A pilot-fighting schema p 151 N89-18589

ALEXANDER, W. C.
The pilot is not the limiting factor in high performance aircraft p 218 N89-18012

ALOUN, F.
F110 engine monitoring and maintenance management systems for F-16 C/D p 70 N88-16781

ALLEN, KENNETH C.
An EHF telecommunication system engineering model p 141 N88-19674
Observed phase delay through rain at 96 GHz p 144 N89-17724

ALLGOOD, G. O.
Ecological significance of equipment features and pilot history in simulator sickness p 203 N89-12172

ALLI, PIETRO
The EH-101 integrated project: A naval, utility and commercial helicopter system p 38 N88-11672

ALLINIAK, O.
Modelling of deformation and microstructural changes in P/M Rene 95 under isothermal forging conditions p 119 N89-15264

ALTAN, TAYLAN
Microstructures, flow properties and processing of Ti6242 alloy p 112 N89-15268

AMADIEU, PATRICE
Qualification of the tant object camera p 170 N87-20358

AMALBERTI, R.
Study of antipulsion mechanisms in the aeronautical environment p 207 N87-29505
Sophisticated integral control methods for use in flight p 212 N87-29510
Organization of displays in the virtual space of the combat aircraft pilot p 212 N87-29516
Voice command and the change of mental representation during task performance p 135 N87-29523

Psychosensory cockpit ergonomics: advantages of intelligent information systems p 49 N88-23784
Pilots as supervisors and managers of automatic systems: A risky new factor in man-machine systems reliability p 219 N89-18021

AMBOS, R.
Target analysis through fine distance discrimination p 130 N87-18746

AMENDOLA, A.
Validation of a multi-block Euler flow solver with propeller-airplane flows p 20 N89-18649

ANANDA, MOHAN
The GPS overview and navigation system concept p 29 N89-10875
The Global Positioning System (GPS) constellation and coverage p 29 N89-10876
The Global Positioning System (GPS) accuracy, system error budget, space and control segment overview p 28 N89-10877

ANDERS, G.
Effectiveness of various control surfaces in quasi-steady and unsteady conditions (AGARD-R-735) p 77 N88-17682

ANDERSON, G. R.
A method for aircraft simulation verification and validation developed at the United States Air Force Flight Simulation Facility p 82 N87-23654

ANDERSON, J. D.
Generation and properties of self-similar stochastic processes with application to ray propagation in random media p 242 N88-17718

ANDERSON, JOHN D., JR.
Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245

ANDERSON, VERNON A.
Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23789

ANDERSON, W. KYLE
Parametric study of grid size, time step and turbulence modeling on Navier-Stokes computations over airfoils p 18 N88-18615
Accurate solutions, parameter studies and comparisons for the Euler and potential flow equations p 187 N89-18624

ANDERSSON, G. B. J.
In vivo measurements of vibration transmission in the human spine p 210 N87-13947

ANDONOVIC, I.
Performance of integrated optical frequency shifters pigtailed to high birefringence fibres using ion-milled grooves p 238 N87-13289

ANDREU, MARC
A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles p 139 N88-19652

ANDREWS, M. D.
Random propagation through the longwave channel p 145 N89-17731

ANDREWS, MICHAEL D.
VLF radio noise p 148 N88-18569

ANDREWS, T. O.
Ignition, combustion, and physical properties of liquid propellants at gun pressures p 115 N89-29065

ANGUS, R. G.
Psychophysiological measures of drowsiness as estimators of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702

ANKARA, ALPAT
Microstructures, flow properties and processing of Ti6242 alloy p 112 N89-15268

ANSELM, I.
Stability in nonlinear waveguides p 124 N87-13291

ANTONIK, JOSEPH
Advanced sensor exploitation p 83 N87-24946

ANTONINI, R.
Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956

APPA, K.
Strength analysis of mechanically fastened composite structures p 186 N89-17692

APPROU, A.
Multi-input decision aid procedure: Application to multi-sensor target classification p 203 N89-18484

ARBITER, D. G.
Efforts toward the validation of a computational fluid dynamics code for analyses of internal aerodynamics p 169 N89-18643

ARDREY, ROBERT S., II
Automated Ada code generation for military avionics p 230 N89-18459

ARMAND, C.
Measurement of model deformation in wind tunnels p 77 N88-13356
Precision improvement of transport aircraft drag measurements p 17 N89-18658
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-18667

ARMANDO, ARMANDO
The use of Aestika flight simulator for the development of the AM-X weapon system p 82 N87-23650

ARMITI, LUCIANO
The EH-101 integrated project: A naval, utility and commercial helicopter system p 38 N88-11672

ARMSTRONG, E. K.
Fatigue and assessment methods of blade vibration p 68 N89-10010

ARMSTRONG, K. B.
British Airways experience with composite repairs p 3 N87-20192

AUTHOR

ARMSTRONG, R. L.

- ARMSTRONG, R. L.**
Non-linear effects on the atmospheric transmission of high-flux electromagnetic beams p 147 N89-17746
- ARNAL, DANIEL**
Three-dimensional layers: Laminar-turbulent transition p 158 N87-22149
- ARNESON, M. C.**
An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818
- ARNOLD, R. J.**
Store separation flight testing [AGARD AG-300-VOL-5] p 31 N86-30727
- ASHBY, M. L.**
Military engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 53 N89-16798
- ASHEIM, J. P.**
Alternative fuel spray behavior p 104 N88-29912
- ASHFORD, J. H.**
Microcomputers in information resource sharing. Part 1: Data and graphics systems p 223 N87-19925
Trends in software and system development p 223 N87-19928
- ASHILL, P. R.**
Experiments on the DFVLR-F4 wing body configuration in several European windtunnels p 87 N89-16848
Wind tunnel experiments on aerofol models for the assessment of computational flow methods p 18 N89-18614
A theoretical and experimental evaluation of a numerical method for calculating supersonic flows over wing-body configurations p 19 N89-18622
- ASHKENAS, IRVING L.**
Collected flight and simulation comparisons and considerations p 83 N87-23660
Pilot modeling applications p 217 N88-29737
- ASHWORTH, D. A.**
Wake and shock interactions in a transonic turbine stage p 57 N87-21930
- ASLAM, M.**
Fiber optics: A survivable and cost-effective transmission medium for terrestrial networks p 240 N87-13302
- ASSAKER, D.**
Computer prediction of internal stresses during heat treatment p 112 N89-15272
- ATENCIO, ADOLPH, JR.**
Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034
- ATTA, R.**
Structure of unsteady flows at leading- and trailing-edges: Flow visualization and its interpretation p 164 N88-23154
- AUBERT, JEAN-PASCAL**
Generating diagnostic knowledge from a structural and functional description p 232 N88-10813
- AUBREY, BARBARA F.**
A model of a defence information service as seen by the user p 249 N87-26678
- AUCH, W.**
A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- AUDONE, BRUNO**
The electromagnetic threat to future avionics systems p 50 N88-23790
- AUJAY, O.**
AQM Accelerometer for precision-guided weapons p 93 N89-17607
- AULEHLA, F.**
New trends in intake/engine compatibility assessment p 60 N87-24467
- AUPOIX, B.**
Homogeneous turbulence two-point closures and applications to one-point closures p 180 N88-11973
Hypersonic laminar boundary layer: Parametric study for the representation of real gas effects p 11 N88-13236
- AUSTIN, J.**
Identification of microwave line-of-sight multipath components p 139 N88-19665
- AUZOLLE, F.**
Acquisition and processing of non-stationary pressure measurements in studies of air intake distortion p 178 N87-21191
- AVAGNINA, G. M.**
Some development trends in light ground attack aircraft p 34 N87-22666
- AZZARONE, RAFFAELE**
Coupling of radio terminals p 152 N89-18594

B

- BAARS, E. P.**
Millimeter wave transmission through man-made obstructions in a battlefield environment p 127 N87-18732
- BACHELET, ERIC**
Industrial introduction of the modeling of aeronautical forging and foundry process simulation p 121 N89-15279

BACHEN, NILS IROGENS

- A statistical procedure for the evaluation of presence/non-presence of stimulus-related EEG activity p 199 N88-27689
- BADHAM, H.**
Considerations for designers of cases for small solid propellant rocket motors p 100 N87-26594
Considerations for designers of cases for small solid propellant rocket motors p 101 N89-16911
- BAER, P. G.**
Liquid propellant gun technology p 115 N86-29064
- BAEUMKER, M.**
Navigation systems for the new generation of combat and transport helicopters and associated flight tests p 29 N87-29481
- BAHAAR, EZEKIEL**
Scattering and depolarization by random rough terrain and vegetation covered terrain-uniform full wave approach p 139 N88-19657
Multiple scattering effects of random distributions of irregularly shaped particles on infrared and optical propagation p 242 N89-17716
- BAILEY, JOHN S.**
A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
- BAILLIE, S. W.**
Investigation of vertical axis handling qualities for helicopter hover and NOE flight p 75 N88-11653
The NAE atmospheric research aircraft p 51 N88-29730
- BAIRSTO, M. A.**
Engine usage condition and maintenance management systems in the UK armed forces p 69 N89-16783
- BAJWA, L. Y.**
A software life cycle support environment p 225 N88-23800
- BAKER, A. A.**
Fibre composite repair of cracked metallic aircraft components: Practical and basic aspects p 2 N87-20187
- BAKER, C. J.**
I-band multipath propagation over the sea surface p 145 N89-17729
- BAKER, D. N.**
Hostile energetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941
- BAKER, E. A.**
Smokeless propellants of improved performance p 113 N86-26469
- BALDASSARRINI, RUGGERO**
The EH-101 integrated project: A naval, utility and commercial helicopter system p 38 N88-11672
- BALKE, H.**
The relationship between operational flight manoeuvre parameters and design parameters p 41 N88-19454
- BALLARD, J. R.**
Impact of IPS and IRS configurations on engine installation design p 31 N87-17070
- BALLING, P.**
Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863
- BALMAIN, K. G.**
Arc propagation, emission and damage on spacecraft electronics p 98 N87-26952
- BALTAR, J. Y.**
Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653
- BALTZLEY, D. R.**
Ecological significance of equipment features and pilot history in simulator sickness p 203 N89-12172
- BALUTEAU, C.**
Assessment of software quality for the AIRBUS A310 automatic pilot p 74 N88-10804
- BANDERET, L. E.**
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25712
- BANDOW, H. E.**
Performance modelling: A tool for lubricant development p 113 N86-29252
- BANING, G.**
The welding of aluminum alloys: A new technology in space application p 176 N87-17056
- BANKS, P. M.**
Active vehicle charging measurements in sounding rocket and space shuttle orbit environments at Low Earth Orbit (LEO) altitude p 97 N87-26945
- BANNINK, W. J.**
The international vortex flow experiment p 166 N89-18619
Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650
- BANTA, G. R.**
The neuroelectric selection of Naval aviation personnel: An evaluation p 208 N88-27707
- BARATA, J. M. M.**
On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N89-18645

PERSONAL AUTHOR INDEX

- BARBER, B.**
Visual display research tool p 80 N87-23635
- BARBERIS, D.**
Separation around ellipsoid-type obstacles: Modeling and validation experiences p 167 N89-18627
- BARBI, C.**
Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
- BARNES, A. G.**
The assessment and evaluation of combat performance improvements p 34 N87-22675
Simulation of aircraft behaviour on and close to the ground: Summary of AGARDograph AG-285 p 80 N87-23640
The role of simulation in flying qualities and flight control system related development p 87 N88-29742
- BARNES, P. R.**
Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead line responses p 151 N89-18590
- BARNES, TERENCE J.**
Current and proposed gust criteria and analysis methods: An FAA overview p 78 N88-29718
- BARON, JEAN-CLAUDE**
Radar display: Conversion of scanning: Errors and correction techniques p 132 N87-18754
- BARREAU, R.**
Effectiveness of various control surfaces in quasi-steady and unsteady conditions [AGARD-R-735] p 77 N88-17682
Some difficulties in the wind tunnel prediction of modern civil aircraft buffeting: Proposed remedies p 18 N89-16669
- BARRETT, A. J.**
The costs of not having refined information p 247 N86-28798
- BARTLETT, R. G.**
Corrosion in avionics and associated equipment, cause, effect and prevention p 47 N88-13335
- BARTON, P.**
Adaptive antennas p 134 N87-23865
- BASSI, F.**
Transonic three-dimensional inviscid calculations in turbomachines p 59 N87-21942
Numerical solution of compressible Navier-Stokes flows p 166 N89-18616
- BASSMAN, MITCHELL J.**
Conversion to Ada: Does it really make sense p 229 N89-18453
- BASSO, G. L.**
Use of a video-photogrammetry system for the measurement of the dynamic response of the shuttle remote manipulator arm p 94 N87-20370
- BASU, SANTIMAY**
Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems p 146 N89-17735
Ionospheric scintillations and in-situ measurements at an auroral location in the European sector p 189 N89-17752
- BASU, SUNANDA**
Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems p 146 N89-17735
Ionospheric scintillations and in-situ measurements at an auroral location in the European sector p 189 N89-17752
- BATCHELLOR, C. R.**
Magnetic and pressure sensors using the compensated polarimetric sensor configuration p 237 N87-13279
- BATE, P. S.**
An application of computer modeling to isothermal forging p 121 N89-15280
- BATEJAT, D.**
Voice command and the change of mental representation during task performance p 135 N87-29523
- BATES, D. R.**
CO2 laser radar systems for target acquisition and guidance p 173 N89-17606
- BATINA, JOHN T.**
Accurate solutions, parameter studies and comparisons for the Euler and potential flow equations p 167 N89-18624
- BATTEZZATO, L.**
Analysis of possible transmission arrangements applicable for driving single or twin counterrotating fans on propfan engines p 66 N88-17670
- BAUER, G.**
Multisensor target reconnaissance p 219 N89-18020
- BAUER, H.-J.**
On the application of finite-difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N88-29938
- BAUER, J.**
Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687

PERSONAL AUTHOR INDEX

- Mechanism of single shear fastened joints p 187 N89-17700
- BAUER, LANCE O.**
Cognitive task demands as reflected in physiological measures p 200 N88-27699
- BAUER, P.**
H. F. radar probing (including modification) p 142 N89-11937
Incoherent/coherent scatter p 142 N89-11940
- BAUMAN, P.**
The correlation between methodological and low-level angle-of-arrival measurements p 140 N89-19868
- BAUMERT, W.**
Engine simulator tests: Comparison of calibration and wind tunnel results p 89 N89-16871
- BAVUSO, SALVATORE J.**
Reliability modeling of fault-tolerant computer based systems p 73 N88-10801
- BAYLE, J. P.**
Parametric study of the total cost of aircraft modernization in terms of development and equipment sales costs p 243 N88-20177
- BEANE, G. A., IV**
Military aircraft propulsion lubricants: Current and future trends p 113 N86-29249
- BEATTY, J. R.**
Precision delivery of unguided submunitions from a tactical standoff missile p 91 N87-16010
- BEAUMONT, S.**
Performance of integrated optical frequency shifters pigtailed to high birefringence fibres using ion-milled grooves p 238 N87-13289
- BECKER, J.**
Gust load prediction and alleviation on a fighter aircraft [AGARD-R-728] p 72 N86-30741
- BECKETT, P.**
Voice control of cockpit systems p 73 N87-29526
- BECKSTEAD, M. W.**
Measurements of distributed combustion p 115 N86-26479
- BEDNARZ, B.**
Closed loop fiber optic gyro p 237 N87-13277
- BEELER, GEORGE B.**
Flow measurements in a water tunnel using a holographic velocimeter p 162 N88-23141
- BEEVIS, D.**
Back pain and discomfort resulting from exposure to vibration in tracked armoured vehicles p 209 N87-13936
Experience in the integration of human engineering effort with avionics systems development p 50 N88-23793
- BEHRMANN, ROLF**
Manned simulation: Helpful means to determine and improve structural load criteria p 42 N88-19459
- BELFIELD, A.**
Predicting crash performance p 25 N89-18438
- BELJAM, R. D.**
Hostile energetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941
- BELLET, J. C.**
Modeling and experimental study of a reactive flow confined with wall injection p 109 N88-29946
- BELLI, M.**
Numerical modeling of combustion processes in gas turbines p 108 N88-29939
- BELLINGER, M.**
Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
- BELROSE, JOHN S.**
HF communications and remote sensing in the high latitude region p 142 N89-11936
- BELUCHE, F.**
Application of high speed holography to aerodynamic and hydrodynamic three-dimensional velocimetry p 163 N88-23144
- BENAY, R.**
Fundamental studies on shock-wave/boundary-layer interaction: in a 3-D channel p 158 N87-21928
- BENEK, J. A.**
Experience with three dimensional composite grids p 227 N88-29324
- BENGER, J.**
New method for suppression of goniometer of errors by radio noise from overhead power lines p 151 N89-18585
- BENIGUEL, Y.**
Modeling electromagnetic wave propagation through a strongly-fluctuating ionized medium by the phase screen method p 147 N89-17739
- BENITES, ERNESTO**
Integrated multisensor targeting p 236 N87-24947
- BENNER, KEVIN M.**
KRS: A knowledge based mission planner p 235 N87-24943
RISE: Requirements and Incremental Specification Environment p 230 N89-16462
- BENNER, WINFRIED**
Helicopter (performance) management p 38 N88-11666

- BENOIT, ANDRE**
Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users [AGARD-CP-410] p 25 N87-21981
Next generation of control techniques in advanced TMA p 27 N87-21998
- BENOIT, J.**
OASIS: A modern tool for real-time simulation p 80 N87-23638
- BENSON, A. J.**
Aerological factors in simulator sickness p 204 N89-12174
- BENVENUTO, N.**
Impulse response measurements and characterization of wideband VHF radio lines p 148 N89-17736
- BENZ, U.**
Pharmacological approaches to performance enhancement in animals p 190 N87-25715
- BERARDI, L.**
Rapid prototyping of complex avionics system architectures p 47 N88-23771
- BERBAUM, K. S.**
Ecological significance of equipment features and pilot history in simulator sickness p 203 N89-12172
- BERG, P.**
A deterministic approach to turbulence: Chaos in Rayleigh-Benard convection p 180 N88-11975
- BERGER, CHRISTIAN**
Experimental study of vortex sheets in plane flow p 162 N88-23142
- BERGER, J.**
Some difficulties in the wind tunnel prediction of modern civil aircraft buffeting: Proposed remedies p 18 N89-18869
- BERGGREEN, JUERGEN**
Economic manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055
- BERGGREN, CHRISTINA**
Development of a generic architecture p 48 N88-23774
Definitions and requirements for distributed real-time systems p 232 N89-18476
- BERNABE, BARBARA A.**
Integrating avionics sensor signals for tactical aircraft p 46 N87-29519
- BERTHOUMIER, C.**
Experimental study of the ignition of explosive charges using visualization of the phenomena p 116 N88-29073
- BERTHON, G. A.**
SPOCK: A tool for real time artificial intelligence p 233 N89-18482
- BERTI, R.**
Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956
- BERTI, ROBERTO**
Spontaneous cerebral electrical activity during prolonged hypoglycemia: A quantitative study in humans p 203 N88-27717
- BERTOLOTI, M.**
Stability in nonlinear waveguides p 124 N87-13291
- BERTONI, HENRY L.**
A diffraction based theoretical model for prediction of UHF path loss in cities p 139 N88-19661
- BERTRAM, A.**
Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363
- BESIERIS, IOANNIS M.**
On the applicability of continuous scattering methods to discrete scattering problems p 237 N89-17740
- BESSI, F.**
Electromagnetic code for naval applications p 150 N89-18583
- BETHKE, K.-H.**
The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
- BETHINI, J. P.**
Progress in optical fiber gyroscopes using integrated optics p 238 N87-13283
- BEVAN, L. H.**
Intermodulation interferences in radio systems p 152 N89-18595
- BEVILACQUA, LOUIS A.**
Optimizing powerplant design and development cycles p 254 N88-20183
- BHARGAVA, VIJAY K.**
Jamming and electronic countermeasures p 151 N89-18586
- BHATTHENA, M. M.**
The application of process modelling to heat treatment of superalloys p 112 N89-15281
- BHOWAL, P. R.**
The application of process modelling to heat treatment of superalloys p 112 N89-15281
- BIANCHINI, J.**
Crash simulation and verification for metallic, sandwich and laminate structures p 25 N89-18437

BLAYLOCK, JAMES

- BIANCO, LUCIO**
Strategic control to improve efficiency of air traffic management p 27 N87-21694
- BIBBY, MALCOLM**
Computational weld mechanics p 175 N87-17052
- BICKEN, A. F.**
Velocity and temperature measurements in a can-type gas-turbine combustor p 57 N87-21184
Flow characteristics of a model annular combustor p 106 N88-29924
- BICKERS, L.**
Wide bandwidth, long distance fibre-optic communication systems p 240 N87-13300
- BICKES, R. W., JR.**
Sapphire fiber optic temperature probe p 241 N87-21186
- BIELE, ANTHONY**
Lethal air defense suppression technology base definition p 234 N87-16004
- BIESIADNY, THOMAS J.**
Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477
- BIFERNO, MICHAEL**
Mental workload measurement in operational aircraft systems: Two promising approaches p 207 N87-30060
- BIGGS, ALBERT W.**
Simulation of multistatic and backscattering cross sections for airborne radar p 132 N87-18757
- BILLDAL, JAN TORE**
Radial compressor design using an Euler solver p 66 N88-17875
Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640
- BILLET, GERMAIN**
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
- BILLMANN, BARRY R.**
Microwave Landing System (MLS) area navigation: Computed centerline experiments and system accuracy analyses in an RF environment p 26 N87-21221
- BINDER, B.**
Engine simulator tests: Comparison of calibration and wind tunnel results p 89 N89-16871
- BINION, T. W., JR.**
Reynolds number effects in transonic flow [AGARD-AG-303] p 17 N89-16760
- BIPPEES, H.**
The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs p 162 N88-23140
- BIRD, JOHN S.**
Predicting the effects of noise and interference on fast frequency-hopped binary NCSK systems p 151 N89-18586
- BIRD, MICHAEL W.**
Application of knowledge-based techniques to aircraft trajectory generation and control p 75 N88-10811
A review of the knowledge engineering process p 233 N88-10814
- BISHOP, G. J.**
Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722
- BIVENS, COURTLAND**
Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034
- BJORKLUND, R.**
Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 131 N87-13940
- BLACK, N.**
The effect of mild hypoxia on the vestibular evoked response p 202 N88-27713
- BLACKBURN, M. R.**
The neuroelectric selection of Naval aviation personnel: An evaluation p 208 N88-27707
- BLAISE, D.**
Numerical viscous-inviscid interaction method for internal separated flows and shock wave-boundary layer interaction p 156 N87-21939
- BLAKE, J. B.**
Hostile energetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941
- BLANK, L. C.**
Wide bandwidth, long distance fibre-optic communication systems p 240 N87-13300
- BLATT, PAUL E.**
Trends in ground-based and in-flight simulators for development applications p 81 N87-23645
- BLAUROCK, JOERG**
Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 164 N88-23155
- BLAYLOCK, JAMES**
Integration of advanced safety enhancements for F-16 terrain following p 56 N89-18477

BLOECKER, U.

- BLOECKER, U.**
Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 86 N88-17874
- BLOK, H.**
Critical analysis of achievements and missing links in gear and bearing tribology in relation to power envelopes p 175 N86-29254
- BLOKLAND, R.**
Some visualization studies on turbulent boundary layers using multiwire hydrogen bubble generation p 184 N88-23153
- BLOM, G.**
Calculations for a generic fighter at supersonic high-lift conditions p 33 N87-20226
- BLOMBERG, R. D.**
Assessing workload for minimum crew certification. Part 1: Static workload analysis and performance analysis p 214 N87-30067
- BLOTTNER, FREDERICK G.**
A spatial marching technique for the inviscid blunt body problem p 12 N88-13239
- BLUESCKE, E.**
Analysis of the flow through double swirl airblast atomizers p 110 N88-29949
- BOALS, W. O., JR.**
An overview of the application of standard measurement uncertainty methodology to propulsion testing p 72 N89-18854
- BODDY, DAVID**
Technical change needs organizational change p 246 N88-30466
- BOERNER, WOLFGANG-M.**
Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
Multi-Bi-static high frequency (PO/GO) radar target imaging of airborne scatterers p 130 N87-18745
- BOERSTOE, J. W.**
Numerical accuracy assessment p 166 N89-18613
Validation of a multi-block Euler flow solver with propeller-airframe flows p 20 N89-18649
- BOESSWETTER, C.**
MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
ECOM effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
- BOFF, KENNETH R.**
Designing for design effectiveness of complex avionics systems p 50 N88-23788
Engineering data compendium: Human perception and performance. User's guide (LC-87-19560) p 215 N88-27749
Engineering data compendium: Human perception and performance, volume 1 (LC-87-19560) p 215 N88-28630
Engineering data compendium: Human perception and performance, volume 2 (LC-87-19560) p 215 N88-28631
Engineering data compendium: Human perception and performance, volume 3 (LC-87-19560) p 215 N88-28632
Matching crew system specifications to human performance capabilities p 220 N89-18031
- BOGDONOFF, S. M.**
Aerodynamics of Hypersonic Lifting Vehicles: Fluid Dynamics Panel AGARD Symposium (AGARD-AR-246) p 184 N88-27480
- BOGUE, R.**
Analogue signal conditioning for flight test instrumentation (AGARD-AG-160-VOL-17) p 45 N86-29616
- BOGUE, R. K.**
Store separation flight testing (AGARD-AG-300-VOL-5) p 31 N86-30727
Developmental air-drop testing techniques and devices (AGARD-AG-300-VOL-6) p 38 N88-12481
- BOHLANDER, R. A.**
Line-of-sight millimeter wave propagation characteristics p 144 N89-17720
- BOWRE, M.**
Application of diffusion bonding combined with superplastic forming (SPF/DB) to the fabrication of TAGV metal sheet structures p 177 N87-17080
- BOND, JAMES W.**
Narrative compression coding for a channel with errors p 150 N89-18584
- BOND, LEONARD J.**
Review of existing NDT technologies and their capabilities p 180 N89-17255
- BONETTO, LUIGINO**
A man-machine interface solution: The EAP glare shields p 219 N89-18018
- BONJOUR, N.**
Automatic research on optimal posture p 191 N87-13942
- BOON, JEAN PIERRE**
Lattice gas hydrodynamics p 180 N88-11978

- BORCHERT, HORST**
MBB simulation facilities applied for rotorcraft research p 84 N88-11655
- BORE, C. L.**
Airframe/store compatibility p 40 N88-13323
- BORE, CLIFFORD L.**
Carriage of external stores p 36 N87-24449
V/STOL and STOVL fighter design p 36 N87-24452
- BORRETTI, A. A.**
Accuracy and efficiency of a time marching approach for combustor modeling p 170 N89-18659
- BORGHESE, F.**
Selective extinction of a dispersion of single and aggregated layered spheres p 147 N89-17743
- BORGMAN, D. C.**
Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20186
- BORLAND, R. G.**
The application of non-stationary data analysis techniques in the identification of changes in the electroencephalogram associated with the onset of drowsiness p 198 N88-27688
- BORTNICK, JANE**
Political and economic barriers to information transfer p 251 N88-30460
- BOST, J. L.**
AQM: Accelerometer for precision-guided weapons p 93 N89-17607
- BOSZKO, P. J.**
Water flow visualization of a ramjet combustion chamber p 162 N88-23138
- BOTHE, H.**
Determination of antennae patterns and radar reflection characteristics of aircraft (AGARD-AG-300-VOL-4) p 124 N86-30931
- BOTTARI, ELIO**
User equipment overview p 30 N89-10879
- BOTTOMLEY, I.**
The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87-29647
- BOTTOMLEY, J. L.**
Advanced information management and decision making in Airborne Early Warning and Control (AEW&C) training systems p 251 N87-29517
- BOUDREAU, ALBERT H.**
Characterization of hypersonic wind tunnel flow fields for improved data accuracy p 90 N89-16874
- BOUHERET, DANIEL**
Design and development of an avionics system adapted to helicopter missions p 49 N88-23786
- BOULANGER, P.**
The workplace vibration environment of off-road machines p 209 N87-13935
- BOURIA, A.**
AQM: Accelerometer for precision-guided weapons p 93 N89-17607
- BOURDEIS, MAGALI**
Experimental study of vortex sheets in plane flow p 162 N88-23142
- BOUSQUET, J. M.**
Analysis of highspeed propellers aerodynamics p 65 N88-17669
- BOUTIER, A.**
How to select a laser velocimeter for a given application? p 118 N87-21179
- BOUTOULLI, M.**
Modeling and experimental study of a reactive flow confined with wall injection p 109 N88-29946
- BOUWER, GERO**
DFVLR in-flight simulators A^{***} Sand ATTRES for flying qualities and flight control res p 83 N87-23657
- BOWCUTT, KEVIN G.**
Numerical optimization of conical flow wavefinders including detailed viscous effects p 36 N88-13245
- BOWEN, C. H.**
Novel ignition systems for heavy calibre guns p 118 N86-29076
- BOWEN, T. J.**
Postural fatigue and the backache of helicopter pilots (DCIEM-85-R-30) p 210 N87-13953
- BOWEN, B. A.**
An expert system for aircraft conflict resolution in dense airspace p 29 N88-10810
Real-time expert systems: A status report p 225 N88-10817
- BOYD, M. J.**
Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951
- BOYKIN, WILLIAM**
Midcourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-16005
- BOYSAN, F.**
Three-dimensional gas turbine combustor modelling p 108 N88-29937
- BRAATEN, M. E.**
Numerical models for analytical predictions of combustor aerothermal performance characteristics p 108 N88-29935

PERSONAL AUTHOR INDEX

- BRADLEY, ANDREW**
Embedding formal methods in SAFRA p 229 N89-18455
- BRADLEY, RICHARD G.**
CFD validation philosophy p 166 N89-18611
- BRADSHAW, P.**
Physics and modelling of three-dimensional boundary layers p 158 N87-22147
- BRAQAGNOLO, N.**
Some development trends in light ground attack aircraft p 34 N87-22666
- BRAITHWAITE, M.**
Back seat in gazelle aircraft p 183 N87-13959
- BRAITHWAITE, P. C.**
Measurements of distributed combustion p 115 N86-26479
- BRAITHWAITE, WILLIS M.**
Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477
- BRATCHER, T. W.**
Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816
- BRAUN, HELMUT**
Security considerations, defence-related and commercial p 250 N87-26681
- BRAUSER, K.**
Computer simulation studies on human control reliability in manual aircraft control: The origin of PIO p 211 N87-29544
The task taxonomy method: A basis for an expert system on human reliability p 207 N87-29506
- BRAY, RICHARD S.**
Visual and motion cueing in helicopter simulation p 80 N87-23634
- BREAS, G. M.**
User needs and how to determine them p 249 N87-26678
- BREDIF, M.**
Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
- BRENNAN, J. H.**
Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
- BREITBACH, E.**
Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357
- BRENCI, M.**
Fiber optic device for temperature remote sensing p 237 N87-13280
- BRENNAN, D. H.**
Vision and visual protection in fast jet aircraft p 216 N88-29292
- BRENNEIS, A.**
Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems p 157 N89-18625
- BRESSLER, S. L.**
Fourth generation neurocognitive pattern analysis system p 198 N88-27686
Neurophysiological patterns of operational fatigue: Preliminary results p 201 N88-27703
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706
- BREUGELMANS, F. A. E.**
Investigation of dihedral effects in compressor cascades p 66 N88-17672
- BREVOT, JEAN-GEORGES**
Responsive requirements definition for combat aircraft in light of uncertainties linked to artificial intelligence and expert systems techniques p 55 N89-18448
- BREWER, DAVID J.**
Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795
- BRICKETT, P.**
The interaction of thalamo-cortical systems in the 40 Hz following response p 199 N88-27894
A study of sources in the human brain associated with stereopsis p 200 N88-27895
- BRIDGES, J. H., III**
Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816
- BRINK, JUDY L.**
An avionics software expert system design p 231 N89-18467
- BRINKLEY, JAMES W.**
Human crashworthiness and crash load limits p 25 N89-18439
- BROCARD, Y.**
Qualification of a water tunnel for force measurements on aeronautical models p 85 N88-23128
- BROCHET, J.**
Computation of secondary flows in an axial multistage compressor p 67 N88-17681
- BROEDE, J.**
Engine life consumption monitoring program for RB199 integrated in the on-board life monitoring system p 53 N89-16789

PERSONAL AUTHOR INDEX

BROCKHAUSEN, K. D.
Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
Application of highly loaded single-stage mixed-flow compressors in small jet-engines p 63 N88-17652

BROUHAUVE, LAURENT
Spacecraft protection against electrostatic discharge application to the ARIANES spacecraft p 99 N87-26956

BROOME, WILLIAM H., JR.
A look toward the future of complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88-23797

BROWN, CLINTON E.
An experimental study to determine the flow and the subsonic static and dynamic stability characteristics of aircraft operating at high angles-of-attack p 42 N88-23129

BROWNE, G. T.
US Naval Air Force avionics and electrical system corrosion prevention and control maintenance p 47 N88-13334

BRUEL, P.
Modeling and experimental study of a reactive flow confined with wall injection p 109 N88-29946

BRUERE, A.
The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195

BRUN, G.
Numerical simulation of diffuser/compressor dome interaction p 65 N88-17663

BRUN, S.
Trends in aeroelastic analysis of combat aircraft p 76 N88-13350

BRUNO, C.
Numerical modeling of combustion processes in gas turbines p 108 N88-29939

BRUNO, CHRISTINE
A practical example of Moving Target Detection (MTD) processing for an air traffic control radar with weather channel p 133 N87-21890

BRUNT, MARK A.
Use of VDU's by flight simulator instructors p 80 N87-23641

BRYANSTON-CROSS, P. J.
The application of holography as a transonic flow diagnostic to rotating components in turbomachinery p 171 N87-21202
A study of passage flow through a cascade of turbine blades using image plane holographic interferometry p 118 N87-21203

BRYCE, J. D.
Design and test of a high blade speed, high work capacity transonic turbine p 64 N88-17658

BUCHLIN, J. M.
Digital image processing applied to fluid dynamic problems p 156 N87-21193
A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148

BUCK, MELVIN L.
Lifting bodies: An attractive aerodynamic configuration choice for hypervelocity vehicles p 39 N88-13248

BUCK, V.
Technology in aircraft systems: Basic principles and applications p 174 N88-29240

BUDOWSKY, DONALD S.
Strategic planning process at the National Technical Information Service p 249 N87-26680

BUECHELE-BUECHER, S.
Jet reaction control system for autonomous precision navigation p 92 N87-29482

BUERK, K.
Information resources management in the R and D environment p 248 N88-28803

BUERS, H.
Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model p 20 N88-18642

BUESCHELBERGER, H.-J.
Packaged fiber optic gyros p 172 N89-17608

BUETEFISCH, K.
The international vortex flow experiment p 166 N89-18619

BUTTKAMP, H.
A comparison of integrated and separate systems for flight control and navigation p 48 N88-23779

BULLARD, J. B.
Developments in data acquisition and processing using an advanced combustion research facility p 79 N87-21192

BURGER, K. H.
Flight testing of fighter aircraft p 35 N87-24448

BUROSMUELLER, W.
Accuracy requirements for high-speed test with engine simulation on transport aircraft models in the NLR-HST p 68 N89-18670

BURKITT, G. P.
Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N88-17696

BURMEISTER, K.
Relationship between backache and flying duty in jet- and prop-pilots demonstrated by a flying wing p 191 N87-13938

BURNS, DONALD W.
Forced vibration and flutter design methodology p 183 N89-10016

BURNS, J. G.
Recent studies on bolted joints in composite structures p 185 N89-17688

BURROWS, LEROY T.
Evolving crashworthiness design criteria p 22 N89-18423

BURRUS, D. L.
Numerical models for analytical predictions of combustor aerothermal performance characteristics p 108 N88-29935

BURTON, PAUL F.
Applications in library management, registrations, loans and stock control p 222 N87-19921
Procurement and management of microcomputer-based systems p 222 N87-19929

BURTON, R. R.
The pilot is not the limiting factor in high performance aircraft p 218 N89-18012

BUSBRIDGE, M. L.
An integrated aircraft navigation and display system utilizing an on-board composite data base p 236 N87-24955

BUSE, LELAND C.
Range delay techniques for radar target simulators p 87 N89-10054

BUSH, R. I.
Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude p 97 N87-26945

BUSSE, ROBERT D.
Formalizing a theory of real-time software specification p 229 N89-18456

BUSSOLARI, STEVEN R.
The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179

BUSTAMANTE, J. L.
Integration of vocal dialogue on-board a combat aircraft p 56 N89-18471

C

CABRIT, P.
Helicopter air intake protection systems p 32 N87-10073

CADIOU, A.
Flame stabilization in a reheat combustor p 105 N88-29921

CAHILL, R. F.
Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276

CAIAFA, C.
Transport airplane crash simulation, validation and application to crash design criteria p 24 N89-18435

CAIN, G. A.
The SAE (Bracknell) automatic deflection, tracking and classification system p 241 N87-29476

CALARESE, W.
Turbulence measurement in hypersonic flow p 10 N88-13224

CALIGIURI, ROBERT D.
Bulk forming of superplastic alloys p 111 N87-29644

CAMBIER, L.
Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946

CAMBRAY, P.
Gaseous premixed flames in non-uniform flows p 109 N88-29945

CAMMAROTA, JOSEPH P.
Detection of acceleration (+ Gz) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710

CAMPBELL, I. M. C.
Experiments to investigate the vortices shed from a submarine-like body of revolution p 164 N88-23156

CAMPOS, FRANK T.
A generic seeker simulation for the evaluation of active RF guidance systems p 227 N89-10050

CAMUS, J.-J.
Measured and predicted loss generation in transonic turbine blading p 58 N87-21934

CANDEL, S. M.
Flamelet modeling of turbulent premixed flames p 109 N88-29942

CAO, M.
Influence of operating conditions on the atomization and distribution of fuel by air blast atomizers p 105 N88-29918

CAUVY, P.

CAPIT, B.
Inertial-GPS: A marriage of reason, an analysis p 26 N87-21865

CAPONNO, JOSEPH F.
Strategic planning process at the National Technical Information Service p 249 N87-26680

CAPPS, D. S.
The accurate measurement of drag in the 8 ft x 8 ft tunnel p 88 N89-16855

CAPRILE, C.
Damage growth in composite bolted joints p 186 N89-17689
Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading p 187 N89-17704
The design of helicopter crashworthiness p 23 N89-18426

CAPRIOTTI, DIEGO
Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245

CARD, V.
A review of measured gust responses in the light of modern analysis methods p 78 N88-29724

CARDRICK, A. W.
Structural design requirements for aircraft incorporating active control technology p 41 N88-19453

CARL, OLIVIER
The selection of future civil air navigation systems p 25 N87-21882

CARPENTIER, MICHEL H.
About the future of airborne radar p 125 N87-18722

CARPER, C. HUDSON
Evolving crashworthiness design criteria p 22 N89-18423

CARR, H. R.
A joint study on the compensation of in-field aero engine vibration diagnosis p 71 N89-16808

CARR, M. P.
Accuracy study of transonic flow computations for three dimensional wings p 19 N89-18628

CARR, PAUL H.
Low-cost, monolithic beamforming components for radar p 131 N87-18750

CARRAHAR, D.
Some turbomachinery blade passage analysis methods: Retrospect and prospect p 59 N87-21947

CARSON, R. C., JR.
Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900

CART, GUAME J.
Digital simulation techniques for end game phenomena p 228 N89-10051

CARTA, FRANKLIN O.
Aeroelasticity in axial-flow turbomachines: Volume 1: Unsteady turbomachinery aerodynamics [AGARD-AG-298-VOL-1] p 8 N87-24398
AGARD manual on aeroelasticity in axial-flow turbomachines: Volume 2: Structural dynamics and aeroelasticity [AGARD-AG-298-VOL-2] p 16 N89-10006
Aeroelastic coupling: An elementary approach p 68 N89-10012

CARTER, E. C.
Development of testing techniques in a large transonic wind tunnel to achieve a required drag accuracy and flow standards for modern civil transports p 88 N89-16857

CARVALHO, M. G.
Radiation transfer in gas turbine combustors p 107 N88-29929

CASALI, JOHN G.
Manifestation of visual/vestibular disruption in simulators: Severity and empirical measurement of symptomatology p 205 N89-12181
Modeling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N89-12182

CASSIE, A. M.
Accurate drag estimation using a single component drag model technique p 88 N89-16856

CASTELLANI, ANTONIO
Effect of modal damping in modal synthesis of spacecraft structures p 95 N87-20362

CASTELOBRANCO, M. SALOME
The auditory evoked response in military pilots p 203 N88-27721

CASTELOBRANCO, MUNO A. A.
The auditory evoked response in military pilots p 203 N88-27721

CATANI, J. P.
On the possibility of a several-kilovolt differential charge in the day sector of a geosynchronous orbit p 99 N87-26953

CAUPENNE, PH.
General aerodynamic-aerothermodynamic concepts for Hermes p 13 N88-13251

CAUVY, P.
Automatic flight control system for modern helicopters p 77 N88-19558

CAZIN, J.

- CAZIN, J.**
ISAURE: Integration of security and fault tolerance in the REALITE 2000 system p 74 N88-10802
- CEBECE, TUNCER**
An approach to practical aerodynamic calculations p 158 N87-22151
- CELENS, E.**
Internal ballistics of small arms: Particular problems. Part 2: Thermodynamic model, powder parameters, initiation p 154 N86-29072
- CERNOSEK, R. W.**
Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281
- CERUTTI, B.**
Helicopter fire control: Advantages of an automatic target tracker p 84 N88-11667
- CETIN, M.**
Application of modified loss and deviation correlations to transonic axial compressors [AGARD-R-745] p 62 N88-13344
- CHADERJIAN, NEAL M.**
Transonic Navier-Stokes wing solutions using a zonal approach: Part 2. High angle-of-attack simulation p 7 N87-20229
- CHAKRAVARTHY, SUKUMAR R.**
A comparative study and validation of upwind and central-difference Navier-Stokes codes for high-speed flows p 159 N89-18647
- CHAMBERS, J. R.**
Technical evaluation report of AGARD Technical Evaluation Meeting on Unsteady Aerodynamics Fundamentals and Applications to Aircraft Dynamics [AGARD-AR-222] p 4 N86-27182
- CHAMBERS, K. W.**
An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818
- CHAMPION, M.**
Modeling and experimental study of a reactive flow confined with wall injection p 109 N88-29946
- CHAN, K. H.**
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949
- CHAN, Y. Y.**
Computational tools for simulation methodologies p 86 N88-28865
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-16867
- CHANDLER, G. I.**
Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281
- CHANETZ, B.**
Separation around ellipsoid-type obstacles: Modeling and validation experiments p 107 N89-18647
- CHAPMAN, ROBERT M.**
Electric and magnetic brain activity related to cognitive performance p 99 N88-27692
- CHAPPELOW, J. W.**
Simulator sickness in the Royal Air Force: A survey p 204 N89-12111
- CHARLESWORTH, JOHN**
A review of the NATO special group of experts on Naval hydrodynamics and related problems p 164 N88-23157
- CHARPIN, M.**
Measurement of model deformation in wind tunnels p 77 N88-13358
- CHARVOZ, JEAN R.**
On the conditions and limits of user intervention in delivered software manufacturer's viewpoint p 229 N89-18451
- CHATTOT, J. J.**
Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
Numerical methods: Euler time dependent solver p 15 N88-29760
- CHAUDHURI, SUJEET K.**
Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
Multi-Bistatic high frequency (PO/CO) radar target imaging of airborne scatterers p 130 N87-18745
- CHAUMETTE, DANIEL**
Damage repair of in-service composite structures: Application to the Mirage 2000 p 2 N87-20184
Bolted scarf joints in carbon composite materials: Comparison between assemblies with an interference fit and those with play p 103 N89-17702
- CHAUSSEE, DENNY**
Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-17234
- CHAUSSEE, DENNY S.**
High speed viscous flow calculations about complex configurations p 7 N87-20227
- CHAUVIN, J.**
Method for predicting performance limits of centrifugal compressors p 66 N88-17677
- CHAWNER, J. R.**
Generation of multiple block grids for arbitrary 3D geometries p 226 N88-29317

- CHEESEMAN, I. C.**
Getting more from vibration analysis p 54 N89-18607
- CHEKROUN, C.**
Electronic scanning antenna for military aircraft of the 1990s p 131 N87-18751
- CHENG, S. S.**
A hybrid transmission scheme on single mode fibers for tactical communications p 241 N87-13306
- CHENOT, J. L.**
A computer program simulating the hot forging of metal powder p 111 N89-15267
- CHETAIL, P.**
The CFM 56-5 on the A-320 at Air France p 53 N89-16793
- CHEUNG, B.**
Influence of vector axis and body posture on visually-induced self-rotation and tilt p 206 N89-12185
- CHEVALIER, PHILIPPE**
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
- CHEVALLIER, J. P.**
Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
- CHEYNE, D.**
The interaction of thalamo-cortical systems in the 40 Hz following response p 199 N88-27694
A study of sources in the human brain associated with stereopsis p 200 N88-27695
- CHEZLEPRETRE, B.**
Qualification of a water tunnel for force measurements on aeronautical models p 85 N88-23128
- CHILTON, R. HUNTER**
MTC T/R modules for the next generation airborne surveillance platforms p 131 N87-18749
- CHITI, S.**
Electromagnetic code for naval applications p 150 N89-18583
- CHIVOT, F.**
Guidance and control of air-launched armaments: An aerodynamic perspective p 92 N88-19557
- CHELOUN, P. V.**
Modelling of CO oxidation in dilution jet flows p 109 N88-29347
- CHOW, P. L.**
On functional approach to random wave propagation problems p 234 N89-17741
- CHRISOULIDIS, D. P.**
Wave-bit sounding of tropospheric ducts above the sea p 145 N89-17728
- CHRISTENSEN, ELISABETH BROE**
Tools for developing real-time embedded systems in Ada: Needs, portability and efficiency p 230 N89-18464
- CHRISTIANSON, CALVIN B.**
Noise measurement systems/techniques p 149 N89-18574
- CHU, LI-CHUAN**
Static aeroelastic effects on the flutter of a supercritical wing p 76 N88-13353
- CHUE, R.**
Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
- CHURCHILL, GARY B.**
Pilot simulation in the development of the XV-15 tilt rotor research aircraft p 81 N87-23646
- CIELO, P.**
A real time vision system for robotic arc welding p 177 N87-17066
- CIELO, PAOLO**
Thermoplastic testing of stratified materials p 179 N87-17064
- CIKANEC, HARRY A.**
Space shuttle main engine monitoring experience and advanced monitoring systems development p 100 N89-16815
- CILIBERTO, S.**
Determination of fractal dimension: connection of space and temporal chaos and application to experimental results p 160 N88-11977
- CIOFALO, M.**
Time-dependent numerical simulation of the starting flow of an incompressible fluid past a downstream-facing step p 169 N89-18646
- CIPRI, F.**
A study to optimize the CFRP-Al mechanical joint in order to reduce electrical resistance p 154 N89-17695
- CIRAY, C.**
Environmental effects on transition and boundary layer characteristics p 165 N88-26876
- CLARK, ROSS D.**
Analytical and experimental methods used to resolve the aerodynamic results of tests conducted in three test facilities p 17 N89-16850
- CLARKSON, C. D. S.**
Manoeuvres by default, by demand and by design p 41 N88-19455

PERSONAL AUTHOR INDEX

- CLEMENS, I.**
Linguistic barriers: Translation problems p 252 N88-30465
- CLEMENS, P.**
Acousto-optic spectrum analyzer using a planar Bragg-cell p 239 N87-13295
- CLER, A.**
Theoretical analysis of flows around helicopter fuselages: Application to design and development p 7 N87-20221
- CLERE, J. M.**
Design and simulated-crash validation of a dynamic response recorder p 221 N89-18442
- CLIFFORD, S. F.**
Line-of-sight millimeter wave propagation characteristics p 144 N89-17720
- COBLENTZ, A. M.**
Automatic research on optimal posture p 191 N87-13942
Biostereometric study of the outward curve of the spine for various reference positions p 191 N87-13943
- COBLENTZ, J. F.**
Automatic research on optimal posture p 191 N87-13942
- COCHRAN, R. C.**
Composite repair material and design development efforts p 3 N87-20188
- COCKRELL, D. J.**
The aerodynamics of parachutes [AGARD-AG-295] p 9 N87-26681
Measurements of aerodynamic forces on unsteadily moving bluff parachute canopies p 162 N88-23137
- COELHO, P. J. M.**
Radiation transfer in gas turbine combustors p 107 N88-29929
- COHEN, H. A.**
Automatic charge control system for geosynchronous satellites p 99 N87-26960
- COLANTUONI, S.**
Experimental investigation on small turboprop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476
- COLANTUONI, SALVATORE**
Optimisation of a transonic flow radial vane diffuser p 58 N87-21938
- COLEY, W. R.**
Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems p 146 N89-17735
- COLLIER, M. W.**
Application of LAN's and electronic optic techniques in the library p 232 N87-19944
- COLLIN, GERARD**
Application of CARS thermometry to a turbulent flame p 104 N87-21175
- COLLIN, K. H.**
A small annular combustor of high power density, wide operating range and low manufacturing cost p 110 N88-29951
- COLLINS, M. W.**
Time dependent numerical simulation of the starting flow of an incompressible fluid past a downstream-facing step p 169 N89-18646
- COLOMBO, G.**
Burning stability of double base propellants p 114 N86-26472
- COMBRES, Y.**
Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270
- COMMON, D.**
The mechanical properties of superplastically formed titanium and aluminium alloys p 111 N87-29647
- CONFORTI, G.**
Fiber optic device for temperature remote sensing p 237 N87-13280
- CONIGLIARO, P.**
Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 41 N87-23649
- CONRAD, JOSEPH M.**
Statistical techniques applied to analysis of airport distributions p 234 N89-17611
- CONRAD, P.**
Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363
- CONSIGNY, H.**
Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
- CONSTANTINO, T.**
Direct erosive burning measurements of a reduced-smoke solid propellant rocket by flash X-rays p 114 N86-26476
- CONVERSE, LEONARD E. JR.**
Advanced sensor exploitation p 83 N87-24946
- CONVERSE, ROBERT A.**
Conversion to Ada: Does it really make sense p 229 N89-18453
- COOK, ANTHONY M.**
Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation [ISBN-92-835-0399-6] p 79 N87-15985

PERSONAL AUTHOR INDEX

- COOK, G. G.**
Ignition, combustion, and physical properties of liquid propellants at gun pressures p 115 N86-29065
Novel ignition systems for heavy calibre guns p 118 N86-29076
- COOK, ROBIN**
Standard fatigue test specimens for fastener evaluation [AGAPP AG-304] p 183 N88-12818
- COOKE, D.**
Computer models of the spacecraft wake p 98 N87-26948
- COOKE, N.**
Some experiences in integrating avionic systems on the civil flight deck p 45 N87-21902
- COOPER, JACK**
Software readiness planning p 230 N89-18466
- COOPER, R.**
Event-related and steady potential changes in the brain related to workload during tracking p 201 N88-27705
- CORNILLE, JEAN-MICHEL**
Generating diagnostic knowledge from a structural and functional description p 232 N88-10813
- COSI, F.**
Fiber optic device for temperature remote sensing p 237 N87-13280
- COSTALES, B.**
Fourth generation neurocognitive pattern analysis system p 198 N88-27686
- COSTES, B.**
Requirements and recommendations for the development of theoretical codes and experimental facilities in the near future p 40 N88-13327
- COTE, OWEN R.**
Radio and radar holes and multipath zones. The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N86-19667
- COTTER, GLADYS**
Information retrieval systems evolve: advances for easier and more successful use p 252 N88-30462
- COUPRY, GABRIEL**
Extreme gusts distribution p 190 N88-29734
- COURSINAULT, ANTOINE**
Development of complex avionics systems: Experience from French military programs p 51 N88-23804
- COUSINS, FRANK W.**
The anatomy of the gyroscope [JAGARD-AG-313] p 172 N88-28287
- COUSTEIX, J.**
Hypersonic laminar boundary layer Parametric study for the representation of real gas effects p 11 N88-13236
- COUSTEIX, JEAN**
Three-dimensional boundary layers: Introduction to calculation methods p 158 N87-22146
- COWAN, DOUGLAS W.**
Integrated multisensor targeting p 236 N87-24947
- COWDREY, D. A.**
Advanced visuals in mission simulators p 80 N87-23636
- COWLES, L. J.**
Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
- COX, N. B.**
Time and cost reduction through computer integrated manufacture p 225 N88-20191
- COX, M. E.**
Possible contributions from the SSR mode S data link to the conduct of efficient aircraft operations p 28 N87-21887
- CRAIG, K. H.**
Identification of microwave line-of-sight multipath components p 139 N88-19665
- CRAWFORD, CHARLES C., JR.**
Risk reduction cost avoidance for full scale development begins with concept formulation p 243 N88-20174
- CRAWFORD, G. M.**
Direction of R and D and current status of understanding of advanced gear steels p 110 N86-29245
- CRAWLEY, EDWARD F.**
Aeroelastic formulation for tuned and mistuned rotors p 68 N89-10013
- CREDEUR, LEONARD**
Advanced ATC: An aircraft perspective p 27 N87-21893
- CREMA, LUIGI BALIS**
Effect of modal damping in modal synthesis of spacecraft structures p 95 N87-20362
- CRESCIMBENI, F.**
Electromagnetic code for naval applications p 150 N89-18583
- CREWS, J. H., JR.**
Beaming/bypass loading on bolted composite joints p 186 N89-17697
- CRISP, D.**
A study of sources in the human brain associated with stereopsis p 200 N88-27695
- CRITES, R. C.**
Transonic wind tunnel boundary interference: A correction procedure p 88 N89-16861

- CROALL, L. F.**
Knowledge based systems in information work p 248 N87-19826
- CROCCO, L.**
Side effects of hypnotic benzodiazepines on the vigilance and efficiency of personnel after awakening p 196 N87-25719
- CROCCO, M. A.**
Side effects of hypnotic benzodiazepines on the vigilance and efficiency of personnel after awakening p 196 N87-25719
- CROOKS, RICHARD S.**
Arcjet validation of surface catalytic using a viscous shock-layer approach p 168 N89-18634
- CROOP, HAROLD C.**
Development of precision structural joints for large space structures p 97 N87-20374
- CROSIGNANI, B.**
Nonlinear ellipse rotation in a low-birefringence optical fiber p 238 N87-13282
- CROSIGNANI, P.**
Coupled-mode theory approach to depolarization associated with propagation in turbulent media p 241 N89-17707
- CROSIGNANI, P.**
Guided Optical Structures in the Military Environment [JAGARD-CP-383] p 237 N87-13273
- CROSS, A. G. T.**
Complex configurations p 86 N88-28861
- CROWLEY, A. B.**
Development and analysis of turbulent non-equilibrium boundary layers p 165 N88-28872
- CROWLEY, A. B.**
Pressure wave Gun barrel interactions p 154 N86-29068
- CUCINOTTA, GIUSEPPE**
Costing of radio terminals p 152 N89-18594
- CUE, ROBERT W.**
Canadian forces aircraft condition/health monitoring Policy, plans and experience p 69 N89-16784
- CULSHAW, B.**
CF-18 engine performance monitoring p 69 N89-16787
- CULSHAW, B.**
Fibre optic gyroscopes in inertial navigation p 25 N87-13275
- CURBILLON, M.**
Aeroelastic analysis of modern transport aircraft p 76 N88-13352
- CUTILLO, B. A.**
Neurophysiological patterns of operational fatigue Preliminary results p 201 N88-27706
- CUTILLO, B. A.**
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706

D

- DABBS, R. S.**
Evolution of combat performance of the Hawk light combat aircraft p 34 N87-22668
- DABUNDO, CHARLES**
Advanced flight control system for nap-of-the-earth flight p 220 N89-18030
- DADI, M.**
Application of high speed holography to aerodynamic and hydrodynamic three-dimensional velocimetry p 163 N88-23144
- DAKIN, J. P.**
Progress with multiplexed sensor arrays based on reflection at spliced joints between sensors p 237 N87-13278
- DAKIN, J. P.**
Magnetic and pressure sensors using the compensated polarimetric sensor configuration p 237 N87-13279
- DALBERT, P.**
A study of methods of phase noise reduction of semiconductor lasers for sensor applications p 172 N87-13286
- DALBERT, P.**
Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949
- DALLEY, E. J.**
Manoeuvres by default, by demand and by design p 41 N88-19455
- DALLMANN, U.**
Simulation of three-dimensional transonic flow with separation past a hemisphere cylinder configuration p 8 N87-20230
- DAM, N.**
Automated measurement of crack length and load line displacement at elevated temperature [JAGARD-R-751] p 183 N88-26695
- DAMEN, B. J.**
Demonstration of FOG-M (Fibre Optic Guided Missile) capabilities by means of simulation and effects of proprioceptive feedback on the control p 93 N89-17609
- DAMOS, D. L.**
The role of asymmetric transfer in the evaluation of voice generation and recognition systems p 136 N87-29525
- DANDREA, B.**
Field artillery gun performances related to triple-base powder quality p 116 N86-29067

DELASERVETTE, X.

- DANIEL, JEAN-PIERRE**
Measurement and modeling of 36 GHz see reflection phenomena p 145 N88-17730
- DANKOWYCH, J. A.**
Closed loop fiber optic gyro p 237 N87-13277
- DARABHA, N.**
Flamelet modeling of turbulent premixed flames p 109 N88-29942
- DARBYSHIRE, E. PHILIP**
Experimental robust HF modems incorporating adaptive excision p 150 N89-18579
- DARNEILL, M.**
The design of static and mobile HF communication systems p 122 N86-27567
- DARNEILL, M.**
Embedded real-time channel evaluation techniques p 122 N86-27569
- DARNEILL, M.**
Review of modulation, coding and speech digitisation techniques p 124 N87-18704
- DARNEILL, M.**
HF system design p 125 N87-18707
- DARNEILL, M.**
Processing techniques for radio communications in non-Gaussian noise environments p 150 N89-18581
- DASARO, JOSEPH A.**
The impact of future avionics technology on the conduct of air warfare p 45 N87-22673
- DAVIES, A. G.**
A comparative study of vortex flows in wind and water tunnels p 163 N88-23151
- DAVIES, D. K.**
Radiation charging and breakdown of insulators p 153 N87-26954
- DAVIS, DANIEL**
Interfacing and integrating hardware and software design systems p 50 N88-23796
- DAVIS, R. T.**
A spatial marching technique for the inviscid blunt body problem p 12 N88-13239
- DAVIS, S. F.**
A second order Godunov method for tactical missiles p 233 N87-20211
- DAWES, C. J.**
The application of diffusion bonding and laser welding in the fabrication of aerospace structures p 176 N87-17054
- DAWES, W. N.**
Measured and predicted loss generation in transonic turbine blading p 58 N87-21934
- DAWES, W. N.**
A numerical study of the 3D flowfield in a transonic compressor rotor with a modelling of the tip clearance flow p 59 N87-21945
- DAY, G. W.**
Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13281
- DAY, WILLIAM R.**
Lethal air defense suppression technology base definition p 234 N87-16004
- DEAN, G. C.**
The application of intelligent knowledge based systems to air traffic control p 28 N87-21904
- DEAN, M.**
Evaluation of DOH and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
- DEBLASIO, LORRAINE**
VLF radio noise p 148 N89-18569
- DEBLON, F.**
Psychosensory cockpit ergonomics, advantages of intelligent information systems p 49 N88-23784
- DECKER, ARTHUR J.**
Beam-modulation methods in quantitative and flow-visualization holographic interferometry p 119 N87-21204
- DEETS, DWAIN A.**
Flight test of a resident backup software system p 74 N88-10805
- DEFEO, PIO**
Verification and validation of flight critical software p 230 N89-18460
- DEGRAFF, P.**
An investigation of simulator sickness and an electrophysiological study p 206 N89-12183
- DEHEYN, G.**
An investigation of simulator sickness and an electrophysiological study p 206 N89-12183
- DEIWERT, GEORGE S.**
Aerothermodynamics research at NASA Ames p 12 N88-13242
- DEJONGE, J. B.**
Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630
- DEJONGE, J. B.**
Stresses in preloaded anisotropic plates p 186 N89-17690
- DEJONGE, J. B.**
Acquisition of gust statistics from AIDS-recorded data p 190 N88-29733
- DELAHAYE, R. P.**
Horizontal study of the incidence of simulator induced sickness among French Air Force pilots p 204 N89-12175
- DELASERVETTE, X.**
Helicopter air intake protection systems p 32 N87-10073

DELERY, J.

- DELERY, J.**
Shock-wave boundary layer interactions
[AGARD-AG-260] p 155 N86-29173
Fundamental studies on shock-wave/boundary-layer
interactions in a 3-D channel p 156 N87-21928
Prediction of base-flows p 16 N88-29765
- DELFRATE, JOHN**
Water losses in retrospect and prospect: An
illuminating tool for vehicle design p 84 N88-23126
- DELGADO, DANIEL**
Advanced helicopter cockpit and control configurations
for helicopter combat mission tasks p 221 N89-18034
- DELILLE, FRANCOIS**
Monopulse secondary radar: Practical realization and
achievement. Mode S: The radar of tomorrow
p 133 N87-21889
- DELUCA, L.**
Burning stability of double base propellants
p 114 N86-26472
- DELUCCIA, J. J.**
AGARD corrosion handbook. Volume 2: Aircraft
corrosion control documents. A descriptive catalogue
[AGARD-AG-278-VOL-2] p 110 N87-24553
- DEMERS, ROSARIO M.**
Compressor blade clearance measurement using
capacitance and phase lock techniques
p 133 N87-21200
- DEMISCH, LOTHAR**
Measurement and classification of the mode of action
of antidepressant drugs p 202 N88-27714
- DEMOEL, R. P.**
Automation strategy and results for an airbase command
and control information system (ASCCIS)
p 236 N87-24952
- DENARD, ROBERT P.**
GPS/interal navigation system integration for enhanced
navigation performance and robustness p 30 N89-10880
Differential operation of NAVSTAR GPS for enhanced
accuracy p 30 N89-10883
GPS navigation processing and Kalman filtering
p 30 N89-10884
- DENBOER, R. D.**
Requirements and capabilities in unsteady windtunnel
testing p 90 N89-16878
- DENOST, J. P.**
Design of filament-wound rocket cases
p 100 N87-28593
Design of filament-wound rocket cases
p 101 N89-16910
- DENTI, P.**
Selective extinction of a dispersion of single and
aggregated layered spheres p 147 N89-17743
- DERBYSHIRE, K.**
S-15 CTS engine monitoring p 52 N89-16788
- DERRIEN, J. C.**
Automatic flight control system for modern helicopters
p 77 N88-19558
- DERRIEN, T.**
Three-dimensional computation of helicopter machine
blades with fins p 21 N89-21940
- DESANTO, JOHN A.**
Multiple scattering from rough surfaces
p 143 N89-17710
- DESAULTY, M.**
Numerical simulation of diffuser/compressor dome
interaction p 65 N88-17663
- DESHALES, B.**
Gaseous premixed flames in non-uniform flows
p 109 N88-29945
- DESIPIO, RICHARD G.**
Systems for the 21st century p 47 N88-23769
- DESMONCEAUX, AUGUSTE**
Organization of helicopter development activities with
a view toward reduction of costs and cycles
p 246 N88-20200
- DESTUYNDER, R.**
Influence of the static deformation on a wing in the
unsteady aerodynamic p 77 N88-13357
Effectiveness of various control surfaces in quasi-steady
and unsteady conditions p 77 N88-17562
Some difficulties in the wind tunnel prediction of modern
civil aircraft buffeting. Proposed remedies
p 18 N89-16869
- DETHOMAS, ANTHONY**
Verification and validation of flight critical software
p 230 N89-18460
- DEUSACK, G.**
New method for suppression of goniometer of errors
by radio noise from overhead power lines
p 151 N89-18585
- DEVES, PHILIPPE**
DEDALE: An expert system for analog circuit
maintenance p 153 N88-10809
- DEWISPELAERE, RENE**
Next generation of control techniques in advanced
TWA p 27 N87-21896
- DICKERSON, MARK C.**
Measures of merit for advanced military avionics. A
user's perspective on software utility p 55 N89-18447

B-8

PERSONAL AUTHOR INDEX

- DIETRICH, H. J.**
Computation of transonic 2D cascade flow and
comparison with experiments p 59 N87-21943
- DIFILIPPO, D.**
Implementation of an airborne SAR motion
compensation system p 127 N87-18728
- DILLENIUS, MARINIX F. E.**
Survey on nonlinear effects p 15 N88-29757
- DIOLORENZO, M.**
Field artillery gun performances related to triple-base
powder quality p 116 N86-29067
- DING, KURT**
Tip clearance measurement in modern compressor
components p 179 N87-21199
- DIHI, D.**
Engine-transmission-structural airframe members
compatibility p 31 N87-10069
- DIPORTO, P.**
Nonlinear ellipse rotation in a low-birefringence optical
fiber p 238 N87-13282
Coupled-mode theory approach to depolarization
associated with propagation in turbulent media p 241 N89-17707
- DITZLER, W. RODNEY**
Integrated multisensor targeting p 236 N87-24947
- DOAN, PAUL**
Experimental robust HF modems incorporating adaptive
excision p 150 N89-18579
- DOBBS, BILL**
Corrosion of electronic components p 46 N88-13333
- DOBLE, J. E.**
The 6 GHz propagation measurements over a 51 km
path in the UK p 141 N88-19673
- DOBULA, J.**
Design and simulated crash validation of a dynamic
response recorder p 221 N89-18442
- DOLLING, D. S.**
Driving mechanism of unsteady separation shock motion
in hypersonic interactive flow p 10 N88-13226
- DONATI, P.**
The workplace vibration environment of off-road
machines p 209 N87-13935
- DONCHIN, EMANUEL**
Workload methodology p 213 N87-30059
Event-related brain potentials as indices of mental
workload and attentional allocation p 200 N88-27696
- DONDE, R.**
Burning stability of double base propellants
p 114 N86-26472
- DONEGAN, T. L.**
Experience with three dimensional composite grids
p 227 N88-29324
- DONNELLAN, T. M.**
Composite repair material and design development
efforts p 3 N87-20188
- DONNERMEYER, D. D.**
Muscle fatigue in static and vibrational seating
environments p 210 N87-13954
- DONOHUE, H. GERARD**
Optimizing powerplant design and development cycles
p 254 N88-20183
- DORMIEUX, M.**
Three-dimensional calculations of lateral jet interaction
with an external supersonic flow p 19 N89-18631
- DOUVILLE, R.**
MIC technology for phased arrays p 135 N87-23866
- DOYLE, J. C.**
Neurophysiological precursors of accurate visuomotor
performance p 201 N88-27706
- DRAGO, R. J.**
A study of the potential benefits associated with the
development of a dedicated helicopter transmission
lubricant p 112 N86-28242
- DRAISEY, S.**
Modal testing of the Olympus development model
stowed solar array p 96 N87-20366
- DRAPER, ALFRED C.**
Lifting bodies: An attractive aerodynamic configuration
choice for hypervelocity vehicles p 39 N88-13248
- DRESS, HENRY P.**
High response data acquisition system p 249 N87-21189
- DREYER, J. P.**
Instantaneous force measurement on a model subjected
to rapid control variations p 90 N89-16872
- DROTZ, A.**
Validation of an Euler code for hydraulic turbines
p 168 N89-18637
- DUBE, FRANCOIS**
Canadian forces aircraft condition/health monitoring.
Policy, plans and experience p 69 N89-16784
- DUBOIS, M.**
Dynamics and routes to chaos from quasiperiodicity
p 160 N88-11374
- DUCASSE, P.**
Rocket altitude test facilities register
[AGARD-AG-297] p 91 N87-24489
- DUCK, M. J.**
Surface modification to minimise the electrostatic
charging of Kapton in the space environment
p 153 N87-26959
- DUDLEY, D. G.**
Parameterization in scattering models p 137 N88-11916
Experiments: Test range facilities, part 2
p 138 N88-11921
- DUDMAN, A. E.**
Re-assessment of gust statistics using CAADRP data
p 78 N88-29732
- DUECK, W.**
An intelligent sensor for equipment health monitoring
of ferromagnetic wear debris concentration in fluids
p 55 N89-16618
- DUESSMAN, ROLF**
Helicopter (performance) management p 38 N88-11666
- DUFAU, J.**
Specification of an engine and its components starting
from a consideration of aircraft missions p 63 N88-17651
- DUFOR, M.**
A real time vision system for robotic arc welding
p 177 N87-17066
- DUFOR, MARC**
Thermoelastic testing of stratified materials
p 179 N87-17064
- DUMAS, M. RIBADEAU**
Accuracy of lift and center-of-thrust measurements at
missile control surfaces p 18 N89-16875
- DUNCAN, I. A.**
The chemical interaction of ballistic modifiers in COB
propellant: its effect upon ballistics and stability
p 114 N86-26475
- DUNFORD, D. V.**
Diffusion bonding of Al-alloys in the solid state
p 177 N87-17058
- DUNFORD, PHIL**
Improved flight test productivity using advanced on line
data systems p 245 N88-20193
- DUNHAM, J.**
Transmission of inlet distortion through a fan
p 62 N87-24475
- DUNKER, R. J.**
A shock loss model for supersonic subsonic flows in
transonic axial flow compressors p 60 N87-21950
- DUNKERTON, S. B.**
The application of diffusion bonding and laser welding
in the fabrication of aerospace structures p 176 N87-17054
- DUNN, M. G.**
Operation of gas turbine engines in dust-laden
environments p 63 N88-17654
- DUPRIEZ, F.**
Numerical and experimental study of the crash behavior
of helicopters and aircraft p 74 N89-18433
- DUPUY, SERGE**
Contribution of expert systems to avionics advance
application on AS30 laser weapon system p 56 N89-18470
- DURANCE, CYNTHIA J.**
Using standards to break down information transfer
barriers p 252 N88-30467
- DURAO, D. F. G.**
The flow around a squared obstacle
p 156 N87-21185
On the validation of 3-D numerical simulations of
turbulent impinging jets through a crossflow
p 20 N89-18645
- DURST, F.**
Finite difference methods in recirculating flows
p 169 N89-18651
- DUSHENKO, T. W.**
Electroencephalographic correlates of pilot
performance: Simulation and in-flight studies
p 208 N88-27711
- DUTERQUE, J.**
Propergol combustion based on octogenesis
p 114 N86-26470
- DYBBS, A.**
Matched index laser anemometry systems for flow
studies in complex geometries p 171 N88-23145
- DYER, R. D.**
Efforts toward the validation of a computational fluid
dynamics code for analysis of internal aerodynamics
p 169 N89-18643
- DYNE, B.**
Flow velocity measurements by image processing of
optically modulated traces p 163 N88-23147
- DYSON, R. J. E.**
Military engine monitoring status at GE Aircraft Engines,
Cincinnati, Ohio p 53 N89-16798
Commercial engine monitoring status at GE Aircraft
Engines, Cincinnati, Ohio p 54 N89-16799

E

- EARLY, M. L.**
Influence of engine variables on future helicopter systems p 32 N87-10072
- EARNshaw, P. B.**
Comparison of the results of tests on A300 aircraft in the RAE 5 metre and the ONERA F1 wind tunnels p 17 N89-16849
- EAST, R. A.**
Hypersonic static and dynamic stability of axisymmetric shapes: A comparison of prediction methods and experiment p 13 N88-13246
- EASTMAN, D. E.**
The effect of mild hypoxia on the vestibular evoked response p 202 N88-27713
- EASTMAN, GEORGE A.**
Cost effective simulation for millimeter wave guidance systems p 79 N89-10053
- EBELING, P.**
Performance improvement of airborne weapon systems methods, scope and limitations p 33 N87-22665
- EBERLE, A.**
Grid generation for an advanced fighter aircraft p 226 N88-29319
Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems p 167 N89-18625
- EBERLE, ALBRECHT**
Euler solution for a complete fighter aircraft at sub- and supersonic speed p 33 N87-20216
- ECCLLES, J. V.**
Active vehicle charging measurements in sounding rocket and space shuttle orbit environments at Low Earth Orbit (LEO) altitude p 97 N87-26945
- ECHTLE, H.**
Comparative study of calculation procedures for viscous flows around airfoils in the transonic regime p 166 N89-18617
- ECKERLE, W. A.**
Nozzle airflow influences on fuel patterning p 105 N88-29916
- ECKSTROM, CLINTON V.**
Prediction of wing aerodynamic effects on aircraft life and pitching moment characteristics p 77 N88-13356
- EDDY, DOUGLAS R.**
EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709
- EDENHOFER, P.**
The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26955
- EDGAR, E. G.**
Corrosion in avionics and associated equipment; cause, effect and prevention p 47 N88-13335
- EDWARDS, P. R.**
Short-Crack Growth Behaviour in an Aluminum Alloy: An ACARD Cooperative Test Programme (AGARD-R-732) p 184 N89-17287
Short-crack growth behaviour in an aluminum alloy: An AGARD cooperative test program p 184 N89-17288
Alignment verification procedures p 184 N89-17291
On-line spectrum load analysis verification p 184 N89-17292
Database program for crack propagation data acquired in the AGARD short cracks collaborative effort p 185 N89-17297
- EDWARDS, R. V.**
Matched index laser anemometry systems for flow studies in complex geometries p 171 N88-23145
- EDWARDS, THOMAS A.**
Geometry definition and grid generation for a complete fighter aircraft p 224 N87-20203
- EGGLESTON, B.**
Comparison of theory and experiment for four supercritical, low drag airfoils p 21 N89-18655
- EGGLESTON, R.**
Impact of future developments in electronic technology on cockpit engineering (AGARD-R-757) p 211 N87-25769
- EHKICH, R. D.**
Precision delivery of unguided submunitions from a tactical standoff missile p 91 N87-16010
- EICKHOFF, H.**
Influence of operating conditions on the atomization and distribution of fuel by air blast atomizers p 105 N88-29918
Analysis of the flow through double swirl airblast atomizers p 110 N88-29949
- ELDEM, C.**
Hypersonic laminar boundary layer: Parametric study for the representation of real gas effects p 11 N88-13236
- ELDER, R. L.**
Application of Doppler and transit laser anemometry in small turbomachines p 172 N87-21180
- ELFSTROM, G. M.**
Impact of nozzle design constraints on test section flow quality p 88 N89-16860
- ELLIS, BRIAN**
Towards the unmanned cockpit p 36 N88-10612

ELLIS, STEPHEN R.

- Head-mounted spatial instruments: Synthetic reality or impossible dream p 206 N89-12184
- ELSENAAR, A.**
Reynolds number effects and the wind tunnel environment p 86 N88-28862
Experimental tools. The tunnel and the model p 86 N88-28864
Empirical tools for simulation methodologies p 86 N88-28866
Transport-type configurations p 43 N88-28867
Reynolds number effects in transonic flow (AGARD-AG-303) p 17 N89-16760
Experiments on the DFVLR-F4 wing body configuration in several European windtunnels p 87 N89-16648
On Reynolds number effects and simulation p 17 N89-16866
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-15867
The international vortex flow experiment p 166 N89-18619
- ELWELL, ROBERT**
The assessment of workload in helicopters p 214 N87-30066
- ELZE, STEFAN**
Ultrasonic testing techniques for diffusion-bonded titanium components p 179 N87-17061
- ELZEKI, M.**
Modal testing of the Olympus development model stowed solar array p 96 N87-20366
- ENGLAND, P.**
Some experiences in integrating avionics systems on the civil flight deck p 45 N87-21902
- ENGLEITNER, KARL-HEINZ**
Schedule and cost control of development p 245 N88-20196
- ENTRUDO, ANTONIO J.**
The auditory evoked response in military pilots p 203 N88-27721
- EPSTEIN, A. H.**
Vortex shedding in compressor blade wakes p 58 N87-21932
- EPSTEIN, C. S.**
Store separation flight testing (AGARD-AG-300-VOL-5) p 31 N86-30727
- ERAP, EMIN**
CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685
- FRICKSON, GARY E.**
Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
- ERIKSSON, INGVAR**
An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691
- ERIKSSON, LARS-ERIK**
Grid generation on and about a cranked-wing fighter aircraft configuration p 226 N88-29318
Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640
- FRKLENS, L. J. J.**
Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23655
- ERNST, A.**
Multivariate and psycho-physiological functions of DSIP p 196 N87-25713
- ERZBERGER, HEINZ**
A time-based concept for terminal-area traffic management p 27 N87-21895
- ESCANDE, B.**
Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946
- ESPOSITO, E.**
Flamelet modeling of turbulent premixed flames p 109 N88-29942
- ESSEN, H.**
Millimeter wave transmission through man-made obstructions in a battlefield environment p 127 N87-18732
- ESTOCHEN, E. L.**
Advanced information management and decision making in Airborne Early Warning and Control (AEW&C) training systems p 251 N87-29517
- EVANS, D. S.**
A model for an electromotive force generator in the magnetosphere: A source of discrete auroral arcs p 188 N87-26940
- EVANS, G. I.**
Elastomer modified cast double base propellants p 114 N86-26473
The reduction of exhaust signature in solid propellant rocket motors p 114 N86-26474
- EVANS, P. R.**
Composite motor case design p 100 N87-28592
Composite motor case design p 101 N89-16909
- EVANS, R. W.**
Metallurgical modeling of superalloy disc isothermal forgings p 120 N89-15266

FETTELSCHOSS, KURT

EWALD, B.

- Balance accuracy and repeatability as a limiting parameter in aircraft development force measurements in conventional and cryogenic wind tunnels p 90 N89-16873
- EWINS, D. J.**
Basic structural dynamics p 183 N89-10007
Structural dynamic characteristics of individual blades p 68 N89-10008
Structural dynamic characteristics of bladed assemblies p 68 N89-10009
- EYRAUD, J. L.**
Acquisition and processing of non-stationary pressure measurements in studies of air intake distortion p 178 N87-21191
- F
- FACER, D.**
Elastomer modified cast double base propellants p 114 N86-26473
- FADDEEN, DELMAR H.**
Pilot subjective evaluation of workload during a flight test certification programme p 212 N87-30057
- FADDY, D.**
Cost analysis of aircraft projects p 3 N87-22664
- FAETH, G. M.**
Radiation from soot-containing flames p 106 N88-29927
- FAGES, FRANCOIS**
Real time expert system for onboard radar identification p 56 N89-18481
SPOCK: A tool for real time artificial intelligence p 233 N89-18482
- FAHR, A.**
Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
- FAIRBROTHER, JOHN**
Some measurements of height gain at VHF p 140 N88-19671
- FALCAODECAMPOS, J. A. C.**
An investigation of ducted propellers in axisymmetric shear flow p 161 N88-23136
- FALCHETTI, F.**
Computation of secondary flows in an axial multistage compressor p 67 N88-17681
- FALCIAI, R.**
Fiber optic device for temperature remote sensing p 237 N87-13280
- FALCO, DAVIDE**
Development cost reduction using integrated CAE/CAD/CAM techniques p 225 N88-20182
- FALL, MARK K.**
High response data acquisition system p 249 N87-21189
- FARROW, R. L.**
Accurate measurements of combustion species concentrations using CARS p 103 N87-21173
- FAUCETT, R.**
Fourth generation neurocognitive pattern analysis system p 198 N88-27686
- FAVIER, D.**
Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
- FEIGELSON, R. S.**
Single crystal fibers p 239 N87-13298
- FELD, H.-J.**
Particle size measurements in sooting combustion systems p 107 N88-29931
- FELSEN, L. B.**
Correcting ray field failures caused by focusing in an inhomogeneous duct: A critical look at the Gaussian beam method p 139 N88-19663
Geometrical theory of diffraction for high-frequency coherence functions in weakly random medium with inhomogeneous background profile p 143 N89-17709
- FELSEN, LEOPOLD B.**
Tailor strength: An overview of some recent theoretical developments p 136 N88-11910
Propagation in longitudinally varying ducts with emphasis on guiding to antibguiding transitions p 139 N88-19658
- FELSTEAD, E. BARRY**
Predicting the effects of noise and interference on fast frequency-hopped M-ary NCFSK systems p 151 N89-18588
- FERRAND, MICHEL**
Collision probability of cruise missiles flying in formation p 91 N87-16007
- FERRAND, PASCAL**
Parametric study of choke flutter with a linear theory p 66 N88-17673
- FETTELSCHOSS, KURT**
Systems analysis and simulation techniques: Essential tools for advanced complex weapon system designs in terms of performance and cost p 244 N88-20187

FIEDLER, K.

- FIEDLER, K.**
Gas path modeling, diagnosis and sensor fault detection p 54 N89-16611
- FIELD, EDWARD C. JR.**
Lightning generation of low-frequency TE atmospheric noise p 148 N89-18568
- FINES, N. R.**
The correlation between methodological and low-level angle-of-arrival measurements p 140 N88-19668
- FINGEROTE, S. I.**
Configuration design of a helicopter integrated navigation system p 29 N87-29480
- FINN, HAROLD M.**
A CFAR design concept for operation in heterogeneous clutter p 128 N87-18733
- FINZI, AMALIA ERCOLI**
Active structural controllers emulating structural elements by ICUs p 96 N87-20367
- FIRMIN, M. C. P.**
Applications of RAE viscous flow methods near separation boundaries for three-dimensional wings in transonic flow p 7 N87-20224
The design of the GARTEUR low aspect-ratio wing for use in the validation of shear layer and overall flow prediction methods p 45 N89-18652
- FISHER, CARRON M. E.**
Experiences using the Mark IV supersonic hypersonic arbitrary body program p 13 N88-13249
- FISHER, CELIA**
Gas path condition monitoring using electrostatic techniques p 54 N89-16617
- FITZSIMONS, T. K.**
VHF/UHF/microwave LOS terrestrial propagation and system design p 125 N87-18709
Problems of spectrum management and system compatibility p 125 N87-18711
- FITZWATER, MARY ANN**
Multiple scattering effects of random distributions of irregularly shaped particles on infrared and optical propagation p 242 N89-17716
- FLEETER, SANFORD**
Unsteady aerodynamic measurements in flutter research p 8 N87-24405
Unsteady aerodynamic measurements in forced vibration research p 9 N87-24406
- FLEMING, D.**
Task interactions in distributed machines of embedded computer systems p 232 N89-18479
- FLETCHER, W. D. M.**
Engine usage condition and maintenance management systems in the UK armed forces p 69 N89-16783
- FLITCROFT, J. E.**
Transmission of electromagnetic through a fan p 62 N87-24475
- FLOCH, JEAN-JACQUES**
Weapon systems polyvalence: An economic and operational challenge p 34 N87-22567
- FLORENT, P.**
Water tunnel measurements by an electrochemical method p 163 N88-23146
- FLORES, J.**
Transonic Navier-Stokes wing solution using a zonal approach Part 1: Solution methodology and code validation p 7 N87-20228
- FOERSTER, K. M.**
The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660
- FOERSTER, W.**
Evaluation of L2F measurements in unsteady turbine flow p 156 N87-21182
- FOMISON, N. R.**
The effects of sweep and bluntness on a glancing shock wave turbulent boundary layer interaction p 10 N88-13227
- FONTANELLA, J. C.**
Optical imagery across atmospheric turbulence p 242 N89-17721
- FOO, BING-YUEN**
Basic monostatic polarimetric broadband target scattering analysis required for high-resolution polarimetric radar target downrange/crossrange imaging of airborne scatterers p 130 N87-18744
- FOPIANO, P. J.**
Direction of R and D and current status of understanding of advanced gear steels p 110 N86-29245
- FORESTER, J. A.**
An assessment of variable format information presentation p 250 N87-29512
- FORSY, C. R.**
A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
- FORSHAW, S. E.**
Back pain and discomfort resulting from exposure to vibration in tracked armoured vehicles p 209 N87-13936
- FORSTER, C. P.**
Application of Doppler and transit laser anemometry in small turbomachines p 172 N87-21184
- FORSTER, ESTRELLA M.**
EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709

FORT, A.

- FORT, A.**
Assessing workload for minimum crew certification Part 1: Static workload analysis and performance analysis p 214 N87-30067
- FORTIER, MICHEL**
Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N89-18654
- FORTNAM, B. R.**
A new global survey of ELF/VLF radio noise p 148 N89-18570
- FOSTER, G. W.**
Measurement and analysis of low altitude atmospheric turbulence obtained using a specially instrumented Gnat aircraft p 190 N88-29728
- FOTTNER, L.**
Development of intake swirl generators for turbo jet engine testing p 63 N87-24480
- FOUILLOT, J. P.**
Assessing workload for minimum crew certification Part 1: Static workload analysis and performance analysis p 214 N87-30067
- FOUNT, M.**
The effect of particle properties on radiative heat transfer p 109 N88-29941
- FOURMAUX, ANTOINE**
Shock waves losses analysis p 58 N87-21936
- FOURNIER, MICHEL**
Modeling of electromagnetic wave and sea surface interaction p 145 N89-17726
- FOURQUET, J. M.**
On the possibility of a several-kilovolt differential charge in the day sector of a geosynchronous orbit p 99 N87-26953
- FOWLER-WHITE, R. M.**
Neurophysiological patterns of operational fatigue: Preliminary results p 201 N88-27703
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706
- FOWLER, B.**
The effects of hypoxia on P300 and reaction time (DCIEM-87-RR-12) p 200 N88-27697
- FOWLKES, JENNIFER E.**
Simulator sickness in US Army and Navy fixed- and rotary-wing flight simulators p 205 N89-12178
- FRADENBURGH, EVAN A.**
Rotorcraft designs for the year 2000 p 37 N88-11665
- FRADIN, C.**
Design and testing of a small radial turbine for auxiliary power units p 64 N88-17661
- FRANCESCONI, R. P.**
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25712
- FRANK, LAWRENCE H.**
Manifestation of visual/vestibular disruption in simulators: Severity and empirical measurement of symptomatology p 205 N89-12181
Modelling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N89-12182
- FRANKE, S. J.**
Space-time statistics of waves propagating through a deep phase screen p 144 N89-17719
- FRASER-SMITH, A. C.**
A new global survey of ELF/VLF radio noise p 148 N89-18570
- FRASER, W. D.**
The effect of mild hypoxia on the vestibular evoked response p 202 N88-27713
- FRAUENDORF, ALBRECHT**
Measurement and classification of the mode of action of antidepressant drugs p 202 N88-27714
Measurement of electrical activity in the GHS with cortical evoked potentials and EEG: Efficacy profiles of drugs using factor analysis p 202 N88-27715
- FRAWLEY, R. C.**
Engine-airframe integration considerations for preliminary air vehicle performance analysis p 31 N87-10068
- FRECH, JOHN A.**
Lethal air defense suppression technology base definition p 234 N87-16004
- FREEDMAN, ROY S.**
Increasing the usefulness of AWACS downlink transmissions by semantic compression p 135 N87-29518
- FREEMAN, A.**
High resolution MTI with SAR p 126 N87-18734
- FREIDAH, J. T.**
Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13287
- FREMOUN, E. J.**
Transonospheric probing and propagation p 141 N89-11934
Satellite in-situ probing p 142 N89-11939
- FRESE, J.**
Crushing behaviour of helicopter subfloor structures p 23 N89-18429

PERSONAL AUTHOR INDEX

FREYMAN, R.

- FREYMAN, R.**
An experimental analytical routine for the dynamic qualification of aircraft operating on rough runway surfaces p 35 N87-23611
- FRIED, WALTER R.**
Operation and performance of an integrated helicopter communication system p 49 N88-23787
- FRIEDERICH, R. H.**
Development, testing and evaluation of a night vision goggle compatible BO-105 for night low level operation p 214 N88-11668
- FRIEDMAN, M. J.**
Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
- FRIEDRICH, HEINZ**
Operational training: Application and experience p 82 N87-23653
- FRITZ, R. B.**
Line-of-sight millimeter wave propagation characteristics p 144 N89-17720
- FRITZ, W.**
Mesh generation for industrial application of Euler and Navier-Stokes solvers p 227 N88-29323
- FRITZ, WILLY**
Numerical grid generation around complete aircraft configurations p 224 N87-20202
- FROEBEL, E.**
Flow unsteadiness in three low-speed wind tunnels p 88 N89-16659
- FROOM, P.**
Low back pain and narrowed disc spaces in fighter pilots p 191 N87-13937
- FUCHS, HEINZ**
Prediction of dynamic derivatives p 15 N88-29761
- FUCHS, R.**
Experimental investigation of a supercritical compressor rotor blade section p 67 N88-17680
- FUCHS, W.**
Pilot control devices p 220 N89-18027
- FUELLHAS, K.**
Integrated design of structures p 34 N87-22669
- FULKER, J. L.**
Wind tunnel experiments on aerofoil models for the assessment of computational flow methods p 18 N89-18614
A theoretical and experimental evaluation of a numerical method for calculating supersonic flows over wing-body configurations p 19 N89-18622
- FUNG, A. K.**
A scattering model for forested area p 132 N89-17715
- FURCOLO, BERNARDO**
Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military airspace users (AGARD-AR-236) p 28 N87-23609
- GABRIEL, R. F.**
Use of task timeline analysis to assess crew workload p 212 N87-30064
- GADELHAK, MOHAMED**
Use of water towing tanks for aerodynamics and hydrodynamics p 163 N88-23149
- GAILLARD, A. W. K.**
Using EMPS to study human information processing p 206 N88-27698
- GALATI, G.**
Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21888
- GALFETTI, L.**
Numerical modeling of combustion processes in gas turbines p 108 N88-29939
- GALLAGHER, JOSEPH T.**
The increased time and cost of development: Causes and (some) remedies p 243 N88-20178
- GALLE-TESSONNEAU, J. R.**
Phobic manifestations among experienced pilots p 197 N87-25722
- GALLI, E.**
Test philosophy of the EH101 integrated avionics p 48 N88-23775
- GALLUS, H. E.**
Influence of shock and boundary-layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
Application of highly loaded single-stage mixed flow compressors in small jet-engines p 63 N88-17652
- GALLUS, HEINZ E.**
Unsteady aerodynamic measurements on rotors p 9 N87-24408
- GALMICHE, J. P.**
The workplace vibration environment of off-road machines p 209 N87-13935
- GANZER, UWE**
Vortex formation over delta double delta and wave rider configurations at supersonic speeds p 12 N88-13243

G

PERSONAL AUTHOR INDEX

GARNIER, CH.
Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358

GARNIER, DANIEL
Postintegration of radar images p 132 N87-18755

GARNSEY, SUSAN
Electric and magnetic brain activity related to cognitive performance p 199 N88-27692

GARRETT, R.
The influence of infrastructure on the costs and timescales of collaborative programmes p 246 N88-20201

GARWOOD, K. R.
Optimisation of military compressors for weight and volume p 63 N88-17649

GAUTHIER-VILLARS, G.
New technologies for improved information systems and services p 248 N86-28802

GAUVRIT, MICHEL
Active control of helicopter vibration using multiloop self-adaptive control p 75 N88-11660

GEE, C. M.
Lightwave technology in future radar equipment designs p 240 N87-13304

GIEGEL, HAROLD L.
Processing science and materials development p 119 N89-15263

GEHLING, R. N.
Benefits of passive damping as applied to active control of large space structures p 96 N87-20371

GEIER, G. JEFFREY
GPS/Inertial navigation system integration for enhanced navigation performance and robustness p 30 N89-10880

GENSSLER, H. P.
Development of intake swirl generators for turbo jet engine testing p 83 N87-24480

GENTZSCH, W.
Vectorization of FORTRAN programs at do-loop level p 228 N89-11398
Restructuring of basic linear algebraic algorithms, chapter 5 p 228 N89-11399
Computational fluid dynamics and supercomputers, chapter 6 p 165 N89-11400

GENTZSCH, WOLFGANG
Computational Fluid Dynamics Algorithms and Supercomputers [AGARD-AG-311] p 223 N89-11395

GEOFFROY, P.
Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433

GEORGI, H.
Crashworthy design of aircraft subfloor structural components p 24 N89-18431

GERAMI, ROBERT
Changes in USAF structural loads requirements p 41 N88-19452

GERGAR, R. D.
AGARD corrosion handbook Volume 2 Aircraft corrosion control documents A descriptive catalogue [AGARD-AG-278-VOL 2] p 110 N87-24553

GERHARDT, PH.
Large ionic species in sooting acetylene and benzene flames p 107 N88-29932

GERHARZ, J. J.
Effect of environment and improvement measures on static and fatigue strength of bolted CFRP joints p 187 N89-17703

GERMAIN, Y.
The Forge 2 isothermal forging model p 112 N89-15271

GERMANO, M.
Vortex dynamics: survey of the activity in Italy p 157 N87-22141

GERSTEN, K.
Techniques of flow visualization [AGARD-AG-302] p 160 N88-16977

GERTZ, J. B.
Vortex shedding in compressor blade wakes p 58 N87-21932

GERTZBEIN, S. D.
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949

GEVINS, A. S.
Fourth generation neurocognitive pattern analysis system p 198 N88-27686
Neurophysiological patterns of operational fatigue: Preliminary results p 201 N88-27703
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706

GHARIB, M.
Flow velocity measurements by image processing of optically modulated traces p 163 N88-23147

GIALLORENZI, T. G.
Progress in optical fiber sensors p 237 N87-13274

GIAVOTTO, V.
Damage growth in composite bolted joints p 186 N89-17689
The design of helicopter crashworthiness p 23 N89-18426

GIBERT, B.
Modeling electromagnetic wave propagation through a strongly-fluctuating ionized medium by the phase screen method p 147 N89-17739

GIBSON, C. P.
Information management in the Army battlefield helicopter p 251 N87-29515

GIBSON, JOHN W.
Unconventional approaches to field repair p 3 N87-20190

GICQUEL, P.
The study of combustion by means of diode laser spectroscopy p 173 N87-21201

GIESS, P.-A.
Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949

GIETL, A.
Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430

GILES, J. A.
Development of in-flight simulation aircraft for research and training applications in UK p 83 N87-23658

GILES, M. B.
Vortex shedding in compressor blade wakes p 58 N87-21932

GILES, RAY
Multi-level parallel processing for very high performance real-time database management p 254 N89-18478

GILL, M. E.
Application of Doppler and transit laser anemometry in small turbomachines p 172 N87-21180

GILLANT, P.
Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472

GILOI, H.-G.
Space-diversity effects on line-of-sight propagation paths p 140 N88-19670

GINOUX, J. J.
Laser applications in flow diagnostics [AGARD-AG-296] p 173 N89-12849

GIORGI, N.
Rapid prototyping of complex avionics system architectures p 47 N88-23771

GIOVANGIGLI, V.
Flamelet modeling of turbulent premixed flames p 109 N88-29942

GIOVANNINI, A.
Modeling the stability of a turbulent premixed flame downstream from a step by a Lagrangian method p 109 N88-29943

GIRARD, A.
Low frequency vibration testing on satellites p 96 N87-20364

GIRLING, S. P.
Gas turbine smoke measurement: A smoke generator for the assessment of current and future techniques p 107 N88-29930

GJESSING, DAG T.
Propagation medium adaptive techniques for adverse communications and for remote sensing p 142 N89-11941

GLASER, O.
A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560

GLENNY, D. E.
Gas path analysis and engine performance monitoring in a Chinook helicopter p 70 N89-16802

GLISTA, ANDREW S., JR.
Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MiISA) p 171 N87-29479

GLUSMAN, STEVEN J.
Advanced light control system for nap-of-the-earth flight p 220 N89-18030

GMELIN, B.
Mission-oriented flying qualities criteria for helicopter design via in-flight simulation p 37 N88-11652

GNOFFO, PETER A.
A comparative study and validation of upwind and central-difference Navier Stokes codes for high-speed flows p 169 N89-18647

GODEFROY, J. C.
The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195

GOEDEL, H.
Aeroelasticity and optimization in lighter aircraft design p 40 N88-13324

GOLDACK, JOHN
Computational weld mechanics p 173 N87-17052

GOLDMAN, LOUIS J.
Combined fringe and Fabry-Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility p 118 N87-21183

GOLDMAN, R. F.
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 195 N87-25712

GRIFFITHS, J. M.

GOODFELLOW, J. V.
Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781

GOODMAN, ALEX
An experimental study to determine the flow and the subsonic static and dynamic stability characteristics of aircraft operating at high angles-of-attack p 42 N88-23129

GOODMAN, R.
Utilization of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649

GOODWIN, R. J.
Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18578

GORDON, D. L.
Measurements of distributed combustion p 115 N86-26479

GORDON, R.
The interaction of thalamo-cortical systems in the 40 Hz following response p 199 N88-27694

GORE, J. P.
Radiation from soot-containing flames p 106 N88-29927

GOTT, GEOFFREY F.
Experimental observations of spectral occupancy at HF p 149 N89-18573
Experimental robust HF modems incorporating adaptive excision p 150 N89-18579

GOULD, G.
Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257

GOULD, R.
Behaviour of mechanically fastened joints in advanced composites p 103 N89-17705

GOUTINES, MARIUS
Air inlet/engine compatibility: Impact of theoretical and experimental methods p 60 N87-24466
Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17679

GOVINDAM, T. R.
Computation of tip and corner region flows p 159 N87-22153

GOWER, DANIEL W., JR.
Simulator sickness in US Army and Navy fixed- and rotary-wing flight simulators p 205 N89-12178

GRAHAM, C.
Advanced techniques employed in blade cooling research p 64 N88-17659

GRAHAM, C. G.
Measured and predicted loss generation in transonic turbine blading p 58 N87-21934

GRANIERO, JOHN A.
Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739

GRANTHAM, K.
Reducing time required for the development of avionics systems p 244 N88-20185

GRARD, R.
Giolto spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947

GRASSO, F.
Numerical solution of compressible Navier-Stokes flows p 166 N89-18618

GRAY, G. W.
Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075
Cardiopulmonary screening for high-performance flying: Selection and retention issues p 195 N87-24079

GREATRIX, D.
Direct erosive burning measurements of a reduced-smoke solid propellant rocket by flash X-rays p 114 N88-26476

GREENE, C.
Configuration design of a helicopter integrated navigation system p 29 N87-29480

GREENHALGH, DOUGLAS A.
CARS thermometry for low and high pressure combustion systems p 103 N87-21172

GREENSTEIN, JOEL S.
Stars, polygons and clusters p 250 N87-29511

GREER, D. S.
Fourth generation neurocognitive pattern analysis system p 198 N88-27686
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706

GREINER, G.
ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N89-18587

GREITZER, E. M.
Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470

GRIFFOEN, J. A.
MADYMO crash victim simulations: A flight safety application p 122 N89-18441

GRIFFITHS, J. M.
Measuring the value of information and information systems, services and products p 247 N86-28799

GRIFFITHS, JOSE-MARIE

- GRIFFITHS, JOSE-MARIE**
 Evaluating the effectiveness of information use
 p 253 N89-11626
 Evaluating the performance of information centre staff
 p 253 N89-11629
 Evaluating performance of information centre operations
 and services
 p 253 N89-11630
 A framework for evaluating the effectiveness of
 information centres and services
 p 253 N89-11631
GRIFFITHS, K. C.
 Re-assessment of gust statistics using CAADRP data
 p 78 N88-29732
GRIMALDI, C.
 Burning stability of double base propellants
 p 114 N86-26472
GRIMES, R.
 The manufacture of superplastic alloys
 p 119 N87-29649
GRIMAKER, S.
 Applications of image analysis in precision guided
 weapons
 p 93 N89-17610
GROENIG, H.
 Short duration flow establishment on a profile in a
 Water-Ludwig-Tunnel
 p 161 N88-23134
GROEP, F. F.
 Automated measurement of crack length and load line
 displacement at elevated temperature
 (AGARD-P-751)
 p 183 N88-26695
GROSS, M.
 Low back pain and narrowed disc spaces in fighter
 pilots
 p 191 N87-19337
GROSSI, M. D.
 An introduction to error-control coding with application
 to HF communications
 p 122 N88-27570
 Measurements of HF propagation parameters for
 Real-Time Channel Evaluation (RTCE) systems
 p 123 N86-27575
GRUBE, GERALD W.
 Functional programming languages and modern
 multiprocessor architectures: The EMSP example
 p 231 N89-18480
GRUNDNER, H.
 Task interactions in distributed machines: embedded
 computer systems
 p 232 N89-18479
GRUNE, D.
 High-pressure combustion: Comparison of theoretical
 and actual results
 p 118 N86-29078
GRUNWALD, A. THUR
 Head-mounted spatial instruments: Synthetic reality or
 impossible dream
 p 206 N89-12184
GSCHEWENDER, L. J.
 Military aircraft propulsion lubricants: Current and future
 trends
 p 113 N86-29249
GUADAGNA, LISA M.
 Advanced development of a cockpit automation design
 support system
 p 49 N88-23785
GUELDER, DEMER L.
 Multiple scattering effects in drop sizing of dense fuel
 sprays by laser diffraction
 p 105 N88-29917
GUENEAU, P.
 Automatic research on optimal posture
 p 191 N87-13942
GUENTHER, GEORG
 Composite repair of cocured J-stiffened panels: Design
 and test verification
 p 1 N87-20181
GUIDOTTI, G.
 Impulse response measurements and characterization
 of wideband VHF radio lines
 p 146 N89-17736
GUILLEN, PHILIPPE
 Numerical simulation of separated supersonic flows
 around tactical missile bodies
 p 19 N89-18632
GUMOT, RENE
 Method and means for ground crash testing at the Centre
 d'Essais Aeronautique de Toulouse: Application to the SA
 341 and AS 332 helicopters
 p 24 N89-18432
GURNEY, J.
 Numerical investigation of the laminar boundary layer
 on a 3-D body started impulsively from rest
 p 6 N87-20220
GULICK, R. K.
 Use of task timeline analysis to assess crew workload
 p 212 N87-30056
GUM, DON R.
 Trends in ground-based and in flight simulators for
 development applications
 p 81 N87-23645
GUNDY, K.
 Transonic Navier-Stokes wing solution using a zonal
 approach: Part 1: Solution methodology and code
 validation
 p 7 N87-20228
GURNEY, J.
 Microcomputers in information resource sharing: Two
 full text systems
 p 249 N87-19927
GUTMARK, E.
 Combustion related shear-flow dynamics in elliptic
 supersonic jets
 p 11 N88-13232

H

- HAAGENSEN, W. R.**
 Unsteady inlet distortion characteristics with the B-1B
 p 9 N87-24478
HAASE, W.
 Mesh generation for industrial application of Euler and
 Navier-Stokes solvers
 p 227 N88-29323
 Comparative study of calculation procedures for viscous
 flows around airfoils in the transonic regime
 p 166 N89-18617
HACKLINGER, MAX
 The development of manoeuvre load criteria for agile
 aircraft
 p 41 N88-19450
HAGENA, F. W.
 In vivo experiments on the response of the human spine
 to sinusoidal G sub z vibration
 p 209 N87-13946
HAGN, G. H.
 Man-made radio noise and interference
 p 148 N89-18571
HAGUE, J.
 Improved coding and control of HF systems in a
 non-Gaussian noise environment
 p 150 N89-18582
HAHN, H.
 Multi-axis vibration tests on spacecraft using hydraulic
 exciters
 p 97 N87-20373
HAHN, M.
 Design for reparability of helicopter composite blades
 p 33 N87-20176
HAINES, A. B.
 Experimental tools: The tunnel and the model
 p 86 N88-28864
 Empirical tools for simulation methodologies
 p 86 N88-28866
 Transport-type configurations
 p 43 N88-28867
 Combat aircraft
 p 43 N88-28868
 A proposed boundary layer simulation methodology for
 wind tunnel testing
 p 89 N89-18867
HALL, CARL W.
 Can a 200 (MIL-STD-1815A) fly missiles
 p 231 N89-18473
HALL, MARTIN P. M.
 Transhorizon coherent interference path
 measurements in Europe
 p 149 N89-18572
HALL, WILLIAM N.
 Polar-aerial charging of the space shuttle and EVA
 astronaut
 p 94 N87-26962
HALLER, JOERG
 A quasi three dimensional method for the calculation
 of transonic flows in turbomachines
 p 59 N87-21941
HALWES, DENNIS R.
 Controlling the dynamic environment during DOE flight
 p 75 N88-11661
HAMEL, P.
 Mission-oriented flying qualities criteria for helicopter
 design via in-flight simulation
 p 37 N88-11652
HAMER, M. J.
 Installed thrust as a predictor of engine health for jet
 engines
 p 71 N89-18806
HAMILTON, C. H.
 Superplastic sheet forming NATO/AGARD lecture
 series on superplasticity
 p 111 N87-29643
HAMILTON, H. HARRIS
 Overview of CFD methods and comparison with flight
 aerothermal data
 p 21 N89-18663
HANKE, DIETRICH
 DFVLR in-flight simulators ATTAS and ATTRES for flying
 qualities and flight control research
 p 83 N87-23657
HANKEY, W. L.
 Application of the Navier-Stokes equations to solve
 aerodynamic problems
 p 7 N87-20225
HANKS, BRANTLEY R.
 Future trends in spacecraft design and qualification
 p 94 N87-20356
HANN, R. L.
 The use of subjective workload assessment technique
 in a complex flight task
 p 213 N87-30058
HANSEN, J. S.
 Study of the dynamic behaviour of stiffened composite
 fuselage shell structures
 p 24 N89-18434
HAPPEL, H. W.
 Computation of transonic 2D cascade flow and
 comparison with experiments
 p 59 N87-21943
 Computation of transonic 3D cascade flow and
 comparison with experiments
 p 20 N89-18641
HARCROW, H. W.
 Benefits of passive damping as applied to active control
 of large space structures
 p 96 N87-20371
HARDING, R. M.
 Human respiratory responses during high performance
 flight
 (AGARD AG 312)
 p 197 N88-12923
HARESCUUGH, R. I.
 Structural materials: The changing scene
 p 102 N88-20190
HARGREAVES, J. K.
 The high-latitude ionosphere: Geophysical basis
 p 188 N89-11933
 The high-latitude ionosphere: Dynamical aspects, and
 models
 p 188 N89-11938

PERSONAL AUTHOR INDEX

- HARLOW, R.**
 Some experiences in integrating avionics systems on the
 civil flight deck
 p 45 N87-21902
HARRIS, D. O.
 A low cost gyroscope for guidance and stabilisation
 units
 p 171 N87-29478
HARRIS, JOHN A., JR.
 Relationships of nondestructive evaluation needs and
 component design
 p 180 N89-17256
HARRIS, R. L., SR.
 In-flight assessment of workload using instrument
 scan
 p 213 N87-30062
HARRIS, THOMAS
 Canadian Forces aircraft condition/health monitoring
 Policy, plans and experience
 p 69 N89-16784
HARROP, R.
 The interaction of thalamo-cortical systems in the 40
 Hz following response
 p 199 N88-27694
 A study of sources in the human brain associated with
 stereoscopy
 p 200 N88-27695
HART, SANDRA G.
 The effects of display-control I/O compatibility and
 integrality on dual-task performance and subjective
 workload
 p 211 N87-29508
 Measurement of pilot workload
 p 214 N87-30068
HARTL, PH.
 GPS Overview and present status
 p 26 N87-21884
HARTMANN, J.
 Requirements on lubrication oil from the view of a
 helicopter manufacturer
 p 112 N86-29244
HARTS, J. M.
 Maintenance of vision-related components
 p 216 N88-29296
HARTT, RICHARD W.
 Bibliographic networks and microcomputer applications
 for aerospace and defense scientific and technical
 information
 p 248 N87-19923
HARVEY, J.
 Diffusion bonding of Al-alloys in the solid state
 p 177 N87-17058
HARWOOD, R. J.
 Measurements of aerodynamic forces on unsteady
 moving bluff parachute canopies
 p 162 N88-29137
HASINSKI, J. P.
 The policy maker looks at information
 p 247 N86-28794
HASLAM, G. E.
 Motion compensation requirements for a high resolution
 spotlight SAR
 p 126 N87-18727
HASSA, C.
 Analysis of the flow through double swept airblast
 atomizers
 p 110 N88-29944
HASSENPLUG, W.
 Navigation systems for the new generation of combat
 and transport helicopters and associated flight tests
 p 29 N87-29481
HAUG, E.
 Crash simulation and verification for metallic sandwich
 and laminate structures
 p 25 N89-18437
HAWKINS, J.
 Active vehicle charging measurements in sounding
 rocket and space shuttle orbiter environments at Low Earth
 Orbit (LEO) altitude
 p 97 N87-26945
HAWORTH, LORAN A.
 Advanced helicopter cockpit and control configurations
 for helicopter combat mission tasks
 p 221 N89-18034
HAYES, DAVID
 The application of multi-dimensional access memories
 to radar signal processing systems
 p 123 N87-18740
HAYNES, RONALD B.
 An avionics software expert system design
 p 231 N89-18467
HEBERT, M. J.
 Advanced information management and decision
 making in Airborne Early Warning and Control (AEW&C)
 training systems
 p 251 N87-29517
HEBRARD, P.
 Simulation study of spraying, streaming and vaporization
 phenomena associated with fuel injection
 p 104 N88-29914
HECKMANN, G.
 Reliability and validity of CFD codes: Flight and wind
 tunnel comparison
 p 167 N89-18626
HEEWSKIRK, A. N.
 Stability of nitrocellulose propellants assessed via
 normal decomposition and alteration of the stabilizer
 composition
 p 114 N86-26471
HEGARTY, J.
 Wavelength division multiplexing at 1.5 microns for high
 capacity optical transmission
 p 236 N87-13284
HEINEMANN, H.-J.
 Downstream flow angle correlations for turbine cascades
 in subsonic and transonic flow conditions
 p 60 N87-21949
HEINEMANN, M.
 Computer models of the spacecraft wake
 p 98 N87-26848
HEITHECKER, CHRISTOF H.
 Machine architectures for artificial intelligence
 computing
 p 222 N87-24948

PERSONAL AUTHOR INDEX

- HEITOR, M. V.**
Velocity and temperature measurements in a can-type gas-turbine combustor p 57 N87-21184
The flow around a squared obstacle p 156 N87-21185
On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N89-18645
- HELIAS, F.**
The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195
- HELLARD, GUY**
A TR 42 carbon fibre flap repair design and inspection p 102 N87-20178
- HELLIWELL, R. A.**
A new global survey of ELF/VLF radio noise p 148 N89-18570
- HELLSING, A. L.**
Individual predictability of back trouble in 18-year old men: A prospective study during military service p 192 N87-13951
- HEMSCH, MICHAEL J.**
Semi-empirical methods for conventional and unconventional missiles p 15 N88-29756
- HENCKEN, K. R.**
Sapphire fiber optic temperature probe p 241 N87-21186
- HENDERSON, CAMPBELL**
High altitude, long endurance RPV design technology study p 32 N87-16011
- HENDERSON, ROBERT E.**
The coming revolution in turbine engine technology p 62 N88-17648
- HENDRICKSON, CLENDON L.**
Flight testing under extreme environmental conditions (JAGARD-AG-300 VOL-8) p 172 N88-27525
- HEINING, P. S.**
Novel ignition systems for heavy calibre guns p 118 N86-29076
- HENOCQUE, CLAUDE**
What can be done to face growing development costs p 244 N87-20181
- HENRIOT, FRANCOISE**
Damage repair of in-service composite structures: Application to the Mirage 2000 p 2 N87-20184
- HENRY, D.**
The study of combustion by means of diode laser spectroscopy p 173 N87-21201
- HENRY, J. R.**
CF-18 F404 transient performance trending p 71 N89-16814
- HENRY, R.**
Structural dynamic characteristics of individual blades p 68 N89-10008
- HEPBURN, J. S. A.**
Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18727
- HERMAN, JOHN R.**
Radio noise characteristics and their system performance implications p 148 N89-18566
- HESLEGRAVE, R. J.**
Psychophysiological measures of drowsiness as estimators of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702
- HESS, ANDREW J.**
An overview of US Navy engine monitoring system programs and user experience p 69 N89-16782
- HESSEL, HERMANN**
The M89 test strategy and tool set for software and system integration p 230 N89-18463
- HETZNER, WOLFGANG**
Requirements and applications for radar simulations: A standpoint of an airframe company p 133 N87-18759
- HEULER, P.**
Long-crack growth rate data: Gaussian loading p 185 N89-17296
- HEWISH, A.**
Remote sensing of interplanetary shocks using a scintillation method p 255 N89-17749
- HEWITT, A.**
Identification of microwave line of sight multipath components p 139 N88-19665
- HEYERDAHL, E.**
An intelligent multi-target tracking system p 119 N87-29484
- HEYMAN, EHUD**
The hybrid wavefront resonance method p 137 N88-11913
- HICKMAN, JAMES R., JR.**
Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072
Aeromedical aspects of mitral valve prolapse p 194 N87-24074
Coronary risk factors in aerospace medicine p 195 N87-24078
- HIGBIE, P. R.**
Hostile electromagnetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941

- HILDRETH, JOSEPH H.**
Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 101 N89-16907
- HILDRETH, JOSEPH H.**
Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 100 N87-26590
- HILGENSTOCK, A.**
Status of CFD validation on the vortex flow experiment p 167 N89-18620
- HILL, R. J.**
Line-of-sight millimeter wave propagation characteristics p 144 N89-17720
- HILLIER, R.**
Computation of flow past conical hypersonic wings using a second order Godunov method p 12 N88-13241
- HILTON, MICHAEL L.**
KRS: A knowledge-based mission planner p 235 N87-24943
- HINKLE, THOMAS V.**
Battle damage repair of composite structures p 3 N87-20189
- HINTZ, ROBERT T.**
Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951
- HIRKO, A. G.**
Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AR-64 military helicopter program p 177 N87-17067
- HIRONDE, JEAN-CLAUDE**
Design optimization for a family of multi-role combat aircraft p 36 N87-24450
- HIRSCH, CH.**
Application of modified loss and deviation correlations to transonic axial compressors (JAGARD-AG-245) p 62 N88-13344
- HIRSCHEL, E. H.**
Zonal solutions for airfoils using Euler boundary-layer and Navier-Stokes equations p 6 N87-20219
Evaluation of results of boundary-layer calculations with regard to design aerodynamics p 158 N87-21150
- HITZEL, S. M.**
Status of CFD validation on the vortex flow experiment p 167 N89-18620
- HJELMBERG, L.**
The international vortex flow experiment p 166 N89-18617
- HO, P. S. W.**
Intermodulation interferences in radio systems p 152 N89-18595
- HOBBS, RANDY W.**
Hierarchy of uncertainty sources in transonic wind tunnel testing p 87 N89-16851
- HOCH, T.**
Turbine rotor blade measurements using infrared pyrometry p 171 N87-21184
- HODARA, H.**
Guided Optical Structures in the Military Environment (JAGARD-CP-745) p 237 N87-13273
- HODGES, J.**
The RAE experimental data base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250
- HOEFT, L. O.**
Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18592
- HOEIJMAKERS, H. W. M.**
Modelling of time variant flows using vortex dynamics activities in the Netherlands p 157 N87-22142
- HOENLINGER, H.**
The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355
- HOEPFNER, D. W.**
AGARD Corrosion Handbook: Volume 1: Corrosion causes and case histories (JAGARD-AG-278 VOL-1) p 110 N86-16374
- HOERL, F.**
System-theoretical method for dynamic condition monitoring of gas turbines p 54 N89-16812
- HOERMANN, E.**
Effects of optical feedback on the performance of high data rate single-mode fiber systems p 238 N87-13268
- HOERNLEIN, H.**
Aeroelasticity and optimization in fighter aircraft design p 40 N88-13324
- HOFFMAN, JOHN M.**
The integration and operational suitability of emerging technologies for future fighter aircraft: A pilot's perspective p 36 N87-24454
- HOFFMANN, R.**
The effect of endogenous alpha on hemispheric asymmetries and the relationship of frontal theta to sustained attention p 208 N88-27701
- HOFFMEYER, JAMES A.**
Measurement, modeling and simulation of LOS microwave channels p 146 N89-17734

HOORMOUZIADIS, J.

- HOFFMANN, G. O.**
In-vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
- HOFSTRA, J. S.**
Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18592
- HOGGEN, ROGER ROY**
The integration, characterisation and trialing of a modern complex airborne radar p 50 N88-23791
- HOGG, G. WILLIAM**
F100-PW-220 engine monitoring system p 53 N89-16795
- HOGGE, M.**
Computer prediction of internal stresses during heat treatment p 112 N89-15272
- HOM, ROGER H.**
Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654
Advances in flying qualities: Concepts and criteria for a mission oriented flying qualities specification p 43 N88-29739
- HOMSEIL, H.**
The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21931
- HOKKE, M.**
Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N88-27693
- HOLDEN, DOUGLAS M.**
Some measurements of height gain at VHF p 140 N88-19671
- HOLFORD, DOROTHY M.**
Operational load measurements on service helicopters p 37 N88-11658
- HOLLAND, HAROLD**
Full scale helicopter crash testing p 23 N89-18428
- HOLLINGTON, JOHN L.**
The anatomy of the gyroscope (JAGARD-AG-313) p 172 N88-26287
- HOLLISTEF, WALTER M.**
Improved guidance and control automation at the man-machine interface (JAGARD-AR-228) p 211 N87-18987
Automation at the man-machine interface p 211 N87-29504
- HOLMES, S. A.**
Optical quadrature demodulator for coherent detection and sensor applications p 239 N87-1328
- HOLST, T. L.**
Transonic Navier-Stokes wing solution using a zonal approach: Part 1: Solution methodology and code validation p 7 N87-20228
- HOLTBY, R.**
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949
- HOLZBAUR, ULRICH D.**
Avionics expert systems p 56 N89-18464
- HOMANN, K. H.**
Large ionic species in sooting acetylene and benzene flames p 107 N88-29932
- HORNORAT, YVES**
Industrial introduction of the modeling of aeronautical forging and foundry process simulation p 121 N89-15279
- HORNUNG, E.**
Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357
- HORNUNG, H.**
Aerodynamics of Hypersonic Lifting Vehicles: Fluid Dynamics Panel AGARD Symposium (JAGARD-AR-246) p 164 N88-27480
- HORNUNG, H. C.**
Reynolds number effects in transonic flow (JAGARD-AG-303) p 17 N89-16760
- HORSMANN, M.**
Comparison between inverse designed (PVD) airfoils and standard series airfoils for high loaded axial turbine nozzle application p 60 N87-21954
- HORTENBACH, KLAUS-JUERGEN**
HF groundwave and skywave propagation p 124 N87-18706
- HORVATH, E.**
Pharmacological approaches to performance enhancement in animals p 190 N87-25715
- HOSMAN, R. J. A. W.**
Active and passive side stick controllers: Tracking task performance and pilot control behaviour p 220 N89-18028
- HOUBOLT, J. C.**
Status review of atmosphere turbulence and aircraft response p 78 N89-28726
- HOUP, THOMAS A.**
Homeostatic entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25718
- HOORMOUZIADIS, J.**
An integrated aero/mechanical performance approach to turbo technology turbine design p 64 N88-17857

HOUSE, BRUCE L.

HOUSE, BRUCE L.
Coherent functional development: Key to successful future system integration p 246 N88-23803

HOUTMAN, E. M.
Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650

HOUWINK, R.
Requirements and capabilities in unsteady windtunnel testing p 90 N89-16878

HOWARD, J. P.
Influence of vection axis and body posture on visually-induced self-rotation and tilt p 206 N89-12185
Vection and the spatial disposition of competing moving displays p 206 N89-12186

HOWELL, WILLIAM E.
Advances in ATC: An aircraft perspective p 27 N87-21893

HREBIEN, LEONID
Detection of acceleration ($\pm 1g$) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710

HUARD, JACQUES
Experimental determination of the transfer function of an axial compressor to distorted inlet flow p 9 N87-24479

HUBBARD, ROBERT D.
The influence of operational requirements on LHX concept formulation p 37 N88-11650

HUBBERT, K. P.
Modeling of CO oxidation in dilution jet flows p 109 N89-29947

HUBER, R.
Performance improvement of airborne weapon systems: methods, scope and limitations p 33 N87-22585

HUEMERS, H.
Modal survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365

HUETINK, J.
A mixed Eulerian-Lagrangian finite element method for simulation of thermo-mechanical forming processes p 120 N89-15274

HUGHES, KEVIN A.
Some measurements of height gain at VHF p 140 N88-19671

HUI, W. H.
Dynamic stability of hypersonic conical lifting vehicles according to Newton-Busemann theory p 75 N88-13247

HUIZING, G. H.
Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20200

HULL, DAVID H.
Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax p 194 N87-24076

HULT, E.
In vivo measurements of vibrator transmission in the human spine p 210 N87-13947

HUMMEL, DIETRICH
Experimental investigations on blunt bodies and corner configurations in hypersonic flow p 13 N88-13225
Documentation of separated flows for computational fluid dynamics validation p 170 N89-18662

HUNT, B.
A graphical aid to RGS program development p 271 N87-29521

HUNT, MELVYN J.
Speech is more than just an audible version of text p 135 N87-29522

HUNTER, H. J.
Developmental air-drop testing techniques and devices (AGARD AG-300-VOL 6) p 38 N88-12481

HUOT, J. P.
A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655

HUPP, R. V.
Heuristic system model validation p 44 N89-10057

HURTAUD, YVONICK
A propagation campaign in a marine environment utilizing a digital system at 36 GHz p 141 N88-19675
Measurement and modeling of 36 GHz sea reflection phenomena p 145 N89-17730

HUSSEY, DAVID W.
The digital colour map simplifies ground attack operations p 187 N87-24950

HUTH, H.
Effect of environment and improvement measures on static and fatigue strength of bolted CFRP joints p 187 N89-17703

HUTT, G. R.
Hypersonic static and dynamic stability of axisymmetric shapes: A comparison of predictor methods and experiment p 13 N88-13245

HYMAN, J.
Automatic charge control system for geosynchronous satellites p 99 N87-28960

HYNES, T. P.
Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470

IGNAZI, G.
Biostereometric study of the outward curve of the spine for various reference positions p 191 N87-13943

ILIFF, K. W.
Identification of dynamic systems - applications to aircraft Part 1: The output error approach (AGARD-AG-300-VOL 3-PT-1) p 33 N87-21913

ILLES, J.
Neurophysiological patterns of operational fatigue: Preliminary results p 201 N88-27703
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706

IMMARIGLIONE, J.-P.
Modelling of deformation and microstructural changes in P-M-Rene 95 under isothermal forging conditions p 119 N89-15264

INAN, U. S.
Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations p 88 N87-26943

INNOCENTI, MARIO
The optimal control of model and applications p 217 N88-29741

ISELT, P.
ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N89-18587

ISHIMARU, AKIRA
Experiment and theory for backscattering enhancement and imaging in random media p 241 N89-17708

ITIL, KURT Z.
CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685

ITIL, TURAN M.
CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685

IVES, G. J.
A joint study on the compensation of in-field aero engine vibration diagnosis p 71 N89-18688

IZUMI, YUTAKA
Radio and radar holes and multipath zones: The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667

JACKSON, A.
The application of intelligent knowledge based systems to air traffic control p 28 N87-21904

JACOBS, DENICE S.
Software development guidelines p 228 N89-18456

JACOBS, PAUL
Midcourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-16005

JACOBSON, M. J.
Design manual for impact damage tolerant aircraft structure, addendum (AGARD-AG-238-ADD) p 42 N88-27185

JAEGGY, BERNARD CHARLES
An ultra high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13228

JAIN, SULEKH C.
Use of vendor consortiums for implementation of process simulation technology p 121 N89-15274

JAIN, V. K.
Physical modeling and viscoplasticity studies of the forging process p 120 N89-15269

JAKEMAN, E.
Hierarchical scattering models p 144 N89-17717

JANKOVITZ, JACK
Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MISA) p 171 N87-29479

JANKOWSKY, E. J.
AGARD corrosion handbook Volume 2: Aircraft corrosion control documents: A descriptive catalogue (AGARD AG-278-VOL 2) p 110 N87-24553

JANSEN, B.
Built-in self test p 154 N89-18468

JANSEN, T.
Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 191 N87-13040

JANTZEN, E.
Tribology in aircraft systems: Basic principles and applications p 174 N88-29240

JARZAB, W.
Crashworthiness of aircraft structures p 24 N89-18436

JASUJA, A. K.
Flow performance of a supersonic fuel injector p 104 N88-29919

JAY, ROBERT L.
Unsteady aerodynamic measurements in flutter research p 8 N87-24405
Unsteady aerodynamic measurements in forced vibration research p 9 N87-24406

JEAL, R. H.
The impact of engineering assumptions on NDF requirements p 180 N89-17254

JEANDEL, D.
Numerical simulation of diffuser/compressor dome interaction p 65 N88-17663

JEFFERS, JAMES D., III
Aeroelastic thermal effects p 68 N89-10615

JEFFERSON, J. H.
Generation and properties of self-similar stochastic processes with application to ray propagation in random media p 242 N89-17718

JEFFREYS, N. E.
The use of the NRC/NAE water facilities in Canadian aeronautical research and development p 85 N88-23132

JEHL, F. X.
Dual frequency MM-wave radar for antitank helicopter p 132 N87-18756

JELALIAN, A. V.
CO₂ laser radar systems for target acquisition and guidance p 173 N89-17606

JELL, C. S.
Air intake aerodynamics p 15 N88-29762

JENKINS, P.
A joint study on the compensation of in-field aero engine vibration diagnosis p 71 N89-18688

JENKINS, P. J.
Information management systems for on-board monitoring systems p 62 N89-16786

JEROME, D.
Research simulators for helicopters p 94 N88-11656

JESKE, H.
Ground-to-air atmospheric consideration p 142 N89-17435
Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a bistatic radar p 147 N89-17748

JEW, K.
Closed loop fiber optic gyro p 207 N87-14277

JEWELL, N. T.
A structured approach to weapon system design p 49 N88-23773

JOCHUM, ANNE M.
Atmospheric turbulence research at DLR (AGARD R 752) p 189 N88-27669

JOHN, E. R.
Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27687

JOHNSON, A. B.
Wake and shock interactions in a transonic turbine stage p 57 N87-21439

JOHNSON, ALLEN L.
UHF SHF SATCOM propagation and system design p 125 N87-18710

JOHNSON, C. B.
Wind tunnel sidewall boundary layer effects in transonic airfoil testing: some corrective, but some not p 89 N89-16604

JOHNSON, DAVID
Measurement and classification of the mode of action of antidepressant drugs p 202 N88-27714
Measurement of electrical activity in the CNS with cortical evoked potentials and EEG: Efficacy profiles of drugs using factor analysis p 202 N88-27715

JOHNSON, DIANA F.
A model to predict visual performance at the man display interface in the cockpit p 218 N89-18013

JOHNSTONE, A. D.
Spacecraft charging: Mitigate experience p 98 N87-26047

JOHNSTONE, W.
Performance of integrated optical frequency shifters optimized to high birefringence fibres using corrugated grooves p 238 N87-13200

JOLYS, P.
Application of diffusion bonding combined with superplastic forming (SP/DB) to the fabrication of TAGV metal sheet structures p 177 N87-17060

JONDA, W.
Requirements on lubrication oil from the view of a helicopter manufacturer p 112 N86-29244

JONES, A. S.
Modal testing of the Olympus development model stowed solar array p 96 N87-20364

JONES, D. J.
Comparison of theory and experiment for four supercritical low drag airfoils p 21 N88-18454

JONES, EDWARD J.
MMIC T/R modules for the next generation airborne surveillance platforms p 121 N87-18024

JONES, HAROLD L.
AI expert system technology: issues for guidance and control applications p 74 N88-17608

PERSONAL AUTHOR INDEX

PERSONAL AUTHOR INDEX

- JONES, J. G.**
Measurement and analysis of low altitude atmospheric turbulence obtained using a specially instrumented Gnat aircraft p 190 N88-29728
- JONES, LAWRENCE G.**
The state of practice in Ada-based program design languages p 229 N89-18457
- JONGEWARD, GARY A.**
Polar-auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
- JOOS, F.**
Influence of operating conditions on the atomization and distribution of fuel by air blast atomizers p 105 N88-29819
Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 106 N88-29973
- JORNEUS, L.**
In vivo measurements of vibration transmission in the human spine p 210 N87-13947
- JOSEPH, A. A.**
Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13287
- JOSEPH, T. R.**
Performance of RF fiber optic links p 240 N87-13301
- JOSLIN, G.**
Closed loop fiber optic gyro p 237 N87-13277
- JOUAN, JEAN-ALAIN**
Composite structure repairs carried out according to aeronautical techniques p 2 N87-20185
- JOUBERT, HUGUES**
Air inlet engine compatibility: Impact of theoretical and experimental methods p 60 N87-24466
- JOULIN, G.**
Gaseous premixed flames in non-uniform flows p 109 N88-29945
- JOWETT, A. P.**
Artificial intelligence in HF communication systems p 150 N89-18580
- JUNCHAT, ALAIN**
A propagation campaign in a marine environment utilizing a digital system at 36 GHz p 141 N88-19675
Measurement and modeling of 36 GHz sea reflection phenomena p 145 N89-17730
- JUST, TH.**
Simultaneous temperature measurements with Raman and CARS in laminar flames p 103 N87-21171

K

- KACPRZYNSKI, JERZY J.**
Reliability of finite element methods in North America (AGARD-R-748) p 183 N88-11139
- KAFYEKE, FASSI**
Prediction of wing-body-store aerodynamics using a small perturbation method and a grid embedding technique p 5 N87-20207
- KAINZINGER, A.**
Computer aided sensor placement optimization p 275 N87-24954
- KAKARAS, EM.**
The effect of particle properties on radiative heat transfer p 109 N88-29941
- KALAFUS, RUDOLPH M.**
Differential use of NAVSTAR GPS for enhanced accuracy p 30 N89-10983
- KALAWSKY, R. S.**
Pilot integration and the implications on the design of advanced cockpits p 226 N89-18026
- KALETKA, JUERGEN**
Modeling XV-15 in rotor aircraft dynamics by frequency and time domain identification techniques p 37 N88-11857
- KALOMIRIS, V. E.**
Tactical fiber optic assembly requirements p 240 N87-13305
- KANDACHAR, P. V.**
AGARD Corrosion Handbook Volume 1: Corrosion, causes and case histories (AGARD-AG-278-VOL 1) p 110 N86-16374
- KANTOR, L.**
Simulator induced sickness among Hercules aircrew p 204 N89-12176
- KAPP, ROLF**
Prediction of dynamic derivatives p 15 N88-29761
Aerodynamic heating of missiles p 16 N88-29764
- KAPPLER, G.**
System theoretical method for dynamic condition monitoring of gas turbines p 54 N89-16812
- KARAM, M. A.**
A scaffolding model for forested area p 143 N89-17713
- KARAS, LEONARD**
Systems engineering technique p 48 N88-23776
- KARASKIEWICZ, R. J.**
Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18592

- KARMAN, S. L., JR.**
Generation of multiple block grids for arbitrary 3D geometries p 226 N88-29317
- KARMAN, STEVE L., JR.**
Analysis of the F-16 flow field by a block grid Euler approach p 6 N87-20217
- KARPOVICH, P. A.**
Fuel property effects on the US Navy's TF30 engine p 67 N88-29911
Fuel effects on flame radiation and hot-section durability p 106 N88-29925
- KASSIS, A.**
Validation of a multi-block Euler flow solver with propeller-slipstream flows p 20 N89-18648
- KATZ, IRA**
Secondary electron generation, emission and transport: Effects on spacecraft charging and NASCAP models p 98 N87-26950
Polar-auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
- KAUFMAN, LLOYD**
Studies of the intact human brain: implications for performance p 198 N88-27684
- KAUL, H. J.**
Computing system configuration for fighter aircraft flight control systems p 79 N89-10632
- KAY, C. J.**
A prototype fibra optic gyroscope for missile guidance applications p 92 N88-19554
- KAYA, D.**
The information scene in Turkey p 249 N87-26676
- KAYMAZ, H.**
Experimental investigation of a supercritical compressor rotor blade section p 67 N88-17580
- KAYNAK, UNVER**
Transonic Navier-Stokes wing solution using a zonal approach: Part 1: Solution methodology and code validation p 7 N87-20229
- KAYTEN, GERALD G.**
Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Vehicle Development Time and Cost Reduction (AGARD-AR-2447) p 4 N89-10007
- KEARNEY, F.**
Weld quality monitor and control system p 179 N87-17062
- KEARNEY, P. J.**
A graphical aid to IKBIS program development p 224 N87-29521
- KEARNS, J. P.**
Accelerated convergence for synchronous approximate agreement p 231 N89-18474
- KEATES, T. F.**
Influence of efficient testing as a substitute for modal survey testing of large space structures p 94 N87-20369
- KEIL, R.**
Effects of optical feedback on the performance of high data rate single-mode fiber systems p 238 N87-13288
- KELLAWAY, W. E. R.**
Software engineering for the British Aerospace Experimental Aircraft Programme (EAP) p 225 N88-23708
- KELLY, F. J.**
Random propagation through the longwave channel p 145 N88-17731
- KELLY, FRANCIS J.**
ELF/VLF/LF propagation and system design p 124 N87-16706
VLF radio noise p 148 N88-18580
- KELLY, LARRY G.**
Composite repair of cracked aluminum structure p 2 N87-20183
- KELSO, B.**
The effects of hypoxia on P300 and reaction time (JGEM-87-RH-12) p 200 N88-27697
- K'NEDY, R. S.**
Ecological significance of equipment features and pilot history in simulator sickness p 264 N88-12177
- KENNEY, ROBERT S.**
Simulator sickness in US Army and Navy fixed and rotary wing flight simulators p 205 N89-12178
- KERRES, W.**
Short duration flow establishment on a profile in a Water-Ludwig Tunnel p 167 N88-25134
- KESSLER, R.**
Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656
- KHALID, M.**
Comparison of theory and experiment for four supercritical low drag airfoils p 21 N89-18655
- KILSHAW, M. J.**
Structural design requirements for aircraft incorporating active control technology p 41 N88-19453
- KIMZEY, W. F.**
An overview of the application of standard measurement uncertainty methodology to propellant testing p 72 N89-18654
- KIND, R. J.**
Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18654

KOENEKE, AXEL

- KINDERVATER, CH.**
Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430
Crashworthy design of aircraft subfloor structural components p 24 N89-18431
- KING, D. W.**
Measuring the value of information and information systems, services and products p 247 N88-28799
- KING, DONALD W.**
Evaluating the effectiveness of information use p 253 N89-11626
Evaluating the performance of information centre staff p 253 N89-11629
Evaluating performance of information centre operations and services p 253 N89-11630
A framework for evaluating the effectiveness of information centres and services p 253 N89-11631
- KING, G.**
Prediction of lumbar spinal segment instability by centre patterns p 192 N87-13949
- KING, S. P.**
Minimisation of helicopter vibration through active control of structural response p 75 N88-11662
- KING, W. P. C.**
Pressure wave-Gun barrel interactions p 154 N86-29066
- KINGCOMBE, R. C.**
Design and test of a high blade speed, high work capacity transonic turbine p 64 N88-17656
- KINGSTON, T. R.**
Some turbomachinery blade passage analysis methods: Retrospect and prospect p 59 N87-21947
- KIRBY, P. J.**
Some considerations relating to aero engine pyrometry p 171 N87-21187
- KIRSCH, RAYMOND P.**
Machine architectures for artificial intelligence computing p 222 N87-24948
- KIRTLLEY, K. R.**
Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 166 N89-18638
- KISIELEWSKI, KEITH M.**
Analysis of the F-16 flow field by a block grid Euler approach p 6 N87-20217
- KITTEN, GERARD**
Current state of an expert system p 236 N87-24953
- KJELGAARD, SCOTT O.**
Detailed flowfield measurements over a 25 deg swept delta wing for code validation p 21 N89-18657
- KLAUSMANN, W.**
Turbulence effects on the droplet distribution behind airblast atomizers p 134 N88-29416
- KLEBSADEL, R. W.**
Hostile energetic particle radiation environments: Earth's outer magnetosphere p 188 N87-26343
- KLEIDER, ALFRED**
Artificial intelligence and its impact on combat aircraft p 232 N87-24946
- KLENK, HERBERT**
Avionics systems engineering and its relationship to mission software development p 25 N89-18434
- KLIMETZKE, F.**
Transonic blade design on rotational stream surfaces p 46 N88-17671
- KLINGENBERG, G.**
Measurement of important ballistic flow properties by spectroscopic techniques p 154 N88-29974
- KLOOS, JAN**
Design loads for Swedish military aircraft in a twenty years perspective p 42 N88-13444
- KNAPTON, J. D.**
Liquid propellant gun technology p 115 N86-29494
- KNAUS, A.**
Flight testing of fighter aircraft p 35 N87-24448
- KNOELL, HARTWIG**
Vibration analysis by speckle interferometry p 193 N87-21187
Tip clearance measurement in modern compressor components p 170 N87-21184
- KOCHER, JAMES A.**
Integrated control and avionics for air superiority p 221 N89-18632
- KOCIAN, DEAN F.**
Design considerations for Virtual Panoramic Display (VPD) helmet systems p 219 N89-18624
- KODWEISS, R.**
Pilot control devices p 220 N89-18627
- KOEGER, H. J.**
Design and calculation of high speed engine bearings p 174 N88-29247
- KOECK, C.**
Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
- KOENEKE, AXEL**
An ultra high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13224

KOERBER, GERMAIN

- KOERBER, GERMAIN**
An ultra high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13226
- KOERBER, U.**
Crashworthy design of aircraft supplant structural components p 24 N89-18431
- KOHL, WERNER**
Requirements and applications for radar simulations. A standpoint of an airline company p 133 N87-18759
- KOLKERT, W. J.**
On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 177 N86-29270
- KOMPENHANS, J.**
Particle imaging velocimetry in a low turbulent windtunnel and other flow facilities p 79 N87-21205
- KONOMOS, GEORGE**
Design for interoperability (interchangeability) p 50 N88-23789
- KOOI, J. W.**
Accuracy requirements for high speed test with engine simulation on transport aircraft models in the NLR-HST p 89 N89-16670
- KOOL, G. A.**
Evaluation of DOH and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
- KOOPMAN, J.**
Analysis of the flow through double swept airblast atomizers p 110 N88-29949
- KOPPENWALLNER, GEORG**
Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles p 11 N88-13230
- KORDULLA, W.**
Simulation of three dimensional transonic flow with separation past a hemisphere cylinder configuration p 8 N87-20230
On the numerical simulation of three dimensional hypersonic flow p 12 N88-13237
The DFVLR-F5 wing experiment Towards the validation of the numerical simulation of transonic viscous wing flows p 19 N89-18623
- KORNHUBER, A.**
Motion cues in every day life p 205 N89-12180
- KOSCHEL, W.**
Turbine rotor blade measurements using infrared pyrometry p 171 N87-21189
Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
Solution on unstructured grids for the Euler- and Navier Stokes equations p 168 N89-18636
- KOSSEL, G.**
New method for suppression of goniometer of errors by radio nose from overhead power lines p 151 N89-18585
- KOSHIGOE, S.**
Combustion related shear flow dynamics in elliptic supersonic jets p 11 N88-13232
- KOSSEY, P. A.**
A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747
- KOSSEY, PAUL A.**
Balloon measurement soft low frequency TE and TM atmospheric noise p 148 N89-18567
- KOUL, A. K.**
Modelling of deformation and microstructural changes in P/M Rene 95 under isothermal forging conditions p 119 N89-15264
Importance of sensitivity and reliability of NDI techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
- KRAFT, EDWARD M.**
Vortex flows p 165 N88-28875
Boundary layer manipulation p 165 N88-28877
- KRAIN, H.**
Secondary flow measurements with 12F technique in centrifugal compressors p 66 N88-17676
- KRAMER, ARTHUR F.**
Event related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696
- KRAMER, L.**
Structure of unsteady flows at leading and trailing edges. Flow visualization and its interpretation p 154 N88-23157
- KRASJANSKI, DAVID**
Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MIIISA) p 171 N87-29479
- KRAUSE, PETER**
MBB simulation facilities applied for rotorcraft research p 84 N88-11654
- KRENZ, QUENTER**
Accuracy problems in wind tunnels during transport aircraft development p 30 N89-16677
- KRETSCHMER, D.**
The characteristics of combustion by fuel composition. Measurements in a small conventional combustor p 105 N88-29920
The behaviour of synthetic fuels in a small transparent combustor p 110 N88-29950

KREUTNER, W.

- Simultaneous temperature measurements with Raman and CARS in laminar flames p 103 N87-21171
- KRIEBEL, J.**
Motion cues in every day life p 205 N89-12180
- KRIEGER, R. J.**
Accuracy criteria for evaluating supersonic aerodynamic coefficient predictions p 15 N88-29756
Semiempirical methods for airbreathing missiles p 16 N88-29763
Next generation missile design p 16 N88-29766
- KRIEZEIS, E. E.**
Wave-tilt sounding of tropospheric ducts above the sea p 145 N89-17728
- KROLL, N.**
Numerical methods for propeller aerodynamics and acoustics at DFVLR p 65 N88-17668
Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows p 170 N89-18661
- KROTHAPALLI, A.**
A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148
- KROUTIL, J. C.**
Experimental investigation of Hover flowfields in water at the McDonnell Douglas Research Laboratories p 161 N88-23135
- KRUCHTEN, ROBERT J.**
Decision aid for threat penetration analysis p 225 N87-24944
- KRUEGER, PETER G.**
Integrated multisensor targeting p 236 N87-24947
- KRAUK, R. V.**
Seat isolation system p 193 N87-17960
- KRUSE, H.**
Evaluation of 12F-measurements in unsteady turbine flow p 156 N87-21182
- KRUYER, WILLIAM B.**
Aeromedical evaluation and disposition of electrocardiographic abnormalities p 193 N87-24071
Valvular and congenital heart disease in the aviator p 194 N87-24073
Hypertension in the aviator p 194 N87-24077
- KRZANOWSKI, J. E.**
Direction of R and D and current status of understanding of advanced gear drives p 110 N86-29245
- KUBENDRAN, L. R.**
Experiments and code validation for junction flows p 21 N89-18658
- KUENKLER, H.**
Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
- KUESTNER, THOMAS**
The use of hardware in the loop techniques in the development of a modern air to surface missile system p 93 N88-19562
- KUGA, YASUO**
Experiment and theory for backscatter enhancement and imaging in random media p 241 N89-17706
- KULCHYSKI, R. B.**
Use of a video photogrammetry system for the measurement of the dynamic response of a shuttle remote manipulator arm p 84 N87-20370
- KULWICKI, PHILIP V.**
Advanced development of a cockpit automation design support system p 49 N88-23785
- KUMAR, AJAY**
Numerical analysis of flow through scramjet engine inlets p 111 N88-13233
A comparative study and validation of upwind and central-difference Navier-Stokes codes for high speed flows p 164 N89-18647
- KUNZ, J. H.**
On board life monitoring system (Onboard LCMCS) p 52 N89-16785
- KUNZE, HANS J.**
Civil and military applications of GPS p 30 N89-10882
- KUSCHEL, HEINER**
Mono- and bistatic radar coverage diagrams including diffractive wave propagation p 139 N88-19560

L

- LABOURETTE, R.**
Life time prediction. Synthesis on ONERA's research in viscoplasticity and continuous damage mechanics. Applied to engine materials and structures p 68 N89-10015
- LABRUJERE, TH. E.**
Accuracy of various wall correction methods for 3D subsonic wind tunnel testing p 89 N89-18661
- LABUTHIE, C.**
Simulation of an integrated flight test control system during air to ground gunnery attack p 34 N87-26672
- LACAU, R. G.**
Prediction of base flows p 16 N88-29765

PERSONAL AUTHOR INDEX

- LACOMME, PHILIPPE**
Dynamics and signal processing algorithms for high frequency of recurrence radar modes p 129 N87-18738
- LACROIX, J. P.**
SPOCK: A tool for real time artificial intelligence p 235 N89-18482
- LAFLAMME, J. C. G.**
The effects of a compressor rebuild on gas turbine engine performance p 70 N89-16814
- LAFRAMBOISE, J. G.**
Spacecraft charging in the auroral plasma: Progress toward understanding the physical effects involved p 98 N87-26344
- LAGARDE, D.**
An approach to studying the effects of psychostimulants on cerebral electrical activity in the non human primate p 203 N88-27776
- LAGARDE, D. P.**
Introduction of a new stimulant CRL 40476 p 196 N87-25714
- LAGRAFF, J. E.**
Wake and shock interactions in a transonic turbine stage p 57 N87-21920
- LAGRANDEUR, ROSS**
Canadian forces aircraft condition health monitoring: policy, plans and experience p 69 N89-16784
- LAINE, B.**
B 18 CTS engine monitoring p 52 N89-16788
- LAKSHMINARAYANA, B.**
Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 168 N89-18636
- LALA, A.**
Vibration measurements on helicopter aircrew: A new approach p 219 N87-21450
- LALA, ALBERTO**
Spontaneous central electrical activity during prolonged hypoglycemia: A quantitative study in humans p 201 N88-27776
- LAM, D. K. W.**
Optoelectronic baseband switching for communications and signal processing p 124 N87-15242
- LAMANTHE, GHISLAINE**
A numerical model of directional solidification of cast turbine blades p 121 N87-15240
- LAMAR, JOHN E.**
Nonlinear lift coefficient at high speed and high angle of attack using vortex flow techniques p 77 N89-13315
- LAMMERS, GERO**
Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 163 N88-21444
- LAMONICA, FRANK S.**
A software life cycle support environment p 215 N88-23810
- LANDIS, KENNETH H.**
Advanced flight control system for use of the X-35 fighter p 220 N89-18648
- LANDOLT, J.**
Influence of vector axis and body posture on visually induced self rotation and tilt p 206 N89-15244
- LANDOLT, J. P.**
The effects of hypoxia on P300 and reaction time (DCLM-87-RR-12) p 200 N88-27647
The effect of mind mapping on the vestibular evoked response p 202 N88-27649
Vector and the spatial disposition of competing moving displays p 204 N89-15246
- LAKE, N. E.**
Ecological significance of equipment features and pilot history in simulator sickness p 293 N89-17170
- LANG, M.**
Motion cues in every day life p 205 N89-12180
- LANGENBERG, K. J.**
Theoretical aspects of target classification in Physics of optics and radar transform methods p 137 N88-11944
- LANGER, ERIK**
The mixture of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18740
- LANGHOUT, G.**
Voice interactive systems in severe noise conditions p 136 N87-24428
- LANZ, MASSIMILIANO**
Active structural controllers: emulating structural elements by H135 p 96 N87-20367
- LAPRIE, J. C.**
Computing systems: dependability and fault tolerance. Basic concepts and terminology p 222 N88-10747
- LARDELLIER, A.**
Specification of an engine and its components starting from a consideration of aircraft missions p 65 N88-17668
- LARKIN, I. W.**
Infrared atmospheric transmission emission measurement in a maritime environment p 242 N89-17702

PERSONAL AUTHOR INDEX

- LAROCHE-LEVY, P.**
Avionics systems: Development method and computer tools p 51 N88-23799
- LAROCHE-LEVY, PHILIPPE**
Workshops for the design of avionics systems and the development of onboard software p 51 N88-23802
- LARROQUE, PIERRE**
Expert system man-machine interface for a combat aircraft cockpit p 219 N89-18022
- LARROUTOUROU, B.**
Numerical modelling of premixed flames in gaseous media p 109 N88-29944
- LARUE, ROLAND**
Linguistic and cultural barriers to the transfer of information p 251 N88-30459
- LASAXON, VICTOR M.**
Measure of merit for advanced military avionics: A user's perspective on software utility p 55 N89-18447
- LASSITER, EDWARD**
The GPS overview and navigation system concept p 29 N89-10875
- LASTER, MARION L.**
Aerodynamic data accuracy and quality: Requirements and capabilities in wind tunnel testing (AGARD AR-254) p 14 N88-28893
- LAU, W. H.**
Identification of microwave line-of-sight multipath components p 139 N88-19665
- LAUER, R. F., JR.**
Wind tunnel predicted air vehicle performance: A review of lessons learned p 87 N89-16852
- LAUFER, E. E.**
Wear of high speed roller bearings p 175 N86-29248
- LAURENCE, D.**
Turbulence modelling through one point closures: Applications enlightening by large eddy simulation p 159 N88-11972
- LAVAL, PIERRE**
Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
- LAVERGNE, G.**
Simulation study of spraying, streaming and vaporization phenomena associated with fuel injection p 104 N88-29914
- LAVERGNE, GERARD**
Experimental study of vortex sheets in plane flow p 162 N88-23142
- LAWRENCE, BARBARA**
Benefits of scientific and technical information services for aerospace and defense p 249 N87-26677
- LAWSON, R.**
Structure of unsteady flows at leading and trailing edges: Flow visualization and its interpretation p 164 N88-23154
- LAWTON, B.**
Bore temperature and heat flux in a 40 mm gun barrel p 117 N86-29069
- LAYCOCK, PATRICK J.**
Experimental observations of spectral occupancy at HF p 149 N89-18573
- LAZARD, J. Y.**
Acceleration of prototype development and reduction of cost by multidisciplinary integration p 246 N88-20199
- LAZAREFF, M.**
Computation of three-dimensional flows by viscous-inviscid interaction using the MZM method p 155 N87-20223
- LE, T. H.**
New numerical techniques in the method of singularities for application to complex three-dimensional configurations p 233 N87-20205
- LEACH, B.**
Implementation of an airborne SAR motion compensation system p 127 N87-18728
- LEBALLEUR, J. C.**
Computation of three-dimensional flows by viscous-inviscid interaction using the MZM method p 155 N87-20223
- Numerical viscous-inviscid interaction method for internal separated flows and shock wave boundary layer interaction p 156 N87-21933
- Progress in Viscous-Inviscid Solvers (VIS) p 159 N87-22152
- LEBIENVENU, PH.**
FCM factor optimization for HFR omission p 130 N87-18742
- LEBLANC, ALAIN**
Canadian forces aircraft condition/health monitoring: Policy, plans and experience p 69 N89-16784
- LEBRUN, D.**
Design and simulated crash validation of a dynamic response recorder p 221 N89-18442
- LECHT, M.**
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473

- LECHTE, HORST G.**
Electrostatic immunity of geostationary satellites p 89 N87-26957
- LEDWA, K.**
Composite repair techniques for J-stiffened composite fuselage structures p 2 N87-20186
- LEE, ALFRED T.**
The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179
- LEFEBVRE, ARTHUR H.**
Atomization of alternative fuels p 104 N88-29913
- LEFEVRE, H. C.**
Progress in optical fibre gyroscopes using integrated optics p 238 N87-13283
- LEGALLO, GUY**
Simulation with real elements of Exocet anti-ship missiles p 44 N89-10056
- LEGER, A.**
The effect of acetyl-di-leucine on the vestibulo-ocular reflex in humans p 196 N87-25717
- Horizontal study of the incidence of simulator induced sickness among French Air Force pilots p 204 N89-12175
- LEGERE, A. J.**
CO₂ laser radar systems for target acquisition and guidance p 173 N89-17606
- LEGGAT, L. JOHN**
A review of the NATO special group of experts on Naval hydrodynamics and related problems p 164 N88-23157
- LEQUISQUET, LOIC**
Current state of an expert system p 236 N87-24953
- LEHMAN, LARRY**
High altitude, long endurance RPV design technology study p 32 N87-16011
- LEHMANN, K.**
Computation of transonic 2D cascade flow and comparison with experiments p 59 N87-21943
- LEHNERTZ, K.**
Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N88-27693
- LEICHER, S.**
Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model p 20 N89-18642
- LEICHER, STEFAN**
Numerical simulation of internal and external inviscid and viscous 3-D flow fields p 155 N87-20213
- LEJEUNE, D.**
Lower back pain in helicopter pilots: Etiopathological factors p 210 N87-13955
- The effect of acetyl-di-leucine on the vestibulo-ocular reflex in humans p 196 N87-25717
- LEMAIRE, J.**
The quiet and distributed plasmasphere p 187 N87-26938
- A model for an electromotive force generator in the magnetosphere: A source of discrete auroral arcs p 188 N87-26940
- LEMEUR, ALAIN**
Shock waves losses analysis p 58 N87-21936
- LENMER, LUDWIG**
Composite repair of damaged J-stiffened panels: Design and test verification p 1 N87-20181
- LEMMON, JOHN J.**
Propagation and performance measurements over a digital troposcatter communications link p 146 N89-17733
- LEMOINE, MICHEL**
Role and design of a software engineering data base in the context of an advanced support environment p 231 N89-18485
- LEMPEREUR, CHRISTINE**
Experimental study of vortex sheets in plane flow p 162 N88-23142
- LENGELLE, G.**
Properjet combustion based on octogenosis p 114 N86-26470
- LENNON, JOHN F.**
Regions of validity for some rough surface scattering models p 241 N89-17711
- LEONARD, A.**
Recent activity in vortex methods in the United States p 157 N87-22144
- LEPAPE, YVES**
A program for the calculation of radio wave transmission through the analysis of melt zone morphology p 139 N88-19662
- LESIGOURGES, J.**
The use of the electron beam weldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
- LESIGOURGES, J.**
The application of the RBD process to the disposition of anti-wear alloys p 177 N87-17069
- LESLIE, PATRICIA J.**
Development savings through parametric modeling of program costs p 743 N88-20175

- LESTER, M.**
The use of P2 pulsations as indicators of substorm effects at geostationary orbit p 186 N87-26942
- LEUNG, PHILIP**
Polar-aural charging of the space shuttle and EVA astronaut p 94 N87-26962
- LEUPP, J.**
Welding of aluminum castings p 177 N87-17068
- LEVAILLANT, C.**
A computer program simulating the hot forging of metal powder p 111 N89-15267
- Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270
- LEVERSUICH, N. P.**
Design and test of a high blade speed, high work capacity transonic turbine p 64 N88-17658
- LEVIONNOIS, ALBERT**
Maintenance aid system for wide body aircraft p 70 N89-16805
- LEVY, L.**
On the possibility of a several-kiloyott differential charge in the day sector of a geosynchronous orbit p 99 N87-26953
- LEWIS, D. H.**
Closed loop fiber optic gyro p 237 N87-13277
- LEWIS, J. S.**
Development of a plenum chamber burner system for an advanced VTOL engine p 65 N88-17664
- LEWIS, NITA L.**
EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709
- LEYNAERT, J.**
Fundamentals of fighter aircraft design: Engine intake and afterbody p 40 N88-13322
- LIANG, D. F.**
Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18727
- Implementation of an airborne SAR motion compensation system p 127 N87-18728
- Configuration design of a helicopter integrated navigation system p 29 N87-29480
- LIBROWSKI, K.**
Getting more from vibration analysis p 54 N89-16807
- LIBURDI, J.**
Repair techniques for gas turbine components p 178 N87-17071
- LIDDERDALE, I. GAVIN**
Measurement of aircrew workload during low level flight: Part 1: A comparison between in-flight and post flight assessment methods p 213 N87-30064
- LIEBERMAN, H. R.**
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude and cold-induced stress responses p 195 N87-25712
- LIGHTHART, L. P.**
Basic characteristics of FM-CW radar systems p 131 N87-18753
- FM-CW radar remote sensing of hydrometeors p 144 N89-17721
- LIJEWSKI, LAWRENCE E.**
Composite 3rd generation for aircraft configurations with the EAGLE code p 227 N88-29321
- LILIENTHAL, M. G.**
Ethological significance of equipment features and pilot history in simulator sickness p 203 N89-12172
- LILIENTHAL, MICHAEL G.**
Simulator sickness in US Army and Navy fixed and rotary-wing flight simulators p 205 N89-12178
- LILLEY, ERIC G.**
Development savings through parametric modeling of program costs p 243 N88-20175
- LILLEY, JOHN R., JR.**
Polar-aural charging of the space shuttle and EVA astronaut p 94 N87-26962
- LINCOLN, JANET E.**
Engineering data compendium: Human perception and performance: User's guide (ILC-87-19560) p 215 N88-27749
- Engineering data compendium: Human perception and performance: volume 1 (ILC-87-19560) p 215 N88-28630
- Engineering data compendium: Human perception and performance: volume 2 (ILC-87-19560) p 215 N88-28631
- Engineering data compendium: Human perception and performance: volume 3 (ILC-87-19560) p 215 N88-28632
- LINROTH, K.**
Evaluation and prediction of back pain during military field service p 132 N87-13950
- LIOTTI, G.**
Experimental investigation on small turbo-prop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476
- LIS, STANLEY**
Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739

LITCHFIELD, M. R.

- LITCHFIELD, M. R.**
An examination of the impact of potential advances in component technology for future military engines p 63 N88-17650
- LITTLE, MICHAEL O.**
MMIC T/R modules for the next generation airborne surveillance platforms p 131 N87-18749
- LITTLE, R.**
The flight evaluation of a speech recognition and a speech output system in an advanced cockpit display and flight management system for helicopters p 46 N87-29527
- LITVA, J.**
The correlation between methodological and low-level angle-of-arrival measurements p 140 N88-19688
- LIU, C. H.**
Space-time statistics of waves propagating through a deep phase screen p 144 N88-17719
- LLORET, P.**
Inertial-GPS: A marriage of reason and analysis p 26 N87-21885
- LLOYD, A. R. J. M.**
Experiments to investigate the vortices shed from a submarine-like body of revolution p 164 N88-23156
- LOCK, WILTON P.**
Flight test of a resident backup software system p 74 N88-10805
- LOCKE, C. DOUGLASS**
The avionics software architecture impact on system architecture p 48 N88-23778
- LOCKENOUR, J. L.**
Simulation as a lighter design tool p 35 N87-24447
- LOEFFLER, S.**
Laser-ionic species in sooting acetylene and benzene flames p 107 N88-29932
- LOETZELICH, M.**
Solution on unstructured grids for the Euler- and Navier-Stokes equations p 168 N89-1536
- LOGAN, R. A.**
Wavelength division multiplexing at 1.5 microns for high capacity optical transmission p 238 N87-13294
- LOHMANN, D.**
Numerical methods for propeller aerodynamics and acoustics at DFVLR p 65 N88-17668
- LOJACOMO, E.**
Some development trends in light ground attack aircraft p 34 N87-22666
- LOKBERG, OLE J.**
TV holography: A promising inspection tool for analysis of composite materials p 170 N87-20180
- LOMUZO, P.**
Impulse response measurements and characterization of wideband VHF radio lines p 146 N89-17736
- LONG, LYLE M.**
The off-design performance of hypersonic waveguides p 38 N88-13244
- LONG, RICK A.**
Software productivity through Ada engines p 228 N89-19449
- LONGBRAKE, RONALD B.**
Avionics acquisition trends and future approaches p 244 N88-20184
- LOOMIS, PETER V. W.**
GPS navigation processing and Kalman filtering p 30 N89-10884
- LORDON, JEROME**
Numerical simulation of separated supersonic flows around tactical missile bodies p 19 N89-18632
- LORK, F. J.**
Architecture and role of the Sensor Subsystem in future aircraft weapon systems p 47 N88-23770
- LOROESCH, H. K.**
Effects of unfavorable environmental conditions on the service life of jet engine and helicopter bearings p 174 N86-29238
- LOSQUADRO, G.**
Space based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21888
- LOUIS, RAYMOND**
Improvement of specific fastening elements for assembling composite structures p 186 N89-17694
- LOURENCO, L.**
A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148
- LOVE, CHARLES M.**
Design and development of an advanced F100 compressor p 67 N88-17678
- LOVE, W.**
Progress in the implementation of AGARD AR-144 in motion system assessment and monitoring p 81 N87-23642
- LOW, H. C.**
Spray performance of a vaporizing fuel injector p 105 N88-29919
- LOWDEN, P.**
Repair techniques for gas turbine components p 178 N87-17071
- LU, X.**
Three-dimensional gas turbine combustor modelling p 108 N88-29937

B-18

- LUBBEN, D.**
Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951
- LUCAS, J.**
Fluoride glasses for infrared waveguides p 240 N87-13299
- LUCAS, MARC**
Synthetic aperture imaging airborne radar p 127 N87-18731
- LUCIANI, R.**
Motion induced vestibular potentials p 202 N88-27712
- LUDWIG, J. C.**
Modelling the behaviour of additives in gun barrels p 155 N86-29075
- LUEERS, H.**
Computing system configuration for fighter aircraft flight control systems p 79 N89-10832
- LUETKENHOEGER, B.**
Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N88-27693
- LUNDERSTAEDT, R.**
Gas path modelling, diagnosis and sensor fault detection p 54 N89-16811
- LUPERI, A.**
Description of a water tank facility: Study of a missile at high incidence p 85 N88-23133
- LUSSEYRAN, D.**
Structure of unsteady flows at leading and trailing-edges: Flow visualization and its interpretation p 164 N88-23154
- LUTTRELL, STEPHEN P.**
Markov random fields: A strategy for clutter modelling p 143 N89-17712
- LYNCH, F. T.**
Wind tunnel sidewall boundary layer effects in transonic airfoil testing-some correctable, but some not p 89 N89-16864
- LYNCH, M. K.**
Three-dimensional flow visualization using laser sheet scanning p 162 N88-23143

M

- MA, YUSHIEH**
Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745
- MAARSINGH, R. A.**
Accuracy of various wall-correction methods for 3D subsonic wind-tunnel testing p 89 N89-16863
- MABEY, D. G.**
Technical evaluation report of AGARD Technical Evaluation Meeting on "Unsteady Aerodynamics Fundamentals and Applications to Aircraft Dynamics" (AGARD-AR-222) p 4 N88-27182
- MACEY, D. G.**
Some aspects of aircraft dynamic loads due to flow separation (AGARD-AR-750) p 40 N88-18588
- MACCORMACK, R. W.**
On the validation of a code and a turbulence model appropriate to circular control airfoils p 18 N89-18616
- MACDONALD, D.**
Determination of antennae patterns and radar reflection characteristics of aircraft (AGARD-AG-100-VOL 4) p 124 N86-30431
- MACDONALD, R. I.**
Optoelectronic broadband switching for communications and signal processing p 124 N87-13294
- MACFADYEN, D. N.**
Performance of integrated optical frequency shifters pigtailed to high birefringence fibres using ion milled grooves p 238 N87-13289
- MACKENZIE, EILEEN**
Ionospheric communications and in-situ measurements at an auroral location in the European sector p 189 N89-17752
- MACKIE, A. J.**
The design and performance of an adaptive packet-switched HF data terminal p 149 N89-18577
- MACKINTOSH, G. B.**
Installed thrust as a predictor of engine health for jet engines p 71 N89-16806
- MACKRODT, P. A.**
Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model p 20 N89-18542
- MACLEOD, J. D.**
The effects of a compressor rebuild on gas turbine engine performance p 70 N89-16803
- MACMILLER, C. J.**
Unsteady inlet distortion characteristics with the B-1B p 9 N87-24478
- MACPHERSON, J. I.**
The NAE atmospheric research aircraft p 51 N88-24730
- MACPHERSON, P. B.**
The value of laboratory simulation testing for predicting gearbox performance p 174 N86-29237

PERSONAL AUTHOR INDEX

- MADDOUX, KENNETH C.**
Use of vendor consortiums for implementation of process simulation technology p 121 N89-15278
- MADHAVA, N. M.**
Evaluation of DDH and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
- MAGEE, L. E.**
Simulator induced sickness among Hercules aircrew p 204 N89-12176
- MACNEER, C.**
Structure of unsteady flows at leading and trailing-edges: Flow visualization and its interpretation p 164 N88-23154
- MAGRE, PHILIPPE**
Application of CARS thermometry to a turbulent flame p 104 N87-21175
- MAHE, C.**
Three-dimensional calculations of lateral jet interaction with an external supersonic flow p 19 N89-18631
- MAHESH, J.**
Configuration design of a helicopter integrated navigation system p 29 N87-29480
- MAYER, K.**
Aircraft engine oils and their behaviour at high temperatures p 113 N86-29251
- MAILLOUX, ROBERT J.**
Basic parameters of antennas for aircraft, satellites and missiles p 134 N87-23860
- MAINE, R. E.**
Identification of dynamic systems - applications to aircraft Part 1: The output error approach (AGARD-AG-300-VOL-3 PT-1) p 33 N87-17133
- MAITLAND, A.**
Welding of aluminum castings p 177 N87-17068
- MALCOLM, GERALD N.**
Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
- MALCOLM, GERALD N.**
Flow visualization study of vortex manipulation on fighter configurations at high angles of attack p 161 N88-23150
- MALLET, JOHN D.**
A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
- MALLEY, H. M.**
A structured approach to weapon system design p 48 N88-23133
- MALMO, JAN T.**
TV holography: A promising inspection tool for analysis of composite materials p 170 N87-20180
- MAMODE, A.**
Low frequency vibration testing on satellites p 96 N87-20364
- MANCO, A.**
CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 138 N88-27684
- MANDAL, A. C.**
Investigation of the human factors of office workers p 191 N87-13244
- MANDELL, MYRON**
Secondary electron generation, emission and transport: Effects on spacecraft charging and NASA models p 68 N87-26956
- MANGIONE, P. J.**
A study of the potential benefits associated with the development of a dedicated helicopter transmission lubricant p 112 N86-29242
- MANGOLD, P.**
Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable fighter aircraft configurations p 14 N87-23448
- MANNEVILLE, PAUL**
Transition to turbulence via scratch temporal intermittency p 161 N88-17976
- MANSEL, W.**
Ada in embedded avionics systems p 57 N89-18486
- MANTEGAZZA, PAOLO**
Active structural controllers: Simulating structural elements by ICUs p 96 N87-20360
- MAPLES, VANCE H.**
Cost effective simulation for millimeter wave guidance systems p 79 N89-10054
- MARCHBANK, W. R.**
The integration of computational fluid dynamics into the military aircraft design process p 33 N87-20210
- MARCHESE, P.**
The welding of aluminum alloys: A new technology in space application p 176 N87-17056
- MARESCA, C.**
Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
- MARGALIOT, S.**
Low back pain and narrowed disc spaces in fighter pilots p 141 N87-13847
- MARICI, LIVIO**
Electric and magnetic brain activity related to cognitive performance p 199 N88-27682

PERSONAL AUTHOR INDEX

MARKS, G.
Modal testing of the Olympus development model
stowed solar array p 96 N87-20366

MARMELSTEIN, ROBERT E.
Guidelines for evaluation of software engineering tools
p 230 N89-18461

MARR, ROGER L.
Pilot simulation in the development of the XV-15 tilt
rotor research aircraft p 81 N87-23646

MARSHMAN, A. P. L. A.
Flexible and high quality software on a multiprocessor
computer system controlling a research flight simulator
p 81 N87-23643

MARTELLI, F. G.
Accuracy and efficiency of a time marching approach
for combustor modeling p 170 N89-19659

MARTIN-SIEGFRIED, Y.
Developments and perspectives at AMD-BA in the field
of impact and crash sizing p 23 N89-18427

MARTIN, D. J.
Some approaches to the design of high integrity
software p 73 N88-10793

MARTIN, L.
Identification of microwave line-of-sight multipath
components p 139 N88-19665

MARTIN, LOUIS
An investigation of terrain related variables for predicting
the multipath fade depth distribution on terrestrial
microwave lines p 138 N88-19654

MARTIN, LOUIS
A review of the role of surface reflection in multipath
propagation over terrestrial microwave links p 138
N88-19655

MARTIN, LOUIS
Refractive index, meteorology and fading in line-of-sight
transmission paths p 140 N88-19656

MARTINEZDEPISON, EMILIO
Signal noise/interferer combiner unit programmable
(SINCU) p 149 N89-18575

MARTYN, JOHN
European examples of evaluating the effectiveness of
information centres and services p 253 N89-11628

MARYAO, JOSE H.
The auditory evoked response in military pilots
p 203 N89-27121

MARVIN, J. G.
Shock wave boundary layer interactions
[AGARD-AG-280] p 155 N86-29173

MARVIN, JOSEPH G.
Wind tunnel requirements for computational fluid
dynamics code verification p 90 N89-16880

MARVIN, JOSEPH G.
Accuracy requirements and benchmark experiments for
CFD validation p 166 N89-18612

MARZORATI, GIOVANNI
The EH-101 integrated project: A naval, utility and
commercial helicopter system p 38 N88-11672

MASON-SMITH, I.
A programme manager's needs for information
p 247 N86-28795

MASTROIANI, G. R.
Back discomfort in US Army helicopter aircrew
members p 209 N87-13939

MATHAUER, H.
Aerodynamic heating of missiles p 16 N88-29784

MATHE, JEAN-MICHEL
Experimental study of vortex sheets in plane flow
p 162 N88-22142

MATHYSSEK, K.
Effects of optical feedback on the performance of high
data rate single-mode fiber systems p 238 N87-13288

MATSON, DAVID L.
Evoked potential analysis of impact acceleration
experiments p 201 N88-27708

MATTHEWS, GARY W.
Mission planning and proper design: The long range
connection p 217 N89-18010

MATTHEWS, F. L.
Tensile strength of bolted joints in fibre reinforced
plastics p 102 N89-17699

MAULL, D. J.
Flow models using vortex dynamics: Work in the United
Kingdom p 157 N87-22143

MAYNARD, N. C.
Structures of density and velocity fluctuations in the
auroral oval and their impact on communication and radar
systems p 146 N89-17735

MAZAR, R.
Geometrical theory of diffraction for high-frequency
coherence functions in weakly random medium with
inhomogeneous background profile p 143 N89-17709

MAZAREANU, S.
Fault management in aircraft power plant controls
p 71 N89-16809

MBA, M. NSI
Wind tunnel validation of aerodynamic field calculation
codes for rotors and propellers in various flight
conditions p 169 N89-18639

MCCALLUM, W. C.
Event related and steady potential changes in the brain
related to workload during tracking p 201 N88-27705

MCCRARY, JOHN W.
Electric and magnetic brain activity related to cognitive
performance p 199 N88-27692

MCCROSKEY, W. J.
Technical evaluation report on the Fluid Dynamics Panel
Symposium on Applications of Computational Fluid
Dynamics in Aeronautics [AD-A172209] p 159 N87-27958

MCDANIEL, JOE W.
A critical assessment of wind tunnel results for the NACA
0012 airfoil p 17 N89-16847

MCDANIEL, JOE W.
Advanced development of a cockpit automation design
support system p 49 N88-23785

MCDARMAID, D. S.
The mechanical properties of superplastically formed
titanium and aluminium alloys p 111 N87-29647

MCDONACH, A.
Performance of integrated optical frequency shifters
pigtailed to high birefringence fibres using ion-milled
grooves p 238 N87-13289

MCDONALD, H.
Computation of tip and corner region flows
p 159 N87-22153

MCDONALD, M. A.
The design of the GARTEUR low aspect-ratio wing for
use in the validation of shear layer and overall flow
prediction methods p 45 N89-18652

MCEWEN, THOMAS A.
MMIC T/R modules for the next generation airborne
surveillance platforms p 131 N87-18749

MCFADDEN, J. D. O.
Optical fiber sensors for the measurement of pulsed
electric currents p 238 N87-13281

MCILL, P. R.
A new global survey of ELF/VLF radio noise
p 148 N89-18570

MC GOVERN, JENNIFER B.
EEG indices of G-induced Loss Of Consciousness
(G-LOC) p 201 N88-27709

MC GOWAN, JOSEPH
Velocity accuracy measurement of GPS user
equipment p 28 N87-25477

MC GOWAN, AMANDA
The application of non-stationary data analysis
techniques in the identification of changes in the
electroencephalogram associated with the onset of
drowsiness p 198 N88-27688

MC GUIRK, J. J.
Three-dimensional combustor predictors: A comparison
of equilibrium and laminar flamelet chemistry models
p 108 N88-29940

MC GUIRK, J. J.
On the validation of 3-D numerical simulations of
turbulent impinging jets through a crossflow p 20
N89-18645

MC KENDRICK, W. H.
The unmanned aircraft as a force multiplier
p 32 N87-16001

MC KINLEY, RICHARD L.
Effect of audio bandwidth and bit error rate on PCM,
ADPCM and LPC speech coding algorithm intelligibility
p 136 N87-29529

MC KINNON, M.
Seat isolation system p 193 N87-13960

MC MILLAN, R. W.
Line-of-sight millimeter wave propagation
characteristics p 144 N89-17720

MC NICHOLAS, K.
Advanced techniques employed in blade cooling
research p 64 N88-17659

MC QUILLLEN, EDWARD
High altitude, long endurance RPV design technology
study p 32 N87-16011

MC RUIER, DUANE T.
Pilot modeling p 217 N88-29736

MEADORS, G. F., III
Development of a paradigm to assess nutritive and
biochemical substances in humans: A preliminary report
on the effects of tyrosine upon altitude- and cold-induced
stress responses p 195 N87-25712

MEADOWS, A. J.
Measures, methods and models employed in evaluating
the effectiveness of information centers and servers
p 253 N88-27709

MEAUZE, GEORGES
Determination of the supersonic cascade entrance
zone p 157 N87-21948

MEDOFF, BARRY P.
Digital and optical systolic architectures for airborne
adaptive radars p 129 N87-18739

MEELKER, J. H.
Mathematical potential flow calculations about
transport aircraft p 5 N87-20208

MEGHA, VINCENT A.
Flight test of a resident backup software system
p 74 N88-10805

MEHU, BRUNO
Utilization of EMICAT for the development of aerospace
expert systems p 56 N89-18483

MEIFFREN, J. L.
State-of-the-art in non-destructive evaluation of turbine
engine parts p 181 N89-17261

MILHAUD, C.

MEIJER, H. A.
The lubrication of dynamically loaded concentrated hard
line contacts: Temperature and pressure measurements
p 175 N86-29247

MEINEL, H.
Dual frequency MM-wave radar for antitank helicopter
p 132 N87-18756

MEJZAK, RICHARD S.
New technology impacts on future avionics
architectures p 45 N87-24948

MELLANO, W.
Rapid prototyping of complex avionic system
architectures p 47 N88-23771

MELLER, ALAIN
Generating diagnostic knowledge from a structural and
functional description p 232 N88-10813

MELLING, A.
Seeding gas flows for laser anemometry p 172
N87-21178

MENNLE, E.
Comparison of experimental results and analytically
predicted data for double shear fastened joints
p 185 N89-17687

MENU, J. P.
Psychosensory cockpit ergonomics: Advantages of
intelligent information systems p 49 N88-23784

MENU, J. P.
Study of anticipation mechanisms in the aeronautical
environment p 207 N87-29505

MENU, J. P.
Sophisticated integral control methods for use in flight
p 212 N87-29510

MENU, J. P.
Organization of displays in the visual space of the combat
aircraft pilot p 212 N87-29516

MENU, J. P.
Voice command and the change of mental
representation during task performance p 135
N87-29523

MERCIER, F.
Low frequency vibration testing on satellites
p 96 N87-20364

MEREDITH, J. F.
Exploring the capabilities of flight management systems
in solving the airport arrival problem p 28
N87-21899

MERRINGTON, G. L.
Identification of dynamic characteristics for fault isolation
purposes in a gas turbine using closed-loop
measurements p 71 N89-18613

MERRY, R. T. G.
Detection of latent epilepsy in aircrew candidates
p 203 N89-27720

MERZKIRCH, W.
Techniques of flow visualization
[AGARD-AG-302] p 160 N88-16977

METERSKY, M. L.
A change in system design emphasis: From machine
to man p 49 N88-23782

METGES, P. J.
Lower back pain in helicopter pilots: Etiopathological
factors p 210 N87-13955

METZGER, K.
Space diversity effects on line-of-sight propagation
paths p 140 N88-19670

MEUNIER, S.
Numerical simulation of diffuser/combustor dome
interaction p 65 N88-17663

MEURZEC, J. L.
Measured and predicted responses of the Nord 260
aircraft to the low altitude atmospheric turbulence
p 78 N88-29723

MEYER, W.
Development of intake swirl generators for turbo jet
engine testing p 80 N87-24480

MEYSMANS, R.
Interior ballistics of small arms: Particular problems Part
1: Heat transfer and cook-off phenomenon in a small caliber
weapon p 154 N86-29071

MICHAEL, MARK T.
Data and signal processing architectures for future
avionics p 52 N89-10835

MICHAELIS, K.
Scoring tests of aircraft transmission lubricants at high
speeds and high temperatures p 113 N86-29253

MICHEL, P.
ISAURE: Integration of security and fault tolerance in
the REALITE 2000 system p 74 N88-10802

MICHEL, ROGER
Boundary layer development and transition
p 14 N88-28871

MICHEL, U.
Flow unsteadiness in three low-speed wind tunnels
p 88 N89-16859

MIGNANI, A. G.
Fiber optic device for temperature remote sensing
p 237 N87-13280

MIGNEAULT, GERARD E.
The application of emulation techniques in the analysis
of highly reliable guidance and control computer
systems p 73 N88-10798

MILHAUD, C.
An approach to studying the effects of psychostimulants
on cerebral electrical activity in the non-human primate
p 203 N88-27716

MILHAUD, C. L.

- MILHAUD, C. L.**
Introduction of a new stimulant CRL 40476
p 196 N87-25714
- MILLER, J. C.**
Neurophysiological patterns of operational fatigue
Preliminary results p 201 N88-27703
- MILLER, JAMES C.**
EEG indices of G-induced Loss Of Consciousness (GLOC)
p 201 N88-27709
- MILLER, SARAH J.**
Cross-frequency correlation of intensity fluctuations in the phase-changing media p 146 N89-17738
- MISCHIEL, C.**
Design and testing of a small radial turbine for auxiliary power units p 64 N89-17561
- MISEGADES, KENT**
Euler solution for a complete fighter aircraft at sub- and supersonic speed p 33 N87-20216
- MITCHELL, N.**
Computer aided tactics for air combat
p 214 N88-19559
- MITCHELL, SCOTT W.**
Low-cost, monolithic beamforming components for radar p 131 N87-18750
- MITON, H.**
Method for predicting performance limits of centrifugal compressors p 86 N88-17677
- MODENA, IVO**
Electric and magnetic brain activity related to cognitive performance p 199 N88-27692
- MOELLER, K. W.**
Accuracy requirements for high-speed test with engine simulation on transport aircraft models in the NLR-HST p 89 N89-16870
- MOENIG, R.**
Application of highly loaded single-stage mixed-flow compressors in small jet engines p 63 N88-17652
- MOFFITT, A.**
The effect of endogenous alpha on hemispheric asymmetries and the relationship of frontal theta to sustained attention p 208 N88-27701
- MOL, W. J. A.**
CFD applications in design and analysis of the Fokker 50 and Fokker 100 p 19 N89-18629
- MOLINET, F.**
Electromagnetic reflectivity in non-homogeneous continuous random media with cylindrical symmetry p 147 N89-17744
- MOLLARD, R.**
Biostereometric study of the outward curve of the spine for various reference positions p 191 N87-13943
- MOLZOW, MANFRED**
Comparison of the influence of different gust models on structural design p 43 N88-29722
- MOM, A. J. A.**
Evaluation of DDH and weld-repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
AGARD engine disc cooperative test programme (AGARD-R-766) p 67 N88-28926
- MONGIA, HUKAM C.**
Gas turbine combustion modeling p 108 N88-29936
- MONSEN, P.**
Modern HF communications, modulation and coding p 123 N86-27571
- MONTHEILLET, F.**
Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270
- MONTI, R.**
Computerized thermographic technique for the detection of boundary layer separation p 18 N89-16876
- MONTIN, J. L.**
An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818
- MOOU, H. A.**
Low-speed longitudinal flying qualities of modern transport aircraft p 43 N88-29738
Technology evolved in the simulation of motion cues The current trend p 204 N89-12173
- MOON, D.**
Artificial intelligence and its impact on combat aircraft p 232 N87-24945
- MOON, RICHARD H.**
A summary of methods for establishing airframe design loads from continuous gust design criteria p 43 N88-29721
- MOORE-EDD, MARTIN C.**
Homeostatic entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25718
- MOORE, JAMES**
Computational weld mechanics p 175 N87-17052
- MOORE, THOMAS J.**
Effect of audio bandwidth and bit error rate on PCM ADPCM and LPC speech coding algorithm intelligibility p 136 N87-29529
- MORCHOISNE, Y.**
New numerical techniques in the method of singularities for application to complex three-dimensional configurations p 233 N87-20205

- Computation of unsteady flows using the point vortex method p 157 N87-22138
- MOREAU, PIERRE**
Application of CARS thermometry to a turbulent flame p 104 N87-21175
- MORELLI, F.**
New aerodynamic design of the fenestron for improved performance p 37 N88-11664
- MORGAN, D. REED**
High speed parallel processing networks for advanced architectures p 223 N89-10837
- MORGAN, J. M.**
Airborne simulation at the National Aeronautical Establishment of Canada p 83 N87-23559
Investigation of vertical axis handling qualities for helicopter hover and NOE flight p 75 N88-11853
The use of integrated side-arm controllers in helicopters p 220 N89-18029
- MORGAN, MICHAEL A.**
Singularity expansion method Target Resonances p 137 N88-11912
Input signal shaping K-pulse p 137 N88-11917
Numerical modeling Finite methods p 137 N88-11918
Experiments Test range facilities, part 1 p 138 N88-11920
- MORGAN, N. H.**
Fourth generation neurocognitive pattern analysis system p 194 N88-27686
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27716
- MOROSOW, G.**
Benefits of passive damping as applied to active control of large space structures p 96 N87-20371
- MORPHET, FRANK N.**
The integration, characterization and trialing of a modern complex airborne radar p 50 N88-23791
- MORPHY, D. D.**
Modelling of deformation and microstructural changes in P/M Rene 95 under isothermal forging conditions p 119 N89-15264
- MORRELL, MARK**
Experimental observations of spectral occupancy at HF p 149 N89-18573
- MORRIS, A. J.**
Introduction to finite element basics p 233 N87-16377
- MORRISON, TOMMY R.**
Perceptual processing capabilities relevant to design of visual displays for information management in advanced airborne weapon systems p 250 N87-29513
- MORRISON, W. F.**
Liquid propellant gun technology p 115 N86-29064
- MORRISSEY, JAMES F.**
Radio and radar holes and multipath zones The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667
- MORTON, WILLIAM C.**
Simulation validation experience PATRIOT guidance system p 79 N89-10055
- MOSES, C. A.**
Fuel effects on flame radiation and hot-section durability p 106 N88-29925
- MOSIER, S. A.**
Fuel property effects on the US Navy's TF30 engine p 67 N88-29911
- MOSS, J. B.**
Flamelet chemistry modelling of soot formation for radiation p 106 N88-29928
- MOSSEY, P. E.**
The Forge 2 isothermal forging model p 112 N89-15271
- MOUSTAPHA, S. H.**
A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655
- MUENLBAUER, K.**
Spacecraft qualification using advanced vibration and modal testing techniques p 96 N87-20369
- MUELLER, BERNHARD**
Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660
- MUELLER, E.**
MM-wave propagation and application in military communication systems p 140 N88-19669
- MUELLER, G.**
ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N89-18587
- MUELLER, JAN**
The resources required to run an information service p 250 N87-26682
- MUELLER, R.**
Experiments on the DFVLR F4 wing body configuration in several European windtunnels p 87 N89-16848
Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18431
- MUENIER, M.**
Testing complex avionics software A practical experience p 50 N88-23794

PERSONAL AUTHOR INDEX

- MUENIER, MICHEL**
DEDALE An expert system for analog circuit maintenance p 153 N88-10809
How to use PROLOG for expert system programming p 225 N88-10816
A highly reliable computer for airborne applications p 222 N89-10833
- MUIR, D. E.**
CF-18 engine performance monitoring p 69 N89-16787
- MUIR, HELEN C.**
The assessment of workload in helicopters p 214 N87-30066
- MULLER, G.**
Electromagnetic reflectivity in non-homogeneous continuous random media with cylindrical symmetry p 147 N89-17744
- MULLINS, J.**
Rates of formation of soot from hydrocarbon flames and its destruction p 107 N88-29933
- MULLOWNEY, P. E.**
Navy technology requirements for unmanned airborne vehicles p 32 N87-16002
- MURMAN, EARLL M.**
Applications of Euler equations to sharp edge delta wings with leading edge vortices p 6 N87-20214
- MURPHY, C. E.**
Microcomputer-based catalog creation software options for small libraries p 223 N87-19922
- MURRAY, P. M.**
Visual display research tool p 80 N87-23635
- MURRAY, T. W.**
Development of a plenum chamber burner system for an advanced VTOL engine p 65 N88-17664
- MURROW, H. N.**
A summary of atmospheric turbulence measurements with specially-equipped aircraft in the US p 189 N88-29727
- MYERS, DENNIS A.**
F100-PW-220 engine monitoring system p 53 N89-16745
- MYERS, N. B.**
Active vehicle charging measurements in sounding rocket and space shuttle orbit environments at Low Earth Orbit (LEO) altitude p 97 N87-26945

N

- NADEAU, F.**
A real time vision system for robotic arc welding p 177 N87-17066
- NAIK, R. A.**
Bearing bypass loading on bolted composite joints p 186 N89-17697
- NAMBA, MASANOBU**
Three-dimensional flows p 8 N87-24437
- NANEVCEZ, JOSEPH E.**
Polar-auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
- NARLO, J. C. II**
Driving mechanism of unsteady separation shock motion in hypersonic interactive flow p 10 N88-13229
- NAVERRE, HENRI**
Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17676
- NEIMS, D.**
Relation between VEP and visual function in lesions of the optic nerve and visual pathway p 203 N88-27718
- NELSON, J. R.**
Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 72 N87-22674
- NELSON, JOHN G.**
Detection of acceleration (-1 Gz) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710
- NELSON, R. C.**
Flow field surveys of leading edge vortex flows p 167 N89-18621
- NER, M. S.**
Performance of integrated optical frequency shifters pigtailed to high birefringence fibres using ion milled grooves p 238 N87-13299
- NESENBURG, MARTIN**
Modeling of wideband HF channels p 146 N89-17732
- NETZER, D. W.**
Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-26477
- NEUJAHN, H.**
Modeling strategy for cockpit data management in modern fighter aircraft p 218 N89-18017
- NEVES, K.**
An informal glossary of terms used in supercomputing appendix A p 252 N89-11401
- NEVES, KEN W.**
Computational Fluid Dynamics Algorithms and Supercomputers (AGARD AG-311) p 223 N89-11395
Hardware architecture, chapter 2 p 223 N89-11396

PERSONAL AUTHOR INDEX

- Algorithm and general software considerations p 228 N89-11397
- NEVIANI, ALESSANDRO**
Engineering management for validation prototype phase p 245 N88-20195
- NEVIN, ROBERT L.**
High resolution signal processor for limited aperture multimode radar p 128 N87-18736
- NEWMAN, J. C. JR.**
Short-Crack Growth Behaviour in an Aluminum Alloy An AGARD Cooperative Test Programme [AGARD R 732] p 184 N89-17287
Short-crack growth behaviour in an aluminum alloy. An AGARD cooperative test program p 184 N89-17288
Preliminary fatigue tests on short-crack specimens p 184 N89-17290
Alignment verification procedures p 184 N89-17291
Approximate stress-intensity factors for a surface crack and through crack at a semi-circular notch p 185 N89-17294
- NEWTON, J. B.**
Examples of static aeroelastic effects on present combat aircraft projects p 76 N88-13349
- NEWTON, S. G.**
Numerical methods for unsteady transonic flow p 8 N87-24403
- NG, T. T.**
Flow field surveys of leading edge vortex flows p 167 N89-18621
- NIBLETT, LL. T.**
Wing divergence of trimmed aircraft p 76 N88-13354
- NICHOLAS, O. P.**
Development of a flight simulation environment for research and training applications in UK p 53 N87-24652
- NICHOLSON, A. N.**
Enhancement of performance Operational considerations p 195 N87-25710
Sleep and wakefulness Handbook for flight medical officers, second edition [AGARD AG-270(E)] p 197 N88-11366
Sleep and wakefulness Handbook for flight medical officers, 2nd edition [AGARD AG-270(F)] p 207 N89-17399
- NICHOLSON, J. H.**
A study of passage flow through a cascade of turbine blades using image plane holographic interferometry p 118 N87-21203
- NICKEL, U.**
Angular super-resolution with array antennas Application to seeker heads p 128 N87-18737
- NICOL, W. S.**
The application of intelligent knowledge based systems to air traffic control p 28 N87-21904
- NIEBAL, N.**
Modal survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365
- NIEDERHOFER, K. H.**
Single-mode fibers for fiberoptic guided missiles A comparison with graded-index multimode fibers p 240 N87-13303
- NIEUWEJAAR, PER W.**
GPS signal structure p 30 N89-10878
Aiding and integration of a GPS receiver p 30 N89-10881
- NIEUWERK, L. R.**
Basic characteristics of FM CW radar systems p 131 N87-18753
- NIEUWPOORT, A. M. H.**
Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-24655
- NINA, M. N. R.**
Processing techniques for correlation of LDA and thermocouple signals p 171 N87-21194
- NITSCHKE, D.**
Crushing behaviour of helicopter subfloor structures p 23 N89-18429
- NIVER, E.**
Correcting ray field failures caused by focusing in an inhomogeneous duct A critical look at the Gaussian beam method p 139 N88-19663
- NOBACK, R.**
Matching P.S.D. Design loads p 43 N88-29720
Acquisition of gust statistics from AIDS-recorded data p 190 N88-29733
- NOBRE, A.**
Fault management in aircraft power plant controls p 71 N89-16809
- NOLL, B.**
Turbulence effects on the droplet distribution behind aircraft atomizers p 104 N88-29915
On the application of finite difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N88-29938
- NORDGREN, B.**
Evaluation and prediction of back pain during military field service p 192 N87-13950

- Individual predictability of back trouble in 18-year old men A prospective study during military service p 192 N87-13951
- NORRE, MARCEL E.**
Cues for training vertigo providing suggestions for the management of simulator sickness p 206 N89-12187
- NOSENCHUCK, D. M.**
Three-dimensional flow visualization using laser-sheet scanning p 162 N88-23143
- NOTARI, ALBERTO**
Use of demonstration/validation prototypes. Impact on total development costs and times p 245 N88-20194
- NOULLEZ, ALAIN**
Lattice gas hydrodynamics p 160 N88-11978
- NOURRY, G. R.**
The design and performance of an adaptive packet-switched HF data terminal p 149 N89-18577
- NUTTALL, J. D.**
Fibre optic gyroscopes in inertial navigation p 25 N87-13275

O

- OBERPARLEITER, WOLFRAM**
Influence of welding flaws on the fatigue strength of electron beam weldments in Ti Al6 V4 p 182 N87-17065
- OCH, F.**
Crashworthiness activities on MBB helicopters p 23 N89-18425
- OCHS, ALFRED**
A precipitation scatter experiment at 30 GHz p 144 N89-17723
- O'CONNOR, C. M.**
Military engine condition monitoring systems The UK experience p 53 N88-16797
- ODGERS, J.**
The characterization of combustion by fuel composition Measurements in a small conventional combustor p 105 N88-29920
The behaviour of synthetic fuels in a small transparent combustor p 110 N88-29950
- ODONNELL, R. D.**
Cortical evoked response and eyeblink measures in the workload evaluation of alternative landing system displays p 213 N87-30061
- ORTEL, H.**
Vortex dynamics A report on work in Germany p 57 N87-22139
- ORTEL, H., JR.**
On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
- OERY, H.**
Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357
- OFFENLOCH, KURT**
Measurement of electrical activity in the CNS with cortical evoked potentials and EEG Efficacy profiles of drugs using factor analysis p 202 N88-27715
- OGRODNIK, ROBERT F.**
Multi-mode multistatics for passive/active airborne surveillance p 126 N87-18726
- OGSTON, N.**
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949
- OHLMEYER, E. J.**
Application of optimal estimation and control concepts to a bank-to-turn missile p 92 N87-29483
- OHMI, M.**
Vector and the spatial disposition of competing moving displays p 206 N89-12186
- OKAPUU, U.**
A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655
Design and aerodynamic performance of a small mixed-flow gas generator turbine p 64 N88-17662
- OLDFIELD, M. L. G.**
A study of passage flow through a cascade of turbine blades using image plane holographic interferometry p 118 N87-21203
- OLIVER, C. J.**
Coherent scattering from random media p 174 N89-17714
- OLLIER, J. P.**
Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
- OLSEN, JAMES J.**
Interpretation in terms of the response of a one degree of freedom oscillator to two successive disturbances p 35 N87-23610
- OLSEN, R. C.**
High spacecraft potentials on ISEE 1 in sunlight p 97 N87-26944
Electron beam experiments at high altitudes p 37 N87-26946
- OLSEN, RODERIC L.**
An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave lines p 138 N88-19654

PALLISTER, K. C.

- A review of the role of surface reflection in multipath propagation over terrestrial microwave links p 138 N88-19655
- Refractive index, meteorology and fading in line-of-sight transmission paths p 140 N88-19666
- OLSSON, N. A.**
Wavelength division multiplexing at 1.5 microns for high capacity optical transmission p 238 N87-13284
- OLVER, A. V.**
The role of residual stress in the performance of gears and bearings p 175 N86-29246
- ONURLU, S.**
Prediction of temperature distribution in axisymmetric extrusion p 120 N89-15265
- ORLIK-RUECKEMANN, K. J.**
Aircraft dynamics Aerodynamic aspects and wind tunnel techniques p 39 N88-13320
Aircraft dynamics Aerodynamic aspects and wind tunnel techniques p 14 N88-29731
- OSCHE, G. R.**
CO2 laser radar systems for target acquisition and guidance p 173 N89-17606
- OSGA, G. A.**
Rapid prototyping of user computer interfaces during system design p 222 N87-29520
- OSKAM, B.**
Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20700
- OSTERGAARD, J. C.**
A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17727
- OSTERGAARD, JENS**
Meteor burst propagation and system design p 125 N87-18708
- OSTGAARD, JOHN C.**
Advanced avionics architecture pave pillar p 51 N89-10834
- OSULLIVAN, M. R.**
High resolution signal processor for limited aperture multimode radar p 128 N87-18736
- OTT, LAWRENCE M.**
Artificial intelligence and its impact on combat aircraft p 232 N87-24945
- OTTOCHIAN, S. P.**
Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18651
- OWEN, F. K.**
Turbulence measurement in hypersonic flow p 10 N88-13224
Vortex breakdown and control experiments in the Ames Duden water tunnel p 161 N88-25127
- OWEN, G. S.**
Water flow visualisation of a ramjet combustion chamber p 152 N88-23138
- OWEN, P. R.**
Vortex shedding in compressor blade wakes p 58 N87-21910
- OYAMA, K.-I.**
Active vehicle charging measurements of sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude p 37 N87-26943

P

- PAAS, J. E.**
Commercial engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 54 N89-16794
- PACK-DAVISON, MAURICE R.**
The unmanned aircraft as a force multiplier p 32 N87-16011
- PACOU, C.**
Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
- PADOVA, C.**
Operation of gas turbine engines in dust laden environments p 63 N88-17654
- PAGE, LELAND F.**
Philosophy of applying automation to air traffic control p 27 N87-21896
- PAGLIARO, GIOVANNI**
The EH-101 integrated project A naval utility and commercial helicopter system p 38 N88-11672
- PAGLIUSO, SALVATORE**
Joining of carbon fiber composite with fasteners p 103 N89-17701
- PAGNIEZ, P.**
Guidance and control of air-launched armaments An aeroengineer's perspective p 92 N88-19557
- PALFREYMAN, J. H.**
The use of knowledge based systems techniques in ESM processing p 235 N87-24941
- PALLISTER, K. C.**
Development of testing techniques in a large transonic wind tunnel to achieve a required drag accuracy and flow standards for modern civil transports p 88 N88-18857

PANARAS, ARGYRIS G.

- PANARAS, ARGYRIS G.**
Simulation of impinging shear layers using vortex dynamics p 157 N87-22140
- PANJABI, M. M.**
In vivo measurements of vibration transmission in the human spine p 210 N87-13947
- PANTEW, C.**
Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 199 N88-27593
- PAPA, REGINA M.**
Pilot workload assessment: A flight test approach p 218 N89-18014
- PAPA, ROBERT J.**
Regions of validity for some rough surface scattering models p 241 N89-17711
- PAPAGEORGIOU, N.**
The effect of particle properties on radiative heat transfer p 109 N88-29941
- PAPAILIOU, K. D.**
Discrete operating conditions gas path analysis p 54 N89-16810
- PAPIRNYK, O.**
Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
- PAPUCHON, M.**
Progress in optical fiber gyroscopes using integrated optics p 238 N87-13283
- PARAMESWARAN, T.**
Nonlinearity and single shot noise problems in CARS spectroscopy p 104 N87-21174
- PARK, CHUL**
Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630
- PARK, S. K.**
Accelerated convergence for synchronous approximate agreement p 231 N89-18474
- PARKE, ROBERT C.**
FS-111A aircrew use of temazepam during surge operations p 197 N87-25721
- PARKER, D. E.**
Preadaptation to the stimulus rearrangement of weightlessness: Preliminary studies and concepts for trainer designs p 207 N89-12188
- PARKER, JAMES L.**
Mission requirements and aircraft sizing p 39 N88-13317
- PARKER, L. W.**
Spacecraft charging in the auroral plasma: Progress toward understanding the physical effects involved p 98 N87-26949
- PARKINSON, D.**
Progress in the implementation of AGARD AR-144 in motion system assessment and monitoring p 81 N87-23642
- PARKINSON, R.**
The effects of two Carlucci initiatives: concurrency and streamlining on the test and evaluation phase of system acquisitions p 245 N88-20198
- PARKS, ROGER E.**
Development and testing of a predictive methodology for optimization of man-machine interface in future avionics systems p 48 N88-23780
- PARRAG, MIKE**
A look toward the future of complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88-23797
- PARSONS, D.**
Predicting crash performance p 25 N89-18438
- PARTRIDGE, P. G.**
Diffusion bonding of Al-alloys in the solid state p 177 N87-17558
- PASERON, L.**
Diffusion bonding of metals p 179 N87-29646
- PASTRICK, HAROLD L.**
The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87-29647
- PASSERON, L.**
Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358
- PASTRICK, HAROLD L.**
Lethal air defense suppression technology base definition p 234 N87-16004
- PATEL, BALYANTRAI**
Computational weld mechanics p 175 N87-17052
- PATHAK, P. H.**
Uniform geometrical theory of diffraction p 136 N88-11911
- PATZNER, PAUL A.**
Manned air in air combat simulation p 81 N87-23648
- PAULSSON, L.**
Individual predictability of back trouble in 18 year old men: A prospective study during military service p 192 N87-13951
- PAUSOER, H.-J.**
Mission-oriented flying qualities criteria for helicopter design via in-flight simulation p 37 N88-11652
- PAYNE, B. W.**
Re-assessment of gust statistics using CAADRP data p 78 N88-29732

- PAYNE, F. M.**
Flow field surveys of leading edge vortex flows p 167 N89-18621
- PEAKE, D. J.**
Vortex breakdown and control experiments in the Ames-Dryden water tunnel p 161 N88-23127
- PEAKE, DAVID J.**
Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
- PEALAT, MICHEL**
Application of CARS thermometry to a turbulent flame p 104 N87-21175
- PEARCE, ROGER**
Superplasticity: An overview p 111 N87-29642
- PEARSON, J. D. M.**
The chemical interaction of ballistic modifiers in CDB propellant: its effect upon ballistics and stability p 114 N86-26475
- PEDESTARRES, C.**
The use of simulation in the development of the Airbus p 244 N88-20188
- PELEGRI, MARC J.**
Fault tolerant considerations and methods for guidance and control systems [AGARD-AG-289] p 73 N88-10796
- PELLER, H.**
Jet reaction control system for autonomous precision munition p 92 N87-29482
- PELLIEUX, L.**
Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948
- PELOSI, M.**
A study to optimize the CFRP/Al mechanical joint in order to reduce electrical resistance p 154 N89-17695
- PENN, WILLIAM A.**
Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739
- PENNER, H.**
Ignition of high-performance gun ammunition p 116 N86-29077
- PENNIMAN, W. DAVID**
Evaluating for information center planning p 254 N89-11632
- PEREIRA, J. C. F.**
The flow around a squared obstacle p 156 N87-21185
- PEREIRA, JORGE M. N.**
Finite difference methods in recirculating flows p 169 N89-18651
- PEREIRA, JORGE M. N.**
Inherent jitter effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A jitter-lighting scheme p 151 N89-18589
- PERIC, M.**
Solution error estimation in the numerical predictions of turbulent recirculating flows p 170 N89-18656
- PERINELLE, J.**
Description of a water tank facility: Study of a missile at high incidence p 85 N88-23133
- PERRIER, P.**
Accuracy of lift and center-of-thrust measurements at missile control surfaces p 18 N89-16875
- PERKINS, STANLEY C., JR.**
Survey on nonlinear effects p 15 N88-29757
- PERRIER, P.**
General aerodynamic aerothermodynamic concepts for Hermes p 13 N88-13251
- PERRIER, PIERRE**
Utilization of Euler codes in nonlinear aerodynamics p 6 N87-20215
- PERRIER, PIERRE**
Techniques for performance optimization in cruise and manoeuvrability p 39 N88-13321
- PETERS, J. E.**
Alternative fuel spray behavior p 104 N88-29912
- PETERSON, JOHN B., JR.**
High aspect-ratio wings p 85 N88-28859
- PETIAU, C.**
Trends in aeroclastic analysis of combat aircraft p 76 N88-13350
- PETITNOT, J. L.**
Determination of design loads for modern combat aircraft p 42 N88-19457
- PETITNOT, J. L.**
Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433
- PETRIE, J. A. H.**
Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209
- PETRIE, L. E.**
Equipment Antenna systems p 123 N86-27572
- PETRUCCI, M.**
Adaptive systems in operation p 124 N86-27576
- PETRUCCI, M.**
Field artillery gun performances related to single base powder quality p 116 N86-29067
- PETTERNELLA, M. A. D.**
Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956
- PETTY, JAMES S.**
The coming revolution in turbine engine technology p 62 N88-17648

PERSONAL AUTHOR INDEX

- PFISTERER, E.**
Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems p 37 N88-11663
- PFITZNER, MICHAEL**
A 3-D Euler solution for hypersonic Mach numbers p 12 N88-13240
- PHILIPPON, J. P.**
On the possibility of a several kilovolt differential charge in the day sector of a geosynchronous orbit p 99 N87-26953
- PHILLIPS, E. P.**
Preliminary fatigue tests on short-crack specimens p 184 N89-17290
- PICK, JONATHAN C.**
Alignment verification procedures p 184 N89-17291
- PICK, JONATHAN C.**
Long-crack growth rate data: Constant amplitude and FALSTAFF loading p 185 N89-17291
- PICKENS, R. A.**
Communication, Navigation and Surveillance services for the aviation industry: A satellite technology p 26 N87-21896
- PICKETT, A. K.**
Crash simulation and verification for metallic, sandwich and laminate structures p 25 N89-18437
- PIEDECOCO, B.**
Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948
- PIEHLER, J.**
In vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
- PIERQUIN, F.**
Study of the electron beam weldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
- PIETREMENT, J. C.**
Radar simulators p 82 N87-23651
- PIGEAU, R.**
The effect of endogenous alpha on hemispheric asymmetries and the relationship of frontal theta to sustained attention p 208 N88-27701
- PIGEAU, R. A.**
Psychophysiological measures of drowsiness: An estimator of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702
- PINEAU, J. W.**
Biostatistical study of the outward curve of the spine for various reference positions p 191 N87-13943
- PINKUS, ALAN R.**
Night lighting and night vision goggle compatibility p 216 N88-29297
- PINSON, LARRY D.**
Display system image quality p 216 N88-29298
- PINSON, LARRY D.**
Future trends in spacecraft design and qualification p 94 N87-20356
- PITA, G. P. A.**
Processing techniques for correlation of LDA and thermocouple signals p 171 N87-21194
- PITARYS, MARC J.**
Debugging distributed Ada avionics software p 229 N89-18458
- PITT, N. J.**
Glass fibres for transmission in the 8-12 micrometers waveband p 239 N87-13297
- PITTS, JOAN I.**
Grid generation on and about a cranked wing fighter aircraft configuration p 226 N88-29318
- PIZZELLA, VITTORIO**
Electric and magnetic brain activity related to cognitive performance p 199 N88-27692
- PLATZER, MAX F.**
Aerolasticity in axial-flow turbomachines: Volume 1: Unsteady turbomachinery aerodynamics [AGARD-AG-298 VOL 1] p 8 N87-24398
- PLATZER, MAX F.**
AGARD manual on aerolasticity in axial-flow turbomachines: Volume 2: Structural dynamics and aerolasticity [AGARD-AG-298 VOL 2] p 16 N89-10006
- PLISSONNEAU, BERNARD**
Repair of helicopter composite structure techniques and substantiations p 1 N87-20179
- PLITZ, W.**
In vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
- PLUMAT, Y.**
Dynamic analysis of direct television satellite TV-SAT/TDF p 95 N87-20360
- POCOCK, P. V.**
Event-related and steady potential changes in the brain related to workload during tracking p 201 N88-27705
- POINTET, ALAIN**
Avionics and corrosion p 47 N88-13336

PERSONAL AUTHOR INDEX

- POIRIER, J. L.**
Lower back pain in helicopter pilots. Ecopathological factors p 210 N87-13955
The evaluation of vigilance in studies of aeronautical pharmacology p 196 N87-25716
Design and simulated crash validation of a dynamic response recorder p 221 N89-18442
- POIRION, F.**
Measured and predicted responses of the Nord 260 aircraft to the low altitude atmospheric turbulence p 78 N88-29723
- POLGE, ROBERT J.**
A general solution for the synthesis of binary sequences with desired correlation sequence p 130 N87-18743
- POLNIAZSEK, JOSEPH P.**
MMIC T/R modules for the next generation airborne surveillance platforms p 131 N87-18749
- POMMIER, LAURENT**
Role and design of a software engineering data base in the context of an advanced support environment p 231 N89-18485
- POOL, A.**
Determination of antennae patterns and radar reflection characteristics of aircraft [AGARD AG-300-VOL-4] p 124 N86-30931
- POOLE, P.**
Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- POON, C.**
Literature review on the design of mechanically fastened composite joints p 179 N89-17686
Behaviour of mechanically fastened joints in advanced composites p 103 N89-17705
- POPA, A. E.**
Lightwave technology in future radar equipment designs p 240 N87-13304
- POPE, M. H.**
Muscle fatigue in static and vibrational seating environments p 210 N87-13954
- PORCU, SILVIO**
Spontaneous cerebral electrical activity during prolonged hypoglycemia. A quantitative study in humans p 203 N88-27717
- PORLIER, G.**
The effects of hypoxia on P300 and reaction time [DCEM 87 RR-12] p 200 N88-27697
- PORTAT, M.**
The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195
- POST, D.**
Interferometric measurement of strains and displacements in engine components p 178 N87-21196
- POSTEMA, L.**
Implementation of an airborne SAR motion compensation system p 127 N87-18728
- POT, T.**
Fundamental studies on shock wave-boundary-layer interactions in a 3-D channel p 156 N87-21928
- POTTER, J. L.**
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-16867
- POTTER, J. LEITH**
Missiles, fuselage and similar bodies p 85 N88-28858
Missiles, fuselages and similar bodies p 14 N88-28869
- POTTER, K. E.**
Multifunction millimetre-wave radar for all-weather ground attack aircraft p 126 N87-18725
- POVINELLI, LOUIS A.**
Viscous analyses for flow through subsonic and supersonic intakes p 61 N87-24469
CFD validation experiments for internal flows p 168 N89-18635
- POWERS, J. P.**
Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-26477
- POWERS, S. J.**
Design criteria for hardware-in-the-loop simulation facilities p 228 N89-10052
- POWERS, WILLIAM T.**
Plume spectrometry for liquid rocket engine health monitoring p 100 N89-18616
- PRASAD, K. KRISHNA**
Some visualization studies on turbulent boundary layers using modified hydrogen bubble generation p 164 N88-23153
- PRICE, DOUGLAS B.**
Technology development program for twenty-first century aerospace vehicles p 47 N88-23768
- PRICHER, L. S.**
Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27687
- PRICKETT, M. J.**
Microprocessor applications in airborne flight test instrumentation [AGARD AG-160-VOL-18] p 45 N87-21920

- PRIEST, PETER F. M., II**
DARPA's AirLand Battle Management Program and USAF's Tactical Expert Mission Planner (TEMLAR) p 235 N87-24942
- PRIMOT, J.**
Optical imagery across atmospheric turbulence p 242 N89-17721
- PROVOST, M. J.**
COMPASS (Trademark). A generalized ground-based monitoring system p 55 N89-16819
- PRUNER, JAMES R.**
X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
- PUCHER, M.**
Multifunctional requirements for a gearbox secondary power system in a modern fighter aircraft and its components and interface requirements p 174 N86-29243
- PUECH**
Strapdown inertial systems applications for tactical missiles (stand-off missiles) p 91 N87-16008
- PUGH, P. G.**
Picking winners. Parametric cost estimating and project management p 243 N88-20176
- PULJOL, C.**
Precision improvement of transport aircraft drag measurements p 17 N89-16858
- PULESTON, D. J.**
An integrated aircraft navigation and display system utilizing an on-board composite data base p 236 N87-24955
- PUPOLIN, S.**
Impulse response measurements and characterization of wideband VHF radio lines p 146 N89-17736
- PURCELL, S.**
The effect of endogenous alpha on hemispheric asymmetries and the relationship of frontal theta to sustained attention p 208 N88-27701
- PURVIS, BRADLEY**
Fighter pilot performance during airborne and simulator missions. Physiological comparisons p 215 N88-27704
- PURVIS, CAROLYN**
Secondary electron generation, emission and transport. Effects on spacecraft charging and NASCAP models p 98 N87-26950

Q

- QIN, N.**
Numerical experiments with hypersonic flows beneath a delta-wing combination p 12 N86-13238
- QUANDT, P.**
The biomechanical characteristics of the spinal column. Bibliographic review p 191 N87-13941
- QUEMARD, C.**
Comparison of the results of tests on A300 aircraft in the RAE 5 metre and the ONERA F1 wind tunnels p 17 N89-16849
- QUEMARD, J. P.**
Guided stand-off weapons and the evaluation of means for launch calculation. The application of new techniques p 235 N87-16009
- QUINLIVAN, RICHARD PAUL**
Overview of AGARD Lecture Series No. 155. Knowledge-based concepts and artificial intelligence applications to guidance and control p 74 N88-10807
- QUINN, J. M.**
A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747

R

- RAASCH, W.**
Multi-axis vibration tests on spacecraft using hydraulic exciters p 97 N87-20373
- RABOURDIN, P. J.**
Regulatory aspect of crashworthiness p 22 N89-18422
- RADESPIEL, R.**
Grid generation around transport aircraft configurations using a multi-block structured computational domain p 227 N88-29326
Investigation of the accuracy of finite volume methods for 2 and 3-dimensional flows p 170 N89-18661
- RAHLFS, O.**
A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- RAIMONDO, S.**
Impact of nozzle design constraints on test section flow quality p 88 N89-16860
- RAITT, D. I.**
The information needs of scientists and engineers in aerospace p 247 N86-28796
- RAITT, W. J.**
Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at low Earth Orbit (LEO) altitude p 97 N87-26945

REICHMUTH, J.

- RAIZENNE, M. D.**
AGARD engine disc cooperative test programme [AGARD-R-766] p 87 N88-28926
- RAMACHANDRAN, S.**
Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20186
- RAMKUMAR, R. L.**
Recent studies on bolted joints in composite structures p 185 N89-17688
Strength analysis of mechanically fastened composite structures p 186 N89-17692
- RAMSEY, CHARLES L.**
Battle damage repair of composite structures p 3 N87-20189
- RAMSTEIN, P.**
Criteria for the evaluation of range performances in air/air interception p 133 N87-18760
- RANGER, MICHEL**
A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles p 139 N88-19667
- RAPP, HELMUT**
Avionics systems engineering and its relationship to mission software development p 55 N89-18454
- RASMUSSEN, J. E.**
A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747
- RATCLIFFE, S.**
Semi-automatic cross-checking between different copies of the same flight plan p 28 N87-21903
- RATH, W.**
Computer aided sensor placement optimization p 236 N87-24954
- RATINO, D.**
Motion evoked vestibular potentials p 202 N88-27712
- RAUCH, J.**
Computing system configuration for lighter aircraft flight control systems p 79 N89-10832
- RAUCH, T. M.**
Development of a paradigm to assess nutritive and biochemical substances in humans. A preliminary report on the effects of tyrosine upon altitude and cold-induced stress responses p 195 N87-25712
- RAUFMANN, BERND**
Development of a ground conductivity map for the area of the Federal Republic of Germany from measured field-strength contours p 120 N88-10555
- RAVAT, C. J. C.**
Architecture and role of the Sensor Subsystem in future aircraft weapon systems p 47 N88-23770
- RAY, ARUP R.**
Experimental observations of spectral occupancy at HF p 149 N89-18573
- RAY, J. A.**
Engine-airframe integration for rotorcraft. Component specifications and qualification p 31 N87-10071
Engine airframe integration for rotorcraft. System specifications and qualification p 32 N87-10074
- RAYMOND, E. L.**
The application of process modelling to heat treatment of superalloys p 117 N89-15281
- READER, D. C.**
Human limitations in flight and some possible remedies p 217 N89-18011
- READER, D. G.**
Backache in aircrew p 193 N87-13958
- READING, T. E.**
Back discomfort in US Army helicopter aircrew members p 209 N87-13939
- REDDY, P. M.**
Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18444
- REDEKER, G.**
Experiments on the DFVLR-F4 wing body configuration in several European windtunnels p 87 N89-16844
- REED, A. P. C.**
Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18578
- REEVES, A. S.**
International information exchange programmes are necessary p 248 N86-28800
- REEVES, D. L.**
The neuroelectric selection of Naval aviator personnel. An evaluation p 208 N88-27707
- REGAN, D.**
Dissecting the visual and auditory pathways by means of the two-input technique p 199 N88-27690
Relation between VEP and visual function in lesions of the optic nerve and visual pathway p 203 N88-27714
- REGAN, M. P.**
Dissecting the visual and auditory pathways by means of the two-input technique p 199 N88-27690
- REGNIER, JEAN-LOUIS**
A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles p 139 N88-19662
- REICHMUTH, J.**
Particle imaging velocimetry in a low turbulent windtunnel and other flow facilities p 79 N87-21205

REID, D. B.

- REID, D. B.**
Configuration design of a helicopter integrated navigation system p 29 N87-29480
- REID, L. D.**
The application of optimal control techniques to the UTIAS research simulator p 80 N87-23637
- REINA, F.**
Flight Mechanics Panel Symposium on Rotorcraft Design for Operations Technical evaluation report [AGARD-AR-243] p 42 N88-26362
- REIS, L.**
Comparison of finite difference calculations of a large region of recirculating flow near an airfoil trailing edge p 6 N87-20218
- REMER, JAMES H.**
Microwave Landing System (MLS) area navigation: Computed centerline experiments and system accuracy analysis in an RF environment p 26 N87-21891
- REMON, CHRISTIANE**
Simulation with real elements of Exocet anti-ship missiles p 44 N89-10056
- REPUSSEAU, P.**
SPOCK: A tool for real time artificial intelligence p 233 N89-18482
- RESCHKE, M. F.**
Readaptation to the stimulus rearrangement of weightlessness: Preliminary studies and concepts for trainer designs p 207 N89-12188
- RESHOTKO, E.**
Shock-wave boundary layer interactions [AGARD-AG-280] p 155 N86-29173
Matched index laser anemometry systems for flow studies in complex geometries p 171 N88-23145
- RESHOTKO, ELI**
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-16867
- RETELLE, JOHN**
Artificial intelligence and its impact on combat aircraft p 232 N87-24945
- REX, J. A.**
Magnetic and pressure sensors using the compensated polarimetric sensor configuration p 237 N87-13219
- REYDELLET, D.**
Performance of rocket motors with metalized propellants [AGARD-AR-230] p 99 N87-18610
- REYNOLDS, PHILIP A.**
Unusual airborne simulator applications p 82 N87-23656
- REYNOLDS, W. C.**
Fundamentals of turbulence for turbulence modeling and simulation p 159 N88-11971
- RHOADS, F. J.**
Random propagation through the longwave channel p 145 N89-17731
- RHODES, GONNA**
Systems engineering technique p 48 N88-23776
- RHODES, N.**
Modelling the behaviour of additives in gun barrels p 155 N86-29075
- RHYS-JONES, T. J.**
The drag of slender axisymmetric cones in rarefied hypersonic flow p 11 N88-13229
- RIBAUD, Y.**
Design and testing of a small radial turbine for auxiliary power units p 64 N88-17661
- RICCI, WILLIAM**
Weld quality monitor and control system p 179 N87-17062
- RICHARDS, B. E.**
Numerical experiments with hypersonic flows beneath a cone-delta-wing combination p 12 N88-13238
- RICHARDSON, SCOTT M.**
A numerical study of unsteady flow effects in a supersonic compressor cascade p 59 N87-21944
- RICHER, SUZANNE**
Words: Keys or barriers to information transfer p 252 N88-30464
- RICHESON, W. E.**
Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20186
- RICHTER, JUERGEN H.**
Review of recent developments in evaporation ducting assessment p 139 N88-19664
- RICK, K.**
System-theoretical method for dynamic on-condition monitoring of gas turbines p 54 N89-16812
- RIDLEY, NORMAN**
Cavitation and superplasticity p 111 N87-29645
- RIEDELBAUCH, S.**
On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
- RIEGER, M.**
Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 11 N88-13235
- RIEBS, W.**
Aerodynamic heating of missiles p 16 N88-29754
- RIESS, W.**
Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949

- Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 66 N88-17674
- RIETHMULLER, M. L.**
A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148
- RIGBY, M. J.**
Wake and shock interactions in a transonic turbine stage p 57 N87-21930
- RIGHINI, G. C.**
A spherical waveguide multiplexer-demultiplexer p 238 N87-13285
- RIOCHE, S.**
System for SAR missions p 46 N88-11671
- RIOT, PHILIPPE**
Collision probability of cruise missiles flying in formation p 91 N87-16007
- RIVA, G.**
Burning stability of double base propellants p 114 N86-26472
- RIZK, YEHIA**
Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
- RIZZI, ARTHUR**
Applications of Euler equations to sharp edge delta wings with leading edge vortices p 6 N87-20214
Large-scale viscous simulation of laminar vortex flow over a delta wing p 21 N89-18660
- ROBERT, M.**
Instantaneous force measurement on a model subjected to rapid control variations p 90 N89-16872
- ROBERTS, J. H.**
Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-19672
- ROBERTSON, A.**
A study of sources in the human brain associated with stereopsis p 200 N88-27695
- ROBERTSON, ANDREW R.**
Development of precision structural joints for large space structures p 97 N87-20374
- ROBINSON, THOMAS H.**
Multimission airborne radar for the 1990s p 126 N87-18724
- ROBSON, R. R.**
Automatic charge control system for geosynchronous satellites p 98 N87-26960
- ROCH, JEAN LOUIS**
Design and development of an avionics system adapted to helicopter missions p 49 N88-23786
- ROCHE, JAMES C.**
Secondary electron generation, emission and transport: Effects on spacecraft charging and NASCAP models p 98 N87-26950
- ROCK, P. B.**
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses p 135 N87-25712
- ROCKWELL, D.**
Structure of unsteady flows at leading- and trailing-edges: Flow visualization and its interpretation p 164 N88-23154
- RODELLAR, R.**
The advantage of variable geometry for turbine engines at low power p 63 N88-17653
- RODGER, ALAN S.**
Magnetic storm effects on F layer irregularities near the auroral oval p 180 N89-17750
- RODRIGUEZ, O.**
Application of high speed holography to aerodynamic and hydrodynamic three dimensional velocimetry p 161 N88-23144
- ROELKE, RICHARD J.**
Experimental evaluation of a translating nozzle sidewall radial turbine p 64 N88-17656
- ROGERS, H. E.**
Advanced techniques employed in blade cooling research p 64 N88-17659
- ROGO, CASIMIR**
Experimental evaluation of a translating nozzle sidewall radial turbine p 64 N88-17656
- ROMANI, GIAN LUCA**
Squid instrumentation for neuromagnetic study of complex brain activity p 199 N88-27691
Electric and magnetic brain activity related to cognitive performance p 199 N88-27692
- ROONEY, E. C.**
Wind tunnel predicted air vehicle performance: A review of lessons learned p 87 N89-16852
- RORKE, JAMES B.**
Apache for the battlefield of today and the 21st century p 38 N88-11670
- ROSA, L. M.**
Advanced information management and decision making in Airborne Early Warning and Control (AEW&C) warning systems p 251 N87-29517
- ROSAY, JACQUES**
Lessons learned from the use of new command systems p 210 N89-18023

PERSONAL AUTHOR INDEX

- ROSCOE, ALAN H.**
The practical assessment of pilot workload [AGARD-AG-282] p 212 N87-30054
In-flight assessment of workload using pilot ratings and heart rate p 197 N87-30065
- ROSE, DIETER**
Typical joints in a wing structure p 44 N89-17693
- ROSE, K. E.**
A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
- ROSENSTEIN, H. J.**
Analytical and experimental methods used to resolve the aerodynamic results of tests conducted in three test facilities p 17 N83-16850
- ROSENZWEIG, E. L.**
Composite repair material and design development efforts p 3 N87-20188
- ROSFJORD, T. J.**
Nozzle airflow influences on fuel patterning p 105 N88-29916
- ROSHKO, A.**
Technical evaluation report on the Fluid Dynamics Panel Symposium on aerodynamic and related hydrodynamic studies using water facilities [AGARD-AR-225] p 159 N88-11968
- ROSIER, B.**
The study of combustion by means of diode laser spectroscopy p 173 N87-21201
- ROSSOW, G.**
Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows p 170 N89-18661
- ROTH, M.**
A model for an electromotive force generator in the magnetosphere: A source of discrete auroral arcs p 188 N87-26940
- ROTHER, D.**
MM wave propagation and application in military communication systems p 140 N88-19669
- ROTHER, MANFRED**
Typical joints in a wing structure p 44 N89-17693
- ROUND, P.**
Propulsion system technologies for thrust vectoring p 60 N87-22670
- ROURE, L.**
The workplace vibration environment of off-road machines p 209 N87-13936
- ROUSSET, G.**
Optical imagery across atmospheric turbulence p 242 N89-17721
- ROUSTAN, J.**
Aeroelastic analysis of modern transport aircraft p 76 N88-13952
- ROWLAND, M. E.**
Crewstation Information and Development System (CIDS) p 49 N88-23781
- RUBENSTEIN, J. D.**
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949
- RUBESIN, M. W.**
On the validation of a code and a turbulence model appropriate to circular control airfoils p 16 N89-18616
- RUBIN, A.**
Computer models of the spacecraft wake p 98 N87-26948
- RUDNITSKI, D. M.**
CF-18 engine performance monitoring p 69 N89-16767
- RUDY, DAVID H.**
A comparative study and validation of upwind and central-difference Navier-Stokes codes for high speed flows p 169 N89-18647
- RUGER, J.**
Eye safe Raman laser range finder for ground and airborne application p 173 N87-29475
- RUGGIERO, FRANK T.**
Pilot subjective evaluation of workload during a flight test certification programme p 212 N87-30057
- RUIZ, C.**
Interferometric measurement of strains and displacements in engine components p 178 N87-22136
- RUIZ, C. J.**
Correcting ray field failures caused by focusing in an inhomogeneous duct: A critical look at the Gaussian beam method p 139 N88-19663
- RUMSEY, CHRISTOPHER L.**
Parametric study of grid size, time step and turbulence modeling on Navier-Stokes computations over airfoils p 18 N89-18615
- RUPPERT, D.**
A fiber optic gyro strapdown reference system for guided weapons p 93 N88-19560
- RUSSO, G. P.**
Techniques for boundary layer tripping and control p 86 N88-28863
- RUSSO, GIUSEPPE P.**
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-16867
Experiments on boundary layer transition tripping at low Reynolds numbers p 18 N89-16868

PERSONAL AUTHOR INDEX

- RUSO, V.**
A spherical waveguide multiplexer demultiplexer
p 238 N87-13285
- RUTZ, A.**
Bolted joints in composites primary structures
p 186 N89-17698
- RYAN, J.**
New numerical techniques in the method of singularities for application to complex three-dimensional configurations
p 233 N87-20205
- RYDER, J. L.**
A change in system design emphasis: From machine to man
p 49 N88-23782

S

- SACHER, P. W.**
Fundamentals of fighter aircraft design
p 39 N88-13316
The role of experimental investigation and computational fluid dynamics during fighter aircraft design
p 40 N88-13326
- SADEGHI, M. M.**
Crashworthiness design methods applicable at concept stage
p 22 N89-18424
- SAETHER, E. S.**
Strength analysis of mechanically fastened composite structures
p 186 N89-17692
- SAGNES, P.**
Calculation of cascade flow behavior in a dynamic stall regime
p 61 N87-24472
- SAGNIER, PH.**
Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel
p 242 N88-13222
- SALJA, R.**
Selective extinction of a dispersion of single and aggregated layered spheres
p 147 N89-17743
- SALA, G.**
Damage growth in composite bolted joints
p 186 N89-17689
Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading
p 187 N89-17704
The design of helicopter crashworthiness
p 23 N89-18426
- SALAUN, PIERRE**
Three-dimensional flow
p 6 N87-24402
- SALDEN, D.**
Turbine rotor blade measurements using infrared pyrometry
p 171 N87-21188
- SALES, GARY S.**
Specular scatter: A new mechanism for ionospheric backscatter
p 189 N89-17751
- SALMON, CLAUDE J.**
The treatment of grey literature
p 250 N87-26684
- SALMON, J. A.**
Architecture and role of the Sensor Subsystem in future aircraft weapon systems
p 47 N88-23770
- SALUSTRI, CARLO**
Electric and magnetic brain activity related to cognitive performance
p 199 N88-27692
- SAMIRANT, M.**
High-pressure combustion: Comparison of theoretical and actual results
p 118 N86-29078
- SAMUELSEN, G. S.**
The performance of a surrogate blend in simulating JP-4 in a spray fueled combustor
p 106 N88-29926
- SAMWELL, C. J.**
The BAe (Bracknell) automatic detection, tracking and classification system
p 241 N87-29476
- SANDON, P.**
Horizontal study of the incidence of simulator induced sickness among French Air Force pilots
p 204 N89-12175
- SANDOVER, J.**
Vehicle vibration and back pain
p 209 N87-13945
- SANTORU, J.**
Automatic charge control system for geosynchronous satellites
p 99 N87-26960
- SANTUCCI, G.**
Sophisticated integral control methods for use in flight
p 212 N87-29510
- SAPSARD, M. J.**
Recent UK trials in engine health monitoring: Feedback and forward
p 69 N89-16790
- SARIPALLI, K. R.**
Experimental investigation of hover flowfields in water at the McDonnell Douglas Research Laboratories
p 161 N88-23135
- SARPKAYA, TURKUT**
Oscillating flow over bluff bodies in a U shaped water tunnel
p 161 N88-23131
- SARRAIL, D.**
On the possibility of a several kilovolt differential charge in the day sector of a geosynchronous orbit
p 99 N87-26953

- SASAKI, S.**
Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude
p 97 N87-26945
- SAULAIS, JEAN**
Expert system man-machine interface for a combat aircraft cockpit
p 219 N89-18022
- SAVAGE, CYNTHIA A.**
Information technology to facilitate group interaction
p 252 N88-30463
- SAVASKAN, T.**
Wear of high speed roller bearings
p 175 N86-29248
- SAVINI, M.**
Transonic three-dimensional inviscid calculations in turbomachines
p 59 N87-21942
Numerical solution of compressible Navier-Stokes flows
p 166 N89-18618
- SAWCHUK, R. A.**
Nonlinearity and single shot noise problems in CARS spectroscopy
p 104 N87-21174
- SCALES, CHARLES D.**
People, procedures, performance: The keys to improving the development environment
p 245 N88-20197
- SCARFE, W. R.**
Reducing time required for the development of avionic systems
p 244 N88-20185
- SCHADOW, K. C.**
Combustion related shear-flow dynamics in elliptic supersonic jets
p 11 N88-13232
- SCHAEZNER, J.**
Design criteria for multi-loop flight control systems
p 72 N87-21901
Flight test equipment for the on-board measurement of wind turbulence
p 51 N88-29719
- SCHANG, THIERRY**
Real time expert system for onboard radar identification
p 56 N89-18481
- SCHAPER, F. F. J.**
Design requirements for future commercial operations
p 37 N88-11651
- SCHAUBERT, DANIEL H.**
Printed circuit antenna technology
p 153 N87-23867
- SCHEGGI, A. M.**
Fiber optic device for temperature remote sensing
p 237 N87-13280
- SCHOLE, R.**
Evaluation and prediction of back pain during military field service
p 192 N87-13950
Individual predictability of back trouble in 18-year old men: A prospective study during military service
p 192 N87-13951
- SCHELLENBERG, K.**
Welding of aluminum castings
p 177 N87-17068
- SCHELLING, HELMUT**
Typical joints in a wing structure
p 44 N89-17693
- SCHERR, S.**
Status of CFD validation on the vortex flow experiment
p 167 N89-18620
Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows
p 170 N89-18661
- SCHERR, S. J.**
Numerical simulation of the flow field around a complete aircraft
p 8 N87-20231
- SCHERRER, DOMINIQUE**
Influence of the convection on evaporation and combustion of a fuel droplet
p 110 N88-29948
- SCHUEERER, G.**
Solution error estimation in the numerical predictions of turbulent recirculating flows
p 170 N89-18656
- SCHWEIG, G.**
The use of aerodynamic wind tunnel models to prove structural design
p 77 N88-13355
- SCHICK, F. V.**
The use of subjective workload assessment technique in a complex flight task
p 213 N87-30058
- SCHILDT, U.**
Spacecraft qualification using advanced vibration and modal testing techniques
p 96 N87-20368
- SCHINDLER, R.**
Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems
p 37 N88-11863
- SCHIRLE, PATRICK**
Modeling of functional specifications for onboard software: Experience with the Rafale avionics system
p 48 N88-23777
- SCHLUETER, HEINRICH**
Engine condition monitoring: State-of-the-art civil application
p 53 N89-16792
- SCHMATZ, M. A.**
Zonal solutions for airfoils using Euler boundary layer and Navier-Stokes equations
p 6 N87-20219
Status of CFD validation on the vortex flow experiment
p 167 N89-18620
Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems
p 167 N89-18625
- SCHMIDINGER, G.**
Integrated design of structures
p 34 N87-22669

SCHULZE, BERND

- Static aeroelastic considerations in the definition of design loads for fighter airplanes
p 76 N88-13351
- SCHMIDINGER, GERHART**
Interaction between structural considerations and system design in advanced flight controls
p 77 N88-19458
- SCHMIDT, E.**
Transonic blade design on rotational stream surfaces
p 66 N88-17671
- SCHMIDT, M.**
Comparison between inverse designed (IPVD) airfoils and standard series airfoils for high loaded axial turbine nozzle application
p 60 N87-21951
- SCHMIDDEL, HEINZ**
A precipitation scatter experiment at 30 GHz
p 144 N89-17723
- SCHMIT, V. P.**
A study of pilot flight information crossmonitoring performance
p 211 N87-29509
- SCHMITT, V.**
Experiments on the DFVLR-F4 wing body configuration in several European windtunnels
p 87 N89-16848
Some difficulties in the wind tunnel prediction of modern civil aircraft buffeting: Proposed remedies
p 18 N89-16869
- SCHMITZ, D. M.**
New trends in intake/engine compatibility assessment
p 60 N87-24467
- SCHNAKENBERG, D. D.**
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cold-induced stress responses
p 195 N87-25712
- SCHNEIDER-HELMERT, D.**
Multivariate and psycho-physiological functions of DSIP
p 196 N87-25713
- SCHNITTA-ISRAEL, BONNIE**
Increasing the usefulness of AWACS downlink transmissions by semantic compression
p 135 N87-29518
- SCHODL, R.**
Laser 2 focus velocimetry
p 172 N87-21177
Evaluation of L2F-measurements in unsteady turbine flow
p 156 N87-21182
- SCHODDERT, ROLF**
Engine condition monitoring: State-of-the-art civil application
p 53 N89-16792
- SCHOELLER, W.**
GPS: Overview and present status
p 26 N87-21864
- SCHOENE, J.**
Numerical methods for propeller aerodynamics and acoustics at DFVLR
p 65 N88-17668
- SCHOENBERGER, GUIDO A.**
Multivariate and psycho-physiological functions of DSIP
p 196 N87-25713
- SCHOFIELD, CHRISTOPHER**
Canadian forces aircraft condition health monitoring: Policy, plans and experience
p 69 N89-16784
- SCHOUTEN, M. J. W.**
The lubrication of dynamically loaded concentrated hard line contacts: Temperature and pressure measurements
p 175 N86-29247
- SCHRA, L.**
Automated measurement of crack length and load line displacement at elevated temperature
p 165 N88-26656
- SCHRAAK, HELMUT E.**
Aircraft radar antennas
p 134 N87-23861
- SCHREIFER, H. A.**
Experimental investigations on shock losses of transonic and supersonic compressor cascades
p 58 N87-21937
- SCHROEDER, W.**
Packaged fiber optic gyroscopes
p 172 N89-17604
- SCHUCK, W. D.**
Single mode fibers for fiber optic guided missiles: A comparison with graded-index multimode fibers
p 40 N87-13934
- SCHUESSLER, M. SCOTT**
Prototype manufacturing techniques for reducing cost, schedule and technical risk
p 244 N88-20149
- SCHUETZ, WALTER**
Influence of welding flaws on the fatigue strength of electron beam weldments in Ti-Alk V4
p 182 N87-17065
- SCHUFFEL, H.**
Demonstration of FOG M (Fiber Optic Guided Missile) capabilities by means of simulation and effects of proprioceptive feedback on the control
p 83 N89-17609
- SCHULTZ, D. L.**
Wake and shock interactions in a transonic turbine stage
p 57 N87-21130
- SCHULZ, U.**
In board life monitoring system Tornado (OLMOS)
p 52 N89-16785
- SCHULZE, BERND**
Comparison between 2D transonic flutter calculations in the time and frequency domain
p 10 N87-28520

SCHUMMER, G. J.

- SCHUMMER, G. J.**
Electroencephalographic correlates of pilot performance: Simulation and in-flight studies p 208 N88-27711
- SCHUNK, R. W.**
Magnetospheric control of the bulk ionospheric plasma p 187 N87-26309
Giotto-spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947
- SCHURMAN, T.**
Pharmacological approaches to performance enhancement in animals p 190 N87-25715
- SCHWADERER, B.**
PIN-FET preamplifier for high-speed optical transmission systems p 239 N87-13293
- SCHWABORN, D.**
The OFVLR-F5 wing experiment: Towards the validation of the numerical simulation of transonic viscous wing flows p 19 N89-18623
- SCHWARTZ, N.**
Panoramic Cockpit Control and Display System (PCCADS) p 219 N89-18019
- SCHWARTZ, ROBERT S.**
Valvular and congenital heart disease in the aviator p 194 N87-24073
- SCHWARZ, R.**
Crashworthiness of aircraft structures p 24 N89-18436
- SCHWARZ, W.**
Grid generation for an advanced fighter aircraft p 226 N88-29319
Status of CFD validation on the vortex flow experiment p 167 N89-18620
- SCHWEIGER, J.**
The use of aeroelastic wind tunnel models to prove structural design p 77 N88-13355
- SCHWERING, FELIX K.**
Millimeter wave antennas for avionics p 134 N87-23864
- SCIPPA, S.**
Propellant grain design p 116 N87-28595
Propellant grain design p 117 N89-16912
- SCOTT-WILSON, J. B.**
The policy maker looks at information p 247 N86-28794
- SCOTT, M. G.**
Glass fibres for transmission in the 8-12 micrometers waveband p 239 N87-13297
- SCOTT, RANDALL E.**
Air-to-air radar flight testing (AGARD-AG-300 VOL 7) p 141 N88-27406
- SCOTT, W. R.**
Long term possibilities for nondestructive evaluation for US Navy aircraft p 181 N89-17259
- SCRIVENER, C. T. J.**
A study of passage flow through a cascade of turbine blades using image plane holographic interferometry p 118 N87-21203
- SEALS, J. DENNIS**
Functional programming languages and modern multiprocessor architectures: The EMSP example p 231 N89-18480
- SEASHOLTZ, RICHARD G.**
Combined fringe and Fabry-Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility p 118 N87-21183
- SEATON, C. T.**
Nonlinear planar guided wave interactions and devices p 239 N87-13250
Integrated optics optical limiters p 239 N87-13252
- SEGNER, SAMUEL M.**
Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593
Automating the deconfliction of jamming and spectrum management p 152 N89-18596
- SEIBERT, W.**
Mesh generation for industrial application of Euler and Navier-Stokes solvers p 227 N88-29323
- SEIFERT, R.**
MLS: Its technical features and operational capabilities p 26 N87-21892
Computer simulation studies on human control reliability in manual aircraft control: The origin of PIO p 211 N87-21844
The task taxonomy method: A basis for an expert system on human reliability p 207 N37-29506
Modeling strategy for cockpit data management in modern fighter aircraft p 218 N89-18017
- SEIFERT, RUDIGER**
Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man/Machine Interface in Tactical Aircraft Design and Combat Automation (AGARD-AR-249) p 44 N89-12954
- SELIGMAN, J. V.**
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949

SELINCE, GERARD

- Simulation with real elements of Exocet anti-ship missiles p 44 N89-10056
- SELLA, FRANCO**
Interaction between structural considerations and system design in advanced flight controls p 77 N88-19458
- SELLARS, R. J.**
Materials for lighter aircraft p 40 N88-13325
- SELLERS, WILLIAM L. III**
Detailed flowfield measurements over a 75 deg swept delta wing for code validation p 21 N89-18657
- SELVAGGINI, R.**
Measurement of model deformation in wind tunnels p 77 N88-13358
- SEMMES, R. G.**
Efforts toward the validation of a computational fluid dynamics code for analysis of internal aerodynamics p 169 N89-18643
- SENATORE, G.**
Method for predicting performance limits of centrifugal compressors p 66 N88-17677
- SENNETT, MICHAEL S.**
Unconventional approaches to field repair p 3 N87-20190
- SENSBURG, O.**
Integrated design of structures p 34 N87-22669
Static aeroelastic considerations in the definition of design loads for fighter airplanes p 76 N88-13351
- SEROVY, G. K.**
Application of modified loss and deviation correlations to transonic axial compressors (AGARD-R 745) p 62 N88-13344
- SEVE, A.**
Optical imagery across atmospheric turbulence p 242 N89-17721
- SEVENNEC, B.**
Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358
- SEYB, N. J.**
The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21931
- SHA, WILLIAM T.**
Generic corrosion model p 77 N88-13355
- SHAFFER, IRVING S.**
Avionic corrosion p 46 N88-13332
- SHANAHAN, D. F.**
Back discomfort in US Army helicopter aircrew members p 209 N87-13939
- SHANG, J. S.**
Application of the Navier-Stokes equations to solve aerodynamic problems p 7 N87-20225
Numerical simulation of the flow field around a complete aircraft p 8 N87-20231
- SHAPIRO, ALBERT J.**
Design development tradeoffs to achieve a mission effective SOW guidance system p 91 N87-16003
- SHARMA, SURENDRA P.**
Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18639
- SHARPE, W. E.**
Examples of static aeroelastic effects on present combat aircraft projects p 76 N88-13349
- SHAW, J. A.**
A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
Component adaptive grid generation for aircraft configurations p 226 N88-29316
- SHEDDEN, A. C. J.**
The chemical interaction of ballistic modifiers in CDR propellant: Its effect upon ballistics and stability p 114 N86-26475
- SHEETS, DANIEL**
Changes in USAF structural loads requirements p 41 N88-19452
- SHEN, C. Q.**
Measurements of aerodynamic forces on unsteadily moving bluff parachute canopies p 162 N88-23137
- SHEPARD, J.**
The specification and design of a future maritime reconnaissance aircraft p 47 N88-23772
- SHEPHERD, J. T.**
Some approaches to the design of high integrity software p 73 N88-10799
- SHEPHERD, P. A.**
Development and application of a weapons multiblock suite p 168 N89-18633
- SHEPPARD, C. G. W.**
Modelling of CO oxidation in dilution jet flows p 109 N88-29947
- SHEPPARD, DUANE J.**
A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
- SHERBY, OLEG D.**
Bulk forming of superplastic alloys p 111 N87-29644
- SHERRELL, F. G.**
Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816

PERSONAL AUTHOR INDEX

- SHIMSKI, J. T.**
Military aircraft propulsion lubricants: Current and future trends p 113 N86-29249
- SHINGLEDECKER, CLARK A.**
In-flight workload assessment using embedded secondary radio communications tasks p 212 N87-30055
- SHIVELY, ROBERT**
Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034
- SHOHET, H. M.**
Engine-airframe integration considerations for preliminary air vehicle performance analysis p 31 N87-10068
- SHUKITT, B. L.**
Development of a paradigm to assess nutritive and biochemical substances in humans: A preliminary report on the effects of tyrosine upon altitude- and cortisol-induced stress responses p 195 N87-25712
- SHUMAN, B. M.**
Automatic charge control system for geosynchronous satellites p 99 N87-26960
- SHYY, W.**
Numerical models for analytical predictions of combustor aerothermal performance characteristics p 108 N88-29935
- SIBILIA, C.**
Bistability in nonlinear waveguides p 124 N87-13291
- SILET, J.**
The advantage of variable geometry for turbine engines at low power p 63 N88-17653
- SILVA, ANTONIO**
Robust algorithm synchronizes mode changes in fault-tolerant asynchronous architecture p 231 N89-18475
- SIMMONS, B.**
Rates of formation of soot from hydrocarbon flames and its destruction p 107 N88-29933
- SIMON, B.**
Influence of operating conditions on the atomization and distribution of fuel by air blast atomizers p 101 N88-29918
Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 116 N88-29923
- SIMONS, PHILIP H.**
Managing advanced avionic system design p 49 N88-23782
- SIMONSEN, L.**
Visual related accidents: incidents p 216 N86-29249
- SIMOYI, P. SUSAN**
Shock structure measured in a transonic fan using laser anemometry p 57 N87-21926
- SIMPSON, W.**
Vection and the spatial disposition of competing moving displays p 216 N89-12166
- SINCLAIR, P. M.**
Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20204
- SINCLAIR, S. R. M.**
The use of integrative side-arm controllers in helicopters p 220 N89-18024
- SINDONI, O. L.**
Selective extinction of a dispersion of single and aggregated layered spheres p 147 N89-17745
- SINGH, M.**
Giotto-spacecraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947
- SISLE, M. E.**
Design criteria for hardware in the loop simulation facilities p 228 N89-10052
- SISTO, F.**
Stall flutter p 72 N87-24404
- SIVATHANU, Y. R.**
Radiation from soot containing flames p 106 N88-29927
- SJOGREN, J. A.**
Accelerated convergence for synchronous approximate agreement p 231 N89-18474
- SKELLY, JUNE J.**
Fighter pilot performance during airborne and simulator missions: Physiological comparisons p 215 N86-27704
- SKOW, ANDREW M.**
Water facilities in retrospect and prospect: An illuminating tool for vehicle design p 84 N88-23126
Flow visualization study of vortex manipulation on fighter configurations at high angles of attack p 161 N88-23130
- SLISSA, MONIQUE**
Workshops for the design of avionics systems and the development of onboard software p 51 N88-23802
Control of on board software p 55 N89-18452

PERSONAL AUTHOR INDEX

SLOOFF, J. W.
Aircraft drag prediction and reduction. Addendum 1
Computational drag analyses and minimization, mission
impossible?
[AGARD-R-723-ADD-1] p 5 N86-2718*

SMITH, A. M. O.
Technical evaluation report on the Fluid Dynamics Panel
Symposium on aerodynamic and related hydrodynamic
studies using water facilities
[AGARD-AR-225] p 159 N88-11968

SMALLWOOD, G. J.
Nonlinearity and single shot noise problems in CARS
spectroscopy p 101 N87-21174

SMITH, A. M. O.
Technical evaluation report on the Fluid Dynamics Panel
Symposium on aerodynamic and related hydrodynamic
studies using water facilities
[AGARD-AR-225] p 159 N88-11968

SMITH, J.
Accuracy of various wall-correction methods for 3D
subsonic wind-tunnel testing p 89 N89-16863

SMITH, J. C.
Electroencephalographic correlates of pilot
performance. Simulation and in-flight studies p 208 N88-1711

SMITH, J. S.
An assessment of the use of low order panel methods
for the calculation of supersonic flows p 224 N87-20204

SMITH, K.
Fourth generation neurocognitive pattern analysis
system p 198 N88-27686

SMITH, KENT F.
Full scale helicopter crash testing p 23 N89-18428

SMITH, P. K.
The reduction of exhaust signature in solid propellant
rocket motors p 114 N86-26474

SMITH, R. A. C.
A structured approach to weapon system design p 48 N88-23773

SMITH, R. B.
Some approaches to the design of high integrity
software p 73 N88-10799

SMITH, ROBERT E.
Grid generation on and about a cranked-wing fighter
aircraft configuration p 226 N88-29316

SMITH, T. D.
Improved combat performance using relaxed static
stability and a spin prevention system (FBW Jaguar) p 72 N87-22674

SMITH, TREVOR S.
Pumping systems and flow interfaces for rapid response
electronic reheat controls p 65 N88-17665

SNELL, M. B.
Test specimens for bearing and bypass stress
interaction in carbon fibre reinforced plastic laminates p 102 N89-17696

SNELLING, D. R.
Nonlinearity and single shot noise problems in CARS
spectroscopy p 104 N87-21174

SNYDER, B. D.
Recent studies on bolted joints in composite
structures p 185 N89-17688

SNYDER, C. E. JR.
Military aircraft propulsion lubricants. Current and future
trends p 113 N86-29249

SNYDER, D. D.
Design optimization of fighter aircraft p 36 N87-24451

SNYDER, LYNN E.
Forced vibration and flutter design methodology p 183 N89-10016

SOBIECZKY, H.
The DFVLR-F5 wing experiment. Towards the validation
of the numerical simulation of transonic viscous wing
flows p 19 N89-18623

SOBIECZKY, HELMUT
Analytical surfaces and grids p 227 N88-29322

SOEDER, RONALD H.
Summary of investigations of engine response to
distorted inlet conditions p 102 N87-24477

SOFFA, L. L.
Inertia welding of nitralloy N and 18 nickel maraging
250 grade steels for utilization in the main rotor drive shaft
for the AH-64 military helicopter program p 177 N87-17067

SOHN, D.
Structure of unsteady flows at leading and
trailing edges. Flow visualization and its interpretation p 164 N88-23154

SOICHER, 'HAM
Media effects on electronic systems in the high altitude
region p 141 N89-11932

SOJKA, J. J.
Magnetospheric control of the bulk ionospheric
plasma p 187 N87-26939

SOLBACH, KLAUS
EHF multifunction phased array antenna p 131 N87-18752

SOLBACH, KLAUS
Antennas conformal antennas missile
antennas p 114 N87-23862

SORENSEN, REESE L.
Three-dimensional elliptic grid generation for an F-16
p 228 N88-29315

SOTHERAN, A.
High performance turbofan afterburner systems p 105 N88-29922

SOTTAS, G.
Validation of an Euler code for hydraulic turbines p 168 N89-18637

SOTTINI, S.
A spherical waveguide multiplexer demultiplexer p 238 N87-13285

SOWA, M. J.
A statistical analysis of polar meteor scatter propagation
in the 45 to 104 MHz band p 147 N89-17747

SPAUDLING, ARTHUR D.
Effects of noise and interference on system
performance p 149 N89-18576

SPECHT, J.
Aero-engine gears. Manufacturing cracks and their effect
on operation p 174 N86-29239

SPENCER, D. G. JR.
Pharmacological approaches to performance
enhancement in animals p 190 N87-25715

SPETH, J. F.
A new laminar water tunnel to study the transition
process in a plasma layer and in a separation bubble and
a new tool for industrial aerodynamics and hydrodynamic
research p 85 N88-23150

SPEYER, J. J.
Assessing workload for minimum crew certification. Part
1. Static workload analysis and performance analysis p 214 N87-30067

SPIJKERVET, A. L.
Tactical mission planning and management p 235 N87-16006

SPIKES, H. A.
Future trends in helicopter transmission lubricants p 113 N86-29250

SPINONI, MAURIZIO
The use of Aentaka flight simulator for the development
of the AMX weapon system p 62 N87-23650

SPINWEBER, CHERYL L.
Sedating and non-sedating sleeping aids in air
operation p 197 N87-25720

SPITZER, CARY R.
Advanced ATC. An aircraft perspective p 27 N87-21893

SPIVACK, MARK
Numerical simulation of wave propagation in random
media p 234 N89-17742

SPONG, H. L.
Determining the azimuthal distribution of noise and
interference across the HF spectrum at the RAE Receiving
Station, Cobbett Hill, Surrey, England p 153 N89-18597

SPRUNG, CLAUDE
Service life calculator for the M53 turbofan engine p 70 N89-16796

SRINIVASAN, R.
Physical modeling and viscoplasticity studies of the
forging process p 120 N89-15269

SRIVASTAVA, SATISH K.
Tough surface propagation and scatter with applications
to ground wave remote sensing in an ocean
environment p 145 N89-17727

STAEGER, W.
Engine simulator tests. Comparison of calibration and
wind tunnel results p 89 N89-16871

STAFFORD, ROGER
Simulation and design of high precision unit processes
via numerical methods p 120 N89-15273

STALKER, R. J.
Shock tunnels for real gas hypersonics p 84 N88-13223

STAMATIS, A.
Discrete operating conditions gas path analysis p 54 N89-16810

STANEWSKY, E.
Introduction and critical flow phenomena p 14 N88-28870

STANEWSKY, E.
Shock boundary layer interaction p 165 N88-28873

STANEWSKY, E.
Reynolds number effects in transonic flow
[AGARD-AG-303] p 17 N89-16760

STANEWSKY, E.
Physical aspects of viscous simulation and associated
research requirements p 89 N89-16865

STANISLAS, M.
Application of high speed holography to aerodynamic
and hydrodynamic, three-dimensional velocimetry p 163 N88-23144

STANNILAND, D. R.
The use of computational fluid dynamic methods to
assess the effects of model support systems and working
section modifications on the flow around wind tunnel
models p 88 N89-16862

STANNY, R. R.
The neuroelectric selection of Naval aviation personnel
An evaluation p 208 N88-27707

STEWART, P. A. E.

STAPLE, A. E.
Minimization of helicopter vibration through active
control of structural response p 75 N88-11662

STAPLES, K. J.
Progress in the implementation of AGARD-AR-144 in
motion system assessment and monitoring p 81 N87-23642

STAPLETON, S. F.
Evolution of combat performance of the Hawk light
combat aircraft p 34 N87-22668

STARGARDTER, HANS
Fan flutter test p 68 N89-10014

STARKEN, H.
Experimental investigation of a supercritical compressor
rotor blade section p 67 N88-17680

STAUBLI, T.
Structure of unsteady flows at leading and
trailing edges. Flow visualization and its interpretation p 164 N88-23154

STAVROPOULOS, A.
Correlation between EEG abnormal activity and aircraft
accidents. A long term observation p 208 N88-27719

STEEDEN, R. V.
Developments in data acquisition and processing using
an advanced combustion research facility p 79 N87-21192

STEELE, D.
Development of a plenum chamber burner system for
an advanced VTOL engine p 65 N88-17664

STEENEKEM, J. H. M.
Voice interactive systems in severe noise conditions p 136 N87-29529

STEENKEN, WILLIAM G.
Turbofan engine post-instability behavior. Computer
simulations, test validation and application of simulations p 62 N87-24474

STEGEMAN, G. L.
Nonlinear planar guided wave interactions and devices
Integrated optics optical limiters p 239 N87-13290

STEGEMAN, G. L.
Nonlinear planar guided wave interactions and devices
Integrated optics optical limiters p 239 N87-13292

STEGEMAN, G. L.
Three dimensional grid generation for complex
configurations. Recent progress [AGARD-AG-309] p 226 N88-29311

STEGER, JOSEPH
Numerical simulation of the hypersonic flow around thin
vehicles p 11 N88-13254

STEGER, JOSEPH L.
Using the boundary layer equations in three dimensional
viscous flow simulation p 155 N87-20220

STEIN, V.
Physical optics method. Prediction of radar signatures p 137 N88-11474

STEIN, V.
Numerical modeling. Integral equation method p 137 N88-11919

STEINBRENNER, J. P.
Generation of multiple block grids for arbitrary 3D
geometries p 226 N88-29311

STEINBRENNER, JOHN P.
Analysis of the F-16 flow field by a block grid Euler
approach p 6 N87-20217

STEINERT, W.
Experimental investigation of a supercritical compressor
rotor blade section p 67 N88-17680

STEINHAUSER, L.
Bonding of superalloys by diffusion welding and diffusion
brazing p 177 N87-17064

STEINHOFF, JOHN
Algebraic grid generation for fighter type aircraft p 227 N88-29320

STEPHEN, D.
Diffusion bonding in the manufacture of aircraft
structure p 176 N87-17067

STEPHEN, D.
Designing for superplastic alloys p 119 N87-29648

STEPHENS, W. E.
Performance of RF fiber optic links p 240 N87-17061

STERMAN, M. B.
Electroencephalographic correlates of pilot
performance. Simulation and in-flight studies p 208 N88-27719

STERN, J. A.
Closing the man-machine loop. On the use of
physiological measures to affect computer controlled
downward p 211 N87-29407

STERN, JOHN A.
Cognitive task demands as reflected in physiological
measures p 200 N88-27690

STEVENS, N. JOHN
Polar auroral charging of the space shuttle and EVA
astronaut p 94 N87-26962

STEWART, C. D.
Flamelet chemistry modeling of soot formation for
radiation p 106 N88-29928

STEWART, P. A. E.
The application of radiation physics and
photogrammetric techniques for the diagnosis and solution
of mechanical engineering problems and performance
improvements in the development of aero gas turbine
engines at Rolls Royce p 178 N87-21188

STEWART, R. M.

- STEWART, R. M.**
Getting more from vibration analysis p 54 N89-16867
- STOCK, H. W.**
Comparative study of calculation procedures for viscous flows around airfoils in the transonic regime p 166 N89-18617
- STOCKMANN, M.**
Acoustic spectrum analyzer using a linear Braag cell p 239 N87-13295
- STOLIKER, JANICE R.**
Pilot workload assessment: A flight test approach p 218 N89-18014
- STOLLERY, J. L.**
The effects of sweep and buffiness on a glancing shock wave-turbulent boundary layer interaction p 10 N88-13227
- STONE, BARBARA M.**
Sleep and wakefulness: Handbook for flight medical officers, second edition (AGARD AG-70(E)) p 197 N88-11366
- STONE, G.**
Sleep and wakefulness: Handbook for flight medical officers, 2nd edition (AGARD AG-70(E)) p 207 N89-17399
- STONE, G.**
Use of task timeline analysis to assess crew workload p 212 N87-30656
- STONE, M. H.**
Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- STONE, ROBERT H.**
Development of field level repairs for composite structures p 1 N87-20177
- STORM, WILLIAM F.**
EB-111A crew use of benzazepam during stage operations p 147 N87-25727
- STOUT, J.**
CFD applications in design and analysis of the Fokker 60 and Fokker 100 p 19 N89-18629
- STRAND, ARVID**
TV radiography: A promising inspection tool for analysis of composite materials p 170 N87-20180
- STRAWA, ANTHONY W.**
Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630
- STRAWHORNE, BILL**
The application of multi-dimensional access memories to radar signal processing systems p 100 N87-18741
- STRAWN, R. G.**
The prediction of transonic loading on advancing helicopter rotors p 5 N87-20206
- STRAZISAR, ANTHONY J.**
Crew fatigue asymmetry for aerodynamic components: Shock structure measurement in a transonic supersonic tunnel p 147 N87-25729
- STRETTON, W. A.**
The application of intelligent knowledge-based systems to aircraft control p 10 N87-25734
- STRICKER, W.**
Simultaneous temperature measurements with Roman gas micro-analytical systems p 152 N87-25737
- STRUCK, H.**
The relationship between operational flight manoeuvre parameters and design parameters p 41 N88-18452
- STRUNZ, M.**
A new laminar water tunnel: Study of the transition process of a flat plate and of a separation bubble and a new type for industrial aerodynamics and hydrodynamic research p 45 N88-18455
- STUBBEN, MARK A.**
ATC: The impact of flight automation on pilot workload p 201 N89-18033
- STUBERT, B.**
Computation of transonic 3D cascade flow and comparison with experiments p 20 N89-18451
- STUCKENBERG, NORBERT**
Optimal delivery of sensory balance in flight control systems using automatic observers p 14 N88-18004
- STURM, RICHARD J.**
CMC: A new materials and their impact on system performance p 152 N89-18457
- SUN, M. E.**
Experiments with free stream turbulent composite grids p 227 N88-21424
- SUIT, WILLIAM T.**
Technology development program for twenty-first century aircraft engines p 17 N88-20164
- SULLIVAN, THOMAS J.**
Aerodynamic performance of a cascade model of a free stream subjected to p 45 N88-18456
- SUNG, C. H.**
Experiments and code validation for turbulent flows p 22 N89-18456
- SUTTON, ALFRED G.**
Integrated multidisciplinary targeting p 247 N87-24347

- SUTTON, G. R.**
Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- SUTTON, KENNETH**
Overview of CFD methods and comparison with flight aerothermal data p 21 N89-18663
- SWADLING, S. J.**
Diffusion bonding in the manufacture of aircraft structure p 176 N87-17057
- SWAIN, M. H.**
Preliminary fatigue tests on short-crack specimens p 184 N89-17290
- SWEENEY, D. M. C.**
Suggested plastic replica method p 185 N89-17291
- SWEENEY, D. M. C.**
Simulator induced sickness among Hercules aircrew p 204 N89-18176
- SWIERSTRA, SIP**
Next generation of control techniques: advanced TMA p 27 N87-21869
- SWIHART, DONALD**
Integration of advanced safety enhancements for F-16 terrain following p 56 N89-18472
- SWITHENBANK, J.**
Three dimensional gas turbine combustor modelling p 108 N88-29937
- SWOLINSKY, M.**
Flight test equipment for the on-board measurement of wind turbulence p 51 N88-29719
- SYED, K. J.**
Flamelet chemistry modeling of soot formation for radiation p 106 N88-29724
- SZECZENI, EDMOND**
Understanding fan blade flutter through linear cascade aeroelastic testing p 9 N87-24407
- SZODRUCH, J.**
Delta wing configurations p 13 N88-28860
- SZODRUCH, JOACHIM**
Vortex formation over delta double-delta and wave rider configurations at supersonic speeds p 12 N88-17242

T

- TAIG, IAN C.**
Starting the problem: The step before FEM modelling p 182 N87-16476
- TAIG, IAN C.**
Modelling for the finite element method p 182 N87-16479
- TAILIBERT, PATRICK**
How to use a PEG-LOG for expert system programming p 225 N88-10818
- TAN, C. S.**
Calculations of inlet distortion induced compressor outflow instability p 61 N87-24470
- TANAKA, WAYNE H.**
Considerations in utilizing IR signature p 241 N87-1814
- TANENHAUS, MARTIN E.**
Digital simulation techniques for joint game phenomena p 226 N88-10817
- TANNEHILL, R. S.**
Neurophysiological predictors of accurate visuomotor performance p 231 N88-27706
- TAPE, R. F.**
Engine system technologies for thrust vectoring p 60 N87-25677
- TASK, H. LEE**
Vision through aircraft display windows p 219 N88-29284
- TAUTZ, M.**
Display system image quality p 216 N88-29284
- TAUTZ, M.**
Computer models of the spacecraft wake p 98 N87-25648
- TAYLOR, J.**
An interim comparison of operational CG records in turbulence on small and large civil aircraft p 74 N88-29429
- TAYLOR, M. M.**
Layered processing of man-machine interaction with computers p 106 N87-29434
- TAYLOR, R. G.**
NDE of welded beam welded joints: micro focus x-ray method p 174 N87-18453
- TAYLOR, R. G.**
Found for optimum AGARD approach and actions p 181 N89-17290
- TAYLOR, R. M.**
The optical propagation and information management p 241 N87-24347
- TEAGUE, C. C.**
A new global survey of aircraft engine noise p 146 N89-18470
- TEKKAYA, A. E.**
Endo-vent simulation of dental forming processes p 106 N89-18470
- TENNESSENS, U. ANUREJ**
Modeling the effects of engine and aerodynamic on fast frequency response M and N-PK systems p 146 N89-18469

PERSONAL AUTHOR INDEX

- TENNYSON, R. C.**
Study of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18474
- TERRELL, T.**
Modelling of deformation and microstructural changes in P.M. Rene 95 under isothermal forging conditions p 119 N89-17763
- TERRANDO, GIANFRANCO**
A man-machine interface solution: The EAP glare shields p 219 N89-18018
- TERRET, CLAUDE**
Measurement and modeling of 36 GHz sea reflection phenomena p 145 N89-17730
- TESCHE, F. M.**
Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overvoltage line responses p 151 N89-18590
- TESTER, H. M.**
System considerations for integrated machinery health monitoring p 70 N87-15804
- THART, W. G. J.**
Patch repair of corroded aircraft skin areas p 3 N87-20187
- THAYER, JEFFREY S.**
Polar auroral charging of the space shuttle and EVA astronauts p 94 N87-20962
- THE, N. G.**
On the thermal behaviour of the flame during the interior ballistic cycle of propellant guns p 117 N88-29670
- THEIMER, P.**
The advantage of a thrust rating concept used on the RB199 engine p 70 N89-18465
- THEISSEN, M.**
Closing the man-machine loop: On the use of physiological measures to affect computer controlling devices p 211 N87-25667
- THIBAUD, F.**
Validation of an engine code for hydraulic turbines p 146 N89-18477
- THIEL, K. H.**
PFS: Overview and present status p 24 N87-25663
- THIEL, TH.**
Repair procedures for composite parts on the aircraft p 1 N87-20177
- THIEMANN, H.**
Glofto spacecraft charging: How to impact generated plasma in the presence of dielectric materials p 10 N87-25667
- THOMA, W. K.**
Relationship between background and flying duty time and crop pilots demonstrated by a flying wing p 10 N87-25667
- THOMAS, DIETER**
Speed control of a missile with a variable surface-to-skin propulsion p 10 N87-25667
- THOMAS, JAMES L.**
A comparative study and validation of ground and orbital deflection losses for a space-based missile p 10 N87-25667
- THOMAS, O.**
Flow velocity measurement using a laser Doppler velocimetry p 10 N87-25667
- THOMAS, S. D.**
Transonic Navier-Stokes wing analysis using a finite approach: Evaluation of solution methods and validation p 10 N87-25667
- THOMPSON, B. E.**
Comparison of test and numerical calculations of the flow region of reconfiguring flow field and fluid flow p 10 N87-25667
- THOMPSON, D. C.**
A study of the changing measurement of wind speed and space shuttle orbital reentry at the William Orbit (EO) altitude p 10 N87-25667
- THOMPSON, J. W. JR.**
An overview of the application of standard measurement uncertainty methodology to propulsion testing p 10 N87-25667
- THOMPSON, JOE F.**
Composite grid generator for aircraft configurations with the FACET code p 201 N88-29429
- THOMPSON, JOSEPH F.**
Three dimensional grid generation for complex configurations: Recent progress for complex (AGARD AG-48) p 201 N88-29429
- THORNTON, V. DARRYL**
Statistical techniques applied to analysis of airport configurations p 234 N89-17291
- THORP, G. P.**
Considerations for designers of cases for small solid propellant rocket motors p 106 N87-29434
- THORP, G. P.**
Considerations for designers of cases for small solid propellant rocket motors p 106 N87-29434
- THRANE, E. V.**
Propagation of state in the case of modeling and prediction of HIF propagation p 122 N88-25666
- THRANE, E. V.**
Propagation of the case in the case of modeling and prediction of HIF propagation p 122 N88-25666
- THRASHER, DORWOOD I.**
Study of the effect of solid propellant rocket motor grain design on the rocket motor p 10 N87-25667

PERSONAL AUTHOR INDEX

- State of the art of solid propellant rocket motor grain design in the United States p 117 N89-16914
- TICHENOR, D. A.**
Sapphire fiber optic temperature probe p 241 N87-21136
- TILE, M.**
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949
- TILLMAN, PETER R.**
Multi-level parallel processing for very high performance real-time database management p 254 N89-18478
- TISCHLER, MARK B.**
Modeling XV-15 tilt-rotor aircraft dynamics by frequency and time-domain identification techniques p 11 N88-11657
- TISCHLER, V. A.**
Recent studies on bolted joints in composite structures p 105 N89-17688
- TJELTA, TERJE**
An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave links p 138 N88-19654
A review of the role of surface reflection in multipath propagation over terrestrial microwave links p 138 N88-19655
Refractive index meteorology and fading in line-of-sight transmission paths p 140 N88-19656
- TJONNELAND, E.**
Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653
- TOBER, GUSTAV**
Ultrasonic testing techniques for diffusion-bonded titanium components p 179 N87-17061
- TOBIAS, LEONARD**
A time-based concept for terminal-area traffic management p 27 N87-21895
- TODD, G. R.**
Development and application of a weapons multiblock suite p 158 N89-18633
- TOENSKOETTER, H.**
Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
- TOERNKVIST, GÖSTA**
Design loads for Swedish military aircraft in a twenty years perspective p 42 N88-19456
- TOGNACINI, R.**
Validation of a multi-block Euler flow solver with propeller upstream flows p 20 N89-18644
- TOLE, J. R.**
In-flight assessment of workload using instrument scan p 213 N87-30062
- TOMAINÉ, ROBERT L.**
The influence of operational requirements on LHX concept formulation p 37 N88-11650
- TOMLINSON, B. N.**
Simulator motion characteristics and perceptual fidelity p 87 N87-23639
- TONINI, R.**
Some development trends in light ground attack aircraft p 34 N87-26666
- TORRES, B. W.**
Switches for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18542
- TORRES, MANUEL**
Repair of helicopter composite structure techniques and substitutions p 1 N87-20179
- TOSCANO, R.**
Selective extinction of a dispersion of single and aggregated layered spheres p 147 N89-17243
- TOURNIER, C.**
Water tunnel measurements by an electrochemical method p 163 N88-23146
- TOWNE, CHARLES E.**
Viscous analyses for flow through subsonic and supersonic intakes p 51 N87-24469
- TRABER, J.**
Pharmacological approaches to performance enhancement in animals p 140 N87-25715
- TRABOCCO, R. E.**
Composite repair material and design development efforts p 3 N87-20188
- TRAK, D. C.**
Preparation and properties of infrared transmitting heavy metal fluoride glass optical fibers p 234 N87-13296
- TRIGARI, S.**
A spherical waveguide multiplexer demultiplexer p 218 N87-13254
- TRILLO, S.**
Nonlinear ellipse rotation in a low turbulence optical fiber p 238 N87-13282
- TROLLINGER, J. D.**
Laser applications in flow diagnostics p 173 N89-12849
- TROTTER, G.**
An investigation of steep descent guidance for vertically guided submunitions p 42 N88-19555
- TROUP, J. D. G.**
Epidemiology of the driver's back p 141 N87-13933

- Measurements of change of stature in the assessment of static and dynamic spinal loading p 193 N87-13957
- TROUVE, A.**
Flame front modeling of turbulent premixed flames p 109 N88-29942
- TROY, R.**
Assessment of software quality for the AIRBUS A310 automatic pilot p 74 N88-10804
- TRUBERT, J. F.**
Gas analysis for the investigation of the combustion of double base propellants and HMX p 115 N86-26478
- TRUCHOT, A.**
Design and analysis of solid rocket motor nozzles p 101 N89-16908
Design and analysis of solid rocket motor internal insulation p 101 N89-16915
Overall optimization of solid rocket motor p 102 N89-16916
- TRUCHOT, ANDRE**
Design and sizing of solid rocket nozzles p 100 N87-28591
Design and sizing of internal thermal insulators for solid propellant rocket engines p 116 N87-28598
Comprehensive optimization of solid propellant rocket engines p 116 N87-28599
- TSANG, PAMELA S.**
The effects of display control I/O compatibility and integrality on dual-task performance and subjective workload p 211 N87-29509
- TSE, D.**
Flow characteristics of a model annular combustor p 106 N88-29924
- TSEUNG, A. C. C.**
Intermodulation interferences in radio systems p 152 N89-18545
- TUNCER, N.**
The information scene in Turkey p 249 N87-26676
- TUNG, C.**
The prediction of transonic loading on advancing helicopter rotors p 5 N87-20206
- TUNSLLEY, J. K. E.**
The use of simulated synthetic aperture radar signals of ships in the development of an automatic ship classification system p 132 N87-18758
- TUREK, ROBERT O.**
Stars, polygons and clusters p 250 N87-29511
- TURNER, H. B.**
Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13287
- TURPIN-INVERNON, CHRISTOPHE**
Avionics and corrosion p 47 N88-13335
- TURRA, S.**
Analysis of possible transmission arrangements applicable for driving single or twin counterrotating fans on propfan engines p 66 N88-17670
- TURTLE, JOHN P.**
Balloon measurement of soft low frequency TE and TM atmospheric noise p 148 N89-18547

U

- UDD, E.**
Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276
- UECER, A. S.**
Application of modified lusk and devolish correlations to transonic axial compressors p 42 N88-13344
- UHLHORN, R. W.**
Fiber optic buses and networks for advanced avionics architectures p 52 N89-17036
- ULRICH, D.**
Crash simulation and verification for metallic sandwich and laminate structures p 25 N89-18437
- URLITS, P. J. M.**
Tactical mission planning and management p 235 N87-16006
- URSCHER, WILLIAM**
Integration of advanced safety enhancements for F-16 terrain following p 46 N89-18472
- URUNDUL, E.**
The information scene in Turkey p 249 N87-26676
- USCINSKI, B. J.**
Intensity fluctuations due to moving point sources p 236 N89-17737

V

- VACHERY, V.**
Air navigation services and aircraft around the year 2000 p 25 N87-21883
- VADROT, R.**
Simulation of fly-by-wire control for civil transport aircraft at the French Centre d'Essais en Vol p 81 N87-23647
- VAERMAN, J.**
Short term developments in non-destructive evaluation applicable to turbine engine parts p 181 N84-17254

VANINGEN, J. L.

- VALENTE, A.**
Rapid prototyping of complex avionic system architectures p 47 N88-14771
- VALENTIN, R.**
Space-diversity effects on line of sight propagation paths p 149 N89-19670
- VALERA, J. D.**
Integrated optics optical limiters p 239 N87-13292
- VALLOT, L.**
Configuration design of a helicopter integrated navigation system p 29 N87-29480
- VALOT, CL.**
Study of anticipation mechanisms in the aeronautics environment p 247 N87-24505
- VAMPOLA, A. L.**
Thick dielectric charging on high altitude spacecraft p 99 N87-26963
- VANAUTRYVE, G. M.**
The ideal information system? What does the user really want? p 248 N86-28801
- VANDALSEM, WILLIAM R.**
Using the boundary layer equations in three dimensional viscous flow simulation p 155 N87-20222
- VANDEGOOR, A. J.**
Built-in self test p 154 N89-19468
- VANDEGRAAFF, R. C.**
Considerations concerning the assessment of pilot workload for complex task conditions p 218 N89-18015
- VANDEGRAAFF, RENE C.**
Investigation of workload measuring techniques: A theoretical and practical framework p 214 N89-30564
- VANDEMEY, P.**
Stability of nitrocellulose propellants assessed via thermal decomposition and alteration of the stabilization composition p 114 N86-26473
- VANDENBERG, B.**
Three-dimensional shear layer experiments and their use as test cases for calculation methods p 158 N87-22146
- VANDENBOSCH, P.**
An investigation of simulator sickness and an electromyostagmographic study p 408 N89-12141
- VANDENBRAEMBUSSCHE, RENE**
Optimization of a transonic flow radar wind defuser p 64 N87-21474
- VANDEREEFT, P. J. J.**
Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23651
- VANDERLUGT, J.**
A mixed Eulerian-Lagrangian finite element method for simulation of thermo-mechanical forming processes p 20 N84-15215
- VANDERVAART, J. C.**
Active and passive side stick controllers: Tracking task performance and pilot control behaviour p 220 N89-18076
- VANDERVOOREN, J.**
Matrix transonic potential flow calculations about transport aircraft p 4 N87-20208
- VANDERWEES, A. J.**
Matrix transonic potential flow calculations about transport aircraft p 5 N87-20208
- VANDERWEEKEN, A. J. P.**
Acquisition of gust statistics from AIDS recorded data p 190 N88-23733
- VANDRANEN, W. N.**
Automation strategy and results for an airbase command and control information system (ABICUS) p 250 N87-13452
- VANDRIEL, N.**
Development of an airborne facility for advanced avionics research p 51 N88-23407
- VANE, MALCOLM R.**
The use of simulated synthetic aperture radar signals of ships in the development of an automatic ship classification system p 132 N87-18758
- VANES, JACK**
Battle damage repair of composite structures p 3 N87-20187
- VANEVEPY, D.**
Impact of nozzle design constraints on test section flow quality p 84 N89-16850
- VANGAASBEEK, JAMES**
MBS simulation facilities applied for rotorcraft research p 84 N88-11645
- VANGENT, R. N. K. W.**
Demonstration of FOG (Fiber Optic Guided Missile) capabilities by means of simulation and effects of preceptive feedback on the control p 93 N89-17609
- VANHORN, J. R.**
Experimental investigation of hover flowfields in water at the McDonnell Douglas Research Laboratories p 161 N88-21134
- VANINGEN, J. L.**
Classical separation: trailing edge flows and buffeting p 14 N88-28874

VANLEEUEWEN, H. J.

- VANLEEUEWEN, H. J.**
The lubrication of dynamically loaded concentrated hard line contacts. Temperature and pressure measurements p 175 N86-29247
- VANLEEUEWEN, H. P.**
Automated measurement of crack length and load line displacement at elevated temperature [AGARD-R-751] p 183 N86-26695
- VANNICOLA, VINCENT C.**
Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739
- VANPATTEN, R. E.**
Fighter design for human load limits p 41 N88-19451
- VANROESSEL, H. J.**
Dynamic stability of hypersonic conical lifting vehicles according to Newton-Busemann theory p 75 N88-13247
- VANSINTUYEN, J. S.**
Basic characteristics of FM-CW radar systems p 131 N87-18753
FM-CW radar remote sensing of hydrometeors p 144 N89-17725
- VANVLIET, M.**
Seat isolation system p 193 N87-13960
- VANWANDERHAM, M. C.**
Relationships of nondestructive evaluation needs and component design p 180 N89-17256
- VAQUEZ, PHILIPPE**
Trend monitoring of a turboprop engine at low and mean power p 54 N89-16801
- VARADAN, VASUNDARA V.**
Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745
- VARADAN, VIJAY K.**
Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745
- VARENNES, SERGE**
How to use PROLOG for expert system programming p 225 N88-10816
- VATOUX, S.**
Progress in optical fiber gyroscopes using integrated optics p 238 N87-13283
- VEATCH, D. W.**
Analogue signal conditioning for flight test instrumentation [AGARD-AG-160-VOL-17] p 45 N86-29816
- VEESER, L. R.**
Optical fiber sensor for the measurement of pulsed electric currents p 238 N87-13281
- VEINOT, D. E.**
Wear of high speed roller bearings p 175 N86-29248
- VELGER, MORDEKHAI**
Head-mounted spatial instruments. Synthetic reality or impossible dream p 206 N89-12184
- VENKATYA, V. B.**
The use of the finite element method p 182 N87-16380
Recent studies on bolted joints in composite structures p 185 N89-17688
Strength analysis of mechanically fastened composite structures p 186 N89-17692
- VENNERI, SAMUEL L.**
Future trends in spacecraft design and qualification p 94 N87-20356
- VERDIN, D.**
Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959
- VERDON, JOSEPH M.**
Linearized unsteady aerodynamic theory p 8 N87-24399
- VERNOTDESROCHES, L.**
A numerical model of directional solidification of cast turbine blades p 121 N89-15277
- VEUILLOT, J.-P.**
Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946
- VIDULICH, MICHAEL A.**
The effects of display control I/O compatibility and integrality on dual-task performance and subjective workload p 211 N87-29508
- VIEGAS, J. R.**
On the validation of a code and a turbulence model appropriate to circular control airfoils p 18 N89-18616
- VIEILLARD, A.**
Implication of engine performance monitoring for the aircraft manufacturer p 53 N89-16794
- VIELLEFOND, H.**
Lower back pain in helicopter pilots. Etiopathological factors p 210 N87-13955
The evaluation of vigilance in studies of aeronautical pharmacology p 196 N87-24416
The effect of acetylcholine on the vestibulo-ocular reflex in humans p 196 N87-251
- VIGNAU, H.**
The advantage of variable geometry for turbine engines at low power p 61 N88-17653

VIKMANIS, MARIS M.

- Advances in workload measurement for cockpit design evaluation p 216 N89-18016
- VILAR, E.**
Identification of microwave line-of-sight multipath components p 139 N88-19665
- VILLEDIEU, PIERRE**
Control of on-board software p 55 N89-18452
- VIRTUANI, GIUSEPPE**
A129 advanced solutions for meeting today's combat helicopter requirement p 38 N88-11669
- VIVANCOS, ANTOINE**
Utilization of EMICAT for the development of aerospace expert systems p 56 N89-18483
- VLEGHERT, J. P. K.**
Measurement uncertainty of the AGARD/PEP uniform engine test program p 71 N89-16853
- VOELCKERS, U.**
Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897
A rule-based system for arrival sequencing and scheduling in air traffic control p 29 N88-10815
- VOERSMANN, P.**
Flight test equipment for the on-board measurement of wind turbulence p 51 N88-29719
- VOGAS, M. S.**
Correcting ray field failures caused by focusing in an inhomogeneous duct. A critical look at the Gaussian beam method p 139 N88-19663
- VOGLER, LEWIS E.**
Measurement, modeling and simulation of LOS microwave channels p 146 N89-17734
- VOHY, T.**
Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433
- VOLKERS, D. F.**
CFD applications in design and analysis of the Fokker 50 and Fokker 100 p 19 N89-18629
- VOLLMEERS, H.**
Simulation of three-dimensional transonic flow with separation past a hemisphere cylinder configuration p 8 N87-20230
- VOLPI, A.**
Burning stability of double-burne propellants p 114 N86-26472
- VONGIERKE, H. E.**
Fighter design for human load limits p 41 N88-19451
- VONGIERKE, HENNING E.**
Human crashworthiness and crash load limits p 25 N89-18439
- VONTEIN, VOLKER**
Reasons for increasing development cost of rotary wing aircraft and ideas to reverse the trend p 254 N88-20179
- VOOGT, H.**
CFD applications in design and analysis of the Fokker 50 and Fokker 100 p 19 N89-18629
- VORNBERGER, A.**
Solution on unstructured grids for the Euler- and Navier-Stokes equations p 168 N89-18636
- VOSS, P.-H.**
Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a bistatic radar p 147 N89-17748
- VU, B. DANG**
Simulation of an integrated flight/fire control system during air-to-ground gunnery attack p 34 N87-22672
- VUILLET, A.**
New aerodynamic design of the fenestron for improved performance p 37 N88-11664

W

- WAAS, M.**
On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N86-29070
- WABNITZ, S.**
Nonlinear ellipse rotation in a low-birefringence optical fiber p 238 N87-13282
- WADA, BEN K.**
Structural qualification of large spacecraft p 95 N87-20361
- WADE, C. A.**
Progress with multiplexed sensor arrays based on reflection at spliced joints between sensors p 237 N87-13278
- WADHAM, P. N.**
The effects of electrostatic discharge phenomena on Telesat's domestic communications satellites p 99 N87-26958
- WAERSTED, M.**
Musculo-skeletal illnesses among workers exposed to low intensity work load of long duration p 191 N87-13949
- WAGOONER, C. A.**
An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in fluids p 55 N89-16818

PERSONAL AUTHOR INDEX

- WAGNER, B.**
Status of CFD validation on the vortex flow experiment p 167 N89-18620
- WAGNER, DOUGLAS A.**
Gear systems for advanced turboprops p 65 N88-17667
- WAGNER, H. GG.**
The influence of pressure on soot formation p 107 N88-24934
- WAGNER, M.**
Acquisition and processing of non-stationary pressure measurements in studies of air intake distortion p 178 N87-21141
- WAGNER, WALTER**
The MBB test strategy and tool set for software and system integration p 230 N89-18463
- WAGONER, W. R.**
Crewstation Information and Development System (CIDS) p 49 N88-23781
- WAI, J. C.**
Calculations for a generic fighter at supersonic high-alt conditions p 33 N87-20226
- WAINWRIGHT, W. A.**
Flight test evaluation of crew workload. Part 1. Aircraft certification for a minimum crew of two pilots p 213 N87-30063
- WAKE, ALISON J.**
Hypersonic aerodynamics. Applications for HOTOL p 13 N88-13252
- WAKLEY, IAN**
Multi-level parallel processing for very high performance real-time database management p 254 N88-18478
- WALFISCH, JORAM**
A diffraction based theoretical model for prediction of UHF path loss in cities p 139 N88-19661
- WALKER, S. D.**
Wide bandwidth long distance fibre-optic communication systems p 240 N87-13300
- WALLACE, DEAN**
Microelectronics the next fifteen years p 154 N88-23792
- WALLACE, R.**
Acquisition and analysis of dynamic rotating machinery data p 178 N87-21190
- WALLACE, W.**
AGARD Corrosion Handbook. Volume 1. Corrosion causes and case histories [AGARD-AG-278-VOL-1] p 110 N86-16374
- WALLIS, R. A.**
The application of process modelling to heat treatment of superalloys p 112 N89-15281
- WALSH, JOHN**
Rough surface propagation and scatter with applications to ground wave remote sensing in an ocean environment p 145 N89-17727
- WALTROP, P. J.**
Hypersonic airbreathing propulsion. Evolution and opportunities p 62 N88-13731
- WANG, QIANG**
Jamming and electronic countermeasures p 151 N89-18586
- WANHILL, R. J. H.**
Patch repair of corroded aircraft skin areas p 3 N87-20191
Microstructural examination of core programme material p 184 N89-17289
- WARBER, CHRIS R.**
Lightning generation of low-frequency TE atmospheric noise p 148 N89-18568
- WARD, A. D.**
Three generations of software engineering for airborne systems p 230 N89-18465
- WARD, JOHN J.**
Integrating avionics sensor signals for tactical aircraft p 46 N87-29519
- WARD, K. D.**
U-band multipath propagation over the sea surface p 145 N89-17729
- WARD, L. C.**
The RAE experimental data base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250
- WARDLAW, A. B., JR.**
A second order Godunov method for tactical missiles p 233 N87-20211
- WARDLAW, ANDREW B., JR.**
Space marching Euler solvers p 15 N88-29759
- WARFIELD, M.**
Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 168 N89-18638
- WARNER, F. NEAL**
A sequential adaptation technique and its application to the Marx 12 IFF system p 128 N87-18735
- WARRINGTON-KEARSLEY, B. P.**
A review of the NDMC back care education programme p 192 N87-17752
- WATANABE, S. F.**
Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276

PERSONAL AUTHOR INDEX

- Optical quadrature demodulator for coherent detection and sensor applications p 234 N87-13247
- WEATHERILL, N. P.**
A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
Component adaptation and generation for aircraft configurations p 226 N88-29316
- WEBB, P. H.**
Interferometric measurement of strains and displacements in engine components p 178 N87-21196
- WEBSTER, RICHARD T.**
Lowest monolithic beamforming components for radar p 141 N87-18750
- WEDEKIND, G.**
Integration of aerodynamic performance stability and control requirements into the design process of modern variable geometry aircraft configurations p 9 N87-24446
- WELLS, D. J.**
Wind tunnel experiments on aerodynamic models for the assessment of computational flow methods p 14 N88-18614
- WEEKS, THOMAS M.**
A 2-D integrating advanced technologies for tomorrow's air combat p 34 N87-22671
- WEIDEL, M.**
Flow control devices p 220 N89-18027
- WEILAND, CLAUUS**
A 3-D Euler solution for hypersonic Mach numbers p 12 N88-15249
- WEIMER, DAN**
Unsteady wind tunnel and in situ measurements at an airfield location in the European sector p 183 N88-17752
- WEINBERG, H.**
The interaction of thalamic cortical systems in the 40 Hz traveling response p 159 N88-27634
A study of sources in the human brain associated with stereopsis p 200 N88-27095
- WEINSTEIN, LEONARD M.**
Flow measurements in a water tunnel using a holographic interferometric velocimeter p 152 N88-21147
- WEISS, MARC S.**
Elastic potential of stress of impact acceleration experiments p 201 N88-27724
- WEISSNER, R.**
Requirements and criteria for the passive safety of automobiles p 271 N89-18440
- WENDRZYCKI, R. D.**
A study of the potential benefits associated with the development of a distributed helicopter transmission system p 112 N88-29242
- WENDT, J. F.**
European hypersonic wind tunnels p 84 N88-13221
- WENTWORTH, STANLEY E.**
Conventional approaches to fluid input p 1 N87-29140
- WERLE, H.**
The ONERA water tunnel test facilities for flow visualization of aerodynamic and naval domains p 162 N88-29139
- WERLE, P.**
Simulation of a jet deflection system with the aid of the Euler equations p 164 N87-20212
- WESTGAARD, R. H.**
Musculoskeletal stresses among workers exposed to low intensity work load of long duration p 191 N87-19549
- WETZEL, W.**
On the numerical simulation of a three-dimensional hypersonic flow p 10 N88-13217
- WEY, E.**
A computer program simulating the hot forging of metal powder p 111 N89-1267
- WHATLEY, WALTER J.**
Airjet validation of surface roughness using a stochastic simulation approach p 168 N88-19111
- WHIPPLE, E. C. JR.**
High speed aircraft vibrations on CSEE-1 in flight p 97 N87-26344
- WHITCHER, F. S. E.**
The requirements in data acquisition and processing using an advanced combustion research facility p 94 N87-24142
- WHITE, DAWN**
Real time monitor and control system p 174 N87-12465
- WHITE, PAUL**
Use of Markov probability and reliability model generation methods in the analysis of reliability of a fault tolerant hardware and software based system with flexible repair strategies p 183 N88-18477
- WHITEHEAD, D. S.**
A class of two dimensional methods p 1 N87-24418
- WHITEHEAD, R. E.**
Aerodynamic characteristics of a delta wing with a blunt leading edge and a curved upper surface p 1 N88-27634

- WHITELAW, J. H.**
Velocity and temperature measurements in a can-type gas turbine combustor p 57 N87-21184
Flow characteristics of a model annular combustor p 108 N88-29924
- WHITLOW, WOODROW, JR.**
Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center (NAS 115 891331) p 9 N87-28519
- WHITTEKER, J. H.**
VHF/UHF propagation by diffraction. Calculation by numerical integration p 139 N88-19659
- WHORIC, JAMES M.**
Hierarchy of uncertainty sources in transonic wing tunnel testing p 87 N89-16951
- WICKENS, CHRISTOPHER D.**
Workload methodology p 213 N87-30059
Event-related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696
- WICKENS, R. H.**
The use of the NRC/NAAE water facilities in Canadian aeronautical research and development p 85 N88-20132
- WIDNALL, W. S.**
Motion compensation requirements for a high resolution spotlight SAR p 126 N87-18722
- WIESE, MICHAEL R.**
Grid generation on and about a cranked wing fighter aircraft configuration p 226 N88-29314
- WILKER, J. J.**
Acoustic effects on the dynamic of lightweight structures p 183 N87-20372
- WILD, P. N.**
Three-dimensional gas turbine combustor modeling p 108 N88-29937
- WILDER, D. G.**
Muscle fatigue in static and vibrational seating environments p 210 N87-13354
- WILKINSON, W. S.**
Intermodulation interference in radio systems p 152 N89-18595
- WILLIAMS, A.**
Rates of formation of soot from hydrocarbon flames and its destruction p 107 N88-29433
- WILLIAMS, D.**
Information management in the Army battlefield helicopter p 251 N87-23615
- WILLIAMS, D. A.**
Development of a flight simulation program for research and training applications in the p 83 N87-24638
- WILLIAMS, D. O.**
Physics of current knowledge on engine response to distorted inflow conditions p 49 N87-24485
- WILLIAMS, DAVID H.**
Advanced ATC. An aircraft perspective p 271 N87-21693
- WILLIAMS, J. E.**
Accuracy criteria for evaluating hypersonic aerodynamic coefficient predictions p 15 N88-29744
Semiempirical methods for airbreathing missiles p 16 N88-29743
Next generation missile design p 15 N88-29746
- WILLIAMS, JOSEPH C.**
Prototype manufacturing techniques for reducing cost, schedule, and technical risk p 243 N88-20189
- WILLIAMS, M. CARLSON**
Laser velocimetry study of stator-rotor interactions in a multi-stage gas turbine compressor p 123 N87-21181
- WILLIAMSON, P. R.**
Active vehicle charging measurements in a subsonic rocket and space shuttle/stable environment (low Earth Orbit (LEO)) attitude p 97 N87-26945
- WILLIAMSON, R. G.**
A research program on the aerodynamics of a highly loaded turbine stage p 16 N88-17655
- WILLIAMSON, W. S.**
Automatic change control system for asynchronous networks p 91 N87-26940
- WILLMAN, W. W.**
Effects of closing speed uncertainty on optimal guidance p 92 N88-19546
- WILSON, ANDREW**
Radial compressor design using an Euler stream p 46 N88-17674
- WILSON, G.**
Multisensory vestibular stimulation p 219 N88-27717
- WILSON, G. F.**
Using the man-machine system. On the use of physiological measures to assess computer controlled systems p 211 N87-26947
- WILSON, GLENN**
Cardiac output response and workload measures in the workload evaluation of alternative landing system displays p 243 N87-30063
- WILSON, GLENN**
Fighter pilot performance during airborne and simulator missions. Physiological comparisons p 243 N88-27718

- WILSON, K. J.**
Combustion related shear-flow dynamics in elliptic supersonic jets p 11 N88-13292
- WILSON, O. C.**
Developments in HF equipment and systems mobile and portable terminals p 123 N86-27573
- WILSON, R. M.**
Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- WINFUL, H. G.**
Nonlinear planar guided wave interactions and devices p 239 N87-13290
- WINTER, H.**
Scoring tests of aircraft transmission lubricants at high speeds and high temperatures p 113 N86-29253
- WIRTH, C. J.**
In vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
- WIRTH, W. D.**
Solid state multifunction phased array radar p 126 N87-16723
- WISMANS, J.**
MADYMO crash victim simulations. A flight safety application p 122 N89-18441
- WITHERS, P. B.**
Progress with multiplexed sensor arrays based on reflection at spliced joints between sensors p 237 N87-13274
A study of methods of phase noise reduction of semiconductor lasers for sensor applications p 172 N87-13286
- WITTIG, S.**
Turbulence effects on the droplet distribution behind airblast atomizers p 104 N88-29815
On the application of finite-difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N88-24938
- WITTIGN, S.**
Particle size measurements in sooting combustion systems p 107 N88-24941
- WITTLIFF, C. E.**
A survey of existing hypersonic ground test facilities North America p 84 N88-13221
- WITTLIN, G.**
Transport airplane crash simulation validation and application to crash design criteria p 14 N88-18431
- WOLF, H.**
Large cone species including accident and terrorist flames p 137 N88-29807
- WOLFFELT, KARL W.**
Investigation on the movement of vortex burst point in a dynamically changing angle of attack for a rectangular delta wing of a water tunnel with observation to similar studies in windtunnel p 163 N88-29744
- WONG, SHU W.**
Experimental robust HF modems incorporating a digital processor p 140 N88-24673
- WOOD, C. P.**
The performance of a subsonic flow in a mixing layer in a spray fueled combustor p 1 N88-29744
- WOOD, JERRY R.**
Shock structure measured in a transonic fan using laser anemometry p 1 N87-21929
- WOOD, M. N.**
The accurate measurement of drag in the MIT-RPI tunnel p 94 N89-18435
- WOODCOCK, ROBERT J.**
A second look at MIL-881C flying qualities requirements p 34 N88-29113
- WOODWARD, D. S.**
An assessment of the use of low order panel methods for the calculation of subsonic flows p 224 N87-23074
- WORMS, JOSEF**
Use of a single step technique for adaptive array processing p 129 N87-14731
- WRENN, G. L.**
Spacecraft charging. Multisat experience p 128 N87-26941
- WRIGHT, NICOLA A.**
The application of psychophysiological techniques in the identification of the onset of stressless p 18 N88-17674
- WURTMAN, RICHARD J.**
Use of tyrosine and other nutrients to enhance and sustain performance p 148 N87-21113
- WYKES, KATHARINE M.**
Towards the next generation fighter cockpit. The EAF experiment p 219 N87-14731

X

- XU, L. P.**
Measured and predicted loss generation in transonic turbine blading p 1 N87-29334

YANEZ, ALBERT

Y

- YANEZ, ALBERT**
Sources of information for a defense information service p 250 N87-26683
- YANG, C. C.**
The enhancement effect of the backscattered intensity in a random medium p 143 N89-17715
- YANG, C.-I.**
Experiments and code validation for junction flows p 21 N89-18658
- YAP, C.**
Flow velocity measurements by image processing of optically modulated traces p 163 N88-23147
- YATES, E. CARSON, JR.**
Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center (NAS 115 89133) p 9 N87-28519
Static aeroelastic effects on the flutter of a supercritical wing p 76 N88-13353
AGARD standard aeroelastic configurations for dynamic response - Wing 445 6 (AGARD-R-765) p 42 N88-27193
- YATES, THOMAS C.**
Pumping systems and flow interfaces for rapid response electronic reheat controls p 65 N88-17665
- YEH, K. C.**
The enhancement effect of the backscattered intensity in a random medium p 143 N89-17715
- YEN, H. W.**
Lightwave technology in future radar equipment designs p 240 N87-13304
- YOSHIMURA, H.**
Calculations for a generic fighter at supersonic high-alt conditions p 33 N87-20226
Design of wings and wing/body configurations for transonic and supersonic speeds p 39 N88-13318
Three dimensional grid generation for complex configurations. Recent progress p 226 N88-29313 (AGARD-AG-309)
Lessons learned in the mesh generation for PN/S calculations p 226 N88-29314
Computational Fluid Dynamics Algorithms and Supercomputers (AGARD-AG-311) p 223 N89-11395
- YOUNG, A. D.**
The aerodynamics of parachutes (AGARD-AG-295) p 9 N87-26681
- YOUNG, L.**
Information services: Pros and cons p 247 N86-28797
- YOUNG, LAURENCE R.**
The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179
- YOUNG, W. A.**
Closed loop fiber optic gyro p 237 N87-13277
- YOWAKIM, F. M.**
Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18644

Z

- ZABKA, W.**
The judgement and evaluation of long term investments demonstrated by means of a civil aircraft program p 254 N88-20180
- ZANOTTI, C.**
Burning stability of double base propellants p 114 N86-26472
- ZARCHAN, PAUL**
Comparison of statistical digital simulation methods p 227 N89-10049
- ZEINER, P. K.**
Influence of engine variables on future helicopter systems p 32 N87-10072
- ZEITLIN, G. M.**
Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706
- ZELLER, BERNARD**
Sizing solid propellant engine charges p 116 N87-28596
Solid propellant grain design p 117 N89-16913
- ZERLETT, G.**
Relationships between whole-body vibration and disorders of the backbone diagnosed on operators of earth-moving machinery p 208 N87-13934
- ZIMMERMAN, G.**
Mechanical behaviour of propellant grains under heavy dynamic load p 115 N86-29066
- ZIMMERMANN, HARALD H.**
Linguistic technical aspects of machine translation p 252 N88-30461
- ZIMMERMANN, HELMUT**
Comparison between 2D transonic flutter calculations in the time and frequency domain p 10 N87-28520
- ZOBY, ERNEST V.**
Overview of CFD methods and comparison with flight aerothermal data p 21 N89-18663


PERSONAL AUTHOR INDEX

- ZUCCO, E.**
Rapid prototyping of complex avionic system architectures p 47 N88-23771
- ZUPPARDI, G.**
Computerized thermographic technique for the detection of boundary layer separation p 18 N89-16876
- ZWAAN, R. J.**
Requirements and capabilities in unsteady windtunnel testing p 90 N89-16878
- ZWAN, ALLEN D.**
Arcjet validation of surface catalytic using a viscous shock-layer approach p 168 N89-18634
- ZWINGERS, T.**
In-vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946

CORPORATE SOURCE INDEX

AGARD INDEX OF PUBLICATIONS (1986-1988)

Typical Corporate Source Index Listing



Listings in this index are arranged alphabetically by corporate source. The title of the document provides the user with a brief description of the subject matter. The report number helps to indicate the type of document cited (i.e. translation). It is given only for complete publications not for individual papers. The page number identifies the page in the abstract section (Part 1) on which the citation appears. The NASA accession number denotes the number by which the citation is identified on that page. The titles are arranged under each corporate source in ascending accession number order.

A

- Adaptive Sensors, Inc., Santa Monica, CA.**
A CFAR design concept for operation in heterogeneous clutter p 128 N87-18733
A sequential adaptation technique and its application to the Mark 12 IFF system p 128 N87-18735
Admiralty Research Establishment, Gosport (England).
Experiments to investigate the vortices shed from a submarine-like body of revolution p 164 N88-23156
A review of the NATO special group of experts on Naval hydrodynamics and related problems p 164 N88-23157
- Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).**
AGARD Corrosion Handbook Volume 1 Corrosion, causes and case histories p 110 N86-16374
[AGARD-AG-278-VOL-1]
Smokeless Propellants p 113 N86-26468
Gas analysis for the investigation of the combustion of double-base propellants and HMX p 115 N86-26478
Technical evaluation report of AGARD Technical Evaluation Meeting on Unsteady Aerodynamics - Fundamentals and Applications to Aircraft Dynamics [AGARD-AR-222] p 4 N86-27182
Aircraft drag prediction and reduction Addendum 1 Computational drag analyses and minimization, mission impossible? p 5 N86-27187
[AGARD-R-723-ADD-1]
Combat loads on modern fighters p 30 N86-27276
[AGARD-R-730]
Impact damage to composite structures p 102 N86-27425
[AGARD-R-729]
Propagation Impact on Modern HF Communications System Design p 122 N86-27566
[AGARD-LS-145]
Static aeroelasticity in combat aircraft p 182 N86-27678
[AGARD-R-725]
The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes [AGARD-CP-385] p 247 N86-28793
Infantry Ballistics of Guns p 117 N86-29063
[AGARD-CP-392]
Shock wave boundary layer interactions p 155 N86-29173
[AGARD-AG-280]

- Aircraft and Bearing Tribological Systems [AGARD-CP-394] p 174 N86-29236
Analogue signal conditioning for flight test instrumentation p 45 N86-29816
[AGARD-AG-180-VOL-17]
Interaction between EMP (Electromagnetic Pulse), lightning and static electricity with aircraft and missile avionics systems p 22 N86-30708
[AGARD-LS-144]
Crashworthiness of airframes p 22 N86-30709
[AGARD-R-737]
The influence of large-scale computing on aircraft structural design p 31 N86-30726
[AGARD-R-726]
Store separation flight testing p 31 N86-30727
[AGARD-AG-300-VOL-5]
Aircraft response to turbulence p 72 N86-30739
[AGARD-R-738]
Application of Ada higher order language to guidance and control p 72 N86-30740
[AGARD-LS-146]
Gust load prediction and alleviation on a fighter aircraft p 72 N86-30741
[AGARD-R-728]
Determination of antennae patterns and radar reflection characteristics of aircraft p 124 N86-30931
[AGARD-AG-300-VOL-4]
Design of bolted joints in composites p 175 N86-31064
[AGARD-R-727]
The prospects for finite element analysis methods for structural qualification p 182 N86-31083
[AGARD-R-736]
Engine-Airframe Integration for Rotorcraft p 31 N87-10067
[AGARD-LS-148]
Guided Optical Structures in the Military Environment [AGARD-CP-383] p 237 N87-13273
Backache and Back Discomfort p 190 N87-13932
[AGARD-CP-378]
In vivo measurements of vibration transmission in the human spine p 210 N87-13947
Rotorcraft icing: Progress and potential [AGARD-AR-223] p 32 N87-15966
Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation [ISBN-92-835-0399-6] p 79 N87-15985
Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems p 51 N87-16000
[AGARD-CP-388]
Practical Application of Finite Element Analysis to Aircraft Structural Design p 182 N87-16376
[AGARD-LS-147]
Advanced Joining of Aerospace Metallic Materials [AGARD-CP-398] p 175 N87-17051
Performance of rocket motors with metalized propellants p 99 N87-18610
[AGARD-AR-230]
Special Course on Interaction of Propagation and Digital Transmission Techniques p 124 N87-18703
[AD-A175698]
Multifunction Radar for Airborne Applications p 125 N87-18721
[AGARD-CP-381]
Improved guidance and control automation at the man-machine interface p 211 N87-18987
[AGARD-AR-228]
The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work [AGARD-LS-149] p 221 N87-19920
The Repair of Aircraft Structures Involving Composite Materials p 1 N87-20174
[AGARD-CP-402]
Patch repair of corroded aircraft skin areas p 3 N87-20191
Applications of Computational Fluid Dynamics in Aeronautics p 5 N87-20199
[AGARD-CP-412]
Mechanical Qualification of Large Flexible Spacecraft Structures p 94 N87-20355
[AD-A175529]
Advanced Instrumentation for Aero Engine Components p 118 N87-21170
[AGARD-CP-399]
How to select a laser velocimeter for a given application? p 118 N87-21179
Efficient Conduct of Individual Flights and Air Traffic - Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Airspace Users [AGARD-CP-410] p 25 N87-21881

- Identification of dynamic systems - applications to aircraft. Part 1: The output error approach [AGARD-AG-300-VOL-3-PT-1] p 33 N87-21913
Microprocessor applications in airborne flight test instrumentation p 45 N87-21920
[AGARD-AG-180-VOL-18]
Transonic and Supersonic Phenomena in Turbomachines p 57 N87-21927
[AGARD-CP-401]
Wake and shock interactions in a transonic turbine stage p 57 N87-21930
The potential impact of developments in electronic technology on the future conduct of air warfare, volume 3 p 153 N87-22094
[AGARD-AR-232-VOL-3]
Round Table Discussion on Modelling of Time-Variant Flows Using Vortex Dynamics p 157 N87-22137
[AGARD-AR-239]
Computation of unsteady flows using the point vortex method p 157 N87-22138
Computation of Three-Dimensional Boundary Layers Including Separation p 158 N87-22145
[AGARD-R-741]
Improvement of Combat Performance for Existing and Future Aircraft p 33 N87-22663
[AGARD-CP-409]
Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military airspace users p 28 N87-23608
[AGARD-AR-236]
Aircraft Dynamic Response to Damaged and Repaired Runways p 34 N87-23609
[AGARD-R-739]
Flight Simulation p 80 N87-23633
[AGARD-CP-408]
Microwave Antennas for Avionics p 134 N87-23859
[AGARD-LS-151]
Short Course on Cardiopulmonary Aspects of Aerospace Medicine p 193 N87-24070
[AGARD-R-758]
Aeromedical evaluation and disposition of electrocardiographic abnormalities p 193 N87-24071
Noninvasive methods for the detection of coronary artery disease in aviators: A stratified Bayesian approach p 194 N87-24072
[AGARD-CP-407]
Valvular and congenital heart disease in the aviator p 194 N87-24073
Aeromedical aspects of mitral valve prolapse p 194 N87-24074
[AGARD-CP-406]
Pulmonary physiology and pulmonary function testing in aerospace medicine p 194 N87-24075
Aeromedical disposition of pulmonary sarcoidosis, chronic obstructive lung disease, reactive airway disease and spontaneous pneumothorax p 194 N87-24076
Hypertension in the aviator p 194 N87-24077
Coronary risk factors in aerospace medicine p 195 N87-24078
Cardiopulmonary screening for high-performance flying Selection and retention issues p 195 N87-24079
Aeroelasticity in axial-flow turbomachines. Volume 1 Unsteady turbomachinery aerodynamics p 8 N87-24398
[AGARD-AG-298-VOL-1]
Integrated Design of Advanced Fighters p 35 N87-24445
[AGARD-LS-153]
Engine Response to Distorted Inflow Conditions p 60 N87-24464
[AGARD-CP-400]
Rocket altitude test facilities register p 51 N87-24489
[AGARD-AG-297]
AGARD corrosion handbook Volume 2 Aircraft corrosion control documents A descriptive catalogue [AGARD-AG-278-VOL-2] p 110 N87-24553
Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations [AGARD-CP-404] p 235 N87-24940
Current state of an expert system p 236 N87-24953
Biochemical Enhancement of Performance p 195 N87-25709
[AGARD-CP-415]
Impact of future developments in electronic technology on cockpit engineering p 211 N87-25765
[AGARD-R-757]
Planning and Designing Effective Defence and Related Information Services p 249 N87-26675
[AGARD-CP-416]
The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications p 97 N87-26937
[AGARD-CP-406]

SOURCE

AGARD

AGARD guide to aerospace and defence technical report series in NATO countries
[AGARD-R-743] p 197 N87-27391
Technical evaluation report on the Fluid Dynamics Panel Symposium on Applications of Computational Fluid Dynamics in Aerodynamics
[AGARD-R-7209] p 159 N87-27958
Future Research on Transonic Unsteady Aerodynamics and its Aerodynamic Applications
[AGARD-R-749] p 7 N87-28518
Design Methods in Solid Rocket Motors
[AGARD-R-153] p 100 N87-28589
Advances in Guidance and Control Systems and Technology
[AGARD-CP-411] p 28 N87-29474
Information Management and Decision Making in Advanced Airborne Weapon Systems
[AGARD-CP-414] p 46 N87-29503
Supercapacity
[AGARD-R-154] p 111 N87-29641
The practical assessment of pilot workload
[AGARD-AG-282] p 212 N87-30054
Fault tolerant considerations and methods for guidance and control systems
[AGARD-CP-289] p 73 N88-10796
Knowledge Based Concepts and Artificial Intelligence. Applications to Guidance and Control
[AGARD-R-155] p 74 N88-10806
Reliability of finite element methods in North America
[AGARD-R-148] p 183 N88-11139
Sleep and wakefulness Handbook for flight medical officers, second edition
[AGARD-AG-276(E)] p 197 N88-11366
Rotorcraft Design for Operations
[AGARD-CP-423] p 37 N88-11649
Theoretical Aspects of Target Classification
[AGARD-R-152] p 136 N88-11909
Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structures and its Modeling
[AGARD-R-755] p 159 N88-11970
Developmental androp testing techniques and devices
[AGARD-AG-300-VOL-6] p 38 N88-12481
Human respiratory responses during high performance flight
[AGARD-AG-312] p 197 N88-12923
Aerodynamics of Hypersonic Lifting Vehicles
[AGARD-CP-428] p 10 N88-13219
Special Course on Fundamentals of Fighter Aircraft Design
[AGARD-R-740] p 39 N88-13315
Workshop on Avionics Corrosion Control
[AGARD-R-733] p 46 N88-13331
Application of modified loss and deviation correlations to transonic axial compressors
[AGARD-R-745] p 62 N88-13344
Static Aeroelastic Effects on High Performance Aircraft
[AGARD-CP-403] p 76 N88-13348
The use of aeroelastic wind tunnel models to prove structural design
[AGARD-CP-421] p 77 N88-13355
Techniques of flow visualization
[AGARD-AG-302] p 160 N88-16977
Advanced Technology for Aero Gas Turbine Components
[AGARD-CP-421] p 62 N88-17647
Effectiveness of various control surfaces in quasi-steady and unsteady conditions
[AGARD-R-735] p 77 N88-17682
Some aspects of aircraft dynamic loads due to flow separation
[AGARD-R-750] p 40 N88-18588
Workshop on Design Loads for Advanced Fighters
[AGARD-R-746] p 41 N88-19449
Advances in Air-Launched Weapon Guidance and Control
[AGARD-CP-431] p 92 N88-19553
Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control
[AGARD-CP-407] p 138 N88-19653
Flight Vehicle Development Time and Cost Reduction
[AGARD-CP-424] p 243 N88-20173
Aerodynamic and Related Hydrodynamic Studies Using Water Facilities
[AGARD-CP-413] p 160 N88-23145
The Design, Development and Testing of Complex Avionics Systems
[AGARD-CP-417] p 47 N88-23767
Flight Mechanics Panel Symposium on Rotorcraft Design for Operations. Technical evaluation report
[AGARD-R-743] p 42 N88-26362
Automated measurement of crack length and load line displacement at elevated temperature
[AGARD-R-751] p 183 N88-26595
Design manual for impact damage tolerant aircraft structure, addendum
[AGARD-AG-236-ADD] p 42 N88-27185
AGARD standard aeroelastic configurations for dynamic response 1 Wing 445 6
[AGARD-R-765] p 42 N88-27193

Air-to-air radar flight testing
[AGARD-AG-300-VOL-7] p 141 N88-27406
Aerodynamics of Hypersonic Lifting Vehicles. Fluid Dynamics Panel AGARD Symposium
[AGARD-AR-246] p 184 N88-27480
Flight testing under extreme environmental conditions
[AGARD-AG-300-VOL-8] p 172 N88-27525
Atmospheric turbulence research at DFVLR
[AGARD-R-752] p 189 N88-27669
Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine
[AGARD-CP-432] p 190 N88-27683
Engineering data compendium: Human perception and performance. User's guide
[AGARD-AG-313] p 215 N88-27749
The anatomy of the gyroscope
[AGARD-AG-313] p 172 N88-28287
Engineering data compendium: Human perception and performance, volume 1
[AGARD-AG-313] p 215 N88-28630
Engineering data compendium: Human perception and performance, volume 2
[AGARD-AG-313] p 215 N88-28631
Engineering data compendium: Human perception and performance, volume 3
[AGARD-AG-313] p 215 N88-28632
Boundary layer simulation and control in wind tunnels
[AGARD-AR-224] p 3 N88-28857
Aerodynamic data accuracy and quality Requirements and capabilities in wind tunnel testing
[AGARD-AR-254] p 14 N88-28893
AGARD engine disc cooperative test programme
[AGARD-R-766] p 67 N88-28926
Visual Effects in the High Performance Aircraft Cockpit
[AGARD-R-156] p 216 N88-29291
Three dimensional grid generation for complex configurations. Recent progress
[AGARD-AG-309] p 226 N88-29313
The Flight of Flexible Aircraft in Turbulence
[AGARD-R-734-ADD] p 4 N88-29717
The Flight of Flexible Aircraft in Turbulence
[AGARD-R-734] p 4 N88-29725
Advances in Flying Qualities
[AGARD-R-157] p 4 N88-29735
Special Course on Missile Aerodynamics
[AGARD-R-754] p 14 N88-29755
Combustion and fuels in gas turbine engines
[AGARD-CP-422] p 104 N88-29910
Barriers to Information Transfer and Approaches Toward Their Reduction
[AGARD-CP-430] p 251 N88-30458
Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Vehicle Development Time and Cost Reduction
[AGARD-AR-244] p 4 N88-30001
AGARD manual on aeroelasticity in axial-flow turbomachines. Volume 2: Structural dynamics and aeroelasticity
[AGARD-AG-298-VOL-2] p 16 N88-10006
Guidance and control systems simulation and validation techniques
[AGARD-AG-273] p 78 N88-10048
Performance assessment register
[AGARD-R-763] p 246 N88-10666
Computing Systems Configuration for Highly Integrated Guidance and Control Systems
[AGARD-R-158] p 4 N88-10831
The NAVSTAR GPS System
[AGARD-R-161] p 29 N88-10874
Computational Fluid Dynamics Algorithms and Supercomputers
[AGARD-AG-311] p 223 N88-11395
Evaluating the Effectiveness of Information Centres and Services
[AGARD-R-160] p 253 N88-11625
Media Effects on Electronic Systems in the High Latitude Region
[AGARD-R-162] p 141 N88-11831
Motion Cues in Flight Simulation and Simulator Induced Sickness
[AGARD-CP-433] p 203 N88-12171
Guidance and Control/Flight Mechanics Panels Joint Symposium on The Man-Machine Interface in Tactical Aircraft Design and Combat Automation
[AGARD-AR-249] p 44 N88-12564
Laser applications in flow diagnostics
[AGARD-AG-296] p 173 N88-12849
Aerospace Materials Process Modeling
[AGARD-CP-426] p 119 N88-15262
Remotely sensed effects in transonic flow
[AGARD-AG-303] p 17 N88-16760
Engine Condition Monitoring Technology and Experience
[AGARD-CP-448] p 52 N88-16780

Aerodynamic Data Accuracy and Quality Requirements and Capabilities in Wind Tunnel Testing
[AGARD-CP-429] p 87 N88-16846
Design Methods in Solid Rocket Motors
[AGARD-R-150-REV] p 101 N88-16906
AGA D/SMP Review Damage Tolerance for Engine Structures 1 Non-Destructive Evaluation
[AGARD-R-768] p 173 N88-17253
Short Crack Growth Behaviour in an Aluminum Alloy
[AGARD-R-732] p 184 N88-17287
Sleep and wakefulness Handbook for flight medical officers, 2nd edition
[AGARD-R-770(F)] p 207 N88-17399
Guidance and Control of Precision Guided Weapons
[AGARD-R-435] p 93 N88-17605
Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures
[AGARD-CP-447] p 121 N88-17685
Scattering and Propagation in Random Media
[AGARD-CP-419] p 122 N88-17706
The Man-Machine Interface in Tactical Aircraft Design and Combat Automation
[AGARD-CP-425] p 217 N88-18009
Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness
[AGARD-CP-443] p 22 N88-18421
Full scale helicopter crash testing
[AGARD-CP-419] p 23 N88-18428
Human crashworthiness and crash load limits
[AGARD-CP-443] p 25 N88-18439
Software Engineering and its Application to Avionics
[AGARD-CP-439] p 55 N88-18446
Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems
[AGARD-CP-420] p 147 N88-18565
Validation of Computational Fluid Dynamics. Volume 1: Symposium papers and round table discussion
[AGARD-CP-437-VOL-1] p 165 N88-18610
Validation of Computational Fluid Dynamics. Volume 2: Poster papers
[AGARD-CP-437-VOL-2] p 169 N88-18648
Advisory Group for Aerospace Research and Development, Paris (France).
Standard fatigue test specimens for fastener evaluation
[AGARD-AG-304] p 183 N88-12018
AEG-Telefunken, Ulm (Germany, F.R.).
EHF multifunction phased array antenna
[AGARD-CP-443] p 131 N88-18752
Dual frequency MM-wave radar for attack helicopter
[AGARD-CP-443] p 132 N88-18756
Aircraft antennas/conformal antennas
[AGARD-CP-443] p 134 N88-18762
Aeritalia S.p.A., Cassino (Italy).
Rapid prototyping of complex avionic system architectures
[AGARD-CP-443] p 47 N88-23771
The electromagnetic threat to future avionic systems
[AGARD-CP-443] p 50 N88-23790
A man-machine interface solution. The EAR glare shields
[AGARD-CP-443] p 219 N88-18018
Aeritalia S.p.A., Naples (Italy).
Joining of carbon fiber composite with fasteners
[AGARD-CP-443] p 103 N88-17701
Aeritalia S.p.A., Pomigliano D'Arco (Italy).
Validation of a multi-block Euler flow solver with propeller slipstream flows
[AGARD-CP-443] p 20 N88-18649
Aeritalia S.p.A., Turin (Italy).
The welding of aluminum alloys. A new technology in space application
[AGARD-CP-443] p 176 N88-17056
The use of Aeritalia flight simulator for the development of the AM-X weapon system
[AGARD-CP-443] p 82 N88-23650
Interaction between structural considerations and system design in advanced flight controls
[AGARD-CP-443] p 77 N88-19458
Development cost reduction using integrated CAE/CAD/CAM techniques
[AGARD-CP-443] p 225 N88-20182
A study to optimize the CFRP/Al mechanical joint in order to reduce electrical resistance
[AGARD-CP-443] p 154 N88-17695
Aeronautica Macchi S.p.A., Varese (Italy).
Use of demonstration/validation prototypes. Impact on total development costs and times
[AGARD-CP-443] p 245 N88-20194
Engineering management for validation prototype phase
[AGARD-CP-443] p 245 N88-20195
Aeronautical Radio, Inc., Annapolis, MD.
Communication, Navigation and Surveillance services for the aviation industry using satellite technology
[AGARD-CP-443] p 26 N88-21886
Aeronautical Research Inst. of Sweden, Bromma.
Large scale viscous simulation of laminar vortex flow over a delta wing
[AGARD-CP-443] p 21 N88-18660
Aeronautical Research Labs., Melbourne (Australia).
Fibre composite repair of cracked metallic aircraft components. Practical and basic aspects
[AGARD-CP-443] p 2 N88-20187
Gas path analysis and engine performance monitoring in a Chinook helicopter
[AGARD-CP-443] p 70 N88-16802
Identification of dynamic characteristics for fault isolation purposes in a gas turbine using closed-loop measurements
[AGARD-CP-443] p 71 N88-16813

CORPORATE SOURCE

CORPORATE SOURCE

Aeronautical Systems Div., Wright-Patterson AFB, OH.
Changes in USAF structural loads requirements p 41 N88-19452
Avionics acquisition, trends and future approaches p 244 N88-20184
Engineering data compendium: Human perception and performance: User's guide p 215 N88-27749
Engineering data compendium: Human perception and performance, volume 1 p 215 N88-28630
Engineering data compendium: Human perception and performance, volume 2 p 215 N88-28631
Engineering data compendium: Human perception and performance, volume 3 p 215 N88-28632
Aerospace Corp., El Segundo, CA.
The GPS overview and navigation system concept p 29 N89-10875
The Global Positioning System (GPS) constellation and coverage p 29 N89-10876
The Global Positioning System (GPS) accuracy, system error budget, space and control segment overview p 29 N89-10877
Aerospace Corp., Los Angeles, CA.
Thick dielectric charging on high altitude spacecraft p 99 N87-26961
Aerospace Medical Research Labs., Wright-Patterson AFB, OH.
An assessment of variable format information presentation p 250 N87-29512
Effect of audio bandwidth and bit error rate on PCM ADPCM and LPC speech coding algorithm intelligibility p 136 N87-29519
Fighter design for human load limits p 41 N88-19451
Advanced development of a cockpit automation design support system p 49 N88-23785
Designing for design effectiveness of complex avionics systems p 50 N88-23788
Fighter pilot performance during airborne and simulator missions: Physiological comparisons p 215 N88-27704
Motion evoked vestibular potentials p 202 N88-27712
Engineering data compendium: Human perception and performance: User's guide p 215 N88-27749
Engineering data compendium: Human perception and performance, volume 1 p 215 N88-28630
Engineering data compendium: Human perception and performance, volume 2 p 215 N88-28631
Engineering data compendium: Human perception and performance, volume 3 p 215 N88-28632
Vision through aircraft transparencies p 216 N88-29294
Night lighting and night vision goggle compatibility p 216 N88-29297
Display system image quality p 216 N88-29298
Advances in workload measurement for cockpit design evaluation p 218 N89-18016
Design considerations for Virtual Panoramic Display (VPD) helmet systems p 219 N89-18024
Matching crew system specifications to human performance capabilities p 220 N89-18031
Integrated control and avionics for air superiority p 221 N89-18032
Aerospace Research Labs., Wright-Patterson AFB, OH.
Cortical evoked response and eyeblink measures in the workload evaluation of alternative landing system displays p 213 N87-30061
Aerospaciale, Marignane (France).
Control of on-board software p 55 N89-18452
Aerospaciale, Paris (France).
Contribution of expert systems to avionics advance application on AS30 laser weapon system p 56 N89-18470
Aerospaciale Usines de Toulouse (France).
Aeroelastic analysis of modern transport aircraft p 76 N88-13352
Implication of engine performance monitoring for the aircraft manufacturer p 53 N89-16794
Agusta S.p.A., Milan (Italy).
The EH-101 integrated project: A naval, utility and commercial helicopter system p 38 N88-11672
Agusta Sistemi S.p.A., Tradate (Italy).
Robust algorithm synchronizes mode changes in fault-tolerant asynchronous architectures p 231 N89-18475
Agusta Sistemi S.p.A., Varese (Italy).
Test philosophy of the EH101 integrated avionics p 48 N88-23775
Air Force Aero Propulsion Lab., Wright-Patterson AFB, OH.
Military aircraft propulsion lubricant: Current and future trends p 113 N88-29249

Air Force Avionics Lab., Wright-Patterson AFB, OH.
Panoramic Cockpit Control and Display System (POCADS) p 218 N89-18019
Air Force Flight Dynamics Lab., Wright-Patterson AFB, OH.
The use of the finite element method p 182 N87-16380
Development of precision structural joints for large space structures p 97 N87-20374
Recent studies on bolted joints in composite structures p 165 N89-17588
Air Force Flight Test Center, Edwards AFB, CA.
The development of the T-46 next generation trainer manned engineering simulator at the US Air Force Flight Test Center p 82 N87-23652
A method for aircraft simulation verification and validation developed at the United States Air Force Flight Simulation Facility p 82 N87-23654
Minimizing development flight test time and cost in the US Air Force p 245 N88-20192
Pilot workload assessment: A flight test approach p 218 N89-18014
AFTI/F-16 impact of cockpit automation on pilot acceptance p 221 N89-18033
Air Force Geophysics Lab., Hanscom AFB, MA.
Computer models of the spacecraft wake p 98 N87-26948
Automatic charge control system for geosynchronous satellites p 99 N87-26960
Polar-auroral charging of the space shuttle and EVA astronaut p 94 N87-26962
Radio and radar holes and multipath losses: The global and local influences on atmospheric refractive structure and resulting adverse radio and radar performance p 140 N88-19667
Ionospheric scintillations and in-situ measurements at an auroral location in the European sector p 189 N89-17752
Air Force Human Resources Lab., Wright-Patterson AFB, OH.
Engineering data compendium: Human perception and performance: User's guide p 215 N88-27749
Engineering data compendium: Human perception and performance, volume 1 p 215 N88-28630
Engineering data compendium: Human perception and performance, volume 2 p 215 N88-28631
Engineering data compendium: Human perception and performance, volume 3 p 215 N88-28632
Air Force Materials Lab., Wright-Patterson AFB, OH.
Corrosion of electronic components p 46 N88-13333
Air Force Rocket Propulsion Lab., Edwards AFB, CA.
Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 100 N87-28590
State of the art of solid propellant rocket motor grain design in the United States p 116 N87-28591
Advances in solid rocket nozzle design and analysis technology in the United States since 1970 p 101 N89-16907
State of the art of solid propellant rocket motor grain design in the United States p 117 N89-16914
Air Force Space Div., Los Angeles, CA.
User equipment overview p 30 N89-10879
Civil and military applications of GPS p 30 N89-10882
Air Force Systems Command, Andrews AFB, MD.
The integration and operational suitability of emerging technologies for future fighter aircraft: A pilot's perspective p 36 N87-2454
Air Force Systems Command, Wright-Patterson AFB, OH.
Efforts toward the validation of a computational fluid dynamics code for analysis of internal aerodynamics p 169 N89-18643
Air Force Test Pilot School, Edwards AFB, CA.
A look toward the future: Complex avionics systems development using the USAF Test Pilot School's avionics systems test training aircraft p 50 N88-23797
Air Force Wright Aeronautical Labs., Wright-Patterson AFB, OH.
Performance modelling: A tool for lubricant development p 113 N86-29252
UHF/SHF SATCOM propagation and system design p 124 N87-18710
Composite repair of cracked aluminum structure p 27 N87-1183
Application of the Navier-Stokes equations to solve aerodynamic problems p 7 N87-20225
Numerical simulation of the flow field around a complete aircraft p 8 N87-20231
Compressor blade clearance measurement using capacitance and phase lock techniques p 133 N87-21200
A numerical study of unsteady flow effects in a supersonic compressor cascade p 59 N87-21944

Argonne National Lab.

X-29 integrating advanced technologies for tomorrow's air combat p 34 N87-22671
Interpretation in terms of the response of a one degree-of-freedom oscillator to two successive disturbances p 35 N87-23610
Trends in ground-based and in-flight simulators for development applications p 81 N87-23645
Lifting bodies: An attractive aerodynamic configuration choice for hypervelocity vehicles p 39 N88-13248
Mission requirements and aircraft sizing p 39 N88-13317
The coming revolution in turbine engine technology p 62 N88-17648
Design for interoperability (interchangeability) p 50 N88-23789
A second look at MIL prime flying qualities requirements p 44 N88-29740
Advanced avionics architecture pave pillar p 51 N89-10834
Data and signal processing architectures for future avionics p 52 N89-10835
High speed parallel processing networks for advanced architectures p 223 N89-10837
Processing science and materials development p 119 N89-15263
Software productivity through Ada engines p 228 N89-18449
Software development guidelines p 228 N89-18450
Debugging distributed Ada avionics software p 229 N89-18454
Guidelines for evaluation of software engineering tools p 230 N89-18461
Air France, Paris.
The CFM 56-5 on the A-320 at Air France p 53 N89-16793
Air Navigation Technical Service, Paris (France).
The selection of future civil air navigation systems p 25 N87-21882
Airbus Industrie, Blagnac (France).
Assessing workload for minimum crew certification: Part 1: Static workload analysis and performance analysis p 214 N87-30067
Aircraft Research Association Ltd., Bedford (England).
A discussion on a mesh generation technique applicable to complex geometries p 224 N87-20201
Experimental tools: The tunnel and the model p 46 N88-28864
Transport-city configurations p 43 N88-28867
Combat aircraft p 43 N88-28868
Component adaptive grid generation for aircraft configurations p 226 N88-29216
Development of testing techniques in a large transonic wind tunnel to achieve a required drag accuracy and flow standards for modern civil transports p 88 N89-16857
The use of computational fluid dynamic methods to assess the effects of model support systems and working section modifications on the flow around wind tunnel models p 88 N89-16862
Accuracy study of transonic flow computations for three dimensional wings p 19 N89-18624
Alabama Univ., Huntsville.
A general solution for the synthesis of binary sequences with desired correlation sequence p 130 N87-18141
Simulation of multistatic and backscattering cross sections for airborne radar p 132 N87-18757
Electron beam experiments at high altitudes p 97 N87-26946
Alcan International Ltd., London (England)
The manufacture of superplastic alloys p 119 N87-29649
Alfa Romeo S.p.A., Naples (Italy).
Optimization of a transonic flow radial vane diffuser p 58 N87-21938
Experimental investigation on small turboprop behaviour under compressor rotating stall for different inlet flow conditions p 62 N87-24476
Allgemeine Elektrizitäts-Gesellschaft, Ulm (Germany, F.R.).
Avionics expert systems p 56 N89-18469
Allied-Signal Aerospace Co., Fort Lauderdale, FL.
Formalizing a theory of real-time software specification p 229 N89-18456
American Inst. of Aeronautics and Astronautics, New York, NY.
Benefits of scientific and technical information services for aerospace and defense p 249 N87-26677
Analytic Sciences Corp., Reading, MA.
AI expert system technology issues for guidance and control applications p 74 N88-10808
Anchor Software Management, Falls Church, VA.
Software readiness planning p 230 N89-18466
ANT Nachrichtentechnik, Backnang (Germany, F.R.).
PIN-FET preamplifier for high speed optical transmission systems p 238 N87-13293
Aquila Univ. (Italy).
Coupled mode theory approach to depolarization associated with propagation in turbulent media p 241 N89-17707
Argonne National Lab., IL.
Generic casting modeling p 121 N89-15276

Arizona Univ.

Arizona Univ., Tucson.

- Nonlinear planar guided wave interactions and devices p 239 N87-13290
- Integrated optics optical limiters p 239 N87-13292
- Parameterization in scattering models p 137 N88-11916

Experiments Test range facilities, part 2

- p 138 N88-11921
- Army Aeromedical Research Lab., Fort Rucker, AL.**
- Back discomfort in US Army helicopter aircrew members p 205 N87-13939
- Simulator sickness in US Army and Navy fixed- and rotary-wing flight simulators p 205 N89-12178

Army Aviation Research and Development Command, Moffett Field, CA.

- Modeling XV-15 tilt-rotor aircraft dynamics by frequency and time-domain identification techniques p 37 N88-11657

Army Aviation Systems Command, Fort Eustis, VA.

- Evolving crashworthiness design criteria p 22 N89-18423

Army Aviation Systems Command, Moffett Field, CA.

- A critical assessment of wind tunnel results for the NACA 0012 airfoil p 17 N89-16847
- Advanced helicopter cockpit and control configurations for helicopter combat mission tasks p 221 N89-18034

Army Aviation Systems Command, Saint Louis, MO.

- Engine-airframe integration for rotorcraft Component specifications and qualification p 31 N87-10071
- Engine-airframe integration for rotorcraft System specifications and qualification p 32 N87-10074
- The influence of operational requirements on LHX concept formulation p 37 N88-11650
- Risk reduction cost avoidance for full scale development begins with concept formulation p 242 N89-20174

Army Avionics Research and Development Activity, Fort Monmouth, NJ.

- The impact of future avionics technology on the conduct of air warfare p 45 N87-22673
- Velocity accuracy measurement of GPS user equipment p 28 N87-29477
- Integrating avionics sensor signals for tactical aircraft p 46 N87-29519

Army Communications-Electronics Command, Fort Monmouth, NJ.

- Tactical fiber optic assembly requirements p 240 N87-13305
- Millimeter wave antennas for avionics p 134 N87-23864
- Media effects on electronic systems in the high latitude region p 141 N89-11932

Army Construction Engineering Research Lab., Champaign, IL.

- Weld quality monitor and control system p 173 N87-17062

Army Electronics Command, Fort Monmouth, NJ.

- Automating spectrum management of tactical communications to minimize mutual interference and maximize frequency reuse on the battlefield p 152 N89-18593
- Automating the deconfliction of jamming and spectrum management p 152 N89-18596

Army Information Systems Command, Fort Huachuca, AZ.

- Noise measurement systems/techniques p 148 N89-18574

Army Materials and Mechanics Research Center, Watertown, MA.

- Direction of R and D and current status of understanding of advanced gear steels p 110 N86-29245

Army Materials Technology Lab., Watertown, MA.

- Unconventional approaches to field repair p 3 N87-20199

Army Research Inst. for the Behavioral and Social Sciences, Alexandria, VA.

- Engineering data compendium Human perception and performance User's guide p 215 N88-27749
- Engineering data compendium Human perception and performance, volume 1 p 215 N88-28630
- Engineering data compendium Human perception and performance, volume 2 p 215 N88-28631
- Engineering data compendium Human perception and performance, volume 3 p 215 N88-28632

Army Research Inst. of Environmental Medicine, Natick, MA.

- Development of a paradigm to assess nutritive and biochemical substances in humans A preliminary report on the effects of tyrosine upon altitude and cold-induced stress responses p 195 N87-25712

Arnold Engineering Development Center, Arnold Air Force Station, TN.

- Hierarchy of uncertainty sources in transonic wind tunnel testing p 87 N89-16851
- An overview of the application of standard measurement uncertainty methodology in propulsion testing p 72 N89-16854

Characterization of hypersonic wind tunnel flow fields for improved data accuracy p 90 N89-16874

Ashtford (J. H.) Associates Ltd., Maldenhead (England).

- Microcomputers in information resource sharing Part 1 Data and graphics systems p 223 N87-19925
- Trends in software and system development p 223 N87-19928

Atlantic Industrial Research Inst., Halifax (Nova Scotia).

- Wear of high speed roller bearings p 175 N86-29248

Atlantic Refining Co., Philadelphia, PA.

- Information technology to facilitate group interaction p 252 N88-30463

Atomic Energy of Canada Ltd., Pinawa (Manitoba).

- An intelligent sensor for equipment health monitoring of ferromagnetic wear debris concentration in oils p 55 N89-16818

Atomic Energy Research Establishment, Harwell (England).

- Knowledge based systems in information work p 248 N87-19926
- Surface modification to minimise the electrostatic charging of Kapton in the space environment p 153 N87-26959

Avions Marcel Dassault, Saint-Cloud (France).

- Utilization of Euler codes in nonlinear aerodynamics p 6 N87-20215
- Determination of design loads for modern combat aircraft p 42 N88-19457
- Guidance and control of air-launched armaments An aerodynamic perspective p 92 N88-19557
- Modeling of functional specifications for onboard software: Experience with the Rafale avionics system p 48 N88-23777
- Avionics systems Development method and computer tools p 51 N88-23799
- Workshops for the design of avionics systems and the development of onboard software p 51 N88-23802
- Bolted scarf joints in carbon composite materials Comparison between assemblies with an interference fit and those with play p 103 N89-17702
- Reliability and validity of CFD codes: Flight and wind tunnel comparison p 167 N89-18626

Avions Marcel Dassault-Breguet Aviation, Istres (France).

- OASIS A modern tool for real-time simulation p 60 N87-23638

Avions Marcel Dassault-Breguet Aviation, Saint-Cloud (France).

- Damage repair of in-service composite structures Application to the Mirage 2000 p 2 N87-20184
- Design optimization for a family of multi-role combat aircraft p 36 N87-24450
- General aerodynamic-aerothermodynamic concepts for Hermes p 13 N88-13251
- Techniques for performance optimisation in cruise and manoeuvrability p 39 N88-13321
- Trends in aeroelastic analysis of combat aircraft p 76 N88-13350
- Acceleration of prototype development and reduction of cost by multidisciplinary integration p 246 N88-20199
- Developments and perspectives at AMD-BA in the field of impact and crash sizing p 23 N89-18427
- Integration of vocal dialogue on-board a combat aircraft p 56 N89-18471

B

Ballistic Research Labs., Aberdeen Proving Ground, MD.

- Liquid propellant gun technology p 115 N86-29054

Barr and Stroud Ltd., Glasgow (Scotland).

- Performance of integrated optical frequency shifters tailored to high birefringence fibres using ion-milled grooves p 238 N87-13289

Barry (Theodore) and Associates, Los Angeles, CA.

- People, procedures, performance The keys to improving the development environment p 245 N88-20197

Basel Univ. (Switzerland).

- Multivariate and psycho-physiological functions of DSI² p 196 N87-25713

BDM Services Co., Albuquerque, NM.

- Shields for protecting cables from the effects of electromagnetic noise and interference p 152 N89-18542

Bell Communications Research, Inc., Morristown, NJ.

- A hybrid transmission scheme on single mode fibers for tactical communications p 241 N87-13306

Bell Telephone Labs., Inc., Murray Hill, NJ.

- Wavelength division multiplexing at 1.5 microns for high capacity optical transmission p 238 N87-13284
- Evaluating for information center planning p 254 N89-11632

Bell Telephone Labs., Inc., Whippany, NJ.

- Functional programming languages and modern multiprocessor architectures The EMSP example p 231 N89-18469

Blok (Harmen), Rijswijk (Netherlands).

- Critical analysis of achievements and missing links in gear and bearing tribology in relation to power envelopes p 175 N86-29254

Boeing Advanced Systems Co., Seattle, WA.

- Slender cone CFD and experimental data comparisons in hypersonic flow p 21 N89-18653

Boeing Aerospace Co., Seattle, WA.

- Cost effective simulation for millimeter wave guidance systems p 79 N89-10053
- Range delay techniques for radar target simulators p 87 N89-10054

Boeing Co., Seattle, WA.

- Pilot subjective evaluation of workload during a flight test certification programme p 212 N87-30057

Boeing Computer Services Co., Seattle, WA.

- Hardware architecture, chapter 2 p 223 N89-11396
- Algorithm and general software considerations p 228 N89-11397
- An informal glossary of terms used in supercomputing appendix A p 252 N89-11401

Boeing Helicopter Co., Philadelphia, PA.

- Advanced flight control system for nap-of-the-earth flight p 220 N89-18030

Boeing Military Airplane Development, Seattle, WA.

- Calculations for a generic fighter at supersonic high lift conditions p 33 N87-20226
- Design of wings and wing/body configurations for transonic and supersonic speeds p 39 N88-1316
- Lessons learned in the mesh generation for FV-15 calculations p 226 N89-29314

Boeing Military Airplane Development, Wichita, KS.

- Prototype manufacturing techniques for reducing cost, schedule, and technical risk p 244 N88-20189
- Crewstation information and development system (CIDS) p 49 N88-23781

Boeing Vertol Co., Philadelphia, PA.

- A study of the potential benefits associated with the development of a ducted helicopter transmission lubricant p 112 N86-29242
- Improved flight test productivity using advanced on-line data systems p 245 N88-20193
- Analytical and experimental methods used to resolve the aerodynamic results of tests conducted in three test facilities p 17 N89-18650

Bombardier Parodi-Delfino S.p.A. Colleferro (Italy).

- Propellant grain design p 116 N87-28594
- Propellant grain design p 117 N89-16912

Bombardier Parodi-Delfino S.p.A., Rome (Italy).

- Field artillery gun performances related to triple base powder quality p 116 N86-29067

Boston Univ., MA.

- Magnetic storm effects on F layer irregularities near the auroral oval p 189 N89-17750

Brigham Young Univ., Provo, UT.

- Measurements of distributed combustion p 115 N86-26479

Britannia Airways Ltd., Luton (England).

- In flight assessment of workload using pilot ratings and heart rate p 197 N87-30064

British Aerospace Aircraft Group, Bristol (England).

- Diffusion bonding in the manufacture of aircraft structure p 176 N87-17057

British Aerospace Aircraft Group, Kingston-upon-Thames (England).

- Carriage of external stores p 36 N87-24449
- V/STOL and STOVL fighter design p 36 N87-24452

British Aerospace Aircraft Group, Preston (England).

- A graphical aid to IKS program development p 224 N87-29521
- Voice control of cockpit systems p 73 N87-28528
- A structured approach to weapon system design p 48 N88-23773
- Towards the next generation fighter cockpit The EAP experience p 219 N89-18025
- Embedding thermal methods in SAFRA p 229 N89-18455

British Aerospace Aircraft Group, Warton (England).

- Stating the problem The step before F.E. modelling p 182 N87-16378
- Modeling for the finite element method p 182 N87-16374
- Applications and developments of computational methods for the aerodynamic problems of complex configurations p 6 N87-20209
- The integration of computational fluid dynamics into the military aircraft design process p 33 N87-20210
- Structural materials The changing scene p 102 N88-20190
- Time and cost reduction through computer integrated manufacture p 225 N88-20191
- Three generations of software engineering for airborne systems p 230 N89-18464

British Aerospace Aircraft Group, Weybridge (England).

- Re-assessment of gust statistics using CAARD data p 78 N88-29742

CORPORATE SOURCE

- British Aerospace Dynamics Group, Hatfield (England).**
Flight test evaluation of crew workload Part 1: Aircraft certification for a minimum crew of two pilots p 213 N87-20063
- British Aerospace Public Ltd. Co., Bracknell (England).**
The BAe (Bracknell) automatic detection, tracking and classification system p 241 N87-29476
- British Aerospace Public Ltd. Co., Bristol (England).**
Designing for superplastic alloys p 119 N87-29648
Experiences using the Mark IV supersonic hypersonic arbitrary body program p 13 N88-13249
A comparative study of vortex flows in wind and water tunnels p 163 N88-23151
Air intake aerodynamics p 15 N88-29762
Infrared atmospheric transmission/emission measurement in a maritime environment p 242 N89-17722
A model to predict visual performance at the man-display interface in the cockpit p 218 N89-18013
Development and application of a weapons multiblock suite p 168 N89-18633
- British Aerospace Public Ltd. Co., Brough (England).**
Pilot integration and the implications on the design of advanced cockpits p 220 N89-18026
- British Aerospace Public Ltd. Co., Kingston-upon-Thames (England).**
Evolution of combat performance of the Hawk light combat aircraft p 34 N87-22668
Airframe/store compatibility p 40 N88-13323
Manoeuvres by default: by demand and by design p 41 N88-19455
- British Aerospace Public Ltd. Co., Lancashire (England).**
The assessment and evaluation of combat performance improvements p 34 N87-22675
Computer aided tactics for air combat p 214 N88-19559
Reducing time required for the development of avionics systems p 244 N88-20185
- British Aerospace Public Ltd. Co., Preston (England).**
Improved combat performance using relaxed static stability and a spin prevention system (FBW Jaguar) p 12 N87-22674
Simulation of aircraft behaviour on and close to the ground Summary of AGARDograph AG-285 p 80 N87-23640
Hypersonic aerodynamics: Applications for HOTOL p 13 N88-13252
Materials for lighter aircraft p 40 N88-13325
Examples of static aeroelastic effects on present combat aircraft projects p 75 N88-13349
Software engineering for the British Aerospace Experimental Aircraft Programme (EAP) p 225 N88-23798
The role of simulation in flying qualities and flight control system related development p 87 N88-29742
Accurate drag estimation using a single component drag model technique p 88 N89-18656
- British Aerospace Public Ltd. Co., Stevenage (England).**
Influence co-efficient testing as a substitute for modal survey testing of large space structures p 94 N87-20369
A prototype fibre optic gyroscope for missile guidance applications p 92 N88-19554
- British Aerospace Public Ltd. Co., Weybridge (England).**
The policy maker looks at information p 247 N88-28794
Complex configurations p 86 N88-28861
Development and analysis of turbulent non-equilibrium boundary layers p 165 N88-28872
- British Aerospace Public Ltd. Co., Woodford (England).**
The specification and design of a future maritime reconnaissance aircraft p 47 N88-23772
- British Airways, Middlesex (England).**
British Airways experience with composite repairs p 3 N87-20192
- British Telecom Research Labs., Ipswich (England).**
Wide bandwidth, long distance fibre-optic communication systems p 240 N87-13300
The 6 GHz propagation measurements over a 51 km path in the UK p 141 N88-19673
- Brussels Univ. (Belgium).**
Lattice gas hydrodynamics p 160 N88-11978
- BULL, Louvain-la-Neuve (France).**
New technologies for improved information systems and services p 248 N88-29802
- Bundesamt fuer Wehrtechnik und Beschaffung, Munich (Germany, F.R.G.).**
The development of manoeuvre load criteria for agile aircraft p 41 N88-19450
- Burden Neurological Inst., Bristol (England).**
Event related and steady potential changes in the brain related to workload during tracking p 201 N88-27705
- Bureau Veritas, Paris (France).**
Trend monitoring of a turboprop engine at low and medium power p 54 N89-16801

C

- CAE Electronics Ltd., Saint Laurent (Quebec).**
Seat isolation system p 193 N87-13960
- California Inst. of Tech., Pasadena.**
Recent activity in vortex methods in the United States p 157 N87-22144
- California Univ., Irvine.**
The performance of a surrogate blend in simulating JP-4 in a spray-fuelled combustor p 106 N88-29826
- California Univ., San Diego, La Jolla.**
High spacecraft potentials on ISEE-1 in sunlight p 97 N87-26944
Flow velocity measurements by image processing of optically modulated traces p 163 N88-23147
- Calspan Advanced Technology Center, Buffalo, NY.**
Unusual airborne simulator applications p 62 N87-23656
Operation of gas turbine engines in dust-laden environments p 63 N88-17654
- Calspan Corp., Buffalo, NY.**
A survey of existing hypersonic ground test facilities, North America p 64 N88-13220
- Carnegie Field Services, Inc., Arnold AFS, TN.**
Vortex flows p 165 N88-28875
Boundary layer manipulation p 165 N88-28877
Experience with three dimensional composite grids p 227 N88-29324
Hierarchy of uncertainty sources in transonic wind tunnel testing p 87 N89-16851
- Cambridge Univ. (England).**
Experimental observations on an unsteady, normal shock/boundary layer interaction p 156 N87-21933
Measured and predicted loss generation in transonic turbine blading p 58 N87-21934
A numerical study of the 3D flowfield in a transonic compressor rotor with a modelling of the tip clearance flow p 59 N87-21945
Flow models using vortex dynamics: Work in the United Kingdom p 157 N87-22143
Classical two-dimensional methods p 9 N87-24400
Calculations of inlet distortion induced compressor flowfield instability p 61 N87-24470
Intensity fluctuations due to moving point sources p 236 N89-17737
Cross-frequency correlation of intensity fluctuations in the phase changing media p 146 N89-17738
Numerical simulation of wave propagation in random media p 234 N89-17742
Remote sensing of interplanetary shocks using a simulation method p 255 N89-17749
- Cameron Force Co., Houston, TX.**
The application of process modelling to heat treatment of superalloys p 112 N89-15281
- Canadair Ltd., Montreal (Quebec).**
Prediction of wing-body-store aerodynamics using a small perturbation method and a grid embedding technique p 25 N87-20207
- Canadian Forces Base Trenton, Astra (Ontario).**
GF-18/F404 transient performance trending p 71 N89-16814
- Canadian Forces Coll., Toronto (Ontario).**
Microcomputer-based catalog creation software options for small libraries p 223 N87-19922
- Carleton Univ., Ottawa (Ontario).**
Computational weld mechanics p 175 N87-17052
An expert system for aircraft conflict resolution in dense airspace p 29 N88-10810
Real-time expert systems: A status report p 225 N88-10817
Measurements and computations of swirling flow in a cylindrical annulus p 20 N89-18644
- Case Western Reserve Univ., Cleveland, OH.**
Matched index laser anemometry systems for flow studies in complex geometries p 121 N88-23145
A proposed boundary layer simulation methodology for wind tunnel testing p 89 N89-16667
- Catania Univ. (Italy).**
Numerical solution of compressible Navier-Stokes flows p 166 N89-18618
- Centre d'Electronique de l'Armement, Bruz (France).**
A program for the calculation of radio-wave transmission loss over the spherical earth and over obstacles p 139 N88-19662
- Centre d'Enseignement et de Recherches de Medecine Aeronautique, Paris (France).**
Pilots as supervisors and managers of automatic systems: A risky new factor in man-machine systems reliability p 219 N89-18021
- Centre d'Essais Aeronautique Toulouse (France).**
Method and means for ground crash testing at the Centre d'Essais Aeronautique de Toulouse: Application to the SA 341 and AS 332 helicopters p 24 N89-18432
- Centre d'Essais en Vol, Breigny-sur-Orge (France).**
The evaluation of vigilance in studies of aeronautical pharmacology p 196 N87-25716
The effect of acetyl-dl-leucine on the vestibulo-ocular reflex in humans p 196 N87-25717
Design and simulated crash validation of a dynamic response recorder p 221 N89-18442

Civil Aviation Authority

- Centre d'Essais en Vol, Istres (France).**
Simulation of fly-by-wire control for civil transport aircraft at the French Centre d'Essais en Vol p 81 N87-23847
Research simulators for helicopters p 84 N88-11656
Lessons learned from the use of new command systems p 218 N89-18023
- Centre d'Etudes et de Recherches, Toulouse (France).**
On the possibility of a several kilovolt differential charge in the day sector of a geosynchronous orbit p 99 N87-26953
ISAURE: Integration of security and fault tolerance in the REALTE 2000 system p 74 N88-10892
Experimental study of vortex sheets in plane flow p 162 N88-23142
Simulation study of spraying, streaming and vaporization phenomena associated with fuel injection p 104 N88-29914
Modeling the stability of a turbulent premixed flame, downstream from a step by a Lagrangian method p 109 N88-29943
- Centre d'Etudes et de Recherches de Medecine Aerospatiale, Paris (France).**
The biomechanical characteristics of the spinal column: Bibliographic review p 191 N87-13941
Introduction of a new stimulant CRL 40476 p 196 N87-25714
Study of anticipation mechanisms in the neurological environment p 207 N87-29505
Sophisticated integral control methods for use in flight p 212 N87-29510
Organization of displays in the visual space of the combat aircraft pilot p 212 N87-29516
Voice command and the change of mental representation during task performance p 135 N89-19572
Psychosensory cockpit ergonomics: advantages of intelligent information systems p 49 N88-23784
An approach to studying the effects of psychosimulants on cerebral electrical activity in the non human primate p 203 N88-27716
- Centre de Documentation de l'Armement, Paris (France).**
Sources of information for a defense information service p 250 N87-26683
- Centre de Medecine Aerospatiale, Brussels (Belgium).**
An investigation of simulator sickness and an electroencephalographic study p 206 N89-12143
- Centre de Recherches de la Compagnie Generale d'Electricite, Marcoussis (France).**
Generating diagnostic knowledge from a structural and functional description p 232 N88-10813
- Centre de Recherches de Medecine Aeronautique, Paris (France).**
Assessing workload for minimum crew certification Part 1: Static workload analysis and performance analysis p 214 N87-20067
- Centre National d'Etudes des Telecommunications, Lannion (France).**
Refractive index, meteorology and fading in line-of-sight transmission paths p 140 N88-10666
- Centre National d'Etudes Spatiales, Toulouse (France).**
Low frequency vibration testing on satellites p 36 N87-20364
- Centre National de la Recherche Scientifique, Chatenay-Malabry (France).**
Flamelet modeling of turbulent premixed flames p 109 N88-29942
- Centre National de la Recherche Scientifique, Marseilles (France).**
Method for predicting performance limits of centrifugal compressors p 66 N88-17677
- Centre National de la Recherche Scientifique, Poitiers (France).**
Gaseous premixed flames in non-uniform flows p 109 N88-29945
Modeling and experimental study of a reactive flow confined with wall injection p 109 N88-29945
- Centre National de la Recherche Scientifique, Toulouse (France).**
Computing systems dependability and fault tolerance: Basic concepts and terminology p 222 N88-10797
- Centre National de la Recherche Scientifique, Verrieres-Le Buisson (France).**
H₂ radar probing (including modification) p 142 N89-11937
Incoherent/coherent scatter p 142 N89-11940
- Cincinnati Univ., OH.**
A spatial marching technique for the inviscid blunt body problem p 12 N88-13239
- City Univ., London (England).**
Intermodulation interferences in radio systems p 152 N89-18595
- Civil Aviation Authority, London (England).**
The application of intelligent knowledge based systems to air traffic control p 28 N87-21904
- Civil Aviation Authority, Redhill (England).**
A review of measured gust responses in the light of modern analysis methods p 78 N88-29724

Cologne Univ.

- Cologne Univ. (Germany, F.R.).**
Pharmacokinetic approaches to performance enhancement in animals p 190 N87-25715
- Colorado School of Mines, Golden.**
Multiple scattering from rough surfaces p 143 N89-17710
- Commanders Naval Air Forces US Atlantic and Pacific Fleets, Norfolk, VA.**
US Naval Air Force avionic and electrical system corrosion prevention and control maintenance p 47 N88-13334
- Commerce Dept., Boulder, CO.**
An EHF telecommunication system engineering model p 141 N88-19674
- Commissariat à l'Energie Atomique, Gif-sur-Yvette (France).**
Dynamics and routes to chaos from quasiperiodicity p 160 N88-11974
A deterministic approach to turbulence: Chaos in Rayleigh-Bénard convection p 160 N88-11975
Transition to turbulence via spatio-temporal intermittency p 160 N88-11976
Linguistic and cultural barriers to the transfer of information p 251 N88-30459
- Communications Research Centre, Ottawa (Ontario).**
Optoelectronic broadband switching for communications and signal processing p 124 N87-13294
MIC technology for phased arrays p 135 N87-23866
A review of the role of surface reflection in multipath propagation over terrestrial microwave links p 138 N88-19655
VHF-UHF propagation by diffraction: Calculation by numerical integration p 139 N88-19659
HF communications and remote sensing in the high latitude region p 142 N88-19036
The design and performance of an adaptive packet-switched HF data terminal p 149 N88-19577
Predicting the effects of noise and interference on fast frequency-hopped M-ary NCSK systems p 151 N89-18588
- Compiere, Inc., Palo Alto, CA.**
Turbulence measurement in hypersonic flow p 10 N88-13224
- Computer Sciences Corp., Falls Church, VA.**
Conversion to Ada: Does it really make sense p 229 N89-18453
- Computer Technology Associates, Inc., Ridgecrest, CA.**
Automated Ada code generation for military avionics p 230 N89-18459
- Computing Devices Co., Ottawa (Ontario).**
Installed thrust as a predictor of engine health for jet engines p 71 N89-16806
- Concentration, Heat and Momentum Ltd., London (England).**
Modeling the behaviour of additives in gun barrels p 155 N86-29075
- Congressional Research Service, Washington, DC.**
Political and economic barriers to information transfer p 251 N88-30460
- Consiglio Nazionale delle Ricerche, Florence (Italy).**
Fiber optic device for temperature remote sensing p 237 N87-13280
A spherical waveguide multiplexer-demultiplexer p 238 N87-13285
- Consiglio Nazionale delle Ricerche, Milan (Italy).**
Burning stability of double base propellants p 114 N86-26472
- Consiglio Nazionale delle Ricerche, Rome (Italy).**
Strategic control to improve efficiency of air traffic management p 27 N87-21894
Squad instrumentation for neuromagnetic study of complex brain activity p 199 N88-27691
Electric and magnetic brain activity related to cognitive performance p 199 N88-27692
- Construcciones Aeronauticas S.A., Madrid (Spain).**
Riveted joints in composites primary structures p 186 N89-17698
- Control Data Corp., Minneapolis, MN.**
An avionics software expert system design p 231 N89-18467
- Costruzioni Aeronautiche Giovanni Agusta S.p.A., Varese (Italy).**
A129 advanced solutions for meeting today's combat helicopter requirements p 38 N88-11669
- Cranfield Inst. of Tech., Bedford (England).**
Introduction to finite element basics p 230 N87-16317
Seeding gas flows for laser anemometry p 172 N87-21178
Application of Doppler and transit laser anemometry in small turbine engines p 172 N87-21180
Acquisition and analysis of dynamic rotating machinery data p 111 N87-21190
Superplasticity: An overview p 111 N87-29642
The assessment of workload in helicopters p 214 N87-30066
The effects of sweep and bluntness on a glancing shock wave turbulent boundary layer interaction p 10 N88-13227

- Spray performance of a vaporizing fuel injector p 105 N88-29919
Flamelet chemistry modeling of soot formation for reduction p 105 N88-29928
Crashworthiness design methods applicable at concept stage p 22 N89-18424

D

- Dalhousie Univ., Halifax (Nova Scotia).**
Dissecting the visual and auditory pathways by means of the two-input technique p 199 N88-27690
Relation between VEP and visual function in lesions of the optic nerve and visual pathway p 203 N86-27718
- Danish Research Center for Applied Electronics, Høersholm.**
Meteor burst propagation and system design p 125 N87-18708
- Dassault-Breguet Aviation, Saint-Cloud (France).**
Expert system man-machine interface for a combat aircraft cockpit p 219 N89-18022
- Dayton Univ., OH.**
Physical modeling and viscoplasticity studies of the forging process p 120 N89-15269
- DDC International A/S, Lyngby (Denmark).**
Tools for developing real-time embedded systems in Ada: Needs, portability and efficiency p 230 N89-18464
- Defence and Civil Inst. of Environmental Medicine, Downsview (Ontario).**
Back pain and discomfort resulting from exposure to vibration in tracked armoured vehicles p 209 N87-13936
Postural fatigue and the backache of helicopter pilots [OCIE 85-R-30] p 210 N87-13953
Layered protocols in voice interaction with computers p 136 N87-29524
Experimentation in the integration of human engineering effort with avionics systems: development p 50 N88-23793
The effect of endogenous alpha on hemispheric asymmetries and the relationship of frontal theta to sustained attention p 208 N88-27701
Psychophysiological measures of drowsiness as estimators of mental fatigue and performance degradation during sleep deprivation p 200 N88-27702
The effect of mild hypoxia on the vestibular evoked response p 202 N88-27711
Simulator induced sickness among Hercules aircrew p 204 N89-12175
- Defence Medical Services Directorate, London (England).**
Human limitations in flight and some possible remedies p 217 N89-18011
- Defence Research Establishment Ottawa (Ontario).**
Implementation of an airborne SAR motion compensation system p 127 N87-18728
Nonlinearity and single shot noise problems in CARS spectroscopy p 104 N87-21174
Comparison of theory and experiment for four supercritical low drag airfoils p 21 N88-18655
- Defence Research Establishment Valcartier (Quebec).**
Direct erosive burning measurements of a reduced smoke solid propellant rocket by flash X-rays p 114 N86-26476
An investigation of steep descent guidance for terminally-guided submunitions p 92 N88-19555
Validation of a user-friendly CFD code for prediction of the aerodynamic characteristics of flight vehicles p 45 N89-18654
- Defence Research Information Centre, Glasgow (Scotland).**
Telling the user what is available: Announcement and search p 250 N87-26685
- Defence Industries Directorate, Athens (Greece).**
Simulation of impinging shear layers using vortex dynamics p 157 N87-22140
- Defence Technical Information Center, Alexandria, VA.**
Information retrieval systems evolve: advances for easier and more successful use p 252 N88-30462
- Department of Communications, Ottawa (Ontario).**
The use of simulated synthetic aperture radar: Signals of ships in the development of an automatic ship classification system p 132 N87-18758
- Department of the Secretary of State, Ottawa (Ontario).**
Words: Keys or barriers to information transfer p 252 N88-30461
- Department of Trade and Industry, London (England).**
Some measurements of height gain at VHF p 140 N88-19671
- Detroit Diesel Allison, Indianapolis, IN.**
Forced vibration and flutter design methodology p 183 N89-10316
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Berlin (Germany, F.R.).**
Flow unsteadiness in three low speed wind tunnels p 88 N89-16850

- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.).**
Computer assisted arrival sequencing and scheduling with the COMPAS system p 27 N87-21897
The boundary layer behaviour of highly loaded compressor cascade at transonic flow conditions p 57 N87-21911
DFVLR in-flight simulators ATTAS and ATTRES for flying qualities and flight control research p 83 N87-23657
Optimal detection of sensor failures in flight control systems using deterministic observers p 74 N88-10803
A rule-based system for arrival sequencing and scheduling in air traffic control p 29 N88-10815
Mission oriented flying qualities criteria for helicopter design via in-flight simulation p 37 N88-11652
Numerical methods for propeller aerodynamics and acoustics at DFVLR p 67 N88-17666
Grid generation around transport aircraft configurations using a multi-block structured computational domain p 227 N88-29325
Experiments on the DFVLR-F4 wing body configuration in several European windtunnels p 87 N89-16848
Investigation of the accuracy of finite volume methods for 2- and 3-dimensional flows p 170 N89-18661
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (Germany, F.R.).**
Laser-2 focus velocimetry p 172 N87-21177
Evaluation of L2F measurements in unsteady turbine flow p 156 N87-21182
Experimental investigations on shock losses of transonic and supersonic compressor cascades p 58 N87-21937
A shock loss model for supercritical subsonic flows in transonic axial flow compressors p 60 N87-21950
Improvement of the parallel compressor model by consideration of unsteady blade aerodynamics p 61 N87-24473
Secondary flow measurements with L2F technique in centrifugal compressors p 66 N88-17676
Experimental investigation of a supercritical compressor rotor blade section p 67 N88-17660
Influence of operating conditions on the atomization and distribution of fuel by air blast atomizers p 105 N88-29918
Analysis of the flow through double swirl airblast atomizers p 110 N88-29949
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (Germany, F.R.).**
Simulation of three dimensional transonic flow with separation past a hemisphere cylinder configuration p 8 N87-20230
Dynamic qualification of spacecraft by means of modal synthesis p 95 N87-20363
Modal survey testing for system identification and dynamic qualification of spacecraft structures p 96 N87-20365
Particle imaging velocimetry in a low turbulent windtunnel and other flow facilities p 79 N87-21205
Vortex dynamics: A report on work in Germany p 157 N87-21234
An experimental-analytical routine for the dynamic qualification of aircraft operating on rough runway surfaces p 35 N88-23611
Low Reynolds number influence on aerodynamic performance of hypersonic lifting vehicles p 11 N88-13230
On the numerical simulation of three-dimensional hypersonic flow p 12 N88-13237
The use of a water towing tank for aerodynamic testing and methods for quantitative evaluation of photographs p 162 N88-23140
Introduction and critical flow phenomena p 14 N88-28870
Shock boundary layer interaction p 165 N88-28873
Analytical surfaces and grids p 227 N88-29322
Physical aspects of viscous simulation and associated research requirements p 89 N89-16865
Engine simulator tests: Comparison of calibration and wind tunnel results p 89 N89-16871
The DFVLR-F3 wing experiment: Towards the validation of the numerical simulation of transonic viscous wing flows p 19 N89-18623
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany).**
MM wave SAR sensor design: Concept for an airborne low level reconnaissance system p 127 N87-18729
ECUM effectiveness of a low sidelobe antenna for SAR ground mapping p 127 N87-18730
The current and field distribution of a high power satellite antenna affected by nonlinear plasma sheath phenomena p 135 N87-26055
Physical optics method: Prediction of radar signatures p 137 N88-11914
Numerical modeling: Integral equation method p 137 N88-11919
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Stuttgart (Germany, F.R.).**
Tribology in aircraft systems: Basic principles and applications p 174 N86-29240

CORPORATE SOURCE

- Simultaneous temperature measurements with Raman and CARS in laminar flames p 103 N87-21171
- Crash investigations with sub-components of a composite helicopter lower airplane section p 23 N89-18430
- Crashworthy design of aircraft subfloor structural components p 24 N89-18431
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Wiesbaden (Germany, F.R.).**
- Robust control system design p 73 N88-10800
- Deutsche Forschungsanstalt fuer Luft- und Raumfahrt, Brunswick (Germany, F.R.).**
- The use of subjective workload assessment technique in a complex flight task p 213 N87-30058
- Deutsche Lufthansa A.G., Hamburg (Germany, F.R.).**
- Engine condition monitoring State-of-the-art civil application p 53 N89-16792
- Deutsche Welle, Cologne (Germany, F.R.).**
- HF groundwave and skywave propagation p 124 N87-18706
- Dokumentationszentrum der Bundeswehr, Bonn (Germany, F.R.).**
- Security considerations, defence-related and commercial p 250 N87-26681
- The resources required to run an information service p 250 N87-26682
- Dornier-Werke G.m.b.H., Friedrichshafen (Germany, F.R.).**
- Repair procedures for composite parts on the alpha p 1 N87-20175
- Numerical grid generation around complete aircraft configurations p 224 N87-20202
- Numerical simulation of internal and external inviscid and viscous 3-D flow fields p 155 N87-20213
- Operational training Application and experience p 92 N87-23653
- Integration of aerodynamic, performance, stability and control requirements into the design process of modern unstable lighter aircraft configurations p 35 N87-24446
- Helicopter (performance) management p 38 N88-11666
- Solution of some 3-D viscous and inviscid supersonic flow problems by finite-volume space-marching schemes p 11 N88-13235
- Systems analysis and simulation techniques. Essential tools for balanced complex weapon system designs in terms of performance and cost p 244 N88-20187
- Mesh generation for industrial application of Euler and Navier Stokes solvers p 227 N88-29323
- Prediction of dynamic derivatives p 15 N88-29761
- Aerodynamic heating of missiles p 16 N88-29754
- Typical joints in a wing structure p 44 N89-17693
- Pilot control devices p 220 N89-18027
- Comparative study of calculation procedures for viscous flows around airfoils in the transonic regime p 166 N89-18617
- Status of CFD validation on the vortex flow experiment p 167 N89-18620
- Numerical and experimental investigation of engine inlet flow with the Dornier EM2 supersonic inlet model p 20 N89-18642
- Douglas Aircraft Co., Inc., Long Beach, CA.**
- An approach to practical aerodynamic calculations p 158 N87-22151
- Use of task timeline analysis to assess crew workload p 212 N87-30056
- DSMA International, Inc., Toronto (Ontario).**
- Impact of nozzle design constraints on test section flow quality p 98 N89-16690
- Dunlap and Associates, Inc., Norwalk, CT.**
- Assessing workload for minimum crew certification Part 1. Static workload analysis and performance analysis p 214 N87-30067
- Dynatit Nobel A.G., Fuerth (Germany, F.R.).**
- Ignition of high-performance gun ammunition p 116 N88-29077
- Dynetics, Inc., Huntsville, AL.**
- Aerodynamics of aircraft afterbody. Report of the working group on aerodynamics of aircraft afterbody (AGARD-AR 226) p 5 N86-32408
- A generic seeker simulation for the evaluation of active RF guidance systems p 227 N89-10050

E

- Ecole Centrale de Lyon (France).**
- Numerical simulation of diffuser/compressor dome interaction p 65 N88-17663
- Parametric study of choke flutter with a linear theory p 66 N88-17673
- Ecole Centrale des Arts et Manufactures, Chateaufort-Malabry (France).**
- Flamelet modeling of turbulent premixed flames p 109 N88-29942
- Ecole Nationale Supérieure de Mécanique et d'Aérotechnique, Poitiers (France).**
- Gaseous premixed flames in non-uniform flows p 109 N88-29945

- Modeling and experimental study of a reactive flow confined with well injection p 109 N88-29946
- Ecole Nationale Supérieure des Mines, Valbonne (France).**
- A computer program simulating the hot forging of metal powder p 111 N89-15267
- Superplastic behaviour of some Ti-6Al-4V alloys investigated by torsion testing p 112 N89-15270
- Ecole Polytechnique Fédérale de Lausanne (Switzerland).**
- Validation of an Euler code for hydraulic turbines p 66 N89-18677
- Ecole Royale Militaire, Brussels (Belgium).**
- Interior ballistics of small arms. Particular problems. Part 1. Heat transfer and cook-off phenomenon in a small caliber weapon p 154 N86-29071
- Interior ballistics of small arms. Particular problems. Part 2. Thermodynamic model, powder parameters, initiation p 154 N86-29072
- EEG Systems Lab., San Francisco, CA.**
- Fourth generation neurocognitive pattern analysis system p 198 N88-26686
- Neurophysiological patterns of operational fatigue. Preliminary results p 201 N88-27703
- Neurophysiological precursors of accurate visuomotor performance p 201 N88-27706
- Eidetics International, Inc., Torrance, CA.**
- Flow visualization study of vortex manipulation on lighter configurations at high angles of attack p 161 N88-23130
- Electricité de France, Chatou.**
- Turbulence modelling through one point closures-applications-enlightening by large eddy simulation p 159 N88-11972
- Electronic System G.m.b.H., Munich (Germany, F.R.).**
- Computer aided sensor placement optimization p 236 N87-24954
- Electronique Marcel Dassault, Saint Cloud (France).**
- Utilization of EMICAT for the development of aerospace expert systems p 56 N89-18483
- Electronique Serge Dassault, Saint Cloud (France).**
- Guided stand-off weapons and the evaluation of means for launch calculation The application of new techniques p 235 N87-16009
- DEDALE An expert system for analog circuit maintenance p 153 N88-10809
- How to use PROLOG for expert system programming p 225 N88-10816
- Testing complex avionics software A practical experience p 50 N88-23794
- A highly reliable computer for airborne applications p 222 N89-10833
- Eltro G.m.b.H., Heidelberg (Germany, F.R.).**
- Eye safe Raman laser range finder for ground and airborne application p 173 N87-29475
- Emmanuel Coll., Boston, MA.**
- Structures of density and velocity fluctuations in the auroral oval and their impact on communication and radar systems p 146 N89-17735
- Engineering Sciences Data Unit, London (England).**
- The costs of not having relevant information p 247 N86-28798
- Engineering System I, Eschborn (Germany, F.R.).**
- Crash simulation and verification for metallic sandwich and laminate structures p 25 N89-18437
- ERA Ltd., Leatherhead (England).**
- Radiation charging and breakdown of insulators p 153 N87-26954
- Ergometrics Technology, Inc., Dayton, OH.**
- In-flight workload assessment using embedded secondary radio communications tasks p 212 N87-30055
- Cortical evoked response and eyeblink measures in the workload evaluation of alternative landing system displays p 213 N87-30061
- Erlangen-Nuremberg Univ. (Germany, F.R.).**
- Solution error estimation in the numerical predictions of turbulent recirculatory flows p 170 N89-18656
- Essex Corp., Orlando, FL.**
- Etiological significance of equipment features and pilot history in simulator sickness p 203 N89-12172
- Etablissement Technique de Bourges (France).**
- Experimental study of the ignition of explosive charges using visualization of the phenomena p 116 N86-29073
- Eurocontrol Agency, Brussels (Belgium).**
- Air navigation services and aircraft around the year 2000 p 25 N87-21883
- Possible contributions from the SSR mode S data link to the conduct of efficient aircraft operations p 21 N87-21887
- Next generation of control techniques in advanced TMA p 27 N87-21898
- European Space Agency, Paris (France).**
- Design and analysis of solid rocket motor nozzle p 101 N89-16906
- Design and analysis of solid rocket motor internal insulation p 101 N89-16915
- Overall optimization of solid rocket motor p 102 N89-16916

French Air Force

- European Space Agency, European Space Research and Technology Center, ESTEC, Noordwijk (Netherlands).**
- Electrostatic immunity of geostationary satellites p 59 N87-26957
- F**
- Fachinformationszentrum fuer Energie, Physik, Mathematik G.m.b.H., Eggenstein, Leopoldshafen (Germany, F.R.).**
- Information resources management in the R and D environment p 246 N86-25803
- Federal Armed Forces Defense Science, Munster (Germany, F.R.).**
- EMP-induced transients and their impact on system performance p 152 N89-18591
- Federal Aviation Administration, Atlantic City, NJ.**
- Microwave Landing System (MLS) area navigation. Computed centerline experiments and system accuracy analysis in an RF environment p 26 N87-21891
- Federal Aviation Administration, Seattle, WA.**
- Current and proposed gust criteria and analysis methods. An FAA overview p 78 N88-29718
- Federal Aviation Administration, Washington, DC.**
- Philosophy of applying automation to air traffic control p 27 N87-21896
- Ferranti Defence Systems Ltd., Edinburgh (Scotland).**
- The unmanned aircraft as a force multiplier p 32 N87-16007
- Fiat Aviazione S.p.A., Turin (Italy).**
- Analysis of possible transmission arrangements applicable for driving single or twin counterrotating fans on propfan engines p 66 N88-17670
- Finsen Inst., Copenhagen (Denmark).**
- Investigation of the lumbar flexion of office workers p 191 N87-13944
- Florence Univ. (Italy).**
- Accuracy and efficiency of a time marching approach for combustor modeling p 170 N89-18559
- Florida State Univ., Tallahassee.**
- A non-invasive experimental technique for the measurement of unsteady velocity and vorticity fields p 163 N88-23148
- Fokker B.V., Schiphol-Oost (Netherlands).**
- CFD applications in design and analysis of the Fokker 50 and Fokker 100 p 19 N89-18629
- Fondazione Ugo Bordon, Rome (Italy).**
- Nonlinear ellipse rotation in a low birefringence optical fiber p 238 N87-15267
- Coupled-mode theory approach to depolarization associated with propagation in turbulent media p 241 N89-17707
- Forschungsgesellschaft fuer Angewandte Naturwissenschaften, Werthoven (Germany, F.R.).**
- New method for suppression of gnomometer of errors by radio noise from overhead power lines p 151 N89-17785
- Forschungsinstitut der Deutschen Bundespost, Darmstadt (Germany, F.R.).**
- Space diversity effects on line-of-sight propagation paths p 140 N88-19670
- A precipitation scatter experiment at 30 GHz p 144 N89-17723
- Forschungsinstitut fuer Funk und Mathematik, Werthoven (Germany, F.R.).**
- Solid state multifunction phased array radar p 126 N87-18723
- Angular super resolution with array antennas. Application to seeker heads p 128 N87-18717
- Forschungsinstitut fuer Hochfrequenzphysik, Werthoven (Germany, F.R.).**
- Millimeter wave transmission through man-made obstructions in a battlefield environment p 127 N87-18712
- On a single step technique for adaptive array processing p 129 N87-18741
- Mono and bistatic radar coverage diagrams including diffractive wave propagation p 139 N88-19660
- Fraunhofer Inst. fuer Betriebsfestigkeit, Darmstadt (Germany, F.R.).**
- Effect of environment and improvement measures on static and fatigue strength of bolted CFRP joints p 187 N89-17700
- Fraunhofer Inst. fuer Kurzzeltdynamik, Weil am Rhein (Germany, F.R.).**
- Mechanical behaviour of propellant grains under heavy dynamic load p 115 N86-29966
- Measurement of important ballistic flow properties by spectroscopic techniques p 154 N86-29074
- French Air Force, Paris.**
- Weapon systems polyvalence. An economic and operational challenge p 34 N87-22667
- Responsible requirements definition for combat aircraft in light of uncertainties linked to artificial intelligence and expert systems techniques p 55 N89-18448

Garrett Turbine Engine Co.

G

- Garrett Turbine Engine Co., Phoenix, AZ.**
Influence of engine variables on future helicopter systems p 32 N87-10072
- GastOPS Ltd., Ottawa (Ontario).**
CF-18 engine performance monitoring p 69 N89-16787
- GEC Avionics Ltd., Rochester (England).**
System considerations for integrated machinery health monitoring p 70 N89-16804
- General Dynamics Corp., Fort Worth, TX.**
Analysis of the F-16 flow field by a block grid Euler approach p 6 N87-20217
Generation of multiple block grids for arbitrary 3D geometries p 226 N88-29317
Integration of advanced safety enhancements for F-16 terrain following p 56 N89-18472
CFD validation philosophy p 166 N89-18611
- General Dynamics Corp., San Diego, CA.**
Arcjet validation of surface catalysis using a viscous shock layer approach p 166 N89-18634
- General Electric Co., Binghamton, NY.**
Overview of AGARD Lecture Series No. 155 knowledge-based concepts and artificial intelligence applications to guidance and control p 74 N88-10807
- General Electric Co., Cincinnati, OH.**
Aerodynamic performance of a scale-model, counter-rotating unducted fan p 65 N88-17566
Numerical models for analytical predictions of combustor aerothermal performance characteristics p 108 N88-29935
Use of vendor consortiums for implementation of process simulation technology p 121 N89-15278
Military engine non-inning status at GE Aircraft Engines, Cincinnati, Ohio p 53 N89-16798
Commercial engine monitoring status at GE Aircraft Engines, Cincinnati, Ohio p 54 N89-16799
- General Electric Co., Evendale, OH.**
Turbulent engine post-instability behavior: Computer simulations, test validation and application of simulations p 62 N87-24474
- General Electric Co., Lynn, MA.**
Optimizing powerplant design and development cycles p 254 N89-20183
- General Electric Co., Utica, NY.**
High resolution signal processor for limited aperture multimode radar p 128 N87-18736
- General Motors Corp., Indianapolis, IN.**
Unsteady aerodynamic measurements in forced vibration research p 9 N87-24406
Gear systems for advanced turboprops p 65 N88-17567
Gas turbine combustion modeling p 108 N88-29936
- General Precision Corp., Shiba Berhara, CA.**
A software life cycle support environment p 225 N88-23800
- German Air Force Air Armament Directorate, Cologne (Germany, F.R.).**
On board life monitoring system Tornado (OLMOS) p 52 N89-16785
- German Army Hospital, Ulm (Germany, F.R.).**
Motion cues in every day life p 205 N89-12180
- Glasgow Univ. (Scotland).**
Performance of integrated optical frequency shifters digitalized to high birefringence fibres using ion-milled grooves p 239 N87-13289
Numerical experiments with hypersonic flows beneath a cone-delta wing combination p 12 N88-13238
Technique change needs organizational change p 246 N88-30466
- Goettingen Univ. (Germany, F.R.).**
The influence of pressure on soot formation p 107 N88-29934
- Grimman Aerospace Corp., Bethpage, NY.**
Integration of simulation to support F-14A low altitude high angle of attack flight testing p 81 N87-23649
- GTE Government Systems Corp., Westborough, MA.**
Radio noise characteristics and their system performance implications p 148 N89-18566
- Gurnsey (J.), Wembley (England).**
Microcomputers in information resource sharing: Two full text systems p 249 N87-19927

H

- H. W. Structures Ltd., Pitsea (England).**
Predicting crash performance p 25 N89-18438
- Hamburg Model Basin (Germany, F.R.).**
Measurements of the time dependent velocity field surrounding a model propeller in uniform water flow p 164 N88-23155
- Hamburg Univ. (Germany, F.R.).**
Ground level atmospheric consideration p 142 N89-11335
Monte Carlo simulation of multiple scattering effects of millimeter waves from rain for a bistatic radar p 47 N89-17748

- Harris Corp., Melbourne, FL.**
Fiber optic buses and networks for advanced avionics architectures p 52 N89-10836
- Harvard Medical School, Boston, MA.**
Homeostatic, entrainment and pacemaker effects of drugs that regulate the timing of sleep and wakefulness p 196 N87-25718
- Harvard-Smithsonian Center for Astrophysics, Cambridge, MA.**
An introduction to error-control coding with application to HF communications p 122 N86-27570
Measurements of HF propagation parameters for Real-Time Channel Evaluation (RTCE) systems p 123 N86-27575
- Hazeltine Corp., Greenlawn, NY.**
Increasing the usefulness of AWACS downlink transmissions by semantic compression p 135 N87-29518
- Hellenic Air Force General Hospital, Athens (Greece).**
Correlation between EEG abnormal activity and aircraft accidents: A long term observation p 208 N88-27719
- Hercules, Inc., Rocket Center, WV.**
Composite motor case design p 100 N87-28592
Composite motor case design p 101 N89-16909
- Hochschule der Bundeswehr, Hamburg (Germany, F.R.).**
Gas path modelling, diagnosis and sensor fault detection p 54 N89-16811
- Honeywell Advanced Technology Centre, North York (Ontario).**
Configuration design of a helicopter integrated navigation system p 29 N87-29480
- Hordt Research, Development and Therapy, Rodgau (Germany, F.R.).**
Measurement and classification of the mode of action of antidepressant drugs p 202 N88-27714
- Hughes Aircraft Co., Fullerton, CA.**
Operation and performance of an integrated helicopter communication system p 49 N88-23787
- Hughes Helicopters, Culver City, CA.**
Inertia welding of nitralloy N and 18 nickel maraging 250 grade steels for utilization in the main rotor drive shaft for the AH-64 military helicopter program p 177 N87-17067
- Hughes Research Labs., Malibu, CA.**
Lightwave technology in future radar equipment designs p 240 N87-13304
- Hull Univ. (England).**
The design of static and noble HF communication systems p 122 N86-27567
Embedded real-time channel evaluation techniques p 122 N86-27569
Review of modulation, coding and speech digitalisation techniques p 124 N87-18704
HF system design p 125 N87-18707
Artificial intelligence in HF communication systems p 150 N89-18580
- Processing techniques for radio communications in non-Gaussian noise environments p 150 N89-18581**
- Human Engineering Labs., Aberdeen Proving Ground, MD.**
Engineering data compendium Human perception and performance: User's guide p 215 N88-27749
[LC-87-19560] p 215 N88-27749
Engineering data compendium Human perception and performance, volume 1 p 215 N88-28630
[LC-87-19560] p 215 N88-28630
Engineering data compendium Human perception and performance, volume 2 p 215 N88-28631
[LC-87-19560] p 215 N88-28631
Engineering data compendium Human perception and performance, volume 3 p 215 N88-28632
[LC-87-19560] p 215 N88-28632
- Human Systems Div., Brooks AFB, TX.**
Engineering data compendium Human perception and performance: User's guide p 215 N88-27749
[LC-87-19560] p 215 N88-27749
Engineering data compendium Human perception and performance, volume 1 p 215 N88-28630
[LC-87-19560] p 215 N88-28630
Engineering data compendium Human perception and performance, volume 2 p 215 N88-28631
[LC-87-19560] p 215 N88-28631
Engineering data compendium Human perception and performance, volume 3 p 215 N88-28632
[LC-87-19560] p 215 N88-28632
- Huntco To Ltd., Scarborough (Ontario).**
Motion compensation requirements for a high resolution spotlight SAR p 126 N87-17727

I

- Illinois Univ., Champaign.**
Event related brain potentials as indices of mental workload and attentional allocation p 200 N88-27696
- Illinois Univ., Chicago.**
Basic monostatic polarimetric broadband target scattering analysis required for high resolution polarimetric radar target downrange/crossrange mapping of airborne scatterers p 130 N87-18744

CORPORATE SOURCE

- Illinois Univ., Urbana-Champaign.**
Workload methodology p 213 N87-30059
Alternative fuel spray behavior p 104 N88-29912
Space-time statistics of waves propagating through a deep phase screen p 144 N89-17719
- IMI Summerfield, Kidderminster (England).**
Elastomer modified cast double base propellants p 114 N86-26473
The reduction of exhaust signature in solid propellant rocket motors p 114 N86-26474
Considerations for designers of cases for small solid propellant rocket motors p 100 N87-28594
Water flow visualisation of a ramrocket combustion chamber p 162 N88-23138
Considerations for designers of cases for small solid propellant rocket motors p 101 N89-16911
- Imperial Coll. of Science and Technology, London (England).**
Future trends in helicopter transmission lubricants p 113 N86-29250
Comparison of finite difference calculations of a large region of recirculating flow near an airfoil trailing edge p 6 N87-20218
Velocity and temperature measurements in a can-type gas-turbine combustor p 57 N87-21184
Physics and modeling of three-dimensional boundary layers p 158 N87-22147
Computation of flow past conical hypersonic wings using a second order Godunov method p 12 N88-13241
Flow characteristics of a model annular combustor p 106 N88-29924
Three-dimensional combustor predictors: A comparison of equilibrium and laminar flamelet chemistry models p 108 N88-29940
Basic structural dynamics p 183 N89-10007
Structural dynamic characteristics of individual blades p 68 N89-10008
Structural dynamic characteristics of bladed assemblies p 68 N89-10009
The static strength of bolted joints in fibre reinforced plastics p 102 N89-16999
- Inco Engineered Products Ltd., Birmingham (England).**
An application of computer modelling to isothermal forging p 121 N89-15280
- Industrial Marine Products Group Ltd., Dartmouth (Nova Scotia).**
Corrosion in avionics and associated equipment, cause effect and prevention p 47 N88-13335
- Industrie per lo Spazio e le Comunicazioni S.p.A., Rome (Italy).**
Coating of radio terminals p 152 N89-18594
- Industriellen-Betriebsgesellschaft m.b.H., Ottenbunn (Germany, F.R.).**
Influence of welding flaws on the fatigue strength of electron beam weldments in Ti Al6 V4 p 182 N87-17065
Spacecraft qualification using advanced vibration and modal testing techniques p 96 N87-20363
Multi-axis vibration tests on spacecraft using hydraulic exciters p 87 N87-20377
Performance improvement of airborne weapon systems: methods, scope and limitations p 13 N87-22666
Manned air to air combat simulation p 81 N87-23666
Impacts of rotor hub design criteria on the operational capabilities of rotorcraft systems p 37 N88-11663
Manned simulation: Helpful means to determine and improve structural load criteria p 42 N88-19459
Long crack growth rate data: Gaussian loading p 185 N89-17296
Crashworthiness of aircraft structures p 24 N89-18336
- Ingenieur a la Direction des Constructions Aeronautiques, Paris (France).**
Regulatory aspect of crashworthiness p 22 N89-18422
- Institut d'Aeronomie Spatiale de Belgique, Brussels.**
The quiet and distributed plasmasphere p 187 N87-26938
A model for an electromagnetic force generator in the magnetosphere: A source of the auroral arcs p 188 N87-26940
- Institut de Mecanique des Fluides de Lille (France).**
Application of high speed photography to aerodynamic and hydrodynamic three-dimensional velocimetry p 163 N88-23144
Particular flight mechanics specifications related to wind tunnel test results p 90 N89-16879
Numerical and experimental study of the crash behavior of helicopters and aircraft p 24 N89-18433
- Institut de Mecanique des Fluides de Marseille (France).**
Wind tunnel validation of aerodynamic field calculation codes for rotors and propellers in various flight conditions p 169 N89-18639
- Institut Franco-Allemand de Recherche Saint-Louis (France).**
High pressure combustion: Comparison of theoretical and actual results p 118 N86-29078

CORPORATE SOURCE

- An ultra-high-speed cinematographic method for the study of wakes in hypersonic ballistic ranges p 173 N88-13228
- Institut fuer Rundfunktechnik, Munich (Germany, F.R.).**
Development of a ground-conductivity map for the area of the Federal Republic of Germany from measured field-strength contours p 138 N88-19656
- Institut National de Recherche d'Informatique et d'Automatique, Valbonne (France).**
Numerical modelling of premixed flames in gaseous media p 109 N88-29944
- Institut National de Recherche et de Sécurité pour la Prévention des Accidents du Travail et des Maladies Professionnelles, Vandœuvre (France).**
The workplace vibration environment of off-road machines p 209 N87-13935
- Institute for Perception RVO-TNO, Soesterberg (Netherlands).**
Voice interactive systems in severe noise conditions p 136 N87-29528
- Institute of Aviation Medicine, Fuerstenfeldbruck (Germany, F.R.).**
Relationship between backache and flying duty in jet- and prop-pilots demonstrated by a flying wing p 191 N87-13938
- Institute of Work Physiology, Oslo (Norway).**
Musculo-skeletal illnesses among workers exposed to low-intensity work load of long duration p 191 N87-13940
- Instituto Superior Técnico, Lisbon (Portugal).**
The flow around a squared obstacle p 156 N87-21185
- Processing techniques for correlation of LDA and thermocouple signals p 171 N87-21194
- An investigation of ducted propellers in asymmetric shear flow p 161 N88-23136
- Radiation transfer in gas turbine combustors p 107 N88-29929
- Inherent after effects in the new rapid acquisition method for frequency-hopped push-to-talk spread spectrum systems: A after-fighting scheme p 151 N89-18589
- On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N87-18645
- Finite difference methods in recirculating flows p 160 N89-18651
- Interferometrics, Inc., Vienna, VA.**
VLF radio noise p 148 N89-18589
- International Business Machines Corp., Endicott, NY.**
Definitions and requirements for distributed real-time systems p 232 N89-18476
- International Business Machines Corp., Gaithersburg, MD.**
Stars, polygons and clusters p 250 N87-29511
- International Business Machines Corp., Owego, NY.**
Development of a genetic architecture p 48 N88-23774
- Systems engineering technique p 48 N88-23776
- The avionics software architecture impact on system architecture p 48 N88-23778
- Israeli Air Force Aeromedical Center, Tel Hashomer.**
Low back pain and narrowed disc spaces in fighter pilots p 191 N87-13937
- Istanbul Univ. (Turkey).**
Numerical investigation of the laminar boundary layer on a 3-D body started impulsively from rest p 6 N87-20220
- Istituto Nazionale di Ottica, Florence (Italy).**
Determination of fractal dimension, connection of space and temporal chaos and application to experimental results p 160 N88-11977
- Istituto per le Telecomunicazioni e l'Elettronica G. Vallauri, Livorno (Italy).**
Electromagnetic code for naval applications p 150 N89-18583
- Italian Air Force Aerospace Medical Center, Rome.**
Spontaneous cerebral electrical activity during prolonged hypoglycemia: A quantitative study in humans p 203 N88-27717
- Italian Air Staff, Rome.**
Some development trends in light ground attack aircraft p 34 N87-22666

J

- Jeffers (James D., III), Tampa, FL.**
Aeroelastic thermal effects p 68 N89-10015
- Jet Propulsion Lab., California Inst. of Tech., Pasadena.**
Structural qualification of large spacecraft p 95 N87-20361
- Johann-Wolfgang-Göthe-Univ., Frankfurt am Main (Germany, F.R.).**
Measurement of electrical activity in the CNS with cortical evoked potentials and EEG: Efficacy profiles of drugs using factor analysis p 202 N88-27715
- Johns Hopkins Univ., Laurel, MD.**
Hypersonic airbreathing propulsion: Evolution and opportunities p 62 N88-15231
- Karlsruhe Univ. (Germany, F.R.).**
Turbulence effects on the droplet distribution behind airblast atomizers p 104 N88-29915
- Particle size measurements in sooting combustion systems p 107 N88-29941
- On the application of finite-difference techniques for the computation of the flow field in gas turbine combustors with complex geometries p 108 N88-29939
- Kassel Univ. (Germany, F.R.).**
Theoretical aspects of target classification: Physical optics and radon transform methods p 137 N88-11915
- KHD Luftfahrttechnik G.m.b.H., Oberursel (Germany, F.R.).**
Multifunctional requirements for a gearbox secondary power system in a modern fighter aircraft and its components and interface requirements p 174 N88-29243
- Comparison between inverse designed (PVO) airfoils and standard series airfoils for high loaded axial turbine nozzle application p 60 N87-21951
- A small annular combustor of high power density, wide operating range and low manufacturing cost p 110 N88-29951
- King Research, Inc., Rockville, MD.**
Measuring the value of information and information systems, services and products p 247 N88-28799
- Evaluating the effectiveness of information use p 253 N89-11626
- Evaluating the performance of information centre staff p 253 N89-11629
- Evaluating performance of information centre operations and services p 253 N89-11630
- A framework for evaluating the effectiveness of information centres and services p 253 N89-11631
- Kline (Nathan S.) Inst. for Psychiatric Research, Orangeburg, NY.**
Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27587
- KLM Helicopters B.V., Amsterdam (Netherlands).**
Design requirements for future commercial operations p 37 N88-11651
- Kyushu Univ., Fukuoka (Japan).**
Three-dimensional flows p 8 N87-24401

L

- Laboratoire Central de Biologie Aérospatiale, Paris (France).**
Numerical control of a vibrating tank for the study of transient signals in biomechanics p 192 N87-13948
- Laboratoire Central de Télécommunications, Paris (France).**
Modeling electromagnetic wave propagation through a strongly-fluctuating ionized medium by the phase screen method p 147 N89-17739
- Laboratoire de Médecine Aérospatiale, Brétigny-sur-Orge (France).**
Lower back pain in helicopter pilots: Etiopathological factors p 210 N87-13955
- Horizontal study of the incidence of simulator induced sickness among French Air Force pilots p 204 N89-12175
- Laboratoire de Recherches Ballistiques et Aérodynamiques, Vernon (France).**
Collision probability of cruise missiles flying in formation p 51 N87-16007
- Laboville, Linkebeek (Belgium).**
The treatment of grey literature p 250 N87-26684
- Lancaster Univ. (England).**
The high-latitude ionosphere: Geophysical basis p 188 N89-11933
- The high-latitude ionosphere: Dynamical aspects, and models p 188 N89-11938
- Land Turbine Sensors Inc., Tullytown, PA.**
Some considerations relating to aero engine pyrometry p 171 N87-21117
- Leval Univ. (Quebec).**
The characteristics of combustion by fuel composition: Measurements in a small conventional combustor p 105 N88-29920
- The behaviour of synthetic fuels in a small transparent combustor p 110 N88-29950
- Lear Siegler, Inc., Grand Rapids, MI.**
Application of knowledge based techniques to aircraft trajectory generation and control p 75 N88-10811
- A review of the knowledge engineering process p 233 N88-10814
- Leeds Univ. (England).**
Rates of formation of soot from hydrocarbon flames and its destruction p 107 N88-29933
- Lehigh Univ., Bethlehem, PA.**
Structure of unsteady flows at leading and trailing edges: Flow visualization and its interpretation p 164 N88-23154

Martin Marietta Aerospace

- Leicester Polytechnic (England).**
Application of LAN's and electronic office techniques in the library p 232 N87-19924
- Leicester Univ. (England).**
The aerodynamics of parachutes p 9 N87-26681
- Measurements of aerodynamic forces on unsteady moving bluff parachute canopies p 162 N88-23137
- Liburdi Engineering Ltd., Burlington (Ontario).**
Repair techniques for gas turbine components p 178 N87-17071
- Liège Univ. (Belgium).**
Computer prediction of internal stresses during heat treatment p 112 N89-15277
- Lisbon Univ. (Portugal).**
On the validation of 3-D numerical simulations of turbulent impinging jets through a crossflow p 20 N89-18645
- Liton Systems (Canada) Ltd., Rexdale, (Ontario).**
Closed loop fiber optic gyro p 237 N87-13277
- Liton Technische Werke, Freiburg (Germany, F.R.).**
Navigation systems for the new generation of combat and transport helicopters and associated flight tests p 29 N87-29481
- A comparison of integrated and separate systems for flight control and navigation p 48 N88-23779
- Packaged fiber optic gyros p 172 N89-17608
- Liverpool Univ. (England).**
Epidemiology of the driver's back p 191 N87-13973
- Measurements of change of stature in the assessment of static and dynamic spinal loading p 193 N87-13957
- Lockheed Aeronautical Systems Co., Burbank, CA.**
A summary of methods for establishing airframe design loads from continuous gust design criteria p 43 N88-29721
- Transport airplane crash simulation: validation and application to crash design criteria p 24 N89-18435
- Lockheed-California Co., Burbank.**
Development of field level repairs for composite structures p 1 N87-20177
- The off-design performance of hypersonic waveriders p 38 N88-13244
- Logistica Management Inst., Bethesda, MD.**
Biographic networks and microcomputer applications for aerospace and defense scientific and technical information p 248 N87-19929
- Los Alamos National Lab., NM.**
Hostile energetic particle radiation environments in Earth's outer magnetosphere p 188 N87-26941
- Loughborough Univ. of Technology (England).**
Vehicle vibration and back pain p 209 N87-13945
- Measures, methods and models employed in evaluating the effectiveness of information centers and services p 253 N89-11627
- Lowell Univ., MA.**
Specular scatter: A new mechanism for ionospheric backscatter p 189 N89-17753
- Lucas Aerospace Ltd., Birmingham (England).**
Pumping systems and flow interfaces for rapid response electronic reheat controls p 65 N88-17665
- LuTech, Inc., Dallas, TX.**
Development of a new high altitude electromagnetic pulse (HEMP) environment and resulting overhead wire responses p 151 N89-14590

M

- Magnavox Electronic Systems Co., Fort Wayne, IN.**
Digital simulation techniques for end game phenomena p 228 N89-10051
- Manchester Univ. (England).**
Cavitation and superplasticity p 111 N87-29645
- Experimental observations of spectral occupancy at HF p 149 N89-18573
- Experimental robust HF modems incorporating adaptive excision p 150 N89-18573
- Marconi Avionics Ltd., Basildon (England).**
The application of multi-dimensional access memories to radar signal processing systems p 129 N87-18740
- Marconi Avionics Ltd., Rochester (England).**
The digital colour map simplifies ground attack operations p 187 N87-24950
- An integrated aircraft navigation and display system utilising an on-board composite data base p 236 N87-24955
- A low cost gyroscope for guidance and statusation units p 171 N87-29478
- Some approaches to the design of high integrity software p 73 N88-10799
- Marconi Co. Ltd., Chelmsford (England).**
High-resolution MTI with SAR p 128 N87-18734
- Marmara Research Inst., Gebze (Turkey).**
Prediction of temperature distribution in axisymmetric extrusion p 120 N89-15265
- Martin Marietta Aerospace, Denver, CO.**
Benefits of passive damping as applied to active control of large space structures p 96 N87-20371

Maryland Univ.

- Maryland Univ., College Park.**
Numerical optimization of conical flow waveriders including detailed viscous effects p 38 N88-13245
- Massachusetts Inst. of Tech., Cambridge.**
Applications of Euler equations to sharp edge delta wings with leading edge vortices p 6 N87-20214
Vortex shedding in compressor blade wakes p 58 N87-21932
Use of tyrosine and other nutrients to enhance and sustain performance p 195 N87-25711
Automation at the man-machine interface p 211 N87-29504
Aerodynamic formulation for tuned and mistuned rotors p 68 N89-10013
- Massachusetts Univ., Amherst.**
Printed circuit antenna technology p 153 N87-23867
- MATRA Espace, Toulouse (France).**
Qualification of the faint object camera p 170 N87-20259
- MATRA Service Aerodynamique, Velizy-Villacoublay (France).**
Simulation of a jet deflection system with the aid of the Euler equations p 155 N87-20212
Description of a water tank facility. Study of a missile at high incidence p 85 N88-23133
Numerical methods. Euler time dependent solver p 15 N88-29760
Accuracy of lift and center-of-thrust measurements at missile control surfaces p 18 N89-16875
- McDonnell Aircraft Co., Saint Louis, MO.**
Battle damage repair of composite structures p 3 N87-20189
Design optimization of fighter aircraft p 36 N87-24451
Transonic wind tunnel boundary interference. A correction procedure p 88 N89-16861
- McDonnell-Douglas Astronautics Co., Huntington Beach, CA.**
Comparison of ring laser and fiber-optic gyro technology p 237 N87-13276
Optical quadrature demodulator for coherent detection and sensor applications p 238 N87-13287
- McDonnell-Douglas Astronautics Co., Saint Louis, MO.**
Accuracy criteria for evaluating supersonic aerodynamic coefficient predictions p 15 N88-29756
Semiempirical methods for aeroblasting missiles p 16 N88-29763
Next generation missile design p 16 N88-29766
- McDonnell-Douglas Corp., Long Beach, CA.**
Mental workload measurement in operational aircraft systems. Two promising approaches p 207 N87-30060
- McDonnell-Douglas Helicopter Co., Mesa, AZ.**
Apache for the battlefield of today and the 21st century p 38 N88-11670
Reducing rotary wing aircraft development time/cost through the use of simulation p 214 N88-20186
- McDonnell-Douglas Research Lab., Saint Louis, MO.**
Experimental investigation of hover flowfields in water at the McDonnell Douglas Research Laboratories p 161 N88-23135
- McMaster Univ., Hamilton (Ontario).**
The correlation between methodological and low-level angle-of-arrival measurements p 140 N88-19668
- Memorial Univ. of Newfoundland, Saint John's.**
Rough surface propagation and scatter with applications to ground wave remote sensing in an ocean environment p 145 N89-17727
- Messerschmitt-Boelkow-Blohm/Entwicklungsbereich Nord, Bremen (Germany, F.R.G.).**
Recent developments and future trends in structural dynamic design verification and qualification of large flexible spacecraft p 95 N87-20357
- Messerschmitt-Boelkow-Blohm G.m.b.H., Augsburg (Germany, F.R.G.).**
Economic manufacturing and inspection of the electron-beam-welded Tornado wing box p 176 N87-17055
- Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (Germany, F.R.G.).**
Comparison between 2D transonic flutter calculations in the time and frequency domain p 10 N87-28520
The relationship between operational flight manoeuvre parameters and design parameters p 41 N88-19454
Delta wing configurations p 13 N88-28660
Accuracy requirements for high-speed test with engine simulation on transport aircraft models in the NLR-HST p 89 N89-16870
Accuracy problems in wind tunnels during transport aircraft development p 90 N89-16877
- Messerschmitt-Boelkow-Blohm G.m.b.H., Hamburg (Germany, F.R.G.).**
Vortex formation over delta, double-delta and waverider configurations at supersonic speeds p 12 N88-13243
Comparison of the influence of different grid models on structural design p 43 N88-28722
- Messerschmitt-Boelkow-Blohm G.m.b.H., Lemwerder (Germany, F.R.G.).**
Ultrasonic testing techniques for diffusion-bonded titanium components p 179 N87-17061

Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (Germany, F.R.G.)

- Requirements on lubrication oil from the view of a helicopter manufacturer p 112 N86-29244
Single-mode fibers for fiber-optic-guided missiles. A comparison with graded-index multimode fibers p 240 N87-13303
Requirements and applications for radar simulations. A standpoint of an airframe company p 133 N87-18759
Design for reparability of helicopter composite blades p 33 N87-20176
Composite repair of cocured J-stiffened panels. Design and test verification p 1 N87-20181
Composite repair techniques for J-stiffened composite fuselage structures p 2 N87-20186
Euler solution for a complete fighter aircraft at sub- and supersonic speed p 33 N87-20216
Zonal solutions for airfoils using Euler boundary layer and Navier-Stokes equations p 6 N87-20219
MLS. Its technical features and operational capabilities p 26 N87-21892
Evaluation of results of boundary-layer calculations with regard to design aerodynamics p 158 N87-22150
Integrated design of structures p 34 N87-22669
Computer simulation studies on human control reliability in manual aircraft control. The origin of PIO p 211 N87-23644
Flight testing of fighter aircraft p 35 N87-24448
New trends in intake/engine compatibility assessment p 60 N87-24467
Development of intake swirl generators for turbo jet engine testing p 83 N87-24480
The task taxonomy method. A basis for an expert system on human reliability p 207 N87-29506
MBB simulation facilities applied for rotorcraft research p 84 N88-11655
A 3-D Euler solution for hypersonic Mach numbers p 12 N88-13240
Fundamentals of fighter aircraft design p 39 N88-13316
Aeroelasticity and optimization in fighter aircraft design p 40 N88-13324
The role of experimental investigation and computational fluid dynamics during fighter aircraft design p 40 N88-13326
Static aeroelastic considerations in the definition of design loads for fighter airplanes p 76 N88-13351
Speed control of a missile with throttleable ducted rocket propulsion p 93 N88-19561
The use of hardware-in-the-loop-techniques in the development of a modern air-to-surface missile system p 93 N88-19562
Reasons for increasing development cost of rotary wing aircraft and ideas to reverse the trend p 254 N88-20179
The judgment and evaluation of long-term investments demonstrated by means of a civil aircraft program p 254 N88-20180
Schedule and cost control of development p 245 N88-20196
Computing system configuration for fighter aircraft flight control systems p 79 N89-10832
Comparison of experimental results and analytically predicted data for double shear fastened joints p 185 N89-17687
Mechanism of single shear fastened joints p 187 N89-17700
Moding strategy for cockpit data management in modern fighter aircraft p 218 N89-18017
Multisensor target reconnaissance p 219 N89-18020
Crashworthiness activities on MBB helicopters p 23 N89-18425
Crushing behaviour of helicopter subfloor structures p 23 N89-18429
Avionics systems engineering and its relationship to mission software development p 55 N89-18454
The MBB test strategy and tool set for software and system integration p 230 N89-18463
Task interactions in distributed machines of embedded computer systems p 232 N89-18470
Ada in embedded avionics systems p 57 N89-18486
Verification of an implicit relaxation method for steady and unsteady viscous and inviscid flow problems p 167 N89-18625
- Messerschmitt-Boelkow G.m.b.H., Munich (Germany, F.R.G.).**
Grid generation for an advanced fighter aircraft p 226 N88-29319
- Messina Univ. (Italy).**
Selective extinction of a dispersion of single and aggregated layered spheres p 147 N89-17743
- Miami Univ., Oxford, OH.**
Preadaptation to the stimulus rearrangement of weightlessness. Preliminary studies and concepts for trainer designs p 207 N89-12188
- Michigan Univ., Ann Arbor.**
Radiation from soot-containing flames p 106 N88-29927

CORPORATE SOURCE

Middle East Technical Univ., Ankara (Turkey).

- Environmental effects on transition and boundary layer characteristics p 111 N88-28876
Microstructures. Flow properties and processing of Ti6242 alloy p 112 N89-15268
Finite-element-simulation of metal-forming processes p 120 N89-15275
- Military Academy, Ankara (Turkey).**
Modeling of deformation and microstructural changes in P/M Rene 95 under isothermal forging conditions p 119 N89-15264
- Ministry of Defence, London (England).**
Cost analysis of aircraft projects p 3 N87-22864
Picking winners. Parametric cost estimating and project management p 243 N88-20176
The influence of infrastructure on the costs and timescales of collaborative programmes p 246 N88-20201
Recent UK trials in engine health monitoring. Feedback and feedforward p 69 N89-16790
- Ministry of National Defence, Ankara (Turkey).**
The information scene in Turkey p 249 N87-29576
- Mississippi State Univ., Mississippi State.**
Composite grid generation for aircraft configurations with the CAGLE code p 227 N88-29321
- Mitre Corp., Bedford, MA.**
Developments in HF equipment and systems mobile and portable terminals p 123 N88-27573
Advanced information management and decision making in Airborne Early Warning and Control (AEW&C) training systems p 251 N87-29517
- Motoren- und Turbinen-Union Muenchen G.m.b.H. (Germany, F.R.G.).**
Aero-engine gears. Manufacturing cracks and their effect on operation p 174 N86-29239
Aircraft engine oils and their behaviour at high temperatures p 113 N86-29251
Vibration analysis by speckle interferometry p 193 N87-21197
Tip clearance measurement in modern compressor components p 179 N87-21199
Influence of shock and boundary layer losses on the performance of highly loaded supersonic axial flow compressors p 58 N87-21935
Computation of transonic 2D cascade flow and comparison with experiments p 59 N87-21942
An integrated aero/mechanical performance approach to high technology turbine design p 64 N88-17657
Engine life consumption monitoring programme. RB199 integrated in the on-board life monitoring system p 53 N89-16789
The advantage of a thrust rating concept used on the RB199 engine p 70 N89-16800
Computation of transonic 3D cascade flow and comparison with experiments p 20 N89-16841
- Muenster Univ. (Germany, F.R.G.).**
Neuromagnetic evidence of place mechanisms for frequency and intensity coding in the human auditory cortex p 139 N88-27693

N

Naples Univ. (Italy).

- Techniques for boundary layer tripping and control p 86 N88-28863
Experiments on boundary layer transition induced at low Reynolds numbers p 18 N89-16868
Computerized thermographic technique for the detection of boundary layer separation p 18 N89-16876
- National Aeronautical Establishment, Ottawa (Ontario).**
Use of a video photogrammetry system for the measurement of the dynamic response of the shuttle remote manipulator arm p 94 N87-20370
Airborne simulation at the National Aeronautical Establishment of Canada p 83 N87-23659
Speech is more than just an audible version of text p 135 N87-29522
Investigation of vertical axis handling qualities for helicopter hover and NOE flight p 75 N88-11653
The NAE atmospheric research aircraft p 51 N88-29730
Aircraft dynamics. Aerodynamic aspects and wind tunnel techniques p 14 N88-29731
Literature survey on the design of mechanically fastened composite joints p 179 N89-17686
Behaviour of mechanically fastened joints in advanced composites p 103 N89-17705
- National Aeronautics and Space Administration, Washington, DC.**
Future trends in spacecraft design and qualification p 94 N87-20356
Engineering data compendium. Human perception and performance. User's guide p 215 N88-27749
[LC-87-19560]
Engineering data compendium. Human perception and performance, volume 1 p 215 N88-28630
[LC-87-19560]
Engineering data compendium. Human perception and performance, volume 2 p 215 N88-28631
[LC-87-19560]

CORPORATE SOURCE

Engineering data compendium Human perception and performance, volume 3 p 215 N88-28632 (LC-87-19560)

National Aeronautics and Space Administration, Ames Research Center, Moffett Field, CA.
Geometry definition and grid generation for a complete fighter aircraft p 224 N87-20203
The prediction of transonic loading on advancing helicopter rotors p 5 N87-20206
Using the boundary-layer equations in three-dimensional viscous flow simulation p 155 N87-20222
High speed viscous flow calculations about complex configurations p 7 N87-20227
Transonic Navier-Stokes wing solution using a zonal approach Part 1: Solution methodology and code validation p 7 N87-20228
Transonic Navier-Stokes wing solutions using a zonal approach Part 2: High angle-of-attack simulation p 7 N87-20229
A time-based concept for terminal-area traffic management p 27 N87-21895
Visual and motion cueing in helicopter simulation p 80 N87-23634
The effects of display-control I/O, compatibility, and integrality on dual-task performance and subjective workload p 211 N87-29508
Measurement of pilot workload p 214 N87-30068
Flight test of a resident backup software system p 74 N88-10805
Numerical simulation of the hypersonic flow around lifting vehicles p 11 N88-13234
Aerothermodynamics research at NASA Ames p 12 N88-13242
Water facilities in retrospect and prospect. An illuminating tool for vehicle design p 84 N88-23126
Vortex breakdown and control experiments in the Ames-Dryden water tunnel p 161 N88-23127
Three-dimensional elliptic grid generation for an F-16 p 226 N88-29315
The use of vestibular models for design and evaluation of flight simulator motion p 205 N89-12179
Head-mounted spatial instruments: Synthetic reality or impossible dream p 206 N89-12184
Wind tunnel requirements for computational fluid dynamics code verification p 90 N89-16880
Accuracy requirements and benchmark experiments for CFD validation p 166 N89-18612
On the validation of a code and a turbulence model appropriate to circular control airfoils p 18 N89-18616
Experimental program for real gas flow code validation at NASA Ames Research Center p 19 N89-18630

National Aeronautics and Space Administration, Lyndon B. Johnson Space Center, Houston, TX.
Preadaptation to the stimulus rearrangement of weightlessness: Preliminary studies and concepts for trainer designs p 207 N89-12188

National Aeronautics and Space Administration, Langley Research Center, Hampton, VA.
Advanced ATC: An aircraft perspective p 27 N87-21893
Artificial intelligence and its impact on combat aircraft p 232 N87-24945
Development of computational methods for unsteady aerodynamics at the NASA Langley Research Center (NAS 115.89133) p 9 N87-28519
In-flight assessment of workload using instrument scan p 213 N87-30062
The application of emulation techniques in the analysis of highly reliable, guidance and control computer systems p 73 N88-10798
Reliability modeling of fault-tolerant computer based systems p 73 N88-10801
Numerical analysis of flow through scramjet engine inlets p 11 N88-13233
Nonlinear lift control at high speed and high angle of attack using vortex flow technology p 76 N88-13319
Static aeroelastic effects on the flutter of a supercritical wing p 76 N88-13353
Prediction of wing aeroelastic effects on aircraft life and pitching moment characteristics p 77 N88-13356
Flow measurements in a water tunnel using a holographic velocimeter p 162 N88-23141
Technology development program for twenty-first century aerospace vehicles p 47 N88-23768
High-aspect-ratio wings p 85 N88-28859
Grid generation on and about a cranked-wing fighter aircraft configuration p 226 N88-29318
Status review of atmospheric turbulence and aircraft response p 78 N88-29726
A summary of atmospheric turbulence measurements with specially-equipped aircraft in the US p 89 N88-29727
Wind tunnel sidewall-boundary-layer effects in transonic airfoil testing-some correctable, but some not p 89 N89-18684
Short-crack growth behaviour in an aluminum alloy: An AGARD cooperative test program p 184 N89-17288
Preliminary fatigue tests on short-crack specimens p 184 N89-17290
Alignment verification procedures p 184 N89-17291

Approximate stress-intensity factors for a surface crack and through crack at a semi-circular notch p 185 N89-17294
Long-crack growth rate data: Constant amplitude and FALSTAFF loading p 185 N89-17295
Bearing-bypass loading on bolted composite joints p 186 N89-17697
Accelerated convergence for synchronous approximate agreement p 231 N89-18474
Parametric study of grid size, time step and turbulence modeling on Navier-Stokes computations over airfoils p 18 N89-18615
Accurate solutions, parameter studies and comparisons for the Euler and potential flow equations p 167 N89-18624
A comparative study and validation of upwind and central-difference Navier-Stokes codes for high-speed flows p 169 N89-18647
Detailed flowfield measurements over a 75 deg swept delta wing for code validation p 21 N89-18657
Experiments and code validation for junction flows p 21 N89-18658
Overview of CFD methods and comparison with light aerothermal data p 21 N89-18663

National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH.
Laser fringe anemometry for aero engine components p 118 N87-21176
Combined fringe and Fabry-Perot laser anemometer for 3 component velocity measurements in turbine stator cascade facility p 118 N87-21183
Beam-modulation methods in quantitative and flow-visualization holographic interferometry p 119 N87-21204
Shock structure measured in a transonic fan using laser anemometry p 57 N87-21929
Viscous analyses for flow through subsonic and supersonic intakes p 61 N87-24469
Summary of investigations of engine response to distorted inlet conditions p 62 N87-24477
Secondary electron generation, emission and transport Effects on spacecraft charging and NASCAP models p 98 N87-26950
Experimental evaluation of a translating nozzle sidewall radial turbine p 64 N88-17856
CFD validation experiments for internal flows p 168 N89-18635

National Aeronautics and Space Administration, Marshall Space Flight Center, Huntsville, AL.
Space Shuttle main engine monitoring experience and advanced monitoring systems development p 100 N89-16815
Plume spectrometry for liquid rocket engine health monitoring p 100 N89-16816

National Aerospace Lab., Amsterdam (Netherlands).
Tactical mission planning and management p 235 N87-16006
Evaluation of DDH and weld repaired F100 turbine vanes under simulated service conditions p 180 N87-17070
Flexible grid generation for complex geometries in two space dimensions based on variational principles p 224 N87-20200
Matrix, transonic potential flow calculations about transport aircraft p 5 N87-20208
Modelling of time-variant flows using vortex dynamics-activities in the Netherlands p 137 N87-22142
Three-dimensional shear layer experiments and their use as test cases for calculation methods p 158 N87-22148
Flexible and high quality software on a multiprocessor computer system controlling a research flight simulator p 81 N87-23843
Correlation between flight simulation and processing of flight tests based on inertial measurements p 82 N87-23855
Automation strategy and results for an airbase command and control information system (ABOCIS) p 226 N87-24952
Investigation of workload measuring techniques. A theoretical and practical framework p 214 N87-30069
Development of an airborne facility for advanced avionics research p 51 N88-23801
Reynolds number effects and the wind tunnel environment p 86 N88-28862
Empirical tools for simulation methodologies p 86 N88-28866
Acquisition of gust statistics from AIDS-recorded data p 190 N88-29733
Low-speed longitudinal flying qualities of modern transport aircraft p 43 N88-29738
Technology involved in the simulation of motion cues: The current trend p 204 N88-12173
Measurement uncertainty of the AGARD/PEP uniform engine test program p 71 N89-16853
Accuracy of various wall-correction methods for 3D subsonic wind-tunnel testing p 89 N89-16863
On Reynolds number effects and simulation p 17 N89-16866
Requirements and capabilities in unsteady windtunnel testing p 90 N89-16878

Microstructural examination of core-programme material p 184 N89-17269
Considerations concerning the assessment of pilot workload for complex task conditions p 218 N89-18015
Numerical accuracy assessment p 166 N89-18613
The international vortex flow experiment p 166 N89-18619

National Aerospace Lab., Emmeloord (Netherlands).
Matching P.S.D. Design loads p 43 N88-29720

National Bureau of Standards, Boulder, CO.
Optical fiber sensors for the measurement of pulsed electric currents p 238 N87-13261

National Center for Energetics and Propulsion, Peschiera Bormio (Italy).
Numerical modeling of combustion processes in gas turbines p 108 N88-29939

National Defence Headquarters, Ottawa (Ontario).
International information exchange programmes are necessary p 248 N86-28800
A model of a defence information service as seen by the user p 249 N87-26678
Canadian forces aircraft condition/health monitoring Policy, plans and experience p 69 N89-16784

National Defence Medical Centre, Ottawa (Ontario).
A review of the NDMC back care education programme p 192 N87-13952

National Hospital, Oslo (Norway).
A statistical procedure for the evaluation of presence/non-presence of stimulus-related EEG activity p 199 N88-27689

National Library of Canada, Ottawa (Ontario).
Using standards to break down information transfer barriers p 252 N88-30467

National Oceanic and Atmospheric Administration, Boulder, CO.
Line-of-sight millimeter wave propagation characteristics p 144 N89-17720

National Research Council of Canada, Boucherville (Quebec).
Thermoelastic testing of strained materials p 179 N87-17064
A real time vision system for robotic arc welding p 177 N87-17066

National Research Council of Canada, Ottawa (Ontario).
Aircraft dynamics Aerodynamic aspects and wind tunnel techniques p 39 N88-13320
A research program on the aerodynamics of a highly loaded turbine stage p 64 N88-17655
The use of the NRC/NAE water facilities in Canadian aeronautical research and development p 85 N88-23132
Computational tools for simulation methodologies p 96 N88-28865
Multiple scattering effects in drop sizing of dense fuel sprays by laser diffraction p 105 N88-29917
The effects of a compressor rebuild on gas turbine engine performance p 70 N89-16803
Importance of sensitivity and reliability of CFD techniques on damage tolerance based life prediction of turbine discs p 181 N89-17257
The use of integrated side-arm controllers in helicopters p 270 N89-10000

National Scientific and Technical Documentation Center, Brussels (Belgium).
Linguistic barriers: Translation problems p 252 N88-30465

National Technical Information Service, Springfield, VA.
Strategic planning process at the National Technical Information Service p 249 N87-26680

National Technical Univ., Athens (Greece).
The effect of particle properties on radiative heat transfer p 109 N88-29941
Discrete operating conditions gas path analysis p 54 N89-16810

National Telecommunications and Information Administration, Boulder, CO.
Observed phase delay through rain at 96 GHz p 144 N89-17724
Modeling of wideband HF channels p 146 N89-17732
Propagation and performance measurements over a digital troposcatter communications link p 146 N89-17733
Measurement, modeling and simulation of LOS microwave channels p 146 N89-17734
Effects of noise and interference on system performance p 149 N89-18576

NATO European Fighter Management Agency, Munich (Germany, F.R.G.).
Operational requirements for engine condition monitoring from the EFA viewpoint p 69 N89-16781

NATO Integrated Communications System Management Agency, Brussels (Belgium).
A programme manager's needs for information p 247 N86-26785

Naval Aerospace Medical Research Lab.

- Naval Aerospace Medical Research Lab., Pensacola, FL
 - Perceptual processing capabilities relevant to design of visual displays for information management in advanced airborne weapon systems p 250 N87-29513
 - The neuroelectric selection of Naval aviation personnel An evaluation p 208 N86-27707
- Naval Air Development Center, Warminster, PA
 - High altitude, long endurance RPV design technology study p 32 N87-18011
 - Composite repair material and design development efforts p 3 N87-20188
 - Application of flight performance advisory systems to US Navy aircraft p 28 N87-21900
 - Machine architectures for artificial intelligence computing p 222 N87-24948
 - New technology impacts on future avionics architectures p 45 N87-24947
 - Joint development of the Multi-Function Integrated Inertial Sensor Assembly (MISA) p 171 N87-29473
 - Avionic common p 48 N88-13332
 - Systems for the 21st century p 47 N88-23789
 - A change in system design emphasis: From machine to man p 48 N88-23782
 - Detection of acceleration (+Gz) induced blackout by matched-filtering of visual evoked potentials p 202 N88-27710
 - Long term possibilities for non-destructive evaluation for US Navy aircraft p 181 N89-17259
- Naval Air Propulsion Test Center, Trenton, NJ
 - High response data acquisition system p 249 N87-21189
- Naval Air Systems Command, Washington, DC
 - Naval technology requirements for unmanned airborne vehicles p 32 N87-18002
 - Integrated multisensor targeting p 236 N87-24947
 - The effects of two Carcano inattentive concurrency and streamlining, on the test and evaluation phase of system acquisitions p 245 N88-20198
 - An overview of US Navy engine monitoring system (NEM) and its use in engine test p 114 N88-16764
 - Wind tunnel predicted air vehicle performance: A review of lessons learned p 87 N89-16852
- Naval Biodynamics Lab., New Orleans, LA
 - Evoked potential analysis of impact acceleration experiments p 201 N88-27708
- Naval Health Research Center, San Diego, CA
 - Sedating and non-sedating sleeping aids in air operation p 197 N87-25720
- Naval Materiel Command, Haverford, PA
 - GPS signal structure p 30 N89-10878
 - Aiding and integration of a GPS receiver p 30 N89-10881
- Naval Ocean Systems Center, San Diego, CA
 - Rapid prototyping of user-computer interfaces during system design p 222 N87-29520
 - Review of recent developments in evaporation ducting assessment p 139 N88-19664
 - Signal noise/interferer combiner unit programmable (SINCU) p 149 N89-18575
 - Na-tive compression coding for a channel with errors p 50 N89-18584
- Naval Postgraduate School, Monterey, CA
 - Experimental techniques for obtaining particle behavior in solid propellant combustion p 115 N86-25477
 - Singularity expansion method: Target Resonances p 137 N88-11912
 - Input signal shaping: K-pulse p 137 N88-11917
 - Numerical modeling: Finite methods p 137 N88-11918
 - Experiments: Test range facilities, part 1 p 138 N88-11920
 - Oscillating flow over bluff bodies in a U-shaped water tunnel p 161 N88-23131
 - Interfacing and integrating hardware and software design systems p 50 N88-23796
- Naval Research Lab., Washington, DC
 - Progress in optical fiber sensors p 237 N87-13274
 - Preparation and properties of infrared transmitting heavy metal fluoride glass optical fibers p 239 N87-13298
 - ELF/VLF/LF propagation and system design p 124 N87-18705
 - Random propagation through the longwave channel p 145 N89-17731
- Naval Surface Weapons Center, Dahlgren, VA
 - Application of optimal estimation and control concepts to a bank-to-turn missile p 92 N87-29483
- Naval Surface Weapons Center, Silver Spring, MD
 - A second order Godunov method for tactical missiles p 233 N87-20211
- Naval Training Systems Center, Orlando, FL
 - Space marching Euler solvers p 15 N88-29759
- Engineering data compendium: Human perception and performance, User's guide [LC-87-19560] p 215 N88-27749
- Engineering data compendium: Human perception and performance, volume 1 [LC-87-19560] p 215 N88-28630
- Engineering data compendium: Human perception and performance, volume 2 [LC-87-19560] p 215 N88-28631

- Engineering data compendium: Human perception and performance, volume 3 [LC-87-19560] p 215 N88-28632
- Naval Weapons Center, China Lake, CA
 - Considerations in utilizing IR signatures p 241 N87-18747
 - Consolidated Land Attack Mission Planning Station (CLAMPS) p 236 N87-24951
 - Combustion related shear-flow dynamics in elliptic supersonic jets p 11 N88-13232
 - Effects of closing speed uncertainty on optimal guidance p 92 N88-19556
 - Microelectronics the next fifteen years p 154 N88-23792
 - Developing systems using state-of-the-art CAD/CAM technology p 225 N88-23795
 - Can Ada (MIL-STD-1815A) fly missiles p 231 N89-18473
- Nebraska Univ., Lincoln
 - Scattering and depolarization by random rough terrain and vegetation covered terrain-uniform full wave approach p 138 N88-19657
 - Multiple scattering effects of random distributions of irregularly shaped particles on infrared and optical propagation p 242 N89-17718
- New Jersey Inst. of Tech., Newark
 - Correcting ray field failures caused by focusing in an inhomogeneous duct: A critical look at the Gaussian beam method p 139 N88-19663
- New Mexico State Univ., Las Cruces
 - Non-linear effects on the atmospheric transmission of high-flux electromagnetic beams p 147 N89-17746
- New York Medical Coll., NY
 - CEEG dynamic brain mapping: A new method to evaluate brain function in different psychological and drug conditions p 198 N88-27685
- New York Univ., New York
 - Studies of the intact human brain: Implications for performance p 198 N88-27684
- New York Medical Center
 - Normative developmental equations for the EEG and their sensitivity to neurological and psychiatric disorders p 198 N88-27687
- Nielsen Engineering and Research, Inc., Mountain View, CA
 - Survey on nonlinear effects p 15 N88-29757
- Nobel's Explosives Co. Ltd., Stevenston (England)
 - The chemical interaction of ballistic modifiers in CDB propellant: Its effect upon ballistics and stability p 114 N86-26475
- Norges Tekniske Høgskole, Trondheim
 - Tv-holography: A promising inspection tool for analysis of composite materials p 170 N87-20180
 - Radial compressor design using an Euler solver p 66 N88-17675
 - Validation of a 3D Euler/Navier-Stokes finite volume solver for a radial compressor p 169 N89-18640
- North Atlantic Treaty Organization, Brussels (Belgium)
 - VHF/UHF/microwave LOS terrestrial propagation and system design p 125 N87-18709
 - Problems of spectrum management and system compatibility p 125 N87-18711
- Northrop Corp., Hawthorne, CA
 - Simulation as a lighter design tool p 35 N87-24447
 - The increased time and cost of development: Causes and (some) remedies p 243 N88-20178
 - Managing advanced avionic system design p 49 N88-23783
 - Strength analysis of mechanically fastened composite structures p 186 N89-17692
- Northwest Research Associates, Inc., Bellevue, WA
 - Transonospheric probing and propagation p 141 N89-11934
 - Satellite in-situ probing p 142 N89-11939
- Norwegian Defence Research Establishment, Kjeller
 - Propagation 1: State of the art of modelling and prediction in HF propagation p 122 N86-27568
 - Propagation 2: Problems in HF propagation p 123 N86-27574
 - An intelligent multi-target tracking system p 119 N87-29484
 - Applications of image analysis in precision guided weapons p 93 N89-17610
- Norwegian Telecommunications Administration
 - An investigation of terrain related variables for predicting the multipath fade depth distribution on terrestrial microwave lines p 138 N88-19654
- Notre Dame Univ., IN
 - Use of water towing tanks for aerodynamics and hydrodynamics p 163 N88-23149
 - Flow field surveys of leading edge vortex flows p 167 N89-18621
- Oce Nederland B.V., Venlo
 - Built-in-inertia p 141 N89-18648

CORPORATE SOURCE

- Office National d'Etudes et de Recherches Aeronautiques, Palaiseau (France)
 - Flame stabilization in a reheat combustor p 105 N88-29921
- Office National d'Etudes et de Recherches Aeronautiques, Paris (France)
 - Computation of three-dimensional flows by viscous-inviscid interaction using the M2M method p 155 N87-20223
 - The utilization of thin film sensors for measurements in turbomachinery p 178 N87-21195
 - The study of combustion by means of diode laser spectroscopy p 173 N87-21201
 - Measured and predicted responses of the Nord 260 aircraft to the low altitude atmospheric turbulence p 78 N88-29723
 - Life time prediction: Synthesis of ONERA's research in microplasticity and continuous damage mechanics, applied to engine materials and structures p 68 N89-10011
 - Comparison of the results of tests on A300 aircraft in the RAE 5 metre and the ONERA F1 wind tunnels p 17 N89-16849
 - Some difficulties in the wind tunnel prediction of modern civil aircraft buffeting: Proposed remedies p 18 N89-16869
 - Optical imagery across atmospheric turbulence p 242 N89-17721
- Office National d'Etudes et de Recherches Aeronautiques, Modane (France)
 - Proton improvement of transport aircraft drag measurements p 17 N89-16856
 - Instantaneous force measurement on a model subjected to rapid control variations p 90 N89-16872
- Office National d'Etudes et de Recherches Aeronautiques, Paris (France)
 - Propergol combustion based on octogenes p 114 N86-26470
 - New numerical techniques in the method of singularities for application to complex three-dimensional configurations p 233 N87-20205
 - Application of CARS thermometry to a turbulent flame p 104 N87-21175
 - Fundamental studies on shock-wave/laminar-layer interactions in a 3-D channel p 156 N87-21928
 - Shock waves losses analysis p 58 N87-21936
 - Numerical viscous-inviscid interaction method for internal separated flows and shock wave-boundary layer interaction p 158 N87-21939
 - Modeling high Reynolds number internal flows by numerical solution of the Navier-Stokes equations p 156 N87-21946
 - Determination of the subsonic cascade entrance zone p 157 N87-21948
 - Progress in Viscous-Inviscid Solvers (VIS) p 159 N87-22152
 - Simulation of an integrated light/fire control system during air-to-ground gunnery attack p 34 N87-22672
 - Three-dimensional flow p 8 N87-24402
 - Understanding fan blade flutter through linear cascade aerodynamic testing p 9 N87-24407
 - Numerical study of the propagation of an inlet flow distortion through an axial compressor p 61 N87-24471
 - Experimental determination of the transfer function of an axial compressor to distorted inlet flow p 9 N87-24479
 - Preparation of qualification tests of a plasma generator for the feeding of a hypersonic wind tunnel p 242 N88-13222
 - Fundamentals of fighter aircraft design: Engine intake and afterburner p 40 N88-13322
 - Requirements and recommendations for the development of theoretical codes and experimental facilities in the near future p 40 N88-13327
 - Influence of the static deformation on a wing in the unsteady aerodynamic p 77 N88-13357
 - Measurement of model deformation in wind tunnels p 77 N88-13358
 - Design and testing of a small radial turbine for auxiliary power units p 64 N88-17661
 - Analysis of highspeed propellers aerodynamics p 65 N88-17669
 - The ONERA water tunnels test possibilities for flow visualization in aeronautical and naval domains p 162 N88-23139
 - Extreme gusts distribution p 190 N88-29734
 - Prediction of base-flows p 16 N88-29765
 - Influence of the convection on evaporation and combustion of a fuel droplet p 110 N88-29948
 - Multi-input decision and procedure: Application to multi-sensor target classification p 233 N89-18484
 - Separation around ellipsoid type obstacles: Modeling and validation experiences p 167 N89-18627
- Office National d'Etudes et de Recherches Aeronautiques, Toulouse (France)
 - Three-dimensional boundary layers: Introduction to calculation methods p 158 N87-22146
 - Three-dimensional layers: Laminar-turbulent transition p 158 N87-22149

CORPORATE SOURCE

Homogeneous turbulence two-point closures and applications to one-point closures p 180 N88-11973
 Hypersonic laminar boundary layer Parametric study for the representation of real gas effects p 11 N88-13236
 Boundary layer development and transition p 14 N88-28871
 Role and design of a software engineering data base in the context of an advanced support environment p 231 N89-18485
 Office of the Under Secretary of Defense for Research and Engineering, Washington, DC.
 Information services Pros and cons p 247 N86-28797
Oficina Geral de Material Aeronautico, Alverca (Portugal).
 The auditory evoked response in military pilots p 203 N88-27721
Ohio State Univ., Columbus.
 Uniform geometrical theory of diffraction p 136 N88-11911
 The Forge 2 isothermal forging model p 112 N89-15271
Organisatie voor Toegepast Natuurwetenschappelijk Onderzoek, Delft (Netherlands).
 MADYMO crash victim simulations: A flight safety application p 122 N89-18441
Organisatie voor Toegepast Natuurwetenschappelijk Onderzoek, Soesterberg (Netherlands).
 Using ERPS to study human information processing p 208 N88-27698
Oxford Univ. (England).
 Interferometric measurement of strains and displacements in engine components p 178 N87-21196
 A study of passage flow through a cascade of turbine blades using image plane holographic interferometry p 118 N87-21203
P
P. P. Data Ltd., Fleet (England).
 Database program for crack propagation data acquired in the AGARD short cracks collaborative effort p 185 N89-17297
Pacific Missile Test Center, Point Mugu, CA.
 Modeling operator control performance and well-being as a function of simulator visual and motion system transport delays p 205 N89-12182
Pacific-Sierra Research Corp., Los Angeles, CA.
 Lightning generation of low-frequency TE atmospheric noise p 148 N89-18568
Palermo Univ. (Italy).
 Time-dependent numerical simulation of the starting flow of an incompressible fluid past a downstream-facing step p 169 N89-18616
Paris V Univ. (France).
 Automatic research on optimal posture p 191 N87-13942
 Biostereometric study of the outward curve of the spine for various reference positions p 191 N87-13943
Pennsylvania State Univ., University Park.
 The enhancement effect of the backscattered intensity in a random medium p 143 N89-17715
 Multiple scattering of waves in random media containing non-spherical scatterers p 234 N89-17745
 Computational techniques and validation of 3D viscous/turbulent codes for internal flows p 168 N89-18638
Petrie Telecommunications, Nepean (Ontario).
 Equipment: Antenna systems p 123 N86-27572
 Adaptive systems in operation p 124 N86-27576
Physikalisches-Technische Studien G.m.b.H., Freiburg (Germany, F.R.).
 Grotto-spacelcraft charging due to impact generated plasma in the presence of dielectric materials p 98 N87-26947
Pisa Univ. (Italy).
 Engine transmission-structural airframe members compatibility p 31 N87-10069
 The optimal control pilot model and applications p 217 N88-29741
Planning Research Corp., Hampton, VA.
 Suggested plastic-replica method p 185 N89-17293
Plessey Co. Ltd., Romsey (England).
 Progress with multiplexed sensor arrays based on reflection at spaced joints between sensors p 237 N87-13278
 Magnetic and pressure sensors using the compensated potentiometric sensor configuration p 237 N87-13279
 A study of methods of phase noise reduction of semiconductor lasers for sensor applications p 172 N87-13286
Plessey Electronic Systems Research Ltd., Romsey (England).
 Envelope and phase statistics for non-Gaussian noise and resulting error probabilities for digital communications systems p 140 N88-18672

Plessey Research Roke Manor Ltd., Romsey (England).
 Design considerations for an automated HF data network with adaptive channel selection p 150 N89-18578
Politecnico di Milano (Italy).
 Active structural controller emulating structural elements by ICUs p 96 N87-20367
 Transonic three-dimensional inviscid calculations in turbomachines p 59 N87-21942
 Numerical modeling of combustion processes in gas turbines p 108 N88-29939
 Damage growth in composite bolted joints p 186 N89-17689
 Stiffness and residual strength variations on mechanical joints in CFRP specimens in cycling loading p 187 N89-17704
 The design of helicopter crashworthiness p 23 N89-18426
Politecnico di Torino (Italy).
 Vortex dynamics-survey of the activity in Italy p 157 N87-22141
Polytechnic Inst. of Brooklyn, Farmingdale, NY.
 Propagation in longitudinally varying ducts, with emphasis on guiding to antinguiding transitions p 138 N88-18658
Polytechnic Inst. of New York, Brooklyn.
 A diffraction based theoretical model for prediction of UHF path loss in cities p 139 N88-19661
Polytechnic Inst. of New York, Farmingdale.
 Target strength: An overview of some recent theoretical developments p 136 N88-11910
Polytechnic of Central London (England).
 European examples of evaluating the effectiveness of information centres and services p 253 N89-11528
Polytechnic Univ., Farmingdale, NY.
 Geometrical theory of diffraction for high-frequency coherence functions in weakly random medium with inhomogeneous background profile p 143 N89-17709
Portsmouth Polytechnic (England).
 Identification of microwave line-of-sight multipath components p 139 N88-19665
Potter (J. Leith), Nashville, TN.
 Missiles, fuselage and similar bodies p 85 N88-28858
 Missiles, fuselages and similar bodies p 14 N88-28869
Pratt and Whitney Aircraft, East Hartford, CT.
 Laser velocimetry study of stator/rotor interactions in a multi-stage gas turbine compressor p 173 N87-21181
 Fan flutter test p 68 N89-10014
Pratt and Whitney Aircraft, West Palm Beach, FL.
 Design and development of an advanced F100 compressor p 87 N88-17678
 Fuel property effects on the US Navy's F730 engine p 67 N88-29911
 F100-PW-220 engine monitoring system p 53 N89-18795
 Relationships of nondestructive evaluation needs and component design p 180 N89-17256
Pratt and Whitney Aircraft of Canada Ltd., Longueville (Quebec).
 Design and aerodynamic performance of a small mixed-flow gas generator turbine p 64 N88-17662
 Fault management in aircraft power plant controls p 71 N89-18609
PRC Kentron, Inc., Hampton, VA.
 Semi-empirical methods for conventional and unconventional missiles p 15 N88-29758
Princeton Univ., NJ.
 Three-dimensional flow visualization using laser-sheet scanning p 162 N88-23143
Prins Maurits Lab. TNO, Rijswijk (Netherlands).
 Stability of nitrocellulose propellants assessed via thermal decomposition and alteration of the stabilizer composition p 114 N86-26471
 On the thermal behaviour of the barrel during the interior ballistic cycle of propellant guns p 117 N88-29970
 Demonstration of FOG-M (Fibre Optic Guided Mx. capabilities by means of simulation and effect: proprioceptive feedback on the control p 93 N89-17674
Purdue Univ., West Lafayette, IN.
 Unsteady aerodynamic measurements in flutter research p 8 N87-24405
 Atomization of alternative fuels p 104 N88-29913

Q

Queensland Univ., Brisbane (Australia).
 Shock tunnels for real gas hypersonics p 84 N88-13223

R

Racal Defence Electronics (Radar) Ltd., Walton-on-Thames (England).
 Modelling of CO oxidation in dilution jet flows p 109 N88-29947

Rome Air Development Center

Radar Systems Group, Los Angeles, CA.
 Multiresonance airborne radar for the 1990s p 126 N87-18724
Raitt (D. I.), Den Haag (Netherlands).
 The information needs of scientists and engineers in aerospace p 247 N86-28796
Raytheon Co., Bedford, MA.
 Comparison of statistical digital simulation methods p 227 N89-10049
 Design criteria for hardware-in-the-loop simulation facilities p 228 N89-10052
 Simulation validation experience PATRIOT guidance system p 79 N89-10055
Raytheon Co., Sudbury, MA.
 CO2 laser radar systems for target acquisition and guidance p 173 N89-17806
Rediffusion Simulation Ltd., Crawley (England).
 Visual display research tool p 80 N87-23635
 Use of VDU's by flight simulator instructors p 80 N87-23641
Rennes Univ. (France).
 Fluoride glasses for infrared waveguides p 240 N87-13299
 A propagation campaign in a marine environment utilizing a digital system at 36 GHz p 141 N88-19675
 Measurement and modeling of 36 GHz sea reflection phenomena p 145 N88-17730
Rheinische Braunkohlenwerke A.G., Cologne (Germany, F.R.).
 Relationships between whole-body vibration and disorders of the backbone diagnosed on operators of earth-moving machinery p 208 N87-13934
Rheinmetall G.m.b.H., Duesseldorf (Germany, F.R.).
 Jet reaction control system for autonomous precision munition p 92 N87-29482
Rhode and Schwartz G.m.b.H., Munich (Germany, F.R.).
 ECM resistance in the HF band by use of adaptive reaction and frequency hopping p 151 N88-18587
Rockwell International Corp., Columbus, OH.
 Helix system model validation p 44 N89-10057
Rockwell International Corp., Duluth, GA.
 Precision delivery of unguided submunitions from a tactical standoff missile p 91 N87-18011
Rockwell International Corp., Lakewood, CA.
 Coherent functional development Key to successful future system integration p 246 N88-23803
 B-1B CITS engine monitoring p 52 N89-16788
Rockwell International Corp., Los Angeles, CA.
 Unsteady inlet distortion characteristics with the B-1B p 9 N87-24471
Rolls-Royce Ltd., Bristol (England).
 The application of radiation physics and photogrammetric techniques for the diagnosis and solution of mechanical engineering problems and performance improvements in the development of aero gas turbine engines at Rolls Royce p 178 N87-21198
 Some turbomachinery blade passage analysis methods Retrospect and prospect p 59 N87-21947
 Propulsion system technologies for thrust vectoring p 60 N87-22670
 Review of current knowledge on engine response to distorted inflow conditions p 60 N87-24465
 Optimisation of military compressors for weight and volume p 63 N88-17649
 Advanced techniques employed in blade cooling research p 64 N88-17659
 Development of a plenum chamber burner system for an advanced VTOL engine p 65 N88-17664
 High performance turbofan afterburner systems p 105 N88-29922
 Fatigue and assessment methods of blade vibration p 68 N89-10010
 Military engine condition monitoring systems The UK experience p 53 N89-16797
 A joint study on the compensation of in-field aero engine vibration diagnosis p 71 N89-18608
Rolls-Royce Ltd., Derby (England).
 NDT of electron beam welded joints (micro-focus and x-ray) p 179 N87-17063
 COMPASS (Trademark): A generalized ground-based monitoring system p 55 N89-16819
 The impact of engineering assumptions on NDE measurements p 180 N89-17254
 Need for common AGARD approach and actions p 181 N89-17260
 Use of Markov probability and reliability model generation methods in the analysis of reliability of a fault tolerant, hardware and software based system with flexible repair policies p 181 N89-18477
Rolls-Royce Ltd., Watford (England).
 Impact of IFS and IRS configurations on engine installation design p 31 N87-10070
Rome Air Development Center, Griffiss AFB, NY.
 Multi mode multistatic for passive/active airborne surveillance p 126 N87-18726
 Digital and optical systolic architectures for airborne adaptive radars p 129 N87-18739
 MMIC T/R modules for the next generation airborne surveillance platforms p 131 N87-18749

Rome Air Development Center

- DARPA's AirLand Battle Management Program and USAF's Tactical Expert Mission PLANNER (TEMPLAR) p 235 N87-24942
- KRS A knowledge-based mission planner p 235 N87-24943
- Decision aid for threat penetration analysis p 235 N87-24944
- Advanced sensor exploitation p 83 N87-24945
- RISE Requirements and Incremental Specification Environment p 230 N89-18462
- Rome Air Development Center, Hanscom AFB, MA.**
- Low-cost, monolithic beamforming components for radar p 131 N87-18750
- Baseline parameters of antennas for aircraft, satellites and missiles p 134 N87-23860
- Regions of validity for some rough surface scattering models p 241 N89-17711
- A statistical analysis of polar meteor scatter propagation in the 45 to 104 MHz band p 147 N89-17747
- Balloon measurement of soft low frequency TE and TM atmospheric noise p 148 N89-18567
- Rome Univ. (Italy).**
- Nonlinear ellipse rotation in a low-birefringence optical fiber p 238 N87-13282
- Bistability in nonlinear waveguides p 124 N87-13291
- Effect of modal damping in modal synthesis of spacecraft structures p 95 N87-20362
- Space-based multifunction radar systems: Future tool for civilian and military surveillance p 133 N87-21888
- Royal Air Force, London (England).**
- A study of pilot flight information crossmonitoring performance p 211 N87-29509
- Engine usage condition and maintenance management systems in the UK armed forces p 89 N89-16783
- Information management systems for on-board monitoring systems p 52 N89-16786
- Royal Air Force, Netherlands (England).**
- Back pain in gazelle crew p 193 N87-13959
- Royal Air Force, Wroughton (England).**
- Detection of latent epilepsy in aircrew candidates p 203 N88-27720
- Royal Air Force Inst. of Aviation Medicine, Farnborough (England).**
- Enhancement of performance: Operational considerations p 195 N87-25710
- Perceptual organization and information management p 251 N87-29514
- The application of non-stationary data analysis techniques in the identification of changes in the electroencephalogram associated with the onset of drowsiness p 198 N88-27688
- Vision and visual protection in fast jet aircraft p 216 N88-29292
- Aetiological factors in simulator sickness p 204 N89-12174
- Simulator sickness in the Royal Air Force A survey p 204 N89-12177
- Royal Air Force Inst. of Aviation Medicine, North Luffenham (England).**
- Backache in aircrew p 193 N87-13958
- Royal Air Force Strike Command, High Wycombe (England).**
- Measurement of aircrew workload during low-level flight. Part 1: A comparison between in-flight and post flight assessment methods p 212 N87-30064
- Royal Aircraft Establishment, Bedford (England).**
- Some experiences in integrating avionics systems on the civil flight deck p 45 N87-21902
- Simulator motion characteristics and perceptual fidelity p 80 N87-23639
- Progress in the implementation of AGARD-AR-144 in motion system assessment and monitoring p 81 N87-23642
- Development of in-flight simulation aircraft for research and training applications in UK p 83 N87-23658
- The flight evaluation of a speech recognition and a speech output system in an advanced cockpit display and flight management system for helicopters p 46 N87-29527
- The flight evaluation of an advanced engine display and monitoring system p 46 N88-11659
- The RAE experimental data-base for missiles at high Mach number and its use in assessing CFD methods p 13 N88-13250
- Measurement and analysis of low altitude atmospheric turbulence obtained using a specially instrumented Gnat aircraft p 190 N88-29728
- The accurate measurement of drag in the 8 ft x 8 ft tunnel p 88 N89-16855
- Wind tunnel experiments on aerofoil models for the assessment of computational flow methods p 18 N89-18614
- A theoretical and experimental evaluation of a numerical method for calculating supersonic flows over wing-body configurations p 19 N89-18622
- Royal Aircraft Establishment, Farnborough (England).**
- Diffusion bonding of Al-alloys in the solid state p 177 N87-17058

- Effect of adhesive bonding variables on the performance of bonded CFRP patch repairs of metallic structures p 2 N87-20182
- An assessment of the use of low-order panel methods for the calculation of supersonic flows p 224 N87-20204
- Applications of RAF viscous flow methods near separation boundaries for three-dimensional wings in transonic flow p 7 N87-20224
- Developments in data acquisition and processing using an advanced combustion research facility p 79 N87-21192
- Transmission of inlet distortion through a fan p 62 N87-24475
- The use of P2 pulsations as indicators of subsonic effects at geostationary orbit p 188 N87-26942
- Information management in the Army battlefield helicopter p 251 N87-29515
- Diffusion bonding of metals p 179 N87-29646
- The mechanical properties of superplastically formed titanium and aluminum alloys p 111 N87-29647
- Towards the unmanned cockpit p 36 N88-10812
- Operational load measurements on service helicopters p 37 N88-11658
- The drag of slender axisymmetric cones in rarefied hypersonic flow p 11 N88-13229
- Wing divergence of trimmed aircraft p 76 N88-13354
- An examination of the impact of potential advances in component technology for future military engines p 53 N88-17650
- Design and test of a high blade speed, high work capacity transonic turbine p 64 N88-17658
- Structural design requirements for aircraft incorporating active control technology p 41 N88-19453
- Gas turbine smoke measurement: A smoke generator for the assessment of current and future techniques p 107 N88-29930
- On-line spectrum loading accuracy verification p 184 N89-17292
- Determining the azimuthal distribution of noise and interference across the HF spectrum at the RAE Receiving Station, Cobbett Hill, Surrey, England p 153 N89-18597
- The design of the GARTEUR low aspect ratio wing for use in the validation of shear layer and overall flow prediction methods p 45 N89-18652
- Royal Armament Research and Development Establishment, Christchurch (England).**
- Test specimens for bearing and by-pass stress interaction in carbon fibre reinforced plastic laminates p 102 N89-17696
- Royal Armament Research and Development Establishment, Portsmouth (England).**
- Ignition, combustion, and physical properties of liquid propellants at gun pressures p 115 N86-29065
- Novel ignition systems for heavy calibre guns p 118 N86-29076
- Royal Army Medical Coll., London (England).**
- Can CNV amplitude predict ability to accomplish a de-handing task? p 214 N88-27700
- Royal Danish Air Force, Vojens.**
- Visual related accidents/incidents p 216 N88-29293
- Royal Inst. of Tech., Stockholm (Sweden).**
- An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691
- Royal Library of Belgium, Brussels.**
- The ideal information system? What does the user really want? p 248 N86-26801
- Royal Military Coll. of Science, Shrivenham (England).**
- Pressure wave Gun barrel interactions p 154 N86-29066
- Bore temperature and heat flux in a 40 mm gun barrel p 117 N88-29069
- Royal Netherlands Air Force, The Hague.**
- Development, testing and evaluation of a night vision goggle compatible BO-105 for night low level operation p 214 N88-11668
- Royal Netherlands Air Force, Zeist.**
- Maintenance of vision-related components p 216 N88-29296
- Royal Netherlands Aircraft Factories Fokker, Schiphol-Oost.**
- Acoustic effects on the dynamic of lightweight structures p 183 N87-20372
- Royal Norwegian Council for Scientific and Industrial Research, Kjeller.**
- Propagation medium adaptive techniques for adverse communications and for remote sensing p 142 N89-11941
- Royal Ordnance PLC, Waltham Abbey (England).**
- Smokeless propellants of improved performance p 113 N86-26469
- Royal Signals and Radar Establishment, Malvern (England).**
- Multifunction millimetre-wave radar for all-weather ground attack aircraft p 126 N87-18725
- Semi-automatic cross checking between different copies of the same flight plan p 28 N87-21903

CORPORATE SOURCE

- Markov random fields: A strategy for clutter modeling p 143 N89-17712
- Coherent scattering from random media p 174 N89-17714
- Hierarchical scattering models p 144 N89-17717
- Generation and properties of self-similar stochastic processes with application to ray propagation in random media p 242 N89-17718
- I-band multipath propagation over the sea surface p 145 N89-17729
- S**
- Seab-Scan, Linköping (Sweden).**
- Design loads for Swedish military aircraft in a twenty years perspective p 42 N88-19456
- Investigation on the movement of vortex burst position with dynamically changing angle of attack for a schematic delta-wing in a watertunnel with correlation to similar studies in windtunnel p 163 N88-23152
- An analysis method for bolted joints in primary composite aircraft structure p 44 N89-17691
- Saarland Univ., Saarbrücken (Germany, F.R.G.).**
- Linguistic-technical aspects of machine translation p 252 N88-30461
- Sandia National Labs., Albuquerque, NM.**
- Accurate measurements of combustion species concentrations using CARS p 103 N87-21173
- Sapphire fiber optic temperature probe p 241 N87-21166
- Scheerer (Georg) and Co., Schweinfurt (Germany, F.R.G.).**
- Effects of unfavorable environmental conditions on the service life of jet engine and helicopter bearings p 174 N86-29238
- Design and calculation of high speed engine bearings p 174 N86-29241
- School of Aerospace Medicine, Brooks AFB, TX.**
- FB-111A aircrew use of temazepam during surge operations p 197 N87-25721
- EEG indices of G-induced Loss Of Consciousness (G-LOC) p 201 N88-27709
- The pilot is not the limiting factor in high performance aircraft p 218 N89-18012
- Science Applications International Corp., Huntsville, AL.**
- Lethal air defense suppression technology base definition p 234 N87-16004
- Science Research Council, Chilton (England).**
- Transhorizon coherent interference path measurements in Europe p 149 N89-18572
- Scientific Research Associates, Inc., Glastonbury, CT.**
- Computation of tip and corner region flows p 159 N87-22153
- Secretariat General de la Defense Nationale, Paris (France).**
- Side effects of hypnotic benzodiazepines on the vigilance and efficiency of personnel after awakening p 196 N87-25719
- Selenia S.p.A., Rome (Italy).**
- Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military airspace users [AGARD-AR-236] p 28 N87-23608
- Service de Sante pour l'Armee de l'Air, Paris (France).**
- Phobic manifestations among experienced pilots p 197 N87-25722
- Service Techniques des Programmes Aeronautiques, Paris (France).**
- Parametric study of the total cost of aircraft modernization in terms of development and equipment series costs p 243 N88-20177
- Development of complex avionics systems: Experience from French military programs p 51 N88-23804
- Improvement of specific fastening elements for assembling composite structures p 186 N89-17694
- Shape Technical Centre, The Hague (Netherlands).**
- Fiber optics: A survivable and cost effective transmission medium for terrestrial networks p 240 N87-13302
- The state of practice in Ada-based program design languages p 249 N89-18457
- Sheffield Univ. (England).**
- Three-dimensional gas turbine combustor modelling p 108 N88-29937
- Siemens A.G., Munich (Germany, F.R.G.).**
- Effects of optical feedback on the performance of high data rate single mode fiber systems p 238 N87-13288
- Acousto-optic spectrum analyzer using a planar Bragg cell p 239 N87-13295
- The mixture of different semiconductor technologies in radar modules and its impact on cooling problems and reliability p 131 N87-18748
- Signatron, Inc., Lexington, MA.**
- Modern HF communications: modulation and coding p 123 N86-27571
- Sikorsky Aircraft, Stratford, CT.**
- Engine-airframe integration considerations for preliminary air vehicle performance analysis p 31 N87-10068

CORPORATE SOURCE

Rotorcraft designs for the year 2000 p 37 N88-11865

Simon Fraser Univ., Burnaby (British Columbia).
The interaction of internal-cortical systems in the 40 Hz following response p 199 N88-27694
A study of sources in the human brain associated with stereopsis p 200 N88-27695

Singer Co., Wayne, N.J.
Design/development tradeoffs to achieve a mission effective SCOW guidance system p 91 N87-16003

Singer-Link-Miles Ltd., Lancing (England).
Advanced visuals in mission simulators p 80 N87-23636

Smith (A. M. O.), San Marino, CA.
Technical evaluation report on the Fluid Dynamics Panel Symposium on aerodynamic and related hydrodynamic studies using water facilities (AGARD-AR-225) p 159 N88-11968

Smiths Industries Ltd., Bishop Cleeve (England).
Exploiting the capabilities of flight management systems in solving the airport arrival problem p 28 N87-21899

Societe Anonyme Belge de Constructions Aeronautiques, Brussels
General operational and training visual concerns p 216 N87-29295
Future visual environment and concerns p 217 N88-29299

Societe Berthet et Cie, Plaisir (France).
Calculation of cascade flow behavior in a dynamic stall regime p 61 N87-24472
Qualification of a water tunnel for force measurements on aeronautical models p 85 N88-23128

Societe d'Applications Generales d'Electricite et de Mecanique, Paris (France).
Inertial-GPS: A marriage of reason, an analysis p 26 N87-21885
Aerionics and corrosion p 47 N88-13336

Societe d'Etude du Radant, Les Ulis (France).
Electronic scanning antenna for military aircraft of the 1990s p 131 N87-18751

Societe de Construction des Avions Hurel-Dubois, Paris (France).
Composite structure repairs carried out according to aeronautical techniques p 2 N87-20185

Societe de Fabrication d'Instruments de Mesure, Massy (France).
Helicopter fire control: Advantages of an automatic target tracker p 94 N88-11667
Automatic flight control system for modern helicopters p 77 N88-19558
Maintenance aid system for wide body aircraft p 70 N89-16805

Societe Europeenne de Propulsion, Saint-Medard-en-Jalles (France).
Design and sizing of solid rocket nozzles p 100 N87-28591
Design and sizing of internal thermal insulators for solid propellant rocket engines p 116 N87-28598
Comprehensive optimization of solid propellant rocket engines p 118 N87-28599

Societe Francaise d'Equipe pour la Navigation Aerienn, Chateaufort (France).
AQM: Accelerometer for precision-guided weapons p 93 N89-17607

Societe Mothesin, Le Plessis-Robinson (France).
Electromagnetic reflectivity in non-homogeneous continuous random media with cylindrical symmetry p 147 N89-17744

Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Evry Cedex (France).
Industrial introduction of the modeling of aeronautical forging and foundry process simulation p 121 N89-15279
Service life calculator for the M53 turbofan engine p 70 N89-16796
Short term developments in non-destructive evaluation applicable to turbine engine parts p 181 N89-17258
State-of-the-art in non-destructive evaluation of turbine engine parts p 181 N89-17261

Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Gennepvillers (France).
The Forge 2 isothermal forging model p 112 N89-15271
A numerical model of directional solidification of cast turbine blades p 121 N89-15277

Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).
Acquisition and processing of non-stationary pressure measurements in studies of air intake distortion p 178 N87-21191
Three-dimensional computation around turbomachine blades with fins p 59 N87-21940
Air inlet/engine compatibility: Impact of theoretical and experimental methods p 60 N87-24466
Specification of an engine and its components starting from a consideration of aircraft missions p 63 N88-17651
Design and testing of a front stage for an advanced high pressure compressor p 67 N88-17679
Computation of secondary flows in an axial multistage compressor p 67 N88-17681

Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Paris (France).
Study of the electron beam weldability of superalloys through the analysis of melt zone morphology p 176 N87-17053
The application of the RBD process to the deposition of anti-wear alloys p 177 N87-17069

Societe Nationale d'Etude et de Construction de Moteurs d'Aviation, Villaroche (France).
What can be done to face growing development costs p 244 N88-20181

Societe Nationale des Poudres et Explosifs, Vert-Le-Petit (France).
Sizing solid propellant engine charges p 116 N87-28596
Solid propellant grain design p 117 N89-16913

Societe Nationale Industrielle Aerospatiale, Cannes (France).
Dynamic modeling and optimal control design for large flexible space structures p 95 N87-20358
Dynamic analysis of direct television satellite TV-SAT/TDF 1 p 95 N87-20360
Spacecraft protection against electrostatic discharge application to the ARABSAT spacecraft p 99 N87-26956

Societe Nationale Industrielle Aerospatiale, Marignane (France).
Helicopter air intake protection systems p 32 N87-10073
Repair of helicopter composite structure techniques and substantiations p 1 N87-20179
Theoretical analysis of flows around helicopter fuselages: Application to design and development p 7 N87-20221
Active control of helicopter vibration using multiloop self-adaptive control p 75 N88-11660
New aerodynamic design of the fenestration for improved performance p 37 N88-11664
System for SAR missions p 46 N88-11671
Organization of helicopter development activities with a view toward reduction of costs and cycles p 246 N88-20200
Design and development of an avionics system adapted to helicopter missions p 49 N88-23786

Societe Nationale Industrielle Aerospatiale, Paris (France).
Strapdown inertial systems applications for tactical missiles (stand-off missiles) p 91 N87-16008
Simulation with real elements of Exocet anti-ship missiles p 44 N89-10056
Three-dimensional calculations of lateral jet interaction with an external supersonic flow p 19 N89-18631
Numerical simulation of separated supersonic flows around tactical missile bodies p 19 N89-18632

Societe Nationale Industrielle Aerospatiale, Saint-Medard-en-Jalles (France).
Design of filament-wound rocket cases p 100 N87-28593
Design of filament-wound rocket cases p 101 N89-16910

Societe Nationale Industrielle Aerospatiale, Suresnes (France).
Application of diffusion bonding combined with superplastic forming (SPF/DB) to the fabrication of TAGV metal sheet structures p 177 N87-17060

Societe Nationale Industrielle Aerospatiale, Toulouse (France).
ATR 42 carbon fibre flap repair design and inspection p 102 N87-20178
The use of simulation in the development of the Airbus p 244 N88-20188

Societe pour l'Equipe des Vehicules, Gosselies (Belgium).
Advanced lighter design: Operational experience and future requirements p 36 N87-24453
General operational and training visual concerns p 216 N88-29295
Future visual environment and concerns p 217 N88-29299

Societe Turbomeca, Bordeaux (France).
The advantage of variable geometry for turbine engines at low power p 63 N88-17653

Software Sciences Ltd., Farnborough (England).
The use of knowledge based systems techniques in ESM processing p 235 N87-24941
Multi-level parallel processing for very high performance real-time database management p 254 N89-18478

Southampton Univ. (England).
Hypersonic static and dynamic stability of axisymmetric shapes: A comparison of prediction methods and experiment p 13 N88-13248

Southwest Research Inst., San Antonio, TX.
Fuel effects on flame radiation and hot-section durability p 106 N88-29825

Spar Aerospace Ltd., Weston (Ontario).
Modal testing of the Olympus development model stowed solar array p 96 N87-20366

Sparta, Inc., Laguna Hills, CA.
Verification and validation of flight critical software p 230 N89-18480

SRI International Corp., Arlington, VA.
Man-made radio noise and interference p 148 N89-18571

SRI International Corp., Menlo Park, CA.
Bulk forming of superplastic alloys p 111 N87-29644

Standard Elektrik Lorenz A.G., Pforzheim (Germany, F.R.).
MM-wave propagation and application in military communication systems p 140 N88-19669

Standard Elektrik Lorenz A.G., Stuttgart (Germany, F.R.).
A fiber optic gyro stand-down reference system for guided weapons p 93 N88-19560

Standard Telecommunication Labs Ltd., Harlow (England).
Glass fibres for transmission in the 8-12 micrometers waveband p 239 N87-13297

Standard Telephones and Cables Ltd., Paignton (England).
Adaptive antennas p 134 N87-23865

Stanford Univ., CA.
Single crystal fibers p 239 N87-13298
Wave-induced particle precipitation from the magnetosphere and the associated ionospheric perturbations p 188 N87-26943
Bulk forming of superplastic alloys p 111 N87-29644
Fundamentals of turbulence for turbulence modeling and simulation p 159 N88-11971
A new global survey of ELF/VLF radio noise p 148 N89-18570

Stevens Inst. of Tech., Hoboken, NJ.
Stall flutter p 72 N87-24404

Stewart Hughes Ltd., Southampton (England).
Getting more from vibration analysis p 54 N89-16807
Gas path condition monitoring using electrostatic techniques p 54 N89-16817

Strathclyde Univ., Glasgow (Scotland).
Fibre optic gyroscopes in inertial navigation p 25 N87-13275
Applications in library management, requisitions, loans and stock control p 222 N87-19921
Procurement and management of microcomputer-based systems p 222 N87-19929

Structural Dynamics Research Corp., Milford, OH.
Simulation and design of high precision unit processes via numerical methods p 120 N89-15273

Stuttgart Univ. (Germany, F.R.).
GPS: Overview and present status p 26 N87-21884
A quasi three dimensional method for the calculation of transonic flows in turbomachines p 59 N87-21941
The unsteady gas flow through stator and rotor of a turbomachine p 64 N88-17660
Transonic blade design on rotational stream surfaces p 66 N88-17671
A new laminar water tunnel to study the transition process in a boundary layer and in a separation bubble and a new tool for industrial aerodynamics and hydrodynamic research p 85 N88-23150

Sunnybrook Medical Centre, Toronto (Ontario).
Prediction of lumbar spinal segment instability by centroid patterns p 192 N87-13949

Sverdrup Technology, Inc., Arnold Air Force Station, TN.
An overview of the application of standard measurement uncertainty methodology to propulsion testing p 72 N89-16854

Sverdrup Technology, Inc., Eglin AFB, FL.
Statistical techniques applied to analysis of airport distributions p 234 N89-17511

Swiss Aluminum Ltd., Neuhausen am Rheinfall.
Welding of aluminum castings p 177 N87-17068

System Dynamics, Inc., Gainesville, FL.
Midcourse guidance for the US Army's low cost fiber optic guided missile p 91 N87-16005

Systems Technology, Inc., Hawthorne, CA.
Collected flight and simulation comparisons and considerations p 91 N87-20660
Handling qualities criterion for very low visibility rotorcraft p 75 N88-11654
Pilot modeling p 217 N88-29736
Pilot modeling applications p 217 N88-29737
Advances in flying qualities: Concepts and criteria for a mission oriented flying qualities specification p 43 N88-29739

T

TAU Corp., Los Gatos, CA.
GPS/inertial navigation system integration for enhanced navigational performance and robustness p 30 N89-10680
Differential operation of NAVSTAR GPS for enhanced accuracy p 30 N89-10683
GPS navigation processing and Kalman filtering p 30 N89-10684

Taylor (J.)

- Taylor (J.), Camberley (England).**
An interim comparison of operational CG records in turbulence on small and large civil aircraft p 78 N88-29729
- Technisch Documentatie en Informatie Centrum voor de Krijgsmacht, The Hague (Netherlands).**
User needs and how to determine them p 249 N87-26679
- Technische Hochschule, Aachen (Germany, F.R.).**
Turbine rotor blade measurements using infrared pyrometry p 171 N87-21188
Unsteady aerodynamic measurements on rotors p 9 N87-24408
Effect of steady state inlet temperature distortion on the engine compressor flow p 61 N87-24468
Application of highly loaded single-stage mixed-flow compressors in small jet engines p 63 N88-17652
Short duration flow establishment on a profile in a Water-Ludwig-Tunnel p 161 N88-23134
Solution on unstructured grids for the Euler- and Navier-Stokes equations p 168 N89-18636
- Technische Hochschule, Darmstadt (Germany, F.R.).**
Large sonic waves in swirling jets, flames and flame flames p 107 N88-29932
- Technische Hochschule, Hanover (Germany, F.R.).**
Downstream flow angle correlations for turbine cascades in subsonic and transonic flow conditions p 60 N87-21949
- Technische Hogeschool, Delft (Netherlands).**
Basic characteristics of FM-CW radar systems p 131 N87-18753
Classical separation, trailing edge flows and buffeting p 14 N88-28874
Stresses in pinloaded anisotropic plates p 186 N89-17690
FM-CW radar remote sensing of hydrometers p 144 N89-17725
Active and passive side stick controllers: Tracking task performance and pilot control behaviour p 220 N89-18028
- Technische Hogeschool, Eindhoven (Netherlands).**
The lubrication of dynamically loaded concentrated hard line contacts: Temperature and pressure measurements p 175 N86-29247
Some visualization studies on turbulent boundary layers using multiwire hydrogen bubble generation p 164 N88-23153
- Technische Hogeschool Twente, Enschede (Netherlands).**
A mixed Eulerian-Lagrangian finite element method for simulation of thermo-mechanical forming processes p 131 N89-15274
- Technische Univ., Brunswick (Germany, F.R.).**
Design criteria for multi-loop flight control systems p 72 N87-21901
Experimental investigations on blunt bodies and corner configurations in hypersonic flow p 10 N88-13225
Flight test equipment for the on-board measurement of wind turbulence p 51 N88-29719
Documentation of separated flows for computational fluid dynamics validation p 170 N89-18662
- Technische Univ., Darmstadt (Germany, F.R.).**
Balance accuracy and repeatability as a limiting parameter in aircraft development force measurements in conventional and cryogenic wind tunnels p 90 N89-16873
- Technische Univ., Delft (Netherlands).**
Investigation of the surface flow of conical bodies at high subsonic and supersonic speeds p 20 N89-18650
- Technische Univ., Hanover (Germany, F.R.).**
Possibilities for on-line surge suppression by fast guide vane adjustment in axial compressors p 96 N88-17674
- Technische Univ., Munich (Germany, F.R.).**
Scoring tests of aircraft transmission lubricants at high speeds and high temperatures p 113 N86-29253
In-vivo experiments on the response of the human spine to sinusoidal G sub z vibration p 209 N87-13946
Bonding of superalloys by diffusion welding and diffusion brazing p 177 N87-17059
Comparison of the performance of a reverse flow annular combustion chamber under low and high pressure conditions p 106 N88-29923
System-theoretical method for dynamic on-condition monitoring of gas turbines p 54 N89-16812
- Technische Univ., Regensburg (Germany, F.R.).**
Vectorization of FORTRAN programs at do-loop level p 228 N89-11398
Restructuring of basic linear algebraic algorithms, chapter 5 p 228 N89-11399
Computational fluid dynamics and supercomputers, chapter 6 p 185 N89-11400
- Tel-Aviv Univ. (Israel).**
The hybrid wavefront resonance method p 137 N88-19113
- Telesat Canada, Ottawa (Ontario).**
The effects of electrostatic discharge phenomena on Telesat's domestic communications satellites p 99 N87-26958

- Telettra S.p.A., Chieti (Italy).**
Impulse response measurements and characterization of wideband VHF radio lines p 146 N89-17736
- Tennessee Univ. Space Inst., Tullahoma.**
Algebraic and generation for fighter type aircraft p 227 N88-29320
- Test Wing (R510th), Edwards AFB, CA.**
Mission planning and proper design The long range connection p 217 N89-18010
Measures of merit for advanced military avionics: A user's perspective on software utility p 55 N89-18447
- Texas Univ., Arlington.**
A scattering model for forested area p 143 N89-17713
- Texas Univ., Austin.**
Driving mechanism of unsteady separation shock motion in hypersonic interactive flow p 10 N88-13226
- Textron Bell Helicopter, Fort Worth, TX.**
Pilot simulation in the development of the XV-15 tilt rotor research aircraft p 81 N87-23646
Controlling the dynamic environment during NOE flight p 75 N88-11661
Development savings through parametric modeling of program costs p 243 N88-20175
Development and testing of a predictive methodology for optimization of man-machine interface in future avionics systems p 48 N88-23780
- Thessaloniki Univ. (Greece).**
Wave-tilt sounding of tropospheric ducts above the sea p 145 N89-17728
- Thomson-CSF, Issy les Moulineaux (France).**
SPOCK: A tool for real time artificial intelligence p 233 N89-18482
- Thomson-CSF, Malakoff (France).**
Synthetic aperture imaging airborne radar p 127 N87-18731
Target analysis through fine distance discrimination p 130 N87-18746
Radar display Conversion of scanning Errors and correction techniques p 132 N87-18754
Postintegration of radar images p 132 N87-18755
Architecture and role of the Sensor Subsystem in future aircraft weapon systems p 47 N88-23770
On the conditions and limits of user intervention in delivered software manufacturer's viewpoint p 229 N89-18451
Real time expert system for onboard radar identification p 56 N89-18481
- Thomson-CSF, Meudon-la-Forêt (France).**
Monopulse secondary radar: Practical realization and achievement. Mode S: The radar of tomorrow p 133 N87-21889
A practical example of Moving Target Detection (MTD) processing for an air traffic control radar with weather channel p 133 N87-21890
- Thomson-CSF, Montrouge (France).**
Dynamics and signal processing algorithms for high frequency of recurrence radar modes p 129 N87-18738
Form factor optimization for HFR emission p 130 N87-18742
Criteria for the evaluation of range performances in air/air interception p 133 N87-18760
- Thomson-CSF, Orsay (France).**
Progress in optical fiber gyroscopes using integrated optics p 238 N87-13283
- Thomson-CSF, Paris (France).**
About the future of airborne radar p 125 N87-18722
- Thomson-CSF, Trappes (France).**
Radar simulators p 82 N87-23651
- Thomson-CSF, Velizy (France).**
Modeling of electromagnetic wave and sea surface interaction p 145 N89-17726
- Thorn EMI, Hayes (England).**
The integration, characterization and trailing of a modern complex airborne radar p 50 N88-23791
- TICRA A/s, Copenhagen (Denmark).**
Spacecraft multi-beam and contoured-beam antennas p 134 N87-23863
- TopExpress Ltd., Cambridge (England).**
Numerical methods for unsteady transonic flow p 8 N87-24403
- Tor Vergata Univ., Rome (Italy).**
Vibration measurements on helicopter aircrew: A new approach p 210 N87-13956
- Toronto Univ., Downsview (Ontario).**
The application of optimal control techniques to the UTIAS research simulator p 80 N87-23637
Study of the dynamic behaviour of stiffened composite fuselage shell structures p 24 N89-18434
- Toronto Univ. (Ontario).**
Arc propagation, emission and damage on spacecraft dielectrics p 98 N87-26952
- Tracor Hydronautics, Inc., Laurel, MD.**
An experimental study to determine the flow and the subsonic static and dynamic stability characteristics of aircraft operating at high angles-of-attack p 42 N88-23129

- TRW, Inc., Redondo Beach, CA.**
Performance of RF fiber optic links p 240 N87-13301
- Turkish Air Force, Ankara.**
F110 engine monitoring and maintenance management systems for F-16 C/D p 70 N89-16791

U

- United Kingdom Atomic Energy Authority, Harwell (England).**
CARS: thermometry for low and high pressure combustion systems p 103 N87-21172
- United Technologies Research Center, East Hartford, CT.**
Linearized unsteady aerodynamic theory p 8 N87-24399
Nozzle airflow influences on fuel patterning p 105 N88-29916
Aeroelastic coupling: An elementary approach p 68 N89-10012
- Université de Valenciennes et du Hainaut-Cambresis (France).**
Water tunnel measurements by an electrochemical method p 163 N88-23146
- University Coll., London (England).**
Spacecraft charging: Meteorological experience p 98 N87-26951
Review of existing NDT technologies and their capabilities p 180 N89-17255
- University Coll. of Swansea (Wales).**
Metallurgical modelling of superalloy disc isothermal forgings p 120 N89-15266
- University Hospital, Leuven (Belgium).**
Cues for training vertigo: providing suggestions for the management of simulator sickness p 206 N89-12187
- University of Southern California, Los Angeles.**
The role of asymmetric transfer in the evaluation of voice generation and recognition systems p 136 N87-29525
- Uppsala Univ. (Sweden).**
Evaluation and prediction of back pain during military field service p 192 N87-13950
Individual predictability of back trouble in 18-year old men: A prospective study during military service p 192 N87-13951
- Utah State Univ., Logan.**
Magnetospheric control of the bulk ionospheric plasma p 187 N87-26939
Active vehicle charging measurements in sounding rocket and space shuttle orbiter environments at Low Earth Orbit (LEO) altitude p 97 N87-26945

V

- Verilog S.A., Toulouse (France).**
Assessment of software quality for the AIRBUS A310 automatic pilot p 74 N88-10804
- Vermont Univ., Burlington.**
Muscle fatigue in static and vibrational seating environments p 210 N87-13954
- Veterans Administration Hospital, Sepulveda, CA.**
Electroencephalographic correlates of pilot performance: Simulation and in flight studies p 208 N88-27711
- Victoria Univ. (British Columbia).**
Jamming and electronic countermeasures p 151 N89-18586
- Virginia Polytechnic Inst. and State Univ., Blacksburg.**
Manifestation of visual/vestibular disruption in simulators: Severity and empirical measurement of symptomatology p 205 N89-12181
On the applicability of continuous scattering methods to discrete scattering problems p 237 N89-17740
- Volkswagen A.G., Wolfsburg (Germany, F.R.).**
Requirements and criteria for the passive safety of automobiles p 221 N89-18440
- Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).**
Digital image processing applied to fluid dynamic problems p 156 N87-21193
European hypersonic wind tunnels p 84 N88-13221
Investigation of dihedral effects in compressor cascades p 66 N88-17672

W

- Warwick Univ., Coventry (England).**
The application of holography as a transonic flow diagnostic to rotating components in turbomachinery p 171 N87-21202
- Washington State Univ., Pullman.**
Superplastic sheet forming NATO/AGARD lecture series on superplasticity p 111 N87-29643
- Washington Univ., Seattle.**
Experiment and theory for backscattering enhancement and imaging in random media p 241 N89-17708

CORPORATE SOURCE

York Univ.

- Washington Univ., Saint Louis, MO.
 Closing the man-machine loop: On the use of physiological measures to affect computer-controlled devices p 211 N87-29507
 Cognitive task demands as reflected in physiological measures p 200 N88-27699
- Waterloo Univ. (Ontario).
 Multi-Bi-static high frequency (PD/GO) radar target imaging of airborne scatterers p 130 N87-18745
 Dynamic stability of hypersonic conical lifting vehicles according to Newton-Eusemann theory p 75 N88-13247
- Wayne State Univ., Detroit, MI.
 On functional approach to random wave propagation problems p 234 N89-17741
- Welding Inst., Cambridge (England).
 The application of diffusion bonding and laser welding in the fabrication of aerospace structures p 176 N87-17054
- Westinghouse Electric Corp., Baltimore, MD.
 Aircraft radar antennas p 134 N87-23861
- Westland Helicopters Ltd., Yeovil (England).
 The value of laboratory simulation testing for predicting gearbox performance p 174 N86-29237
 The role of residual stress in the performance of gears and bearings p 175 N86-29246
 Minimisation of helicopter vibration through active control of structural response p 75 N88-11662


Y

- York Univ. (England).
 Improved coding and control of H+ systems in a non-Gaussian noise environment p 150 N89-18582
- York Univ. (Ontario).
 Influence of vection axis and body posture on visually-induced self-rotation and tilt p 206 N89-12185
 Vection and the spatial disposition of competing moving displays p 206 N89-12186
- York Univ., Downsview (Ontario).
 The effects of hypoxia on P300 and reaction time [DOEM-87-RR-12] p 200 N88-27697
- York Univ., Toronto (Ontario).
 Spacecraft charging in the auroral plasma: Progress toward understanding the physical effects involved p 98 N87-26949

PANEL INDEX

AGARD INDEX OF PUBLICATIONS (1986-1988)

Typical Panel Index Listing



Listings in this index are arranged alphabetically by panel name. The title of the document provides the user with a brief description of the subject matter. The AGARD report number is included for reference. The page number identifies the page in the abstract section (Part 1) on which the citation appears. The NASA accession number denotes the number by which the citation is identified on that page. The titles are arranged under each panel name in ascending accession number order.

A

Aerospace Medical Panel.

- Backache and Back Discomfort p 190 N87-13932
[AGARD-CP-378]
Short Course on Cardiopulmonary Aspects of Aerospace Medicine p 193 N87-24070
[AGARD-R-758]
Biochemical Enhancement of Performance p 195 N87-25709
[AGARD-CP-415]
Impact of future developments in electronic technology on cockpit engineering p 211 N87-25769
[AGARD-R-757]
Information Management and Decision Making in Advanced Airborne Weapon Systems p 46 N87-29503
[AGARD-CP-414]
Sleep and wakefulness Handbook for flight medical officers, second edition p 197 N88-11366
[AGARD-AG-270(E)]
Human respiratory responses during high performance flight p 197 N88-12923
[AGARD-AG-312]
Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine p 190 N88-27683
[AGARD-CP-432]
Visual Effects in the High Performance Aircraft Cockpit p 218 N88-29291
[AGARD-LS-156]
Performance assessment register p 246 N89-10666
[AGARD-R-783]
Motion Cues in Flight Simulation and Simulator Induced Sickness p 203 N89-12171
[AGARD-CP-433]
Sleep and wakefulness Handbook for flight medical officers, 2nd edition p 207 N89-17399
[AGARD-AG-270(F)]
Avionics Panel.
Interaction between EMP (Electromagnetic Pulse), lightning and static electricity with aircraft and missile avionics systems p 22 N88-30706
[AGARD-LS-144]
Multifunction Radar for Airborne Applications p 125 N87-18721
[AGARD-CP-381]

- The potential impact of developments in electronic technology on the future conduct of air warfare, volume 3 p 153 N87-22094
[AGARD-AR-232-VOL-3]
Microwave Antennas for Avionics p 134 N87-23859
[AGARD-LS-151]
Advanced Computer Aids in the Planning and Execution of Air Warfare and Ground Strike Operations p 235 N87-24940
[AGARD-CP-404]
The Design, Development and Testing of Complex Avionics Systems p 47 N88-23767
[AGARD-CP-417]
The NAVSTAR GPS System p 29 N89-10874
[AGARD-LS-161]
Software Engineering and its Application to Avionics p 55 N89-18446
[AGARD-CP-439]

E

Electromagnetic Wave Propagation Panel.

- Propagation Impact on Modern HF Communications System Design p 122 N86-27566
[AGARD-LS-145]
Guided Optical Structures in the Military Environment p 237 N87-13273
[AGARD-CP-383]
Special Course on Interaction of Propagation and Digital Transmission Techniques p 124 N87-18703
[AD-A175698]
The Aerospace Environment at High Altitudes and its Implications for Spacecraft Charging and Communications p 97 N87-26117
[AGARD-CP-406]
Theoretical Aspects of Target Classification p 136 N88-11909
[AGARD-LS-152]
Terrestrial Propagation Characteristics in Modern Systems of Communications, Surveillance, Guidance and Control p 138 N88-19653
[AGARD-CP-407]
Media Effects on Electronic Systems in the High Latitude Region p 141 N89-11931
[AGARD-LS-162]
Scattering and Propagation in Random Media p 122 N89-17706
[AGARD-CP-419]
Effects of Electromagnetic Noise and Interference on Performance of Military Radio Communication Systems p 147 N89-18565
[AGARD-CP-420]

F

Flight Mechanics Panel.

- Analog signal conditioning for flight test instrumentation p 45 N86-29616
[AGARD-AG-160-VOL-17]
Store separation flight testing p 31 N86-30727
[AGARD-AG-300-VOL-5]
Determination of antennae patterns and radar reflection characteristics of aircraft p 124 N86-30531
[AGARD-AG-300-VOL-4]
Rotorcraft icing: Progress and potential p 32 N87-15966
[AGARD-AR-223]
Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Simulation p 79 N87-15985
[ISBN-92-835-0399-6]
Identification of dynamic systems - applications to aircraft Part 1: The output error approach p 33 N87-21913
[AGARD-AG-300-VOL-3-PT-1]
Microprocessor applications in airborne flight test instrumentation p 45 N87-21920
[AGARD-AG-160-VOL-18]
Improvement of Combat Performance for Existing and Future Aircraft p 33 N87-22663
[AGARD-CP-409]
Flight Simulation p 80 N87-23633
[AGARD-CP-408]
Integrated Design of Advanced Fighters p 35 N87-24445
[AGARD-LS-153]
The practical assessment of pilot workload p 212 N87-30054
[AGARD-AG-282]
Rotorcraft Design for Operations p 37 N88-11649
[AGARD-CP-423]
Developmental airdrop testing techniques and devices p 38 N88-12481
[AGARD-AG-300-VOL-6]
Flight Vehicle Development Time and Cost Reduction p 243 N88-20173
[AGARD-CP-424]

- Advances in Flying Qualities p 4 N88-29735
[AGARD-LS-157]
Technical evaluation report on the Flight Mechanics Panel Symposium on Flight Vehicle Development Time and Cost Reduction p 4 N89-10001
[AGARD-AR-244]

Fluid Dynamics Panel.

- Technical evaluation report of AGARD Technical Evaluation Meeting on Unsteady Aerodynamics Fundamentals and Applications to Aircraft Dynamics p 4 N88-27182
[AGARD-AR-222]
Aircraft drag prediction and reduction Addendum 1: Computational drag analyses and minimization, mission impossible? p 5 N86-32408
[AGARD-AR-226]
Shock-wave boundary layer interactions p 155 N86-29173
[AGARD-AG-280]
Aerodynamics of aircraft afterbody. Report of the working group on aerodynamics of aircraft afterbody p 5 N86-32408
[AGARD-AR-226]
Applications of Computational Fluid Dynamics in Aeronautics p 5 N87-20199
[AGARD-CP-412]
Round Table Discussion on Modeling of Time-Varying Flows Using Vortex Dynamics p 157 N87-22137
[AGARD-AR-239]
Computation of Three-Dimensional Boundary Layers Including Separation p 158 N87-22145
[AGARD-R-741]
The aerodynamics of parachutes p 9 N87-26681
[AGARD-AG-295]
Technical evaluation report on the Fluid Dynamics Panel Symposium on Applications of Computational Fluid Dynamics in Aeronautics p 159 N87-27958
[AD-A172209]
Technical evaluation report on the Fluid Dynamics Panel Symposium on aerodynamic and related hydrodynamic studies using water facilities p 159 N88-11966
[AGARD-AR-225]
Special Course on Modern Theoretical and Experimental Approaches to Turbulent Flow Structure and its Modeling p 159 N88-11970
[AGARD-R-755]
Aerodynamics of Hypersonic Lifting Vehicles p 10 N88-13219
[AGARD-CP-428]
Special Course on Fundamentals of Fighter Aircraft Design p 39 N88-13315
[AGARD-R-740]
Techniques of flow visualization p 160 N88-16977
[AGARD-AG-302]
Aerodynamic and Related Hydrodynamic Studies Using Water Facilities p 160 N88-23125
[AGARD-CP-413]
Boundary layer simulation and control in wind tunnels p 3 N88-28857
[AGARD-AR-224]
Three dimensional grid generation for complex configurations Recent progress p 226 N88-29313
[AGARD-AG-309]
Special Course on Missile Aerodynamics p 14 N88-29755
[AGARD-R-754]
Computational Fluid Dynamics: Algorithms and Supercomputers p 223 N89-11395
[AGARD-AG-311]
Reynolds number effects in transonic flow p 17 N89-16760
[AGARD-AG-303]
Aerodynamic Data Accuracy and Quality Requirements and Capabilities in Wind Tunnel Testing p 87 N89-16846
[AGARD-CP-429]
Validation of Computational Fluid Dynamics Volume 1: Symposium papers and round table discussion p 165 N89-18610
[AGARD-CP-437-VOL-1]
Validation of Computational Fluid Dynamics Volume 2: Poster papers p 169 N89-18648
[AGARD-CP-437-VOL-2]

G

Guidance and Control Panel.

- Application of Ada higher order language to guidance and control p 72 N88-30740
[AGARD-LS-146]
Guidance, Control and Positioning of Future Precision Guided Stand-Off Weapons Systems p 91 N87-18600
[AGARD-CP-368]

PANEL

Improved guidance and control automation at the man-machine interface
 [AGARD-AR-228] p 211 N87-18987
 Efficient Conduct of Individual Flights and Air Traffic or Optimum Utilization of Modern Technology for the Overall Benefit of Civil and Military Aerospace Users
 [AGARD-CP-410] p 25 N87-21881
 Efficient conduct of individual flights and air traffic or optimum utilization of modern technology for the overall benefit of civil and military aerospace users
 [AGARD-AR-236] p 28 N87-23608
 Advances in Guidance and Control Systems and Technology
 [AGARD-CP-411] p 28 N87-21474
 Fault tolerant considerations and methods for guidance and control systems
 [AGARD-AG-289] p 73 N88-10796
 Knowledge Based Concepts and Artificial Intelligence Applications to Guidance and Control
 [AGARD-LS-155] p 74 N88-10806
 Advances in Air-Launched Weapon Guidance and Control
 [AGARD-CP-431] p 92 N88-19553
 Guidance and control systems simulation and validation techniques
 [AGARD-AG-273] p 78 N89-10048
 Computing Systems Configuration for Highly Integrated Guidance and Control Systems
 [AGARD-LS-158] p 4 N89-10831
 Guidance and Control of Precision Guided Weapons
 [AGARD-CP-435] p 93 N89-17605
 The Man-Machine Interface in Tactical Aircraft Design and Combat Automation
 [AGARD-CP-425] p 217 N89-18009

P

Propulsion and Energetics Panel.

Smokeless Propellants
 [AGARD-CP-391] p 113 N86-26466
 Interior Ballistics of Guns
 [AGARD-CP-392] p 117 N86-29063
 Engine-Airframe Integration for Rotocraft
 [AGARD-LS-148] p 31 N87-10067
 Performance of rocket motors with metalized propellants
 [AGARD-AR-230] p 99 N87-18610
 Advanced Instrumentation for Aero Engine Components
 [AGARD-CP-399] p 118 N87-21173
 Transonic and Supersonic Phenomena in Turbomachines
 [AGARD-CP-401] p 57 N87-21927
 Aeroelasticity in axial-flow turbomachines Volume 1
 Unsteady turbomachinery aerodynamics
 [AGARD-AG-298-VOL-1] p 8 N87-24398
 Engine Response to Distorted Inflow Conditions
 [AGARD-CP-400] p 60 N87-24464
 Rocket altitude test facilities register
 [AGARD-AG-297] p 91 N87-24489
 Design Methods in Solid Rocket Motors
 [AGARD-LS-150] p 100 N87-28589
 Application of modified loss and deviation correlations to transonic axial compressors
 [AGARD-R-745] p 62 N88-13344
 Advanced Technology for Aero Gas Turbine Components
 [AGARD-CP-421] p 62 N88-17647
 Combustion and fuels in gas turbine engines
 [AGARD-CP-422] p 104 N88-29910
 AGARD manual on aeroelasticity in axial-flow turbomachines Volume 2 Structural dynamics and aeroelasticity
 [AGARD-AG-298-VOL-2] p 16 N89-10006
 Engine Condition Monitoring Technology and Experience
 [AGARD-CP-448] p 52 N89-16780
 Design Methods in Solid Rocket Motors
 [AGARD-LS-150-REV] p 101 N89-18906

S

Structures and Materials Panel.

Combat loads on modern fighters
 [AGARD-R-730] p 30 N86-27276
 Impact damage to composite structures
 [AGARD-R-729] p 102 N86-27425
 Static aeroelasticity in combat aircraft
 [AGARD-R-725] p 182 N86-27678
 Aircraft and Bearing Tribological Systems
 [AGARD-CP-394] p 174 N86-29236
 Crashworthiness of airframes
 [AGARD-R-737] p 22 N86-30709
 The influence of large-scale computing on aircraft structural design
 [AGARD-R-728] p 31 N86-30728
 Gust load prediction and alleviation on a fighter aircraft
 [AGARD-R-728] p 72 N86-30741

The prospects for finite element analysis methods for structural qualification
 [AGARD-R-736] p 182 N86-31083
 Practical Application of Finite Element Analysis to Aircraft Structural Design
 [AGARD-LS-147] p 182 N87-16376
 Advanced Joining of Aerospace Metallic Materials
 [AGARD-CP-398] p 175 N87-17051
 The Repair of Aircraft Structures Involving Composite Materials
 [AGARD-CP-402] p 1 N87-20174
 Mechanical Qualification of Large Flexible Spacecraft Structures
 [AGARD-AG-278-VOL-2] p 94 N87-20355
 Aircraft Dynamic Response to Damaged and Repaired Runways
 [AGARD-R-739] p 34 N87-23609
 AGARD corrosion handbook Volume 2 Aircraft corrosion control documents A descriptive catalogue
 [AGARD-AG-278-VOL-2] p 110 N87-24553
 Future Research on Transonic Unsteady Aerodynamics and its Aeroelastic Applications
 [AGARD-R-749] p 9 N87-28518
 Superplasticity
 [AGARD-LS-154] p 111 N87-29641
 Reliability of finite element methods in North America
 [AGARD-R-748] p 183 N88-11139
 Standard fatigue test specimens for fastener evaluation
 [AGARD-AG-304] p 183 N88-12818
 Workshop on Avionics Corrosion Control
 [AGARD-R-733] p 46 N88-13331
 Static Aeroelastic Effects on High Performance Aircraft
 [AGARD-CP-403] p 76 N88-13348
 Effectiveness of various control surfaces in quasi-steady and unsteady conditions
 [AGARD-R-735] p 77 N88-17682
 Workshop on Design Loads for Advanced Fighters
 [AGARD-R-746] p 41 N88-19449
 The Flight of Flexible Aircraft in Turbulence
 State-of-the-Art in the Description and Modeling of Atmospheric Turbulence
 [AGARD-R-734-ADD] p 4 N88-29717
 The Flight of Flexible Aircraft in Turbulence
 State-of-the-Art in the Description and Modeling of Atmospheric Turbulence
 [AGARD-R-734] p 4 N88-29725
 Aerospace Materials Process Modeling
 [AGARD-CP-426] p 119 N89-15262
 AGARD/SMP Review: Damage Tolerance for Engine Structures 1. Non-Destructive Evaluation
 [AGARD-R-768] p 180 N89-17253
 Short-Crack Growth Behaviour in an Aluminum Alloy
 An AGARD Cooperative Test Programme
 [AGARD-R-732] p 184 N89-17287
 Behaviour and Analysis of Mechanically Fastened Joints in Composite Structures
 [AGARD-CP-427] p 121 N89-17685
 Energy Absorption of Aircraft Structures as an Aspect of Crashworthiness
 [AGARD-CP-443] p 22 N89-18421

T

Technical Information Panel.

The Value of Information as an Integral Part of Aerospace and Defence R and D Programmes
 [AGARD-CP-385] p 247 N86-28793
 The Application of Microcomputers to Aerospace and Defence Scientific and Technical Information Work
 [AGARD-LS-149] p 221 N87-19920
 Planning and Designing Effective Defence and Related Information Services
 [AGARD-CP-416] p 249 N87-26675
 AGARD guide to aerospace and defence technical report series in NATO countries
 [AGARD-R-743] p 197 N87-27391
 Barriers to Information Transfer and Approaches Toward their Reduction
 [AGARD-CP-430] p 251 N88-30458
 Evaluating the Effectiveness of Information Centres and Services
 [AGARD-LS-160] p 253 N89-11625

AGARD INDEX OF PUBLICATIONS (1986-1988)

```

graph TD
    RN[REPORT NUMBER] --- A["AD A50638"]
    A --- P[PAGE NUMBER]
    A --- M[ON MICROFICHE]
    NA[NASA ACCESSION NUMBER] --- N["D 110 N86 16374"]
    N --- P
    N --- M
  
```

The diagram illustrates the structure of a document. It features two main boxes at the top: "REPORT NUMBER" on the left and "NASA ACCESSION NUMBER" on the right. Below "REPORT NUMBER" is the text "AD A50638". Below "NASA ACCESSION NUMBER" is the text "D 110 N86 16374". From the bottom of "AD A50638", two lines lead down to "PAGE NUMBER" and "ON MICROFICHE". Similarly, from the bottom of "D 110 N86 16374", two lines lead down to "PAGE NUMBER" and "ON MICROFICHE".

AD A150638	p 110	N86-16574	4
AD A16664	p 247	N86-28793	4
AD A166552	p 113	N86-26468	4
AD A175107	p 117	N86-29063	4
AD A167541	p 34	N86-27162	4
AD A167541	p 30	N86-27276	3
AD A167594	p 102	N86-27425	4
AD A167595	p 182	N86-27678	4
AD A168241	p 174	N86-29236	4
AD A169584	p 124	N86-30031	4
AD A170299	p 72	N86-30701	4
AD A17226	p 190	N87-13932	3
AD A17227	p 237	N87-13273	3
AD A17291	p 31	N87-10067	4
AD A171298	p 22	N86-30708	4
AD A171399	p 72	N86-30740	4
AD A171300	p 122	N86-27566	4
AD A171301	p 31	N86-30727	4
AD A171302	p 155	N86-29173	3
AD A171303	p 45	N86-29816	4
AD A171304	p 182	N86-31083	4
AD A171305	p 22	N86-30709	4
AD A171306	p 31	N86-30726	4
AD A171307	p 72	N86-30739	4
AD A171308	p 175	N86-31064	4
AD A177209	p 159	N87-27958	4
AD A172741	p 5	N86-32468	4
AD A173314	p 221	N87-19920	2
AD A173353	p 97	N87-16000	4
AD A173807	p 32	N87-15966	4
AD A173823	p 182	N87-16376	4
AD A173915	p 80	N87-23633	4
AD A173978	p 187	N87-18125	2
AD A173979	p 175	N87-17051	4
AD A173991	p 79	N87-15985	4
AD A175529	p 94	N87-20355	4
AD A175565	p 99	N87-18610	4
AD A175698	p 124	N87-18124	2
AD A177380	p 5	N87-20199	4
AD A177651	p 211	N87-16887	4
AD A178424	p 153	N87-22094	4
AD A178691	p 1	N87-20174	4
AD A178777	p 33	N87-21913	3
AD A178963	p 45	N87-21920	4
AD A179039	p 157	N87-22137	4
AD A179085	p 158	N87-22145	4
AD A181676	p 8	N87-24398	4
AD A181677	p 193	N87-24070	4
AD A181678	p 34	N87-23909	4
AD A181679	p 91	N87-24489	4
AD A181680	p 110	N87-24553	4
AD A182096	p 235	N87-24940	4
AD A182145	p 28	N87-23608	4
AD A182150	p 25	N87-21681	4
AD A182635	p 80	N87-24454	4
AD A182802	p 197	N87-27391	4
AD A182954	p 118	N87-21170	4
AD A182996	p 51	N87-21927	4
AD A184071	p 211	N87-25765	4
AD A184044	p 46	N87-29503	4
AD A184478	p 100	N87-28589	4

AD-184501
AD-184620
AD-184769
AD-184833
AD-184834
AD-184835
AD-185152
AD-185152
AD-185224
AD-185580
AD-185603
AD-187157
AD-187157
AD-187957
AD-186622
AD-189002
AD-189621
AD-189668
AD-191463
AD-191464
AD-191551
AD-191601
AD-192214
AD-192410
AD-194291
AD-194402
AD-194648
AD-194653
AD-194686
AD-194684
AD-194686
AD-194689
AD-194870
AD-195285
AD-195982
AD-196333
AD-196773
AD-196776
AD-196777
AD-197162
AD-197172
AD-197579
AD-198045
AD-198663
AD-198664
AD-198665
AD-198666
AD-198687
AD-198702
AD-198872
AD-199169
AD-199189
AD-199170
AD-199172
AD-199306
AD-199307
AD-199308
AD-199308
AD-199527
AD-199533
AD-199697
AD-199742
AD-199759
AD-199829
AD-200527
AD-200528
AD-202243
AD-202492
AD-202493
AD-202494
AD-202527
AD-202496
AD-203450
AD-203451
AD-203595
AD-203600
AD-203892
AD-205648
AGARD-AG-160-VOL-17
AGARD-AG-160-VOL-18
AGARD-AG-168-AD0
AGARD-AG-270(F)
AGARD-AG-270(F)
AGARD-AG-273
AGARD-AG-278-VOL-1
AGARD-AG-278-VOL-2
AGARD-AG-280
AGARD-AG-282

p 33	N87-22663
p 37	N87-26681
p 37	N87-28518
p 249	N87-26675
p 132	N87-26675
p 136	N87-11909
p 195	N87-25709
p 134	N87-23859
p 35	N87-24445
p 87	N87-26937
p 197	N87-26675
p 193	N86-11139
p 59	N86-11968
p 138	N86-12818
p 183	N86-12481
p 62	N86-12481
p 74	N86-10806
n 111	N87-29641
p 197	N86-12923
p 39	N86-13315
p 159	N86-13315
p 160	N86-16977
p 183	N86-26695
p 92	N86-19553
p 251	N86-30658
p 138	N86-19653
p 142	N86-19653
p 46	N86-13331
p 41	N86-19449
p 4	N86-29725
p 190	N87-26783
p 164	N86-27480
p 42	N86-27480
p 226	N86-29313
p 223	N89-11395
p 172	N86-28287
p 172	N86-28286
p 172	N86-27525
p 189	N86-27669
p 243	N86-20173
p 62	N86-17647
p 190	N86-13219
p 47	N86-13219
p 159	N86-18857
p 37	N86-29717
p 159	N86-11970
p 37	N86-11649
p 166	N86-13348
p 12	N86-13348
p 14	N86-17575
p 216	N86-29291
p 4	N86-29735
p 4	N86-10631
p 101	N89-16906
p 160	N89-16906
p 16	N89-17193
p 16	N86-10006
p 4	N86-10001
p 67	N86-26926
p 29	N89-10874
p 14	N89-10874
p 246	N86-10666
p 141	N86-11391
p 203	N86-12171
p 78	N86-10048
p 119	N86-12662
p 18	N86-12662
p 87	N86-16846
p 253	N86-11625
p 173	N86-12849
p 93	N86-12533
p 93	N86-16005
p 52	N86-16005
p 55	N86-16446
p 184	N86-17287
p 45	N86-29616
p 45	N87-21920
p 184	N86-13366
p 197	N86-11366
p 207	N89-17399
p 78	N86-10048
p 110	N86-16374
p 107	N87-24553
p 107	N87-24553
p 212	N87-29054

AGARD-AG-289
 AGARD-AG-295
 AGARD-AG-296
 AGARD-AG-297
 AGARD-AG-298 VOL-1
 AGARD-AG-298 VOL-2
 AGARD-AG-300 VOL-1
 AGARD-AG-300 VOL-2
 AGARD-AG-300 VOL-5
 AGARD-AG-300 VOL-6
 AGARD-AG-300 VOL-7
 AGARD-AG-300 VOL-8
 AGARD-AG-302
 AGARD-AG-303
 AGARD-AG-304
 AGARD-AG-309
 AGARD-AG-310
 AGARD-AG-311
 AGARD-AG-312
 AGARD-AG-313
 AGARD-AR-222
 AGARD-AR-223
 AGARD-AR-224
 AGARD-AR-225
 AGARD-AR-226
 AGARD-AR-228
 AGARD-AR-230
 AGARD-AR-232 VOL-3
 AGARD-AR-234
 AGARD-AR-236
 AGARD-AR-239
 AGARD-AR-240
 AGARD-AR-243
 AGARD-AR-244
 AGARD-AR-246
 AGARD-AR-249
 AGARD-AR-254
 AGARD-CP-378
 AGARD-CP-381
 AGARD-CP-383
 AGARD-CP-385
 AGARD-CP-388
 AGARD-CP-391
 AGARD-CP-392
 AGARD-CP-394
 AGARD-CP-397
 AGARD-CP-398
 AGARD-CP-399
 AGARD-CP-400
 AGARD-CP-401
 AGARD-CP-402
 AGARD-CP-403
 AGARD-CP-404
 AGARD-CP-406
 AGARD-CP-407
 AGARD-CP-408
 AGARD-CP-409
 AGARD-CP-410
 AGARD-CP-411
 AGARD-CP-412
 AGARD-CP-413
 AGARD-CP-414
 AGARD-CP-415
 AGARD-CP-417
 AGARD-CP-419
 AGARD-CP-420
 AGARD-CP-421
 AGARD-CP-422
 AGARD-CP-423
 AGARD-CP-424
 AGARD-CP-425
 AGARD-CP-426
 AGARD-CP-427
 AGARD-CP-428
 AGARD-CP-429
 AGARD-CP-430
 AGARD-CP-432
 AGARD-CP-433
 AGARD-CP-435
 AGARD-CP-437 VOL-1
 AGARD-CP-437 VOL-2
 AGARD-CP-439
 AGARD-CP-443
 AGARD-CP-444
 AGARD-LS-148

p 73 N86-10796
p 91 N87-26881
p 173 N89-12649
p 91 N87-24489
p 16 N87-24398
p 16 N87-24398
p 33 N87-21913
p 124 N86-30931
p 31 N86-30727
p 38 N88-12481
p 172 N86-28287
p 172 N86-27525
p 160 N86-19977
p 17 N89-16760
p 183 N86-12818
p 226 N86-29313
p 172 N86-28287
p 197 N86-12923
p 172 N86-28287
p 4 N86-27182
p 32 N87-15966
p 15 N86-13271
p 159 N88-11968
p 5 N86-32408
p 211 N87-18987
p 99 N87-18610
p 33 N87-22084
p 159 N86-12818
p 26 N87-23608
p 157 N87-22137
p 159 N87-27958
p 42 N86-26362
p 164 N86-19600
p 44 N89-12564
p 14 N86-28983
p 190 N87-13932
p 124 N86-13271
p 23 N87-18773
p 247 N86-28793
p 91 N87-16000
p 113 N86-26468
p 117 N86-29063
p 183 N86-29326
p 94 N86-13271
p 175 N87-17051
p 118 N87-21170
p 60 N87-24464
p 57 N87-19197
p 172 N86-13271
p 76 N86-13348
p 235 N87-24940
p 97 N87-26937
p 138 N86-19653
p 80 N87-23633
p 172 N86-13348
p 25 N87-21881
p 28 N87-29474
p 5 N87-20199
p 160 N86-23125
p 46 N87-29503
p 172 N86-13271
p 249 N87-26675
p 47 N86-23767
p 122 N89-17706
p 147 N89-18585
p 62 N86-17647
p 172 N86-13271
p 37 N86-11649
p 243 N86-20173
p 217 N89-19009
p 119 N89-15262
p 181 N86-17885
p 87 N86-13271
p 89 N86-18846
p 92 N86-30458
p 251 N86-19553
p 190 N86-27883
p 203 N86-12717
p 172 N86-13271
p 165 N89-18610
p 169 N89-18648
p 55 N86-18446
p 22 N89-18421
p 52 N86-16780
p 22 N89-30708

REPORT

AGARD-LS-145

REPORT NUMBER INDEX

AGARD-LS-145	p 122	N86-27586 #	ISBN-92-835-0430-5	p 159	N88-11970 #	ISBN92-835-1528-5	p 22	N86-30708 #
AGARD-LS-146	p 72	N86-30740 #	ISBN-92-835-0431-3	p 121	N89-17685 #	ISBN92-835-1530-7	p 124	N86-30931 #
AGARD-LS-147	p 182	N87-16376 #	ISBN-92-835-0432-1	p 243	N88-20173 #	ISBN92-835-1531-5	p 175	N86-31064 #
AGARD-LS-148	p 31	N87-10067 #	ISBN-92-835-0433-X	p 62	N88-17647 #	ISBN92-835-1532-3	p 72	N86-30741 #
AGARD-LS-149	p 221	N87-19920 #	ISBN-92-835-0435-6	p 138	N88-19673 #			
AGARD-LS-150-REV	p 101	N89-16906 #	ISBN-92-835-0437-2	p 47	N86-23767 #	LC-87-19560	p 215	N88-27749 #
AGARD-LS-150	p 100	N87-28589 #	ISBN-92-835-0438-0	p 160	N88-16977 #	LC-87-19560	p 215	N88-28630 #
AGARD-LS-151	p 134	N87-23859 #	ISBN-92-835-0439-9	p 92	N88-19553 #	LC-87-19560	p 215	N88-28631 #
AGARD-LS-152	p 136	N88-11909 #	ISBN-92-835-0441-0	p 172	N88-26267 #		p 215	N88-28632 #
AGARD-LS-153	p 35	N87-24445 #	ISBN-92-835-0442-9	p 41	N88-19449 #			
AGARD-LS-154	p 111	N87-29641 #	ISBN-92-835-0443-7	p 42	N88-27185 #			
AGARD-LS-155	p 74	N88-10806 #	ISBN-92-835-0444-5	p 122	N89-17706 #			
AGARD-LS-156	p 216	N88-29291 #	ISBN-92-835-0445-3	p 40	N88-18588 #			
AGARD-LS-157	p 4	N88-29735 #	ISBN-92-835-0446-1	p 183	N88-26695 #			
AGARD-LS-158	p 4	N89-10831 #	ISBN-92-835-0447-X	p 190	N88-27683 #			
AGARD-LS-160	p 253	N89-11625 #	ISBN-92-835-0448-8	p 223	N89-11395 #			
AGARD-LS-161	p 29	N89-10874 #	ISBN-92-835-0449-6	p 251	N88-30458 #			
AGARD-LS-162	p 141	N89-11931 #	ISBN-92-835-0450-X	p 42	N88-26362 #			
			ISBN-92-835-0451-8	p 226	N88-29313 #			
AGARD-R-723-ADD.1	p 5	N86-27187 #	ISBN-92-835-0452-6	p 14	N88-29755 #			
AGARD-R-725	p 182	N86-27678 #	ISBN-92-835-0453-4	p 164	N88-27480 #			
AGARD-R-726	p 31	N86-30726 #	ISBN-92-835-0454-2	p 101	N89-16906 #			
AGARD-R-727	p 175	N86-31064 #	ISBN-92-835-0456-9	p 216	N88-29291 #			
AGARD-R-728	p 72	N86-30741 #	ISBN-92-835-0457-7	p 3	N88-28857 #			
AGARD-R-729	p 102	N86-27425 #	ISBN-92-835-0458-5	p 4	N88-29717 #			
AGARD-R-730	p 30	N86-27276 #	ISBN-92-835-0459-3	p 172	N88-27525 #			
AGARD-R-732	p 184	N89-17287 #	ISBN-92-835-0460-7	p 141	N88-27406 #			
AGARD-R-733	p 46	N88-13331 #	ISBN-92-835-0461-5	p 4	N88-29735 #			
AGARD-R-734-ADD	p 4	N88-29717 #	ISBN-92-835-0462-3	p 189	N88-27669 #			
AGARD-R-734	p 4	N88-29725 #	ISBN-92-835-0463-1	p 42	N88-27793 #			
AGARD-R-735	p 77	N88-17682 #	ISBN-92-835-0464-X	p 4	N89-10831 #			
AGARD-R-736	p 182	N86-31083 #	ISBN-92-835-0465-8	p 104	N88-29910 #			
AGARD-R-737	p 22	N86-30709 #	ISBN-92-835-0466-6	p 203	N89-12171 #			
AGARD-R-738	p 72	N86-30739 #	ISBN-92-835-0467-4	p 16	N89-10005 #			
AGARD-R-739	p 34	N87-23609 #	ISBN-92-835-0468-2	p 14	N88-28893 #			
AGARD-R-740	p 39	N88-13315 #	ISBN-92-835-0469-0	p 87	N89-16846 #			
AGARD-R-741	p 158	N87-22145 #	ISBN-92-835-0471-2	p 217	N89-13009 #			
AGARD-R-743	p 197	N87-27391 #	ISBN-92-835-0472-0	p 78	N89-10048 #			
AGARD-R-744	p 124	N87-18703 #	ISBN-92-835-0473-9	p 4	N89-10001 #			
AGARD-R-745	p 62	N88-13344 #	ISBN-92-835-0475-5	p 67	N88-28926 #			
AGARD-R-746	p 41	N88-19449 #	ISBN-92-835-0476-3	p 119	N89-15262 #			
AGARD-R-748	p 183	N88-11139 #	ISBN-92-835-0477-1	p 29	N89-10874 #			
AGARD-R-749	p 9	N87-28518 #	ISBN-92-835-0478-X	p 141	N89-11931 #			
AGARD-R-750	p 40	N88-18588 #	ISBN-92-835-0479-8	p 253	N89-11625 #			
AGARD-R-751	p 183	N88-26695 #	ISBN-92-835-0480-1	p 173	N89-12849 #			
AGARD-R-752	p 189	N88-27669 #	ISBN-92-835-0481	p 52	N89-16780 #			
AGARD-R-754	p 14	N86-29755 #	ISBN-92-835-0483-6	p 55	N89-18446 #			
AGARD-R-755	p 159	N88-11970 #	ISBN-92-835-0484-4	p 180	N89-11253 #			
AGARD-R-757	p 211	N87-25769 #	ISBN-92-835-0485-2	p 22	N89-18421 #			
AGARD-R-758	p 193	N87-24070 #	ISBN-92-835-0486-0	p 93	N89-17605 #			
AGARD-R-763	p 246	N89-10666 #	ISBN-92-835-0487-9	p 147	N89-18565 #			
AGARD-R-765	p 42	N88-27193 #	ISBN-92-835-0489-5	p 165	N89-18610 #			
AGARD-R-766	p 67	N88-28926 #	ISBN-92-835-0490-9	p 169	N89-18648 #			
AGARD-R-768	p 180	N89-17253 #	ISBN-92-835-0491-7	p 165	N89-18610 #			
			ISBN-92-835-0491-7	p 169	N89-18648 #			
AGARDGRAPH-278	p 110	N87-24553 #	ISBN-92-835-0493-3	p 184	N89-17287 #			
AGARDGRAPH-297	p 91	N87-24489 #	ISBN-92-835-1505-6	p 110	N86-16374 #			
			ISBN-92-835-1509-9	p 174	N86-29236 #			
DCIEM-85-R-30	p 210	N87-13953 #	ISBN-92-835-1515-3	p 4	N86-27182 #			
DCIEM-87-RR-12	p 200	N88-27697 #	ISBN-92-835-1516-1	p 182	N86-27878 #			
			ISBN-92-835-1517-2	p 172	N86-27425 #			
ISBN-92-835-0346-4	p 62	N88-13344 #	ISBN-92-835-1518-8	p 30	N86-27276 #			
ISBN-92-835-0387-2	p 113	N86-26488 #	ISBN-92-835-1519-6	p 155	N86-29173 #			
ISBN-92-835-0388-0	p 117	N86-29063 #	ISBN-92-835-1520-X	p 45	N86-29816 #			
ISBN-92-835-0389-9	p 247	N86-28793 #	ISBN-92-835-1521-8	p 122	N86-27566 #			
ISBN-92-835-0390-2	p 91	N87-16000 #	ISBN-92-835-1524-2	p 5	N86-27187 #			
ISBN-92-835-0391-0	p 237	N87-13273 #	ISBN-92-835-1529-3	p 31	N87-10067 #			
ISBN-92-835-0392-9	p 190	N87-13932 #	ISBN-92-835-1534-X	p 99	N87-18610 #			
ISBN-92-835-0394-5	p 80	N87-23633 #	ISBN-92-835-1535-8	p 32	N87-15966 #			
ISBN-92-835-0395-3	p 125	N87-18121 #	ISBN-92-835-1536-6	p 182	N87-16376 #			
ISBN-92-835-0396-1	p 44	N87-20355 #	ISBN-92-835-1537-4	p 211	N87-18987 #			
ISBN-92-835-0397-X	p 175	N87-17051 #	ISBN-92-835-1538-2	p 221	N87-19920 #			
ISBN-92-835-0398-6	p 79	N87-15985 #	ISBN-92-835-1539-0	p 24	N87-18703 #			
ISBN-92-835-0399-6	p 79	N87-15985 #	ISBN-92-835-1540-4	p 33	N87-21913 #			
ISBN-92-835-0400-3	p 1	N87-20174 #	ISBN-92-835-1541-2	p 173	N87-22094 #			
ISBN-92-835-0401-1	p 118	N87-21170 #	ISBN-92-835-1542-0	p 45	N87-21920 #			
ISBN-92-835-0402-X	p 5	N87-20199 #	ISBN-92-835-1543-9	p 8	N87-24398 #			
ISBN-92-835-0403-8	p 25	N87-21881 #	ISBN-92-835-1544-7	p 193	N87-24070 #			
ISBN-92-835-0404-6	p 91	N87-24489 #	ISBN-92-835-1545-5	p 110	N87-24553 #			
ISBN-92-835-0405-4	p 157	N87-22137 #	ISBN-92-835-1546-3	p 212	N87-30054 #			
ISBN-92-835-0407-0	p 158	N87-22145 #	ISBN-92-835-1547-1	p 134	N87-23859 #			
ISBN-92-835-0409-7	p 33	N87-22663 #	ISBN-92-835-1549-8	p 197	N87-27391 #			
ISBN-92-835-0410-0	p 34	N87-23609 #	ISBN-92-835-1551-X	p 211	N87-25769 #			
ISBN-92-835-0411-9	p 235	N87-24940 #	ISBN-92-835-1552-8	p 35	N87-24445 #			
ISBN-92-835-0412-7	p 46	N87-29503 #	ISBN-92-835-1553-6	p 136	N88-11909 #			
ISBN-92-835-0413-5	p 60	N87-24484 #	ISBN-92-835-1554-4	p 73	N89-10796 #			
ISBN-92-835-0414-3	p 57	N87-21927 #	ISBN-92-835-1555-0	p 159	N88-11968 #			
ISBN-92-835-0415-1	p 195	N87-25799 #	ISBN-92-835-1557-9	p 111	N87-29641 #			
ISBN-92-835-0416-X	p 100	N87-28589 #	ISBN-92-835-1559-5	p 38	N88-12481 #			
ISBN-92-835-0417-8	p 159	N87-27758 #	ISBN-92-835-1560-9	p 39	N88-13315 #			
ISBN-92-835-0418-6	p 249	N87-26675 #	ISBN-92-835-1561-7	p 197	N88-12923 #			
ISBN-92-835-0419-4	p 97	N87-26937 #	ISBN-92-835-1568-7	p 74	N88-10806 #			
ISBN-92-835-0420-8	p 192	N86-23125 #	ISBN-92-835-2113-7	p 77	N88-17682 #			
ISBN-92-835-0421-6	p 37	N88-11649 #						
ISBN-92-835-0422-4	p 28	N87-29474 #	ISBN92-835-0393-7	p 72	N86-30739 #			
ISBN-92-835-0424-0	p 9	N87-26881 #	ISBN92-835-1522-6	p 31	N86-30726 #			
ISBN-92-835-0425-9	p 78	N88-13348 #	ISBN92-835-1523-4	p 31	N86-30727 #			
ISBN-92-835-0426-7	p 9	N87-28518 #	ISBN92-835-1525-0	p 22	N86-30709 #			
ISBN-92-835-0428-3	p 4	N88-29725 #	ISBN92-835-1526-9	p 182	N86-31083 #			
ISBN-92-835-0429-1	p 46	N88-13331 #	ISBN92-835-1527-7	p 72	N86-30740 #			
	p 183	N88-12818 #						

ACCESSION NUMBER INDEX

NEB-13324	p 40
NEB-13325	p 40
NEB-13326	p 40
NEB-13327	p 40
NEB-13328	p 40
NEB-13329	p 40
NEB-13330	p 46
NEB-13331	p 46
NEB-13332	p 46
NEB-13333	p 47
NEB-13334	p 47
NEB-13335	p 47
NEB-13336	p 47
NEB-13337	p 47
NEB-13338	p 47
NEB-13339	p 47
NEB-13340	p 76
NEB-13341	p 76
NEB-13342	p 76
NEB-13343	p 76
NEB-13344	p 76
NEB-13345	p 76
NEB-13346	p 76
NEB-13347	p 160
NEB-1677	p 62
NEB-1748	p 62
NEB-1749	p 62
NEB-1750	p 63
NEB-1751	p 63
NEB-1752	p 63
NEB-1753	p 63
NEB-1754	p 63
NEB-1755	p 63
NEB-1756	p 64
NEB-1757	p 64
NEB-1758	p 64
NEB-1759	p 64
NEB-1760	p 64
NEB-1761	p 64
NEB-1762	p 64
NEB-1763	p 65
NEB-1764	p 65
NEB-1765	p 65
NEB-1766	p 65
NEB-1767	p 65
NEB-1768	p 65
NEB-1769	p 65
NEB-1770	p 66
NEB-1771	p 66
NEB-1772	p 66
NEB-1773	p 66
NEB-1774	p 66
NEB-1775	p 66
NEB-1776	p 66
NEB-1777	p 66
NEB-1778	p 67
NEB-1779	p 67
NEB-1780	p 67
NEB-1781	p 67
NEB-1782	p 77
NEB-1783	p 77
NEB-1858	p 40
NEB-1849	p 41
NEB-1840	p 41
NEB-1841	p 41
NEB-1842	p 41
NEB-1843	p 41
NEB-1844	p 41
NEB-1845	p 41
NEB-1846	p 41
NEB-1847	p 41
NEB-1848	p 42
NEB-1849	p 42
NEB-1850	p 42
NEB-1851	p 42
NEB-1852	p 42
NEB-1853	p 42
NEB-1854	p 42
NEB-1855	p 42
NEB-1856	p 42
NEB-1857	p 42
NEB-1858	p 42
NEB-1859	p 42
NEB-1860	p 139
NEB-1861	p 139
NEB-1862	p 139
NEB-1863	p 139
NEB-1864	p 139
NEB-1865	p 139
NEB-1866	p 139
NEB-1867	p 139
NEB-1868	p 139
NEB-1869	p 139
NEB-1870	p 140
NEB-1871	p 140
NEB-1872	p 140
NEB-1873	p 141
NEB-1874	p 141
NEB-1875	p 141
NEB-1876	p 141
NEB-1877	p 141
NEB-1878	p 141
NEB-1879	p 141
NEB-1880	p 141
NEB-1881	p 141
NEB-1882	p 141
NEB-1883	p 141
NEB-1884	p 141
NEB-1885	p 141
NEB-1886	p 141
NEB-1887	p 141
NEB-1888	p 141
NEB-1889	p 141
NEB-1890	p 141
NEB-1891	p 141
NEB-1892	p 141
NEB-1893	p 141
NEB-1894	p 141
NEB-1895	p 141
NEB-1896	p 141
NEB-1897	p 141
NEB-1898	p 141
NEB-1899	p 141
NEB-1900	p 141
NEB-1901	p 141
NEB-1902	p 141
NEB-1903	p 141
NEB-1904	p 141
NEB-1905	p 141
NEB-1906	p 141
NEB-1907	p 141
NEB-1908	p 141
NEB-1909	p 141
NEB-1910	p 141
NEB-1911	p 141
NEB-1912	p 141
NEB-1913	p 141
NEB-1914	p 141
NEB-1915	p 141
NEB-1916	p 141
NEB-1917	p 141
NEB-1918	p 141
NEB-1919	p 141
NEB-1920	p 141
NEB-1921	p 141
NEB-1922	p 141
NEB-1923	p 141
NEB-1924	p 141
NEB-1925	p 141
NEB-1926	p 141
NEB-1927	p 141
NEB-1928	p 141
NEB-1929	p 141
NEB-1930	p 141
NEB-1931	p 141
NEB-1932	p 141
NEB-1933	p 141
NEB-1934	p 141
NEB-1935	p 141
NEB-1936	p 141
NEB-1937	p 141
NEB-1938	p 141
NEB-1939	p 141
NEB-1940	p 141
NEB-1941	p 141
NEB-1942	p 141

ACCESSION NUMBER INDEX

N88-19675 #	D 143	N88-23185 #	p 42	N88-29725 #	p 4	N88-10057 #	p 44	N88-16796 #	p 70
N88-20173 #	D 243	N88-27193 #	p 42	N88-29726 #	p 78	N88-10066 #	p 246	N88-16797 #	p 70
N88-20174 #	D 243	N88-27406 #	p 141	N88-29727 #	p 189	N88-10081 #	p 4	N88-16798 #	p 53
N88-20175 #	D 243	N88-27480 #	p 164	N88-29728 #	p 190	N88-10082 #	p 246	N88-16799 #	p 54
N88-20176 #	D 243	N88-27525 #	p 172	N88-29729 #	p 78	N88-10083 #	p 229	N88-16800 #	p 54
N88-20177 #	D 243	N88-27659 #	p 189	N88-29730 #	p 51	N88-10084 #	p 222	N88-16801 #	p 54
N88-20178 #	D 243	N88-27663 #	p 190	N88-29731 #	p 14	N88-10085 #	p 229	N88-16802 #	p 54
N88-20179 #	D 254	N88-27664 #	p 198	N88-29732 #	p 14	N88-10086 #	p 51	N88-16803 #	p 54
N88-20180 #	D 254	N88-27665 #	p 198	N88-29733 #	p 190	N88-10087 #	p 223	N88-16804 #	p 54
N88-20181 #	D 244	N88-27666 #	p 198	N88-29734 #	p 190	N88-10088 #	p 223	N88-16805 #	p 70
N88-20182 #	D 244	N88-27667 #	p 198	N88-29735 #	p 14	N88-10089 #	p 29	N88-16806 #	p 71
N88-20183 #	D 254	N88-27668 #	p 198	N88-29736 #	p 217	N88-10090 #	p 29	N88-16807 #	p 54
N88-20184 #	D 244	N88-27669 #	p 199	N88-29737 #	p 43	N88-10091 #	p 29	N88-16808 #	p 54
N88-20185 #	D 244	N88-27670 #	p 199	N88-29738 #	p 190	N88-10092 #	p 223	N88-16809 #	p 71
N88-20186 #	D 244	N88-27671 #	p 199	N88-29739 #	p 44	N88-10093 #	p 30	N88-16810 #	p 54
N88-20187 #	D 244	N88-27672 #	p 199	N88-29740 #	p 87	N88-10094 #	p 30	N88-16811 #	p 54
N88-20188 #	D 244	N88-27673 #	p 199	N88-29741 #	p 217	N88-10095 #	p 30	N88-16812 #	p 54
N88-20189 #	D 244	N88-27674 #	p 199	N88-29742 #	p 87	N88-10096 #	p 30	N88-16813 #	p 71
N88-20190 #	D 102	N88-27675 #	p 200	N88-29743 #	p 15	N88-10097 #	p 30	N88-16814 #	p 100
N88-20191 #	D 225	N88-27676 #	p 200	N88-29744 #	p 15	N88-10098 #	p 30	N88-16815 #	p 100
N88-20192 #	D 245	N88-27677 #	p 200	N88-29745 #	p 15	N88-10099 #	p 223	N88-16816 #	p 100
N88-20193 #	D 245	N88-27678 #	p 200	N88-29746 #	p 15	N88-10100 #	p 223	N88-16817 #	p 54
N88-20194 #	D 245	N88-27679 #	p 200	N88-29747 #	p 15	N88-10101 #	p 223	N88-16818 #	p 55
N88-20195 #	D 245	N88-27680 #	p 200	N88-29748 #	p 15	N88-10102 #	p 223	N88-16819 #	p 55
N88-20196 #	D 245	N88-27681 #	p 200	N88-29749 #	p 15	N88-10103 #	p 223	N88-16820 #	p 55
N88-20197 #	D 245	N88-27682 #	p 200	N88-29750 #	p 15	N88-10104 #	p 223	N88-16821 #	p 55
N88-20198 #	D 245	N88-27683 #	p 200	N88-29751 #	p 15	N88-10105 #	p 223	N88-16822 #	p 55
N88-20199 #	D 246	N88-27684 #	p 200	N88-29752 #	p 15	N88-10106 #	p 223	N88-16823 #	p 55
N88-20200 #	D 246	N88-27685 #	p 200	N88-29753 #	p 15	N88-10107 #	p 223	N88-16824 #	p 55
N88-20201 #	D 246	N88-27686 #	p 200	N88-29754 #	p 15	N88-10108 #	p 223	N88-16825 #	p 55
N88-20202 #	D 246	N88-27687 #	p 200	N88-29755 #	p 15	N88-10109 #	p 223	N88-16826 #	p 55
N88-20203 #	D 246	N88-27688 #	p 200	N88-29756 #	p 15	N88-10110 #	p 223	N88-16827 #	p 55
N88-20204 #	D 246	N88-27689 #	p 200	N88-29757 #	p 15	N88-10111 #	p 223	N88-16828 #	p 55
N88-20205 #	D 246	N88-27690 #	p 200	N88-29758 #	p 15	N88-10112 #	p 223	N88-16829 #	p 55
N88-20206 #	D 246	N88-27691 #	p 200						

N89-17690

N89-17690 # p 186
 N89-17691 # p 44
 N89-17692 # p 186
 N89-17693 # p 44
 N89-17694 # p 186
 N89-17695 # p 154
 N89-17696 # p 102
 N89-17697 # p 186
 N89-17698 # p 186
 N89-17699 # p 102
 N89-17700 # p 187
 N89-17701 # p 103
 N89-17702 # p 103
 N89-17703 # p 187
 N89-17704 # p 187
 N89-17705 # p 103
 N89-17706 # p 122
 N89-17707 # p 143
 N89-17708 # p 241
 N89-17709 # p 143
 N89-17710 # p 143
 N89-17711 # p 241
 N89-17712 # p 143
 N89-17713* # p 143
 N89-17714 # p 174
 N89-17715 # p 143
 N89-17716 # p 242
 N89-17717 # p 144
 N89-17718 # p 242
 N89-17719 # p 144
 N89-17720 # p 144
 N89-17721 # p 242
 N89-17722 # p 242
 N89-17723 # p 144
 N89-17724 # p 144
 N89-17725 # p 144
 N89-17726 # p 145
 N89-17727 # p 145
 N89-17728 # p 145
 N89-17729 # p 145
 N89-17730 # p 145
 N89-17731 # p 145
 N89-17732 # p 146
 N89-17733 # p 146
 N89-17734 # p 146
 N89-17735 # p 146
 N89-17736 # p 146
 N89-17737 # p 236
 N89-17738 # p 143
 N89-17739 # p 147
 N89-17740 # p 237
 N89-17741 # p 234
 N89-17742 # p 234
 N89-17743 # p 147
 N89-17744 # p 147
 N89-17745 # p 147
 N89-17746 # p 234
 N89-17747 # p 147
 N89-17748 # p 147
 N89-17749 # p 255
 N89-17750 # p 189
 N89-17751 # p 189
 N89-17752 # p 189
 N89-18009 # p 217
 N89-18010 # p 217
 N89-18011 # p 217
 N89-18012 # p 218
 N89-18013 # p 218
 N89-18014 # p 218
 N89-18015 # p 218
 N89-18016 # p 218
 N89-18017 # p 218
 N89-18018 # p 219
 N89-18019 # p 219
 N89-18020 # p 219
 N89-18021 # p 219
 N89-18022 # p 219
 N89-18023 # p 219
 N89-18024 # p 219
 N89-18025 # p 219
 N89-18026 # p 220
 N89-18027 # p 220
 N89-18028 # p 220
 N89-18029 # p 220
 N89-18030 # p 220
 N89-18031 # p 220
 N89-18032 # p 221
 N89-18033 # p 221
 N89-18034 # p 221
 N89-18421 # p 22
 N89-18422 # p 22
 N89-18423 # p 22
 N89-18424 # p 22
 N89-18425 # p 23
 N89-18426 # p 23
 N89-18427 # p 23
 N89-18428 # p 23
 N89-18429 # p 23
 N89-18430 # p 24
 N89-18431 # p 24
 N89-18432 # p 24
 N89-18433 # p 24
 N89-18434 # p 24

N89-18435 # p 24
 N89-18436 # p 24
 N89-18437 # p 25
 N89-18438 # p 25
 N89-18439 # p 25
 N89-18440 # p 221
 N89-18441 # p 122
 N89-18442 # p 221
 N89-18446 # p 55
 N89-18447 # p 55
 N89-18448 # p 55
 N89-18449 # p 228
 N89-18450 # p 228
 N89-18451 # p 229
 N89-18452 # p 229
 N89-18453 # p 229
 N89-18454 # p 55
 N89-18455 # p 229
 N89-18456 # p 229
 N89-18457 # p 229
 N89-18458 # p 229
 N89-18459 # p 230
 N89-18460 # p 230
 N89-18461 # p 230
 N89-18462 # p 230
 N89-18463 # p 230
 N89-18464 # p 230
 N89-18465 # p 230
 N89-18466 # p 230
 N89-18467 # p 231
 N89-18468 # p 154
 N89-18469 # p 56
 N89-18470 # p 56
 N89-18471 # p 56
 N89-18472 # p 56
 N89-18473 # p 231
 N89-18474* # p 231
 N89-18475 # p 231
 N89-18476 # p 232
 N89-18477 # p 181
 N89-18478 # p 254
 N89-18479 # p 232
 N89-18480 # p 231
 N89-18481 # p 56
 N89-18482 # p 233
 N89-18483 # p 56
 N89-18484 # p 233
 N89-18485 # p 231
 N89-18486 # p 57
 N89-18505 # p 147
 N89-18506 # p 148
 N89-18507 # p 148
 N89-18508 # p 148
 N89-18509 # p 148
 N89-18510 # p 148
 N89-18511 # p 148
 N89-18512 # p 149
 N89-18513 # p 149
 N89-18514 # p 149
 N89-18515 # p 149
 N89-18516 # p 149
 N89-18517 # p 149
 N89-18518 # p 150
 N89-18519 # p 150
 N89-18520 # p 150
 N89-18521 # p 150
 N89-18522 # p 150
 N89-18523 # p 151
 N89-18524 # p 151
 N89-18525 # p 151
 N89-18526 # p 151
 N89-18527 # p 151
 N89-18528 # p 151
 N89-18529 # p 151
 N89-18530 # p 151
 N89-18531 # p 152
 N89-18532 # p 152
 N89-18533 # p 152
 N89-18534 # p 152
 N89-18535 # p 152
 N89-18536 # p 152
 N89-18537 # p 152
 N89-18538 # p 152
 N89-18539 # p 152
 N89-18540 # p 152
 N89-18541 # p 152
 N89-18542 # p 152
 N89-18543 # p 152
 N89-18544 # p 152
 N89-18545 # p 152
 N89-18546 # p 152
 N89-18547 # p 152
 N89-18548 # p 152
 N89-18549 # p 152
 N89-18550 # p 152
 N89-18551 # p 152
 N89-18552 # p 152
 N89-18553 # p 152
 N89-18554 # p 152
 N89-18555 # p 152
 N89-18556 # p 152
 N89-18557 # p 152
 N89-18558 # p 152
 N89-18559 # p 152
 N89-18560 # p 152
 N89-18561 # p 152
 N89-18562 # p 152
 N89-18563 # p 152
 N89-18564 # p 152
 N89-18565 # p 152
 N89-18566 # p 152
 N89-18567 # p 152
 N89-18568 # p 152
 N89-18569 # p 152
 N89-18570 # p 152
 N89-18571 # p 152
 N89-18572 # p 152
 N89-18573 # p 152
 N89-18574 # p 152
 N89-18575 # p 152
 N89-18576 # p 152
 N89-18577 # p 152
 N89-18578 # p 152
 N89-18579 # p 152
 N89-18580 # p 152
 N89-18581 # p 152
 N89-18582 # p 152
 N89-18583 # p 152
 N89-18584 # p 152
 N89-18585 # p 152
 N89-18586 # p 152
 N89-18587 # p 152
 N89-18588 # p 152
 N89-18589 # p 152
 N89-18590 # p 152
 N89-18591 # p 152
 N89-18592 # p 152
 N89-18593 # p 152
 N89-18594 # p 152
 N89-18595 # p 152
 N89-18596 # p 152
 N89-18597 # p 152
 N89-18598 # p 152
 N89-18599 # p 152
 N89-18600 # p 152
 N89-18601 # p 152
 N89-18602 # p 152
 N89-18603 # p 152
 N89-18604 # p 152
 N89-18605 # p 152
 N89-18606 # p 152
 N89-18607 # p 152
 N89-18608 # p 152
 N89-18609 # p 152
 N89-18610 # p 152
 N89-18611 # p 152
 N89-18612* # p 152
 N89-18613 # p 152
 N89-18614 # p 152
 N89-18615* # p 152
 N89-18616* # p 152
 N89-18617 # p 152
 N89-18618 # p 152
 N89-18619 # p 152
 N89-18620 # p 152
 N89-18621 # p 152
 N89-18622 # p 152
 N89-18623 # p 152
 N89-18624* # p 152
 N89-18625 # p 152
 N89-18626 # p 152
 N89-18627 # p 152
 N89-18628 # p 152
 N89-18629 # p 152
 N89-18630* # p 152

N89-18631 # p 19
 N89-18632 # p 19
 N89-18633 # p 168
 N89-18634 # p 168
 N89-18635* # p 168
 N89-18636 # p 168
 N89-18637 # p 168
 N89-18638 # p 168
 N89-18639 # p 169
 N89-18640 # p 169
 N89-18641 # p 20
 N89-18642 # p 169
 N89-18643 # p 20
 N89-18644 # p 20
 N89-18645 # p 169
 N89-18646 # p 169
 N89-18647* # p 169
 N89-18648 # p 169
 N89-18649 # p 20
 N89-18650 # p 20
 N89-18651 # p 169
 N89-18652 # p 45
 N89-18653 # p 21
 N89-18654 # p 45
 N89-18655 # p 21
 N89-18656 # p 170
 N89-18657* # p 21
 N89-18658* # p 21
 N89-18659 # p 170
 N89-18660 # p 21
 N89-18661 # p 170
 N89-18662 # p 170
 N89-18663* # p 21

ACCESSION NUMBER INDEX

Telephone (1)47.38.57.00 • Telex 610 176

DISTRIBUTION OF UNCLASSIFIED AGARD PUBLICATIONS

AGARD does NOT hold stocks of AGARD publications at the above address for general distribution. Initial distribution of AGARD publications is made to AGARD Member Nations through the following National Distribution Centres. Further copies are sometimes available from these Centres, but if not may be purchased in Microfiche or Photocopy form from the Purchase Agencies listed below.

NATIONAL DISTRIBUTION CENTRES

BELGIUM
 Coordonnateur AGARD — VSL
 Etat-Major de la Force Aérienne
 Quartier Reine Elisabeth

LUXEMBOURG
See Belgium

NETHERLANDS

NETHERLANDS

NETHERLANDS

NETHERLANDS

Postage and Fees Paid
National Aeronautics and
Space Administration
NASA-451

ARD
v. NLR

CAN



**National Aeronautics and
Space Administration**

DEN

Washington, D.C. 20546 **SPECIAL FOURTH CLASS MAIL BOOK**

FRA!

or to AGARD
125

GERM

ALEXANDRIA VA 22304

GREE

F. ...
Aircraft Support Equipment Directorate
Department of Research and Development
Holargos, Athens, TGA 1010

Milli Savunma Bakanlığı (MSB)
ARGE Daire Başkanlığı (ARGE)
Ankara

ICELAND

Director of Aviation
c/o Flugrad
Reykjavik

UNITED KINGDOM

Defence Research Information Centre
Kentigern House
65 Brown Street
Glasgow G2 8EX

ITALY

Aeronautica Militare
Ufficio del Delegato Nazionale all'AGARD
3 Piazzale Adenauer
00144 Roma/EUR

UNITED STATES

National Aeronautics and Space Administration (NASA)
Langley Research Center
M/S 180
Hampton, Virginia 23665

THE UNITED STATES NATIONAL DISTRIBUTION CENTRE (NASA) DOES NOT HOLD STOCKS OF AGARD PUBLICATIONS, AND APPLICATIONS FOR COPIES SHOULD BE MADE DIRECT TO THE NATIONAL TECHNICAL INFORMATION SERVICE (NTIS) AT THE ADDRESS BELOW

PURCHASE AGENCIES

**National Technical
Information Service (NTIS)
5285 Port Royal Road
Springfield
Virginia 22161, USA**

ESA/Information Retrieval Service
European Space Agency
10, rue Mario Nikis
75015 Paris, France

**The British Library
Document Supply Centre
Boston Spa, Wetherby
West Yorkshire LS23 7BQ
England**

Requests for microfiche or photocopies of AGARD documents should include the AGARD serial number, title, author or editor, and publication date. Requests to NTIS should include the NASA accession report number. Full bibliographical references and abstracts of AGARD publications are given in the following journals:

Scientific and Technical Aerospace Reports (STAR)
published by NASA Scientific and Technical
Information Branch
NASA Headquarters (NIT-40)
Washington D.C. 20546, USA

Government Reports Announcements (GRA)
published by the National Technical
Information Services, Springfield
Virginia 22161, USA



Printed by Specialised Printing Services Limited
40 Chigwell Lane, Loughton, Essex IG10 3TZ

ISBN 92-835-1563-3